

Principles of Distributed Systems

inft-3507

Dr. J.Burns

ADA University

Autumn 2025

Section 1: Introduction


Ref: <https://www.distributed-systems.net/index.php/books/ds4/>

Distributed versus Decentralized


What many people state



Centralized



Decentralized



Distributed

When does a decentralized system become distributed?

- Adding 1 link between two nodes in a decentralized system?
- Adding 2 links between two other nodes?
- In general: adding $k > 0$ links....?

Alternative approach

Two views on realizing distributed systems

- **Integrative view**: connecting existing networked computer systems into a larger a system.
- **Expansive view**: an existing networked computer systems is extended with additional computers

Two definitions

- A **decentralized system** is a networked computer system in which processes and resources are **necessarily** spread across multiple computers.
- A **distributed system** is a networked computer system in which processes and resources are **sufficiently** spread across multiple computers.

Perspectives on distributed systems

Distributed systems are complex: take perspectives

- **Architecture**: common organizations
- **Process**: what kind of processes, and their relationships
- **Communication**: facilities for exchanging data
- **Coordination**: application-independent algorithms
- **Naming**: how do you identify resources?
- **Consistency** and **replication**: performance requires of data, which need to be **the same**
- **Fault tolerance**: keep running in the presence of partial failures
- **Security**: ensure authorized access to resources

What do we want to achieve?

Overall design goals

- Support sharing of resources
- Distribution transparency
- Openness
- Scalability

Sharing resources

Canonical examples


- Cloud-based shared storage and files
- Peer-to-peer assisted multimedia streaming
- Shared mail services (think of outsourced mail systems)
- Shared Web hosting (think of content distribution networks)

Observation

"The network is the computer"

(quote from John Gage, then at Sun Microsystems)

Distribution transparency

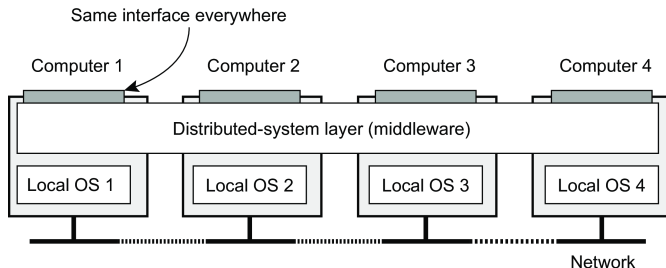

What is transparency?

*The phenomenon by which a distributed system attempts to **hide** the fact that its processes and resources are **physically distributed across multiple computers**, possibly **separated by large distances**.*

Observation

Distribution transparency is handled through many different techniques in a layer between applications and operating systems: a **middleware layer**

Distribution transparency

Types

Transparency	Description
Access	Hide differences in data representation and how an object is accessed
Location	Hide where an object is located
Relocation	Hide that an object may be moved to another location while in use
Migration	Hide that an object may move to another location
Replication	Hide that an object is replicated
Concurrency	Hide that an object may be shared by several independent users
Failure	Hide the failure and recovery of an object

Openness of distributed systems

Open distributed system

A system that *offers components* that can easily be used by, or *integrated into other systems*. An open distributed system itself will often consist of components that originate from elsewhere.

What are we talking about?

Be able to interact with services from other open systems, irrespective of the underlying environment:

- Systems should conform to well-defined *interfaces*
- Systems should easily *interoperate*
- Systems should support *portability* of applications
- Systems should be easily *extensible*

Dependability

Basics

A **component** provides **services** to **clients**. To provide services, the component may require the services from other components \Rightarrow a component may **depend** on some other component.

Specifically

A component C depends on C^* if the **correctness** of C 's behavior depends on the correctness of C^* 's behavior. (Components are processes or channels.)

Dependability

Requirements related to dependability

Requirement	Description
Availability	Readiness for usage
Reliability	Continuity of service delivery
Safety	Very low probability of catastrophes
Maintainability	How easy can a failed system be repaired

Reliability versus availability

Reliability $R(t)$ of component C

Conditional probability that C has been functioning correctly during $[0, t)$ given C was functioning correctly at the time $T = 0$.

Traditional metrics

- **Mean Time To Failure** ($MTTF$): The average time until a component fails.
- **Mean Time To Repair** ($MTTR$): The average time needed to repair a component.
- **Mean Time Between Failures** ($MTBF$): Simply $MTTF + MTTR$.

Terminology

Failure, error, fault

Term	Description	Example
Failure	A component is not living up to its specifications	Crashed program
Error	Part of a component that can lead to a failure	Programming bug
Fault	Cause of an error	Sloppy programmer

Terminology

Handling faults

Term	Description	Example
Fault prevention	Prevent the occurrence of a fault	Don't hire sloppy programmers
Fault tolerance	Build a component and make it mask the occurrence of a fault	Build each component by two independent programmers
Fault removal	Reduce the presence, number, or seriousness of a fault	Get rid of sloppy programmers
Fault forecasting	Estimate current presence, future incidence, and consequences of faults	Estimate how a recruiter is doing when it comes to hiring sloppy programmers

On security

Observation

A distributed system that is not secure, is not dependable

What we need

- **Confidentiality**: information is disclosed only to authorized parties
- **Integrity**: Ensure that alterations to assets of a system can be made only in an authorized way

Authorization, Authentication, Trust

- **Authentication**: verifying the correctness of a claimed identity
- **Authorization**: does an identified entity has proper access rights?
- **Trust**: one entity can be assured that another will perform particular actions according to a specific expectation

Security mechanisms

Symmetric cryptosystem

With **encryption key** $E_K(data)$ and **decryption key** $D_K(data)$: if $data = D_K(E_K(data))$ then $D_K = E_K$.

Note: encryption and decryption key are the same and should be kept **secret**.

Asymmetric cryptosystem

Distinguish a **public key** $PK(data)$ and a **private (secret) key** $SK(data)$.

- Encrypt message from *Alice* to *Bob*: $data = \underbrace{SK_{bob}(\overbrace{PK_{bob}(data)}^{\text{Sent by Alice}})}_{\text{Action by Bob}}$
- Sign message for *Bob* by *Alice*: $[data, \underbrace{data \stackrel{?}{=} PK_{alice}(SK_{alice}(data))}_{\text{Check by Bob}}] = [data, \underbrace{SK_{alice}(data)}_{\text{Sent by Alice}}]$

Security mechanisms

Secure hashing

In practice, we use **secure hash functions**: $H(data)$ returns a **fixed-length string**.

- Any change from $data$ to $data^*$ will lead to a **completely different string** $H(data^*)$.
- Given a hash value, it is computationally impossible to find a $data$ with $h = H(data)$

Practical digital signatures

Sign message for *Bob* by *Alice*:

$$[data, \underbrace{H(data) \stackrel{?}{=} PK_{alice}(sgn)}_{\text{Check by Bob}}] = [data, H, \underbrace{sgn = SK_{alice}(H(data))}_{\text{Sent by Alice}}]$$

Scale in distributed systems

Observation

Many developers of modern distributed systems easily use the adjective “scalable” without making clear **why** their system actually scales.

At least three components

- Number of users or processes (**size scalability**)
- Maximum distance between nodes (**geographical scalability**)
- Number of administrative domains (**administrative scalability**)

Observation

Most systems account only, to a certain extent, for size scalability. Often a solution: multiple powerful servers operating independently in parallel. Today, the challenge still lies in geographical and administrative scalability.


Size scalability

Root causes for scalability problems with centralized solutions

- The computational capacity, limited by the CPUs
- The storage capacity, including the transfer rate between CPUs and disks
- The network between the user and the centralized service

Performance analysis

A centralized service can be modeled as a simple queuing system



Assumptions and notations

- The queue has infinite capacity \Rightarrow arrival rate of requests is not influenced by current queue length or what is being processed.
- Arrival rate requests: λ
- Processing capacity service: μ requests per second

Fraction of time having k requests in the system

$$p_k = \left(1 - \frac{\lambda}{\mu}\right) \left(\frac{\lambda}{\mu}\right)^k$$

Performance analysis

Utilization U of a service is the fraction of time that it is busy

$$U = \sum_{k \geq 0} p_k = 1 - p_0 = \frac{\lambda}{\mu} \Rightarrow p_k = (1 - U)U^k$$

Average number of requests in the system

$$\bar{N} = \sum_{k \geq 0} k \cdot p_k = \sum_{k \geq 0} k \cdot (1 - U)U^k = (1 - U) \sum_{k \geq 0} k \cdot U^k = \frac{(1 - U)U}{(1 - U)^2} = \frac{U}{1 - U}$$

Average throughput

$$X = \underbrace{U \cdot \mu}_{\text{server at work}} + \underbrace{(1 - U) \cdot 0}_{\text{server idle}} = \frac{\lambda}{\mu} \cdot \mu = \lambda$$

Performance analysis

Response time: total time take to process a request after submission

$$R = \frac{\bar{N}}{X} = \frac{S}{1-U} \Rightarrow \frac{R}{S} = \frac{1}{1-U}$$

with $S = \frac{1}{\mu}$ being the service time.

Observations

- If U is small, response-to-service time is close to 1: a request is immediately processed
- If U goes up to 1, the system comes to a grinding halt.

Solution: decrease S .


Techniques for scaling

Hide communication latencies

- Make use of [asynchronous communication](#)
- Have separate handler for incoming response
- **Problem:** not every application fits this model

Techniques for scaling

Facilitate solution by moving computations to client

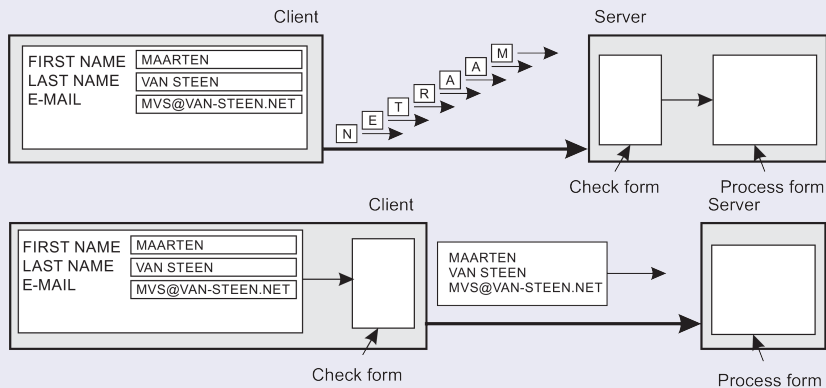

Techniques for scaling

Partition data and computations across multiple machines

- Move computations to clients (Java/ECMA script)
- Decentralized naming services (DNS)
- Decentralized information systems (WWW)

Techniques for scaling

Replication and caching: Make copies of data available at different machines

- Replicated file servers and databases
- Mirrored Websites
- Web caches (in browsers and proxies)
- File caching (at server and client)

Scaling: The problem with replication

Applying replication is easy, except for one thing

- Having multiple copies (cached or replicated), leads to **inconsistencies**: modifying one copy makes that copy different from the rest.
- Always keeping copies consistent and in a general way requires **global synchronization** on each modification.
- Global synchronization precludes large-scale solutions.

Observation


If we can tolerate inconsistencies, we may reduce the need for global synchronization, but **tolerating inconsistencies is application dependent**.

Parallel computing

Observation

High-performance distributed computing started with parallel computing

Multiprocessor and multicore versus multicomputer

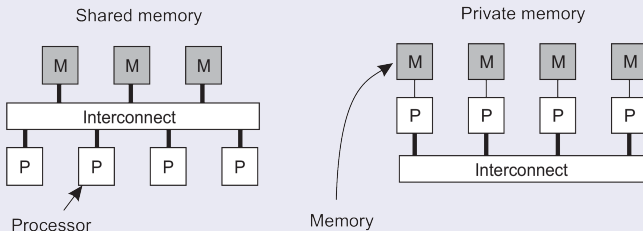

Distributed shared memory systems

Observation

Multiprocessors are relatively easy to program in comparison to multicomputers, yet have problems when increasing the number of processors (or cores). **Solution:** Try to implement a **shared-memory model** on top of a multicomputer.

Example through virtual-memory techniques

Map all main-memory pages (from different processors) into one **single virtual address space**. If a process at processor A addresses a page P located at processor B , the OS at A **traps and fetches P** from B , just as it would if P had been located on local disk.


Problem

Performance of distributed shared memory could never compete with that of multiprocessors, and failed to meet the expectations of programmers. It has been widely abandoned by now.

Cluster computing

Essentially a group of high-end systems connected through a LAN

- Homogeneous: same OS, near-identical hardware
- Single, or tightly coupled managing node(s)

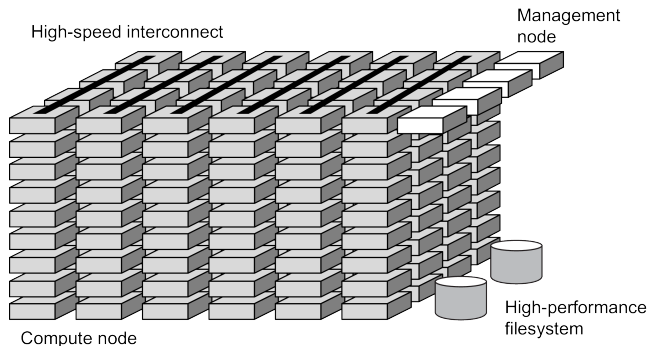

Summary and Conclusions

We have discussed some important principles in Distributed Systems, namely:

- Centralized, Decentralized and Distributed Types
- Support sharing of resources
- Distribution transparency
- Openness and Security
- Performance and Scalability