

Principles of Distributed Systems

inft-3507

Dr. J.Burns

ADA University

Autumn 2025

Section 6: Naming

Ref: <https://www.distributed-systems.net/index.php/books/ds4/>

Naming

Essence

Names are used to denote entities in a distributed system. To operate on an entity, we need to access it at an **access point**. Access points are entities that are named by means of an **address**.

Note

A **location-independent** name for an entity E , is independent of the addresses of the access points offered by E .

Identifiers

Pure name

A name that has no meaning at all; it is just a random string. Pure names can be used for comparison only.

Identifier: A name having some specific properties

- 1 An identifier refers to at most one entity.
- 2 Each entity is referred to by at most one identifier.
- 3 An identifier always refers to the same entity (i.e., it is never reused).

Observation

An identifier need not necessarily be a pure name, i.e., it may have content.

Broadcasting

Broadcast the ID, requesting the entity to return its current address

- Can never scale beyond local-area networks
- Requires all processes to listen to incoming location requests

Address Resolution Protocol (ARP)

To find out which MAC address is associated with an IP address, broadcast the query “who has this IP address”?

Forwarding pointers

When an entity moves, it leaves behind a pointer to its next location


- Dereferencing can be made entirely transparent to clients by simply following the chain of pointers
- Update a client's reference when present location is found
- Geographical scalability problems (for which separate chain reduction mechanisms are needed):
 - Long chains are not fault tolerant
 - Increased network latency at dereferencing

Home-based approaches

Single-tiered scheme: Let a **home** keep track of where the entity is

- Entity's **home address** registered at a naming service
- The home registers the **foreign address** of the entity
- Client contacts the home first, and then continues with foreign location

The principle of mobile IP

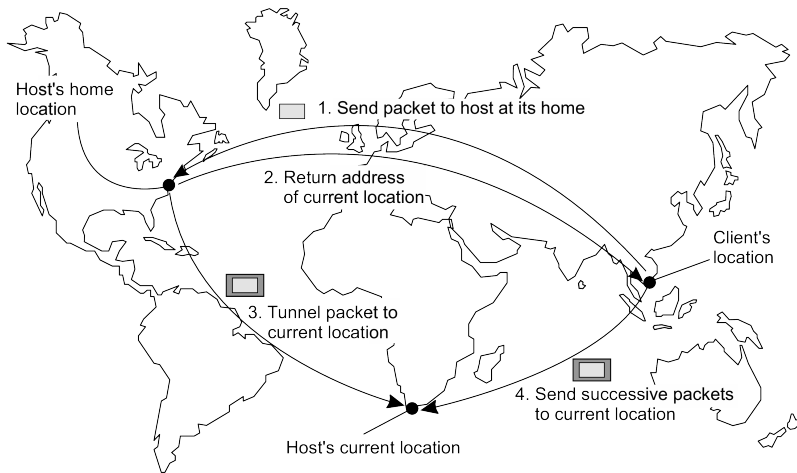

Home-based approaches

Problems with home-based approaches

- Home address has to be supported for entity's lifetime
- Home address is fixed \Rightarrow unnecessary burden when the entity permanently moves
- Poor geographical scalability (entity may be next to client)

Note

Permanent moves may be tackled with another level of naming (DNS)

Illustrative: Chord

Consider the organization of many nodes into a **logical ring**

- Each node is assigned a random m -bit **identifier**.
- Every entity is assigned a unique m -bit **key**.
- Entity with key k falls under jurisdiction of node with smallest $id \geq k$ (called its **successor** $succ(k)$).

Nonsolution

Let each node keep track of its neighbor and start linear search along the ring.

Notation

We will speak of node p as the node have identifier p

Chord finger tables

Principle

- Each node p maintains a **finger table** $FT_p[]$ with at most m entries:

$$FT_p[i] = \text{succ}(p + 2^{i-1})$$

Note: the i -th entry points to the first node succeeding p by at least 2^{i-1} .

Chord finger tables

Principle

- Each node p maintains a **finger table** $FT_p[]$ with at most m entries:

$$FT_p[i] = \text{succ}(p + 2^{i-1})$$

Note: the i -th entry points to the first node succeeding p by at least 2^{i-1} .

- To look up a key k , node p forwards the request to node with index j satisfying

$$q = FT_p[j] \leq k < FT_p[j+1]$$

Chord finger tables

Principle

- Each node p maintains a **finger table** $FT_p[]$ with at most m entries:

$$FT_p[i] = \text{succ}(p + 2^{i-1})$$

Note: the i -th entry points to the first node succeeding p by at least 2^{i-1} .


- To look up a key k , node p forwards the request to node with index j satisfying

$$q = FT_p[j] \leq k < FT_p[j+1]$$

- If $p < k < FT_p[1]$, the request is also forwarded to $FT_p[1]$

Chord lookup example

Resolving key 26 from node 1 and key 12 from node 28

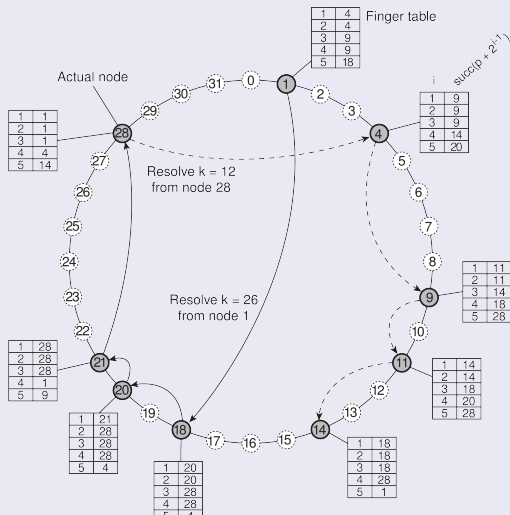

Chord in Python

```

1 class ChordNode:
2
3     def __succNode(self, key):
4         if (key <= self.nodeSet[0] or
5             key > self.nodeSet[len(self.nodeSet)-1]): # key is in segment for which
6             return self.nodeSet[0]                  # this node is responsible
7         for i in range(1, len(self.nodeSet)):
8             if (key <= self.nodeSet[i]):              # key is in segment for which
9                 return self.nodeSet[i]              # node (i+1) may be responsible
10
11     def __finger(self, i):
12         return self.__succNode((self.nodeID + pow(2,i-1)) % self.MAXPROC) # succ( $p+2^{(i-1)}$ )
13
14     def __recomputeFingerTable(self):
15         self.FT[0] = self.nodeSet[(self.nodeInd - 1)%len(self.nodeSet)] # Predecessor
16         self.FT[1:] = [self.__finger(i) for i in range(1, self.nBits+1)] # Successors
17         self.FT.append(self.nodeID)                                     # This node
18
19     def __localSuccNode(self, key):
20         if self.__inbetween(key, self.FT[0]+1, self.nodeID+1): # key in (pred, self]
21             return self.nodeID                                     # this node is responsible
22         elif self.__inbetween(key, self.nodeID+1, self.FT[1]): # key in (self, FT[1]]
23             return self.FT[1]                                     # successor responsible
24         for i in range(1, self.nBits+2):
25             if self.__inbetween(key, self.FT[i], self.FT[(i+1)]): # key in [FT[i], FT[i+1]]
26                 return self.FT[i]                                 # FT[i] is responsible

```

Exploiting network proximity

Problem

The logical organization of nodes in the overlay may lead to **erratic message transfers** in the underlying Internet: node p and node $\text{succ}(p+1)$ may be very far apart.

Solutions

Exploiting network proximity

Problem

The logical organization of nodes in the overlay may lead to **erratic message transfers** in the underlying Internet: node p and node $\text{succ}(p+1)$ may be very far apart.

Solutions

- **Topology-aware node assignment**: When assigning an ID to a node, make sure that nodes close in the ID space are also close in the network. **Can be very difficult.**

Exploiting network proximity

Problem

The logical organization of nodes in the overlay may lead to **erratic message transfers** in the underlying Internet: node p and node $\text{succ}(p+1)$ may be very far apart.

Solutions

- **Topology-aware node assignment**: When assigning an ID to a node, make sure that nodes close in the ID space are also close in the network. **Can be very difficult.**
- **Proximity routing**: Maintain more than one possible successor, and forward to the closest.
Example: in Chord $FT_p[i]$ points to first node in $INT = [p+2^{i-1}, p+2^i-1]$. Node p can also store pointers to other nodes in INT .

Exploiting network proximity

Problem

The logical organization of nodes in the overlay may lead to **erratic message transfers** in the underlying Internet: node p and node $\text{succ}(p+1)$ may be very far apart.

Solutions


- **Topology-aware node assignment**: When assigning an ID to a node, make sure that nodes close in the ID space are also close in the network. **Can be very difficult.**
- **Proximity routing**: Maintain more than one possible successor, and forward to the closest.
Example: in Chord $FT_p[i]$ points to first node in $INT = [p + 2^{i-1}, p + 2^i - 1]$. Node p can also store pointers to other nodes in INT .
- **Proximity neighbor selection**: When there is a choice of selecting who your neighbor will be (not in Chord), pick the closest one.

Hierarchical Location Services (HLS)

Basic idea

Build a large-scale search tree for which the underlying network is divided into hierarchical domains. Each domain is represented by a separate directory node.

Principle

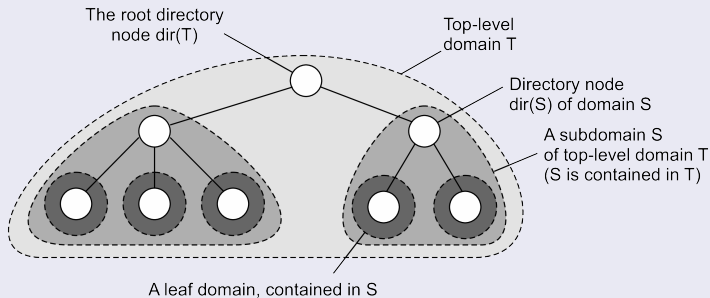


HLS: Tree organization

Invariants

- Address of entity E is stored in a leaf or intermediate node
- Intermediate nodes contain a pointer to a child if and only if the subtree rooted at the child stores an address of the entity
- The root knows about all entities

Storing information of an entity having two addresses in different leaf domains

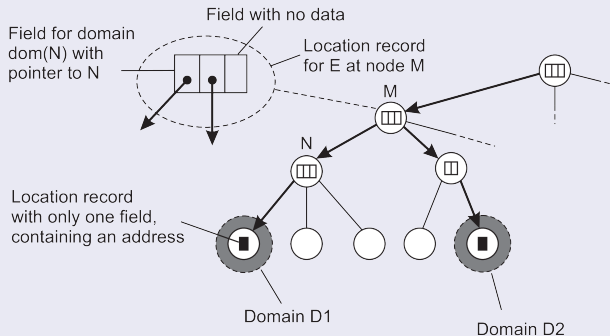


HLS: Lookup operation

Basic principles


- Start lookup at local leaf node
- Node knows about $E \Rightarrow$ follow downward pointer, else go up
- Upward lookup always stops at root

Looking up a location

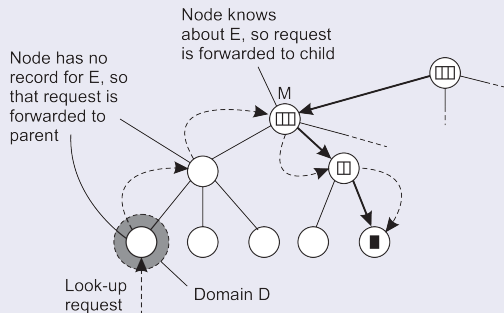


HLS: Insert operation

(a) An insert request is forwarded to the first node that knows about entity E . (b) A chain of forwarding pointers to the leaf node is created

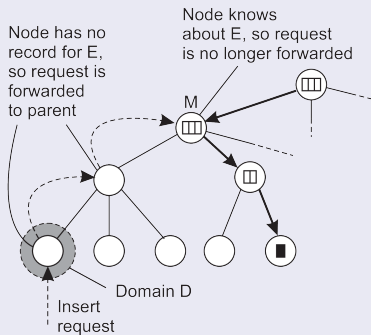

(a)

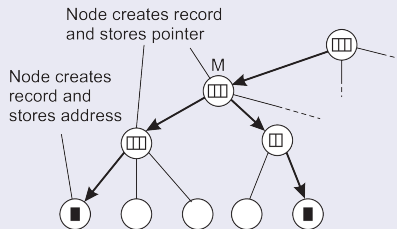

(b)

Can an HLS scale?

Observation

A design flaw seems to be that the root node needs to keep track of **all** identifiers \Rightarrow make a distinction between a **logical design** and its **physical implementation**.

Notation

- Assume there are a total of N physical hosts $\{H_1, H_2, \dots, H_N\}$. Each host is capable of running one or more location servers.
- $D_k(A)$ denotes the domain at level k that contains address A ; $k = 0$ denotes the root domain.
- $LS_k(E, A)$ denotes the unique location server in $D_k(A)$ responsible for keeping track of entity E .

Can an HLS scale?

Basic idea for scaling


- Choose different physical servers for the logical name servers on a per-entity basis
 - (at root level, but also intermediate)
- Implement a mapping of entities to physical servers such that the load of storing records will be distributed

Can an HLS scale?

Solution

- $\mathbf{D}_k = \{D_{k,1}, D_{k,2}, \dots, D_{k,N_k}\}$ denotes the N_k domains at level k
- **Note:** $N_0 = |\mathbf{D}_0| = 1$.
- For each level k , the set of hosts is partitioned into N_k subsets, with each host running a location server representing exactly one of the domains $D_{k,i}$ from \mathbf{D}_k .

Principle of distributing logical location servers

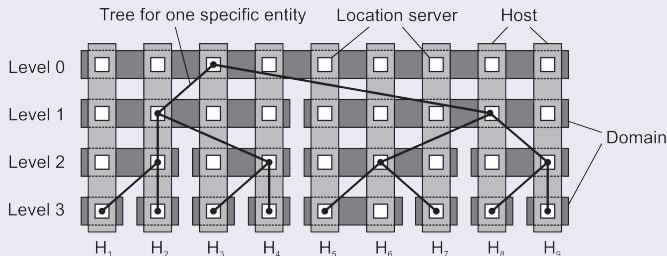

Security in flat naming

Basics

Without special measures, we need to trust that the name-resolution process to return what is associated with a flat name. Two approaches to follow:

- Secure the identifier-to-entity association
- Secure the name-resolution process

Self-certifying names

Use a value derived from the associated entity and make it (part of) the flat name:

- $id(entity) = hash(data\ associated\ with\ the\ entity)$

when dealing with read-only entities, otherwise

- $id(entity) = public\ key(entity)$

in which case additional data is returned, such as a verifiable digital signature.

Securing the name-resolution process


Much more involved: discussion deferred until discussing secure DNS

Name space

Naming graph

A graph in which a **leaf node** represents a (named) entity. A **directory node** is an entity that refers to other nodes.

A general naming graph with a single root node

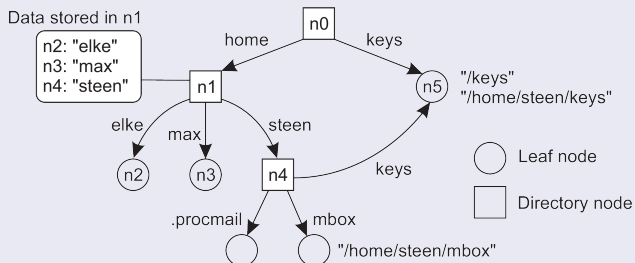

Note

A directory node contains a table of *(node identifier, edge label)* pairs.

Name space

We can easily store all kinds of **attributes** in a node

- Type of the entity
- An identifier for that entity
- Address of the entity's location
- Nicknames
- ...

Name space

We can easily store all kinds of *attributes* in a node

- Type of the entity
- An identifier for that entity
- Address of the entity's location
- Nicknames
- ...

Note

Directory nodes can also have attributes, besides just storing a directory table with *(identifier, label)* pairs.

Name resolution

Problem

To resolve a name, we need a directory node. How do we actually find that (initial) node?

Name resolution

Problem

To resolve a name, we need a directory node. How do we actually find that (initial) node?

Closure mechanism: The mechanism to select the implicit context from which to start name resolution

- `www.distributed-systems.net`: start at a DNS name server
- `/home/maarten/mbox`: start at the local NFS file server (possible recursive search)
- `0031 20 598 7784`: dial a phone number
- `77.167.55.6`: route message to a specific IP address

Name resolution

Problem

To resolve a name, we need a directory node. How do we actually find that (initial) node?

Closure mechanism: The mechanism to select the implicit context from which to start name resolution

- `www.distributed-systems.net`: start at a DNS name server
- `/home/maarten/mbox`: start at the local NFS file server (possible recursive search)
- `0031 20 598 7784`: dial a phone number
- `77.167.55.6`: route message to a specific IP address

Note

You cannot have an explicit closure mechanism – how would you start?

Name linking

Hard link

What we have described so far as a **path name**: a name that is resolved by following a specific path in a naming graph from one node to another.

Soft link: Allow a node N to contain a **name** of another node

- First resolve N 's name (leading to N)
- Read the content of N , yielding *name*
- Name resolution continues with *name*

Name linking

Hard link

What we have described so far as a **path name**: a name that is resolved by following a specific path in a naming graph from one node to another.

Soft link: Allow a node N to contain a **name** of another node


- First resolve N 's name (leading to N)
- Read the content of N , yielding *name*
- Name resolution continues with *name*

Observations

- The name resolution process determines that we read the **content** of a node, in particular, the name in the other node that we need to go to.
- One way or the other, we know where and how to start name resolution given *name*

Name linking

The concept of a symbolic link explained in a naming graph

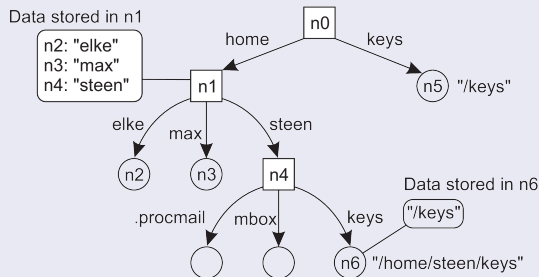

Observation

Node *n5* has only one name

Mounting

Issue

Name resolution can also be used to merge **different name spaces** transparently through **mounting**: associating a node identifier of another name space with a node in a current name space.

Terminology


- **Foreign name space**: the name space that needs to be accessed
- **Mount point**: the node in the current name space containing the node identifier of the foreign name space
- **Mounting point**: the node in the foreign name space where to continue name resolution

Mounting across a network

- 1 The name of an access protocol.
- 2 The name of the server.
- 3 The name of the mounting point in the foreign name space.

Mounting in distributed systems

Mounting remote name spaces through a specific access protocol

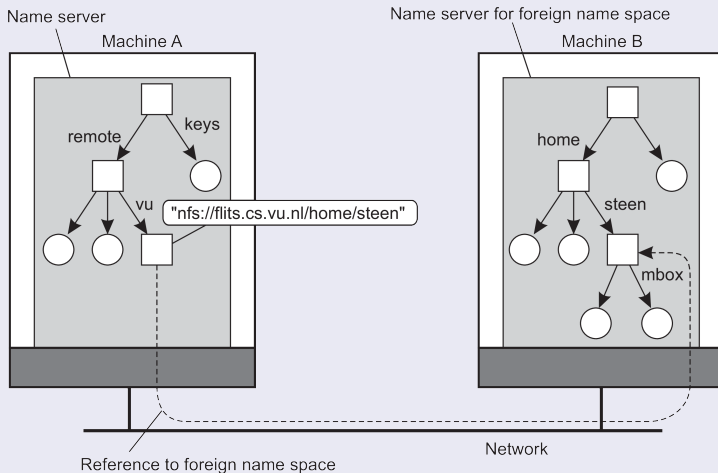

Name-space implementation

Basic issue

Distribute the name resolution process as well as name space management across multiple machines, by distributing nodes of the naming graph.

Name-space implementation

Basic issue

Distribute the name resolution process as well as name space management across multiple machines, by distributing nodes of the naming graph.

Distinguish three levels

Name-space implementation

Basic issue

Distribute the name resolution process as well as name space management across multiple machines, by distributing nodes of the naming graph.

Distinguish three levels

- **Global level:** Consists of the high-level directory nodes. Main aspect is that these directory nodes have to be jointly managed by different administrations

Name-space implementation

Basic issue

Distribute the name resolution process as well as name space management across multiple machines, by distributing nodes of the naming graph.

Distinguish three levels

- **Global level:** Consists of the high-level directory nodes. Main aspect is that these directory nodes have to be jointly managed by different administrations
- **Administrational level:** Contains mid-level directory nodes that can be grouped in such a way that each group can be assigned to a separate administration.

Name-space implementation

Basic issue


Distribute the name resolution process as well as name space management across multiple machines, by distributing nodes of the naming graph.

Distinguish three levels

- **Global level:** Consists of the high-level directory nodes. Main aspect is that these directory nodes have to be jointly managed by different administrations
- **Administrational level:** Contains mid-level directory nodes that can be grouped in such a way that each group can be assigned to a separate administration.
- **Managerial level:** Consists of low-level directory nodes within a single administration. Main issue is effectively mapping directory nodes to local name servers.

Name-space implementation

An example partitioning of the DNS name space, including network files

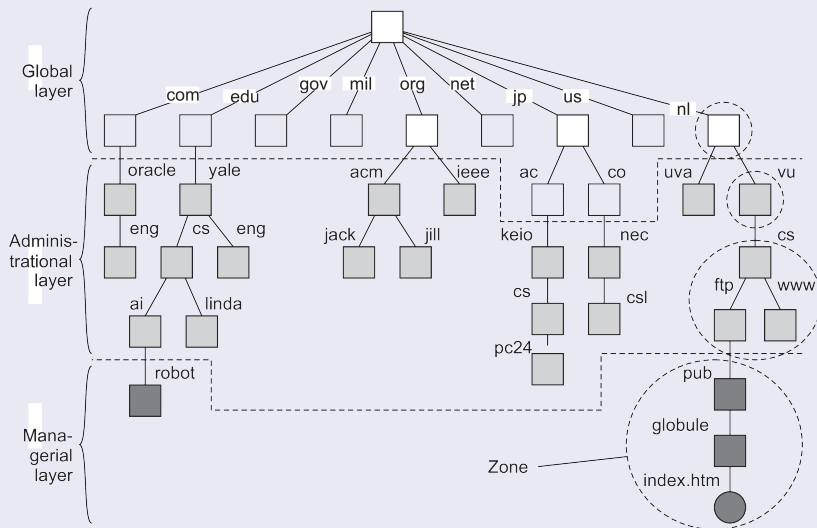

Name-space implementation


A comparison between name servers for implementing nodes in a name space

Item	Global	Administrational	Managerial
1	Worldwide	Organization	Department
2	Few	Many	Vast numbers
3	Seconds	Milliseconds	Immediate
4	Lazy	Immediate	Immediate
5	Many	None or few	None
6	Yes	Yes	Sometimes
1: Geographical scale 2: # Nodes 3: Responsiveness		4: Update propagation 5: # Replicas 6: Client-side caching?	

Iterative name resolution

Principle


- ① $resolve(dir, [name_1, \dots, name_K])$ sent to $Server_0$ responsible for dir
- ② $Server_0$ resolves $resolve(dir, name_1) \rightarrow dir_1$, returning the identification (address) of $Server_1$, which stores dir_1 .
- ③ Client sends $resolve(dir_1, [name_2, \dots, name_K])$ to $Server_1$, etc.

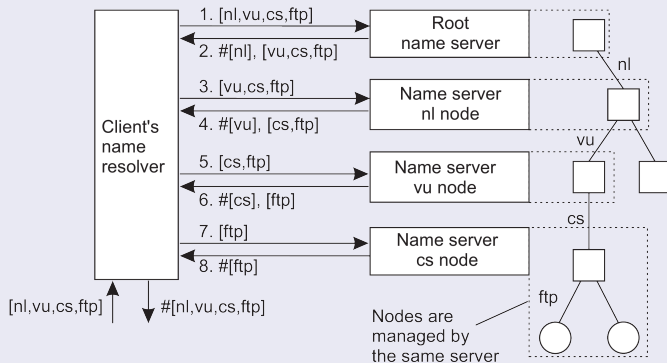

Recursive name resolution

Principle

- 1 $\text{resolve}(\text{dir}, [\text{name}_1, \dots, \text{name}_K])$ sent to Server_0 responsible for dir
- 2 Server_0 resolves $\text{resolve}(\text{dir}, \text{name}_1) \rightarrow \text{dir}_1$, and sends $\text{resolve}(\text{dir}_1, [\text{name}_2, \dots, \text{name}_K])$ to Server_1 , which stores dir_1 .
- 3 Server_0 waits for result from Server_1 , and returns it to client.

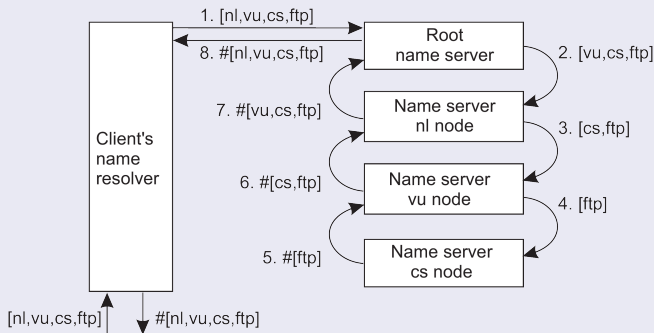

Caching in recursive name resolution

Server for node	Should resolve	Looks up	Passes to child	Receives and caches	Returns to requester
cs	[ftp]	#[ftp]	—	—	#[ftp]
vu	[cs, ftp]	#[cs]	[ftp]	#[ftp]	#[cs] #[cs, ftp]
nl	[vu, cs, ftp]	#[vu]	[cs, ftp]	#[cs] #[cs, ftp]	#[vu] #[vu, cs] #[vu, cs, ftp]
root	[nl, vu, cs, ftp]	#[nl]	[vu, cs, ftp]	#[vu] #[vu, cs] #[vu, cs, ftp]	#[nl] #[nl, vu] #[nl, vu, cs] #[nl, vu, cs, ftp]

Scalability issues

Size scalability

We need to ensure that servers can handle a large number of requests per time unit \Rightarrow high-level servers are in big trouble.

Scalability issues

Size scalability

We need to ensure that servers can handle a large number of requests per time unit \Rightarrow high-level servers are in big trouble.

Solution

Assume (at least at global and administrative level) that content of nodes hardly ever changes. We can then apply extensive replication by mapping nodes to multiple servers, and start name resolution at the nearest server.

Scalability issues

Size scalability

We need to ensure that servers can handle a large number of requests per time unit \Rightarrow high-level servers are in big trouble.

Solution


Assume (at least at global and administrative level) that content of nodes hardly ever changes. We can then apply extensive replication by mapping nodes to multiple servers, and start name resolution at the nearest server.

Observation

An important attribute of many nodes is the [address](#) where the represented entity can be contacted. Replicating nodes makes large-scale traditional name servers unsuitable for locating mobile entities.

Scalability issues

We need to ensure that the name resolution process scales across large geographical distances

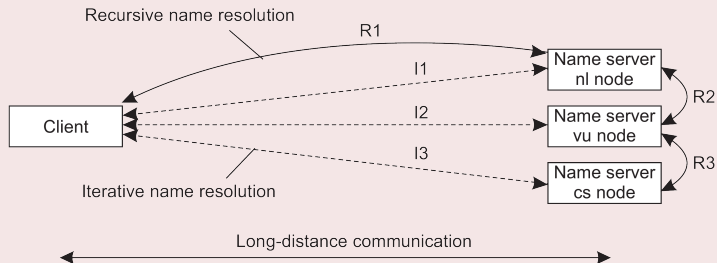

Problem

By mapping nodes to servers that can be located anywhere, we introduce an implicit location dependency.

DNS


Essence

- Hierarchically organized name space with each node having exactly one incoming edge \Rightarrow edge label = node label.
- **domain**: a subtree
- **domain name**: a path name to a domain's root node.


Information in a node

Type	Refers to	Description
<i>SOA</i>	Zone	Holds info on the represented zone
<i>A</i>	Host	IP addr. of host this node represents
<i>MX</i>	Domain	Mail server to handle mail for this node
<i>SRV</i>	Domain	Server handling a specific service
<i>NS</i>	Zone	Name server for the represented zone
<i>CNAME</i>	Node	Symbolic link
<i>PTR</i>	Host	Canonical name of a host
<i>HINFO</i>	Host	Info on this host
<i>TXT</i>	Any kind	Any info considered useful

Modern DNS

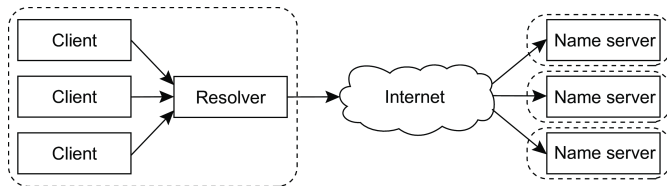

The traditional organization of the implementation of DNS

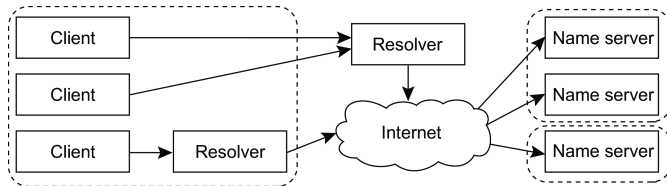

The modern organization of DNS

Secure DNS

Basic approach

Resource records of the same type are grouped into a **signed set**, per zone. Examples:


- A set with all the IPv4 addresses of a zone
- A set with all the IPv6 addresses of a zone
- A set with the name servers of a zone

The public key associated with the secret key used for signing a set of resource records is added to a zone, called a **zone-signing key**.

Trusting the signatures

- All zone-signing keys are grouped again into a separate set, which is signed using another secret key. The public key of the latter is the **key-signing key**.
- The hash of the key-signing key **is stored at, and signed by, the parent zone**

Secure DNS

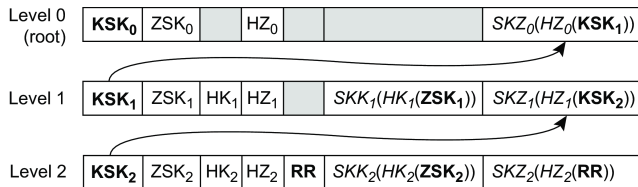


Building a trust chain

- Consider a **single set of resource records RR** , hashed with HZ_k and signed with SKZ_k
- SKZ_k has associated public key ZSK_k
- (Set of) ZSK_k is hashed with HK_k and signed with SKK_k
- SKK_k has associated public key KSK_k

A client can **verify signature** $SKZ_2(HZ_2(RR))$ by checking

$$ZSK_2(SKZ_2(HZ_2(RR))) \stackrel{?}{=} HZ_2(RR)$$


Naming in NFS

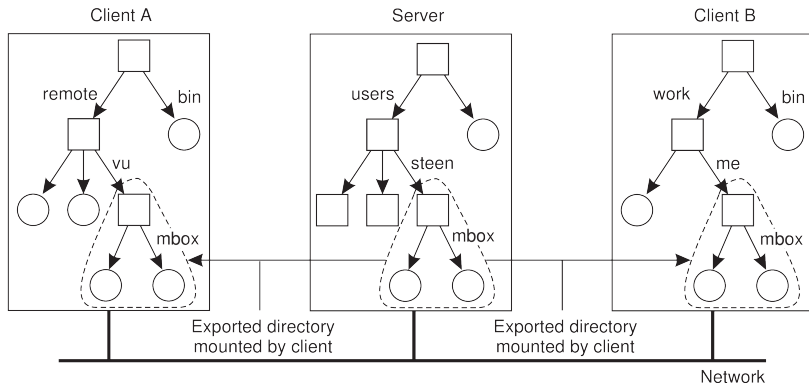

Observation

A server may **export** (a part of) its filesystem, which can then be **imported** by different clients by **mounting**. Note that different clients will have **different (nonsharable) namespaces**!

Mounting nested directories

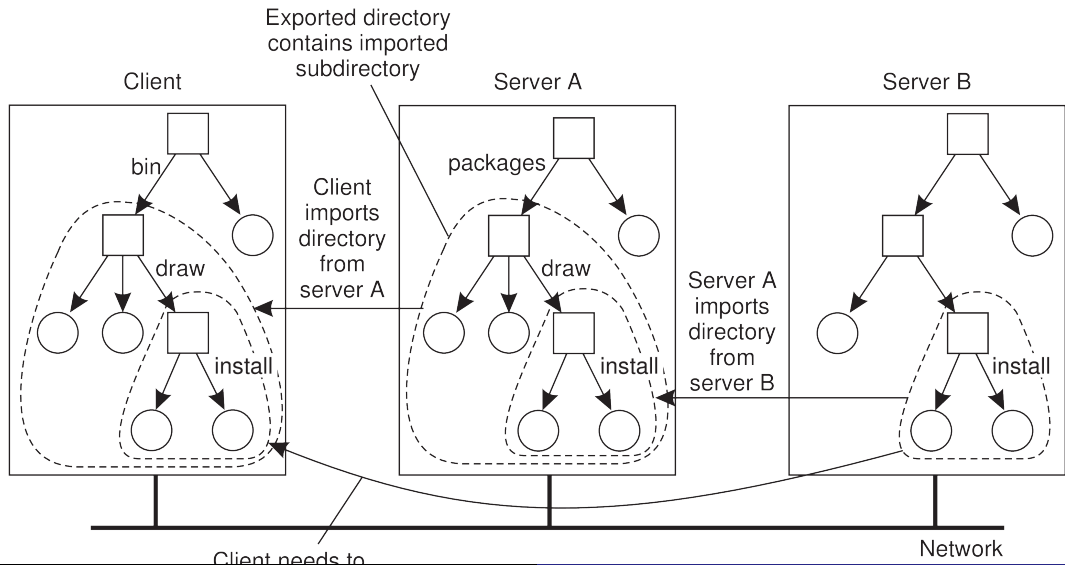

Attribute-based naming

Observation

In many cases, it is much more convenient to name, and look up entities through their **attributes** \Rightarrow traditional **directory services** (aka **yellow pages**).

Attribute-based naming

Observation

In many cases, it is much more convenient to name, and look up entities through their **attributes** \Rightarrow traditional **directory services** (aka **yellow pages**).

Problem

Lookup operations can be expensive, as they require matching **requested attribute values**, against **actual attribute values** \Rightarrow inspect **all entities** (in principle).

Implementing directory services

Solution for scalable searching

Implement basic directory service as database, and combine with traditional structured naming system.

Lightweight Directory Access Protocol (LDAP)

Each directory entry consists of (*attribute, value*) pairs, and is **uniquely named** to ease lookups.


Attribute	Abbr.	Value
Country	<i>C</i>	NL
Locality	<i>L</i>	Amsterdam
Organization	<i>O</i>	VU University
OrganizationalUnit	<i>OU</i>	Computer Science
CommonName	<i>CN</i>	Main server
Mail_Servers	–	137.37.20.3, 130.37.24.6, 137.37.20.10
FTP_Server	–	130.37.20.20
WWW_Server	–	130.37.20.20

LDAP

Essence

- **Directory Information Base**: collection of all directory entries in an LDAP service.
- Each record is uniquely named as a sequence of naming attributes (called **Relative Distinguished Name**), so that it can be looked up.
- **Directory Information Tree**: the naming graph of an LDAP directory service; each node represents a directory entry.

Part of a directory information tree

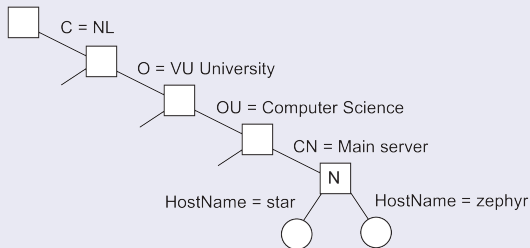

LDAP

Two directory entries having *HostName* as RDN

Attribute	Value	Attribute	Value
<i>Locality</i>	<i>Amsterdam</i>	<i>Locality</i>	<i>Amsterdam</i>
<i>Organization</i>	<i>VU University</i>	<i>Organization</i>	<i>VU University</i>
<i>OrganizationalUnit</i>	<i>Computer Science</i>	<i>OrganizationalUnit</i>	<i>Computer Science</i>
<i>CommonName</i>	<i>Main server</i>	<i>CommonName</i>	<i>Main server</i>
<i>HostName</i>	<i>star</i>	<i>HostName</i>	<i>zephyr</i>
<i>HostAddress</i>	<i>192.31.231.42</i>	<i>HostAddress</i>	<i>137.37.20.10</i>

Result of `search("(C=NL)(O=VU University)(OU=*)(CN=Main server)")`

Distributed index

Basic idea

- Assume a set of attributes $\{a^1, \dots, a^N\}$
- Each attribute a^k takes values from a set R^k
- For each attribute a^k associate a set $\mathbf{S}^k = \{S_1^k, \dots, S_{n_k}^k\}$ of n_k servers
- **Global mapping** F : $F(a^k, v) = S_j^k$ with $S_j^k \in \mathbf{S}^k$ and $v \in R^k$

Observation

If $L(a^k, v)$ is set of keys returned by $F(a^k, v)$, then a query can be formulated as a logical expression, e.g.,

$$(F(a^1, v^1) \wedge F(a^2, v^2)) \vee F(a^3, v^3)$$

which can be processed by the client by constructing the set

$$(L(a^1, v^1) \cap L(a^2, v^2)) \cup L(a^3, v^3)$$

Drawbacks of distributed index

Quite a few



- A query involving k attributes requires contacting k servers
- Imagine looking up "*lastName = Smith* \wedge *firstName = Pheriby*": the client may need to process *many* files as there are so many people named "Smith."
- No (easy) support for *range queries*, such as "*price = [1000 – 2500]*."

Alternative: map all attributes to 1 dimension and then index

Space-filling curves: principle

- 1 Map the N -dimensional space covered by the N attributes $\{a^1, \dots, a^N\}$ into a single dimension
- 2 Hashing values in order to distribute the 1-dimensional space among index servers.

Hilbert space-filling curve of (a) order 1, and (b) order 4



Space-filling curve

Once the curve has been drawn


Consider the two-dimensional case

- a Hilbert curve of order k connects 2^{2k} subsquares \Rightarrow has 2^{2k} indices.
- A range query corresponds to a **rectangle** R in the 2-dimensional case
- R intersects with a number of subsquares, each one corresponding to an index \Rightarrow we now have a **series of indices** associated with R .

Getting to the entities

Each index is to be mapped to a server, who keeps a reference to the associated entity. One possible solution: **use a DHT**.

Named-data networking

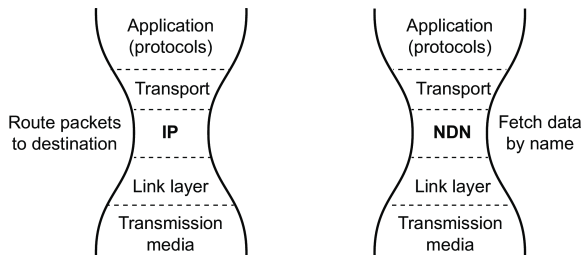

Basics

- Retrieve an entity from the network by using that entity's **name** and **not address**.
- The network takes that name as input, and **routes a request** to a location where the entity is stored.
- NDN takes over the role of IP in a future architecture of the Internet,

Example name

/distributed-systems.net/books/Distributed Systems/4/01/Naming

Routing


Question

Is there really a difference in attempting to route a request such as
distributed-systems.net/books/Distributed Systems/4/01/Naming
from the IPv6 address
2001:610:508:108:192:87:108:15


Key observation

There is **no fundamental difference**. We decide which part of a name or address (i.e., **a prefix**) should be announced within a **global routing substrate**, just as with IPv4 addresses with BGP routers.

Routing

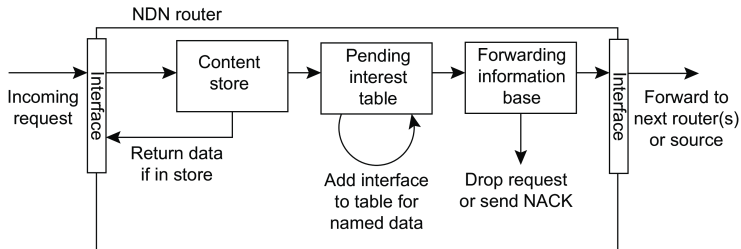

Forwarding a request to (a next router on the way to) its destination

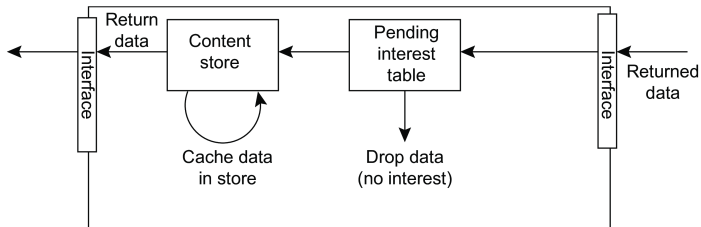

Returning the request (to a router) on the path toward requester