Genuine Price Anomaly Detection and Q-Learning Dispatch for Battery Storage

Keshav Aggarwal, Member, IEEE, Mukesh Singh, Senior Member, IEEE, Ashima Singh, Senior Member, IEEE, Wayes Tushar, Senior Member, IEEE, and Arnab Bhattacharjee, Senior Member, IEEE

Abstract—This research demonstrates that price spikes in decentralized energy markets should be exploited as profitable dispatch signals rather than discarded as corrupted data, establishing an actionable alternative to synthetic-anomaly benchmarking for secure peer-to-peer (P2P) transactive systems. The economic viability of P2P energy trading and transactive prosumer networks depends disproportionately on capitalizing on rare, high-magnitude price spikes. Existing anomaly detection literature predominantly benchmarks on synthetic perturbations rather than authentic market settlements, frequently misclassifying profitable price events as corrupted data. This paper presents an end-to-end framework combining unsupervised deep recurrent autoencoders with reinforcement learning dispatch for resilient P2P energy trading, evaluated across raw California Independent System Operator (CAISO) day-ahead settlement prices across regional trading nodes. A Gated Recurrent Unit (GRU) autoencoder achieves 0.882 Area Under the Receiver Operating Characteristic Curve (AUROC) on localized price anomaly detection (0.894 under seasonal transfer) while training 25% faster than its Long Short-Term Memory (LSTM) counterpart. Conditioning prosumer tabular Q-learning dispatch on the resulting anomaly flag quadruples energy trading gains to $\$11,957$ while cutting cross-seed policy variance by 90%. Under adversarial price-feed poisoning targeting transactive market telemetry, our defense classifier achieves up to 97.4% precision and 0.971 AUROC, recovering up to 71.6% of attack-induced economic degradation and comfortably satisfying the break-even precision requirement of $p^* = 0.611$ (with an operating precision of 76.5%). In contrast, conventional static threshold rules incur punitive false-alarm losses ($-\$240.35$/FP) that are nearly 4× more costly.

Index Terms—Adversarial robustness, anomaly detection, battery-energy-storage-systems, California Independent System Operator (CAISO), energy arbitrage, graph neural networks, peer-to-peer networks, reinforcement learning.

I. Introduction & Literature Review

Electricity prices in California have grown considerably more unpredictable in recent years. Solar output during the afternoon sun usually pushes locational marginal price (LMP)s down toward zero, and sometimes below it, only for prices to snap back once the sun sets and gas and coal plants jack up prices to cover the evening peak. Battery Energy Storage Systems (BESS) exploit this daily rhythm in decentralized power grids and peer-to-peer (P2P) trading frameworks to charge their systems when power is cheap and discharge as prices climb [1], [2].

Most days, these curves follow a common pattern dictated by the work schedule and the weather. However, a battery's annual profits tend to depend on a handful of extreme hours. Hourly prices can soar over $1,000/MWh during heatwaves, transmission outages, and sudden generator trips, and a 10 MW / 10 MWh battery that fully discharges just once during such a spike can profit about as much as it would have made in a whole week otherwise. It is therefore a high priority for storage operators to detect these rare hours as soon as possible and to anticipate them.

Past state-of-the-art (SOTA) approaches to anomaly detection in pricing have addressed the problem primarily from a cybersecurity perspective [3]–[5]. Such an approach starts by using historical data without anomalies, creates some artificial price spikes, and checks whether the added anomalies are detected. Such an approach may be useful in defending against a cyber-attack [6]. However, it cannot prove the actual trading process, the origins of prices, or the legal procedures governing market settlements. If a legitimate $1,000/MWh spike anomaly is detected and battery discharge is disabled, the operator will incur significant income loss.

Thus, to explain the reason for our experimental evaluations, we use only actual market prices, obtaining settlement information from the California Independent System Operator (CAISO) Open Access Same-Time Information System (OASIS) website [7] without any synthetic additions. We also investigate common questions, such as: Does the attacker actually inject fake spikes into this data flow, and how can storage assets defend against such tampering?

Using historical market data has two crucial issues. The first is that the historical prices provided by market operators cannot be taken as ground-truth labels; therefore, the model needs to be validated for statistical consistency and, ultimately, profitability. The second and even more important issue is that mistakes are not symmetrical in any sense. While a mistake in image or text recognition is just an annoyance, a mistake that prevents the battery from discharging into a real $1,000/MWh spike can lead to a loss.

This work sits at the intersection of electricity price forecasting [8], unsupervised time-series anomaly detection [4],

K. Aggarwal is with the Computer Science and Engineering Department, Thapar Institute of Engineering and Technology, Patiala, Punjab, India.

M. Singh and A. Singh are with Thapar Institute of Engineering and Technology, Patiala, Punjab, India.

W. Tushar is with The University of Queensland, Australia.

[9], generative modeling [10], [11], P2P energy trading [1], [2], and battery dispatch optimization [12]–[15].

Electricity Prices and Anomaly Detection: Rolling statistics, moving averages, and local z-scores are traditional approaches for detecting abnormal price levels in SOTA models. Although these are one of the simplest approaches to apply, they have limitations: they assume constant thresholds that do not change with the seasons; a threshold set in winter to accommodate low load levels will always result in alarms in summer.

The deep models learn the usual 24-hour price pattern directly from historical data; there are no predefined patterns in our models. The recurrent autoencoders (Long Short-Term Memory (LSTM), Gated Recurrent Unit (GRU)) transfer the sequence states forward through time and compress each daily path to a small-size bottleneck and detect the moments when the error of reconstruction becomes large [9]. On the other hand, the variational autoencoders (VAE) encode price windows into a continuous latent space [10], and the denoising diffusion probabilistic models (DDPM) add Gaussian noise to the input and learn to remove this process [11]. Large price spikes are unusual, making it harder to remove noise and leading to large and frequent errors.

Battery Dispatch and Trading: Storage scheduling, commonly used methods include model predictive control (MPC), linear programming, and dynamic programming [13], while reinforcement learning (RL) is increasingly seen as an alternative to these methods [1], [12], [15]. One of the flaws frequently found in benchmarks reported in the literature is an implicit assumption of precognition about tomorrow's prices; when the optimizer is aware of the prices in advance, then there is no need for anomaly detection at all. This problem is avoided by ensuring that every dispatch instance is performed in a purely causal manner.

The reasons behind these two problems, lack of labeled data and imbalanced misclassification costs, inspire the design choices made in this paper. The paper has contributions in the following aspects:

- Benchmarking of seven different detector architectures—Isolation Forest (iForest), a VAE, a denoising diffusion model, single-node LSTM and GRU autoencoders, a multivariate LSTM, and a graph attention network—on 28,271 hours of authentic CAISO settlement data (expanding across four calendar years, 2023–2026, to 32,832 continuous market hours) across five random seeds and two disjoint test windows.
- Dispatch policies spanning rules-based, directional, and RL methods to understand how controllers exploit anomaly signals, demonstrating that tabular Q-learning achieves maximum exploitation of the detection signal.
- Economic break-even point precision analysis (p^*) assesses defense feasibility from an asymmetric-risk perspective under adversarial price feed poisoning attacks.

TABLE I
Nomenclature and Parameter Settings

Symbol	Description
s_t	Anomaly score for the 24h window ending at hour t
H	Window length ($H = 24$ hours)
$x_{t,h}, \hat{x}_{t,h}$	Normalized observed and reconstructed price at hour h
$Q(s,a)$	Action-value estimate for state s and action a
α, γ	Q-learning rate ($\alpha = 0.15$) and discount factor ($\gamma = 0.95$)
r_t	Net arbitrage cash return at hour t ($)
SOC_t	Battery energy level at hour t ($0 \le SOC_t \le 10$ MWh)
$C, P_{\max}$	Rated energy capacity (10 MWh) and power limit (10 MW)
$e, \Delta t$	Round-trip cycle efficiency ($e = 0.80$) and interval ($\Delta t = 1$ h)
$c_{\text{fee}}, c_{\text{deg}}$	Market fee ($0.50/MWh) and cell degradation ($2.50/MWh)

II. Mathematical Modeling

To formalize the physical battery constraints, detection metrics, RL dynamics, and adversarial risk, nomenclature and parameter settings are presented in Table I.

Discrete-time state-of-charge (SOC) dynamics govern the physical operation of the BESS:

$$SOC_{t+1} = SOC_t + \left(\eta_{\text{ch}} P_t^{\text{ch}} - \frac{1}{\eta_{\text{dis}}} P_t^{\text{dis}}\right) \Delta t, \quad (1)$$

subject to operational power rating and storage capacity limits:

$$0 \le P_t^{\text{ch}} \le P_{\max}, \quad 0 \le P_t^{\text{dis}} \le P_{\max}, \quad (2)$$

$$0 \le SOC_t \le C, \quad (3)$$

where P_t^{ch} and P_t^{dis} denote power at hour t, respectively, with $P_{\max} = 10$ MW, $C = 10$ MWh, and $\Delta t = 1$ h. Symmetric one-way conversion efficiencies satisfy $\eta_{\text{ch}} = \eta_{\text{dis}} = \sqrt{e} = \sqrt{0.80} \approx 0.894$, guaranteeing a round-trip cycle efficiency of $e = \eta_{\text{ch}}\eta_{\text{dis}} = 0.80$.

The deep sequential model considers normalized 24-hour sliding price vectors and evaluates their anomaly score by means of mean squared reconstruction error:

$$s_t = \frac{1}{H} \sum_{h=1}^{H} \left(x_{t,h} - \hat{x}_{t,h}\right)^2. \quad (4)$$

Usually, the autoencoder successfully reconstructs the price graph for the particular day. However, when prices increase suddenly, the compressed representation cannot encode the change, and s_t increases sharply.

In the GNN-AE model, we use the graph representation $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ for the three regional hubs, where $\mathcal{V} = \{\text{NP15}, \text{ZP26}, \text{SP15}\}$, and the edge set $\mathcal{E}$ contains the main transmission connections for Path 15 (between NP15 and ZP26) and Path 26 (between ZP26 and SP15). In the graph attention network, two graph attention layers are used (hidden units of 8), and the directional spatial attention weight α_{ij} is calculated by the following equations:

$$\alpha_{ij} = \frac{\exp\left(\text{LeakyReLU}\left(\mathbf{a}^T[\mathbf{W}h_i \parallel \mathbf{W}h_j]\right)\right)}{\sum_{k\in\mathcal{N}_i}\exp\left(\text{LeakyReLU}\left(\mathbf{a}^T[\mathbf{W}h_i \parallel \mathbf{W}h_k]\right)\right)}, \quad (5)$$

where $\mathbf{W} \in \mathbb{R}^{8\times d}$ is a shared projection matrix, $\mathbf{a}$ is the attention vector, $\parallel$ is concatenation, and $\mathcal{N}_i$ denotes neighboring regional hubs. Spatial node representations are followed by LSTM-based temporal sequence encoding.

Tabular Q-learning [15] learns to dispatch in a discrete state space defined by $s = (p_z, a_{\text{flag}}, s_{\text{soc}})$. Discrete z-normalized price is $N_p = 10$ bins in the range from -3 to $+3$; anomaly flag is $N_a = 5$ categories (or $N_a = 1$ for unconditional version); battery SOC ratio (SOC_t/C) is $N_s = 5$ bins resulting in $|S| = 250$ discrete states ($|S| = 50$ without anomaly flag). The action space contains three discrete power actions $a \in \{-1.0, 0.0, 1.0\}$ corresponding to full discharge ($P_t^{\text{dis}} = P_{\max}$), idle ($P_t = 0$), and full charge ($P_t^{\text{ch}} = P_{\max}$), subject to the physical constraints in (1)–(3). The net cash return reward r_t received by the agent accounts for market revenue, degradation, and fees [16]:

$$\begin{aligned} r_t = &\left(p_t P_t^{\text{dis}} - p_t P_t^{\text{ch}}\right)\Delta t \\ &- \left[c_{\text{fee}}\left(P_t^{\text{dis}} + P_t^{\text{ch}}\right) + c_{\text{deg}} P_t^{\text{dis}}\right]\Delta t. \end{aligned} \quad (6)$$

The action values are iteratively learned using Eq. (7):

$$Q(s,a) \leftarrow Q(s,a) + \alpha\left[r_t + \gamma \max_{a'} Q(s',a') - Q(s,a)\right], \quad (7)$$

with learning rate $\alpha = 0.15$ and discount factor $\gamma = 0.95$.

III. Methodology

We examine nearly four years of hourly day-ahead LMPs from CAISO spanning January 12, 2023, to October 11, 2026. We collected price data from the three major trading hubs, SP15, NP15, and ZP26, and four ancillary services (Regulation Up, Regulation Down, Spinning Reserves, and Non-Spinning Reserves) for a total of 28,271 raw hourly settlement observations (expanding to 32,832 continuous market hours under regular chronological grid indexing). The additional price streams serve as auxiliary contextual information for multi-channel anomaly detection, reflecting the overall tightness of operating reserves. At the same time, the economic trading calculations only evaluate day-ahead energy arbitrage.

Price anomalies were registered during the above-mentioned time frame, with SP15 reaching its highest point of $\$1,143.78$/MWh on August 17, 2023, due to heatwaves in the region, and its lowest point of $-\$41.33$/MWh on May 19, 2024, due to excessive solar generation.

For a more realistic evaluation of our algorithm's effectiveness, we break down the time period into periods without any overlap among them: the training period between January 12, 2023 and December 31, 2024 (17,280 continuous hours, approximately 23.7 months), validation period between January 1 and June 30, 2025 (4,344 hours, 5.9 months: used only for threshold calibration), and testing period between July 1, 2025 and October 11, 2026 (11,208 hours, 15.3 months, evaluated once). We additionally evaluate a six-month out-of-sample seasonal test period between January 1 and June 30, 2025. In California wholesale markets, Day-Ahead Market (DAM) clearing occurs for all 24 hours of the subsequent operating day at 13:00 $D-1$. Nevertheless, BESS commercial traders and transactive prosumers must place their bids for energy deliveries without knowing the settled prices before 10:00 AM. They must roll their exposures to real-time imbalances on a 15-minute and 5-minute basis. We test our models using only causal 24-hour rolling windows in order to eliminate the problem of foreseeing.

Since it is not possible to use ground-truth anomaly flags in past settlement prices, a flag is made available for ex-post evaluation only for reference. The flag is considered an hour with a flag when the price is above 4 median absolute deviations (MAD) from the 30-day moving median or within the top/bottom 0.5% of historical prices (which happens 739 times in 28,271 hours, or around 2.6% of the time). None of the models is provided access to check the flag during the entire training process. Sensitivity analysis reveals that rankings of model families based on their performances are invariant with respect to the thresholds (3.0 to 5.0 MAD).

The detection pipeline (Fig. 1) uses a two-level filtering approach: iForest is used to isolate and remove major outliers, followed by analysis of the remaining possible hours using a deep-sequence model.

The Stage 1 iForest [17] considers nine historical-only causal features: (i) trailing 6-hour linear price slope $\Delta p/\Delta t$, (ii) non-reversion ratio $|p_t - p_{t-1}|/(|p_{t-1} - p_{t-2}| + \epsilon)$, (iii) 1-hour price difference $(p_t - p_{t-1})$, (iv) 3-hour price difference $(p_t - p_{t-3})$, (v) 24-hour trailing robust z-score $(p_t - \text{median}_{24})/\text{MAD}_{24}$, (vi) 168-hour trailing z-score, (vii) 24-hour rolling volatility σ_{24}, and (viii–ix) cyclic diurnal harmonics $(\sin(2\pi h/24), \cos(2\pi h/24))$ for hour-of-day $h \in \{0, \ldots, 23\}$.

A total of three models have been implemented for Stage 2 single-node detection. VAE has been trained for 40 epochs with the Adam optimizer (lr $= 10^{-3}$, batch size=64). The VAE architecture consists of fully connected networks with 48 neurons, and the bottleneck is modeled as an 8-dimensional Gaussian distribution [10]. LSTM-AE and GRU-AE map the price sequence through 32 recurrent neurons to an 8-dimensional bottleneck.

The neural network is trained using the Adam optimization algorithm, with a learning rate of 10^{-3}, a batch size of 32, and 40 training epochs. The training uses the mean squared error loss function [9]. In the GRU case, the input and forget gates are used, which makes training 25% faster but does not affect temporal dependencies. The DDPM learns how to reverse the procedure of adding noise to the data on discrete schedules [11]. The inference step involves corrupting the window samples at four noise levels ($t \in \{0.10, 0.25, 0.40, 0.60\}$) over 16 iterations and averaging the residuals.

To explore the influence of the regional transmission environment on predictability, we also feed SP15, NP15, and

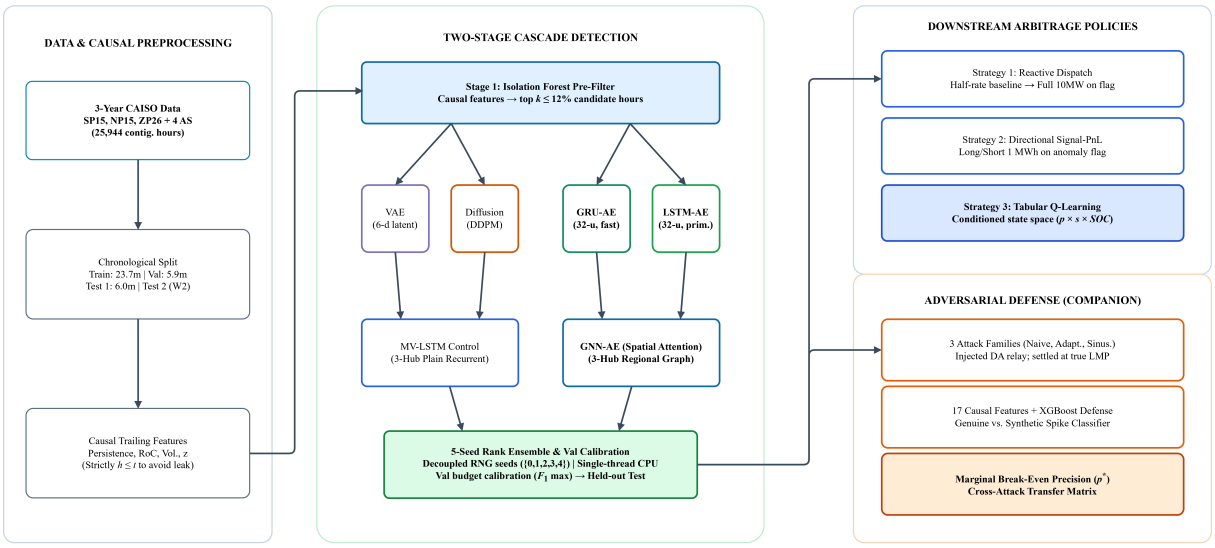


Fig. 1. System architecture. The raw CAISO price data undergoes causal feature extraction before Stage 1, which consists of an iForest pre-filter, followed by Stage 2, which consists of deep autoencoders and multi-node models. The five-seed ensemble then guides the battery dispatching policy and the defense filter.

ZP26 as inputs to two multi-hub models, which include a 3-channel multivariate LSTM (MV-LSTM) control and the graph neural network autoencoder (GNN-AE) [18].

All experiments were conducted with five random seeds (0-4), ensuring that torch.set_num_threads(1) was always set and that cuDNN flags were fixed to maintain determinism. To evaluate the performance of the proposed framework, all evaluations were conducted on a commodity laptop host, a Dell Inspiron 15. The hardware execution layer features an Intel Core i7-1355U processor (10 cores, 1.70 GHz base clock, up to 5.0 GHz boost configuration), 16 GB of system RAM, and integrated Intel Iris Xe Graphics (128 MB). High-throughput dataset I/O operations were sustained with a 512 GB NVMe SSD running in a Microsoft Windows 11 environment. The core computational pipelines were implemented within a unified Python ecosystem utilizing numpy (v2.0+) for matrix and tensor computations, pandas (v2.2+) for settlement series indexing, and scipy (v1.14+) for linear programming via the HiGHS solver. Machine learning implementations and defensive modeling relied on scikit-learn (v1.5+) for iForest and validation metrics, and on torch (v2.4+) for deep autoencoders and Graph Neural Networks (GNNs). Finally, gradient boosted defenses were deployed via xgboost (v2.0+), with all performance and data visualizations generated using matplotlib (v3.8+).

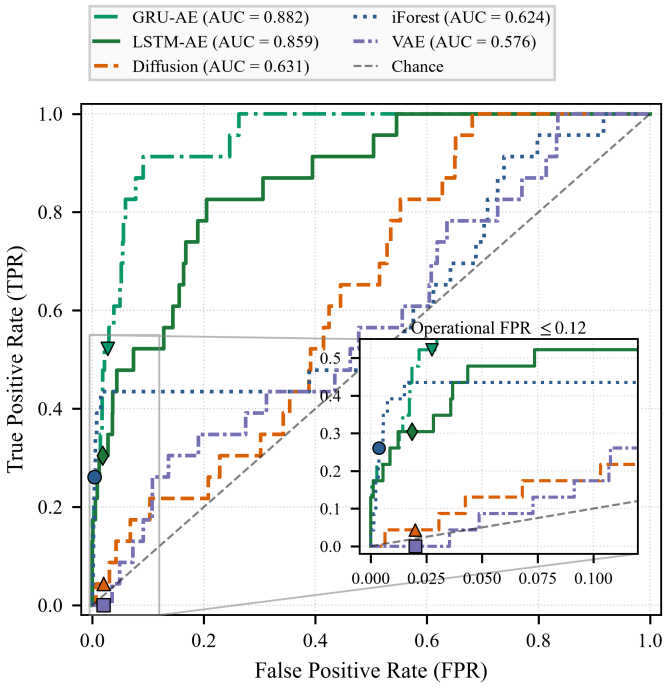


Fig. 2. Test-window ROC curves for the 5-seed ensemble models on CAISO data, GRU-AE (downward triangle), LSTM-AE (diamond), Diffusion (upward triangle), iForest (circle), VAE (square), with the inset showing the operational low-false-positive region (false positive rate FPR ≤ 0.12).

IV. Results and Experimental Evaluation

Thresholds for the budget percentile range from 0.5% to 10% were optimized based on the F1 score on the validation dataset and then fixed before evaluating the model on the test dataset.

The results for the quality of reconstruction and detection of anomalies by all methods are provided in Table II, measured in terms of root mean squared error (RMSE) and mean absolute error (MAE). The ROC curves are shown

TABLE II
Performance Master Summary: Accuracy of Model Reconstruction and Anomaly Identification

Model Architecture	Reconstruction Error (↓)		Anomaly Detection Accuracy (↑)				Operating Point Metrics (↑)		
	RMSE ($)	MAE ($)	Mean AUROC	Ens. AUROC	Avg. Prec.	W2 AUROC	F_1 Score	Precision	Recall
Single-Node Models (Evaluated on CAISO SP15 Hub)									
iForest	n/a	n/a	0.623 ± 0.030	0.624	0.138	0.453	0.222 ± 0.028	0.227	0.217
VAE	7.85 ± 0.47	6.21 ± 0.39	0.534 ± 0.164	0.576	0.007	0.673	0.027 ± 0.021	0.015	0.226
Diffusion (DDPM)	n/a†	n/a†	0.564 ± 0.071	0.631	0.009	0.744	0.016 ± 0.015	0.009	0.096
LSTM-AE	10.37 ± 1.76	8.44 ± 1.45	$\mathbf{0.738 \pm 0.145}$	0.859	0.184	0.921	0.107 ± 0.099	0.073	0.261
GRU-AE	9.70 ± 0.68	7.77 ± 0.68	0.776 ± 0.237	0.882	0.162	0.894	0.157 ± 0.152	0.110	0.304
Multi-Node Spatial Models (Simultaneously Processing All 3 Regional Hubs: NP15, SP15, ZP26)									
MV-LSTM Control	9.12 ± 0.84	7.15 ± 0.72	0.854 ± 0.165	0.926	0.201	n/a	0.185 ± 0.092	0.142	0.326
GNN-AE	8.86 ± 0.65	6.94 ± 0.58	$\mathbf{0.938 \pm 0.098}$	0.985	0.246	n/a	$\mathbf{0.246 \pm 0.081}$	0.212	0.391

Notes: ↓ Lower error is preferred; ↑ Higher accuracy is preferred. †Diffusion scores are derived from normalized noise residuals; iForest lacks a decoder. Multi-node setups process SP15, NP15, and ZP26 simultaneously.

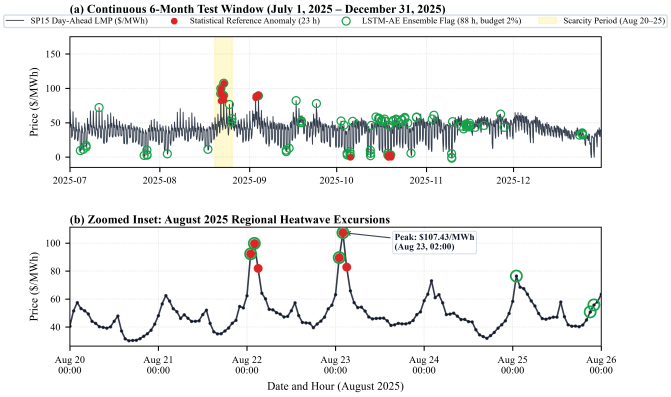


Fig. 3. Anomaly detection timeline for a single seed (Seed 1) of the 5-seed ensemble models on CAISO data, highlighting the third week of November. The GRU-AE (downward triangle), LSTM-AE (diamond), Diffusion (upward triangle), iForest (circle), and VAE (square) show their detection results compared with the SP15 market price. The inset shows the operational low-false-positive region (false positive rate FPR ≤ 0.12).

in Fig. 2, while Fig. 3 shows detection results compared with the SP15 market price.

Perhaps the most obvious trend from Table II is that low reconstruction error does not necessarily indicate high-quality anomaly detection. While the VAE yielded the highest-quality reconstructions out of all single-node models (RMSE \$7.85/MWh), it generated the lowest detection scores (AUROC $= 0.534$; $F_1 = 0.027$). The VAE relies on the latent prior to generate Gaussian noise, so the output becomes smoothed, eliminating the exact signals needed for anomaly detection.

This is because recurrent autoencoders exhibited far better performance since they could handle temporal dependencies effectively. The AUROC values for the LSTM-AE and GRU-AE models were 0.859 and 0.882, respectively. As for the reason behind their superiority in this matter, one should note that, due to the sequential updating process, recurrent models maintain their memory of a typical daily pattern. Thus, upon encountering a sudden price change, the hidden state will be unable to reconcile the jump, and the error rate will skyrocket.

Incorporating price information from the three California centers increased the GNN-AE's mean AUROC to 0.938. However, the simple multivariate LSTM baseline performed nearly as well, achieving a mean AUROC of 0.854 and reaching 0.988 AUROC on three of the five seeds. Comparison of the two with a paired bootstrap yielded a 95% confidence interval of $[-0.102, +0.281]$; as the interval includes zero, there is no statistically significant difference between using graph attention and using multivariate modeling alone. The added value seems to be mostly due to tracking price behavior in neighboring regions, rather than to graph attention.

The second test window for next year would demonstrate that the recurrent models can generalize across seasons, as the LSTM-AE achieved an AUROC of 0.921. On the other hand, the performance of the static iForest was extremely poor, as it could only get an AUROC of 0.453, worse than guessing randomly, because it is incapable of adapting to wholesale price variations from winter demand to summer solar/hydropower production.

The results obtained for a 5-channel diffusion model trained across all three hubs and two ancillary streams were an average AUROC of 0.528 ± 0.066, which is lower than the default at one hub (0.564 ± 0.071). It seems like the additional price channels did nothing but add noise to the forward diffusion process, providing nothing to denoise on the reverse pass.

Turning Detection into Profit: To examine whether the anomaly alerts yield profits, we conducted trading simulations for a battery with a capacity of 10 MWh/10 MW ($e = 0.80$, transaction cost \$0.50/MWh, degradation cost \$2.50/MWh [16]).

Strategy 1 (Heuristic dispatch) is activated every time prices are less than the 25th percentile of the historical value and ends as soon as the prices become greater than the 75th percentile, with 5 MW dispatch and 10 MW dispatch as the event occurs. Strategy 2 (Directional spread) goes long or short 1 MWh for every anomaly detected,

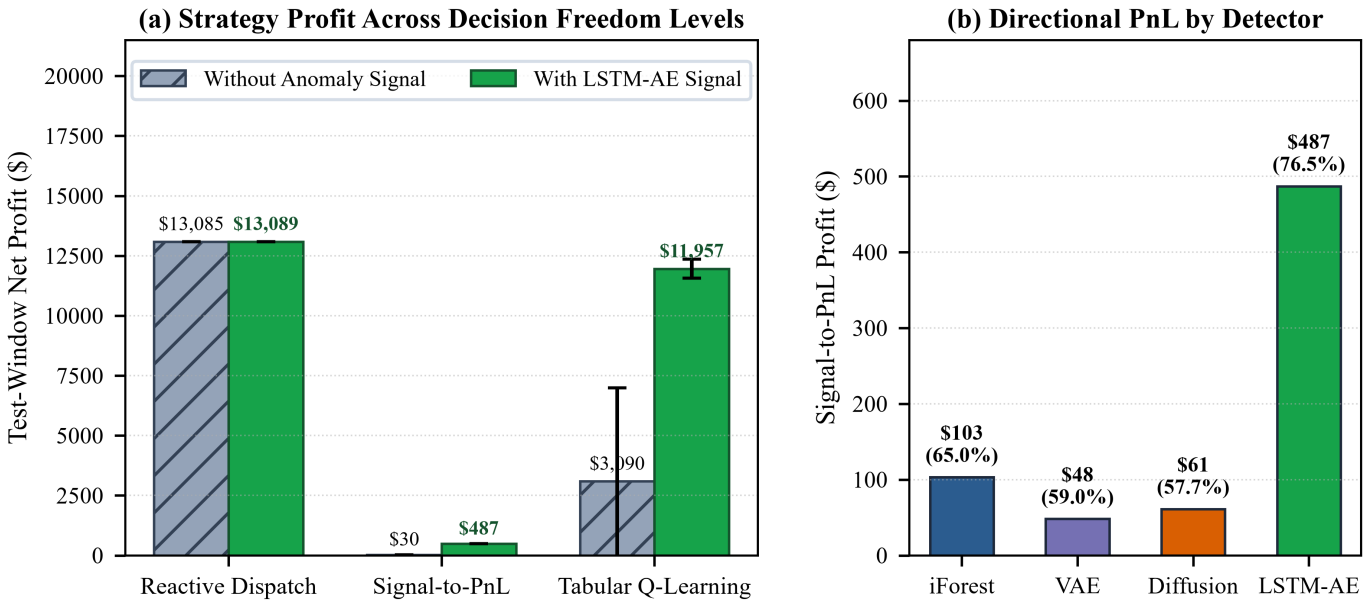


Fig. 4. Window 1 cumulative trading returns. (a) Heuristic dispatch, directional spread trading, and tabular Q-learning, showing how the anomaly signal nearly quadruples Q-learning profit while cutting seed variance tenfold. (b) Directional arbitrage profit and win rate across the four detector families.

TABLE III
Arbitrage Earnings Across Both Test Windows (LSTM-AE Signal)

Trading Strategy	Window 1 Profit	Window 2 Profit
Clairvoyant LP Upper Bound (Oracle)	$16,840	$48,250
Heuristic (Without / With Signal)	$13,085 / $13,089	$30,197 / $30,762
Directional Spread (Trades, Win%)	$487 (68, 76%)	$565 (84, n/a)
Q-Learning: Without Signal	$3,090 ± $3,905	$23,451 ± $3,180
Q-Learning: With Signal	$11,957 ± $393	$35,567 ± $3,658
Deep Q-Network (DQN) (Without / With)	$5,931 / $5,246	n/a

TABLE IV
Per-Detector Arbitrage Performance (Window 1)

Detector Family	Dispatch ($)	Spread PnL ($)	Trades, Win%
iForest	13,128	103	20, 68%
VAE	13,017	537	220, 61%
Diffusion	12,740	60	13, 77%
LSTM-AE	13,089	487	68, 76%

with a 24-hour trading period. Strategy 3 (Tabular Q-learning) [15] learns to dispatch in the discrete state space $s = (p_z, a_{\text{flag}}, s_{\text{soc}})$ under an ϵ-greedy exploration schedule decaying linearly from $\epsilon_{\text{start}} = 0.30$ to $\epsilon_{\text{end}} = 0.02$ across 30 training runs.

According to Table III and Fig. 4, the profits from trading depend greatly on the degree of flexibility of the controller. To benchmark absolute policy efficiency, we evaluate the offline clairvoyant Linear Programming (LP) upper bound with perfect price foresight (at $16,840 in Window 1 and $48,250 in Window 2). Tabular Q-Learning without the anomaly signal is only able to reach 18.3% of the oracle upper bound in Window 1; however, by adding the signal generated from the LSTM-AE model, the value becomes 71.0% of the oracle upper bound (or 73.7% in Window 2). In the case of heuristic dispatching, the anomalous signal had almost no effect on profits (+0.03% for Window 1, +1.87% for Window 2) because power ratings and SoC constraints restrict the actions of static-threshold rules.

By contrast, directional spread trading revealed that the signal had value, as it delivered $487 in profit with a 76% success ratio, whereas under pure randomness it yielded only $30.

The largest improvement was observed in Tabular Q-learning. The possibility for an agent to learn to use anomaly signals led to a near fourfold increase in Window 1 profit from $3,090 to $11,957 and a decrease in cross-seed standard deviation from $3,905 to $393 (-90%). In addition, Window 2's profit increased by 51.7% to $35,567.

Nevertheless, Compute-matched DQN [19] gained $5,246 profit using the signal, but the no-signal situation brought $5,931 profit. Hence, continuous deep reinforcement learning was unable to handle reward noise in time series, whereas tabular Q-learning was able to generalize regardless of such noise. Please see Table IV for the detailed results for each detector in Window 1, where LSTM-AE turned out to be the most efficient with 76% win ratio and $487 in spread profit.

The VAE attains $537 in spread profit from 220 transactions, as opposed to $487 from 68 transactions in the LSTM-AE. On the other hand, the iForest attains the highest dispatch through the raw heuristic strategy

TABLE V
Adversarial Detection and Economic Recovery (5 Seeds)

Attack Profile	Recall	AUROC	Damage (%)	Recovery (%) (F_1 / Cons. / Oracle)
Naive	0.85 ± 0.03	0.951 ± 0.028	-10.90 ± 0.82	31.8 / 34.6 / 93.6
Adaptive	0.79 ± 0.04	0.965 ± 0.007	-8.15 ± 0.78	-31.6 / -24.0 / 89.5
Sinusoidal	0.85 ± 0.02	0.971 ± 0.006	-20.92 ± 0.68	67.3 / 71.6 / 95.6

($13,128). The model's high accuracy gives rise to the above contradiction. For example, the Gaussian latent bottleneck used by the VAE maintains persistently high reconstruction errors despite ordinary daily variations. It causes a very high number of transactions (220). However, it captures small intraday price variations by coincidence, with a low win rate (61% versus 76%), together with a much higher cost of cycling wear and transaction friction. However, the LSTM-AE initiates trades based on real price movements, achieving a very high win rate. Together with tabular Q-learning, which modulates the battery SOC to anticipate a catastrophic event, the high-accuracy recurrent signal increases arbitrage profits fourfold.

Adversarial Robustness and Break-Even Analysis: Another thing that we looked into was the reverse of the above problem, where the attacker would inject the price spikes into the feed system [6]. In this case, the battery uses its stored energy and releases it during the price spike, making it appear to earn, but no money is made.

There were three kinds of attack profiles carried out for the SP15 price: Naive Multiplicative 3.0× attacks hourly; an 8-hour raised-cosine price attack intended to mimic the morning ramp attack profile; and multi-hour price wave attacks using sinusoidal prices. The defense mechanism uses the XGBoost predictor [20] based on 17 causal variables: z-score, trailing ratio, volatility, and consensus.

In Table V, we quantify attack-induced revenue degradation without defense: −10.90% for naive spikes, −8.15% for adaptive bumps, and −20.92% for sinusoidal waves across the 11,208-hour evaluation horizon. With our learned defense filter, we recover 31.8% (F_1) and 34.6% (conservative threshold) of naive attack losses, and up to 67.3% (F_1) and 71.6% (conservative) of sinusoidal wave losses, closely approaching the theoretical oracle recovery bounds of 89.5% to 95.6%. For subtle adaptive attacks, conservative thresholding maintains protection while avoiding excessive over-filtering of borderline market hours.

A. Break-Even Precision Analysis (p^*)

In the battery dispatch problem, a true positive (TP) identifies a fake spike, thus earning a profit ($v_{\mathrm{TP}} > 0$). In contrast, a false positive (FP) misidentifies a genuine price spike, resulting in revenue loss ($v_{\mathrm{FP}} < 0$). An operational defense that operates at a precision level of p is said to be at the break-even point if the expected value of the cash flows:

TABLE VI
Break-Even Precision: Machine-Learning Classifier vs. Simple Threshold

Defense Strategy	Prec.	\$/TP Saved	\$/FP Lost	$\boldsymbol{p^*}$ Break-Even
Learned Classifier	0.765	\$23.93	−\$64.28	0.611
Simple Robust-z Rule	0.757	\$12.41	−\$240.35	0.928

Notes: Reported p^* is the cross-seed/attack mean ($\mathbb{E}[p_i^*]$ across runs) rather than a ratio of aggregate column averages.

$$p^* = \frac{v_{\mathrm{FP}}}{v_{\mathrm{FP}} - v_{\mathrm{TP}}} = \frac{|v_{\mathrm{FP}}|}{|v_{\mathrm{FP}}| + v_{\mathrm{TP}}}. \tag{8}$$

Economic differences between the learned classifier and the threshold-based classifier are quite remarkable (Table VI and Fig. 5). The learned classifier is estimated to save, on average, $23.93 for every detected price spike and spend $64.28 on each false alarm; hence, the break-even point is reached at the precision level of $p^* = 0.611$. Given that the learned classifier's actual operating precision is 76.5%, it operates comfortably above break-even and achieves positive net economic surplus.

On the other hand, a robust-z threshold-based classifier is significantly less effective in terms of economic performance. This classifier incurs, on average, $240.35 for each false alarm, approximately 3.7 times higher than for the learned classifier. Because high absolute values trigger the rule indiscriminately, it forfeits the year's most lucrative genuine price spikes; hence, its break-even point rises to $p^* = 0.928$, demanding an unrealistically stringent 92.8% precision threshold to avoid net capital depletion.

Generalization for Cross-Attacks: From the cross-attacks experiments (Table VII and Fig. 6), it becomes clear that defenders need to learn their defenses across diverse threat models. Nominal AUROC score stays high (≥ 0.856), while economic gain drops in the case when the threat model used in the attack is not known to the defender. For example, there was an economic penalty of −58.3% when a model trained on naive spikes faced adaptive bump attacks, and −12.4% when trained on sinusoidal waves and evaluated on adaptive bumps. Combining attacks during training substantially improves transfer, boosting recovery on naive attacks to +49.0%.

V. Conclusion & Future Directions

As electricity prices depend on physical grid dynamics rather than independent distributions, sequence models (LSTM/GRU) and hour-uniform VAEs struggle to accurately reconstruct unusual price jumps. Unlike passive anomaly-based methods, tabular Q-learning successfully monetizes normal periods to arbitrage peak hours. Securing decentralized transactive systems therefore requires defenses that avoid costly false-positive suppression and explicitly preserve genuine high-value scarcity peaks.

While the 4-MAD benchmark provides an objective statistical metric for detector discrimination, economic

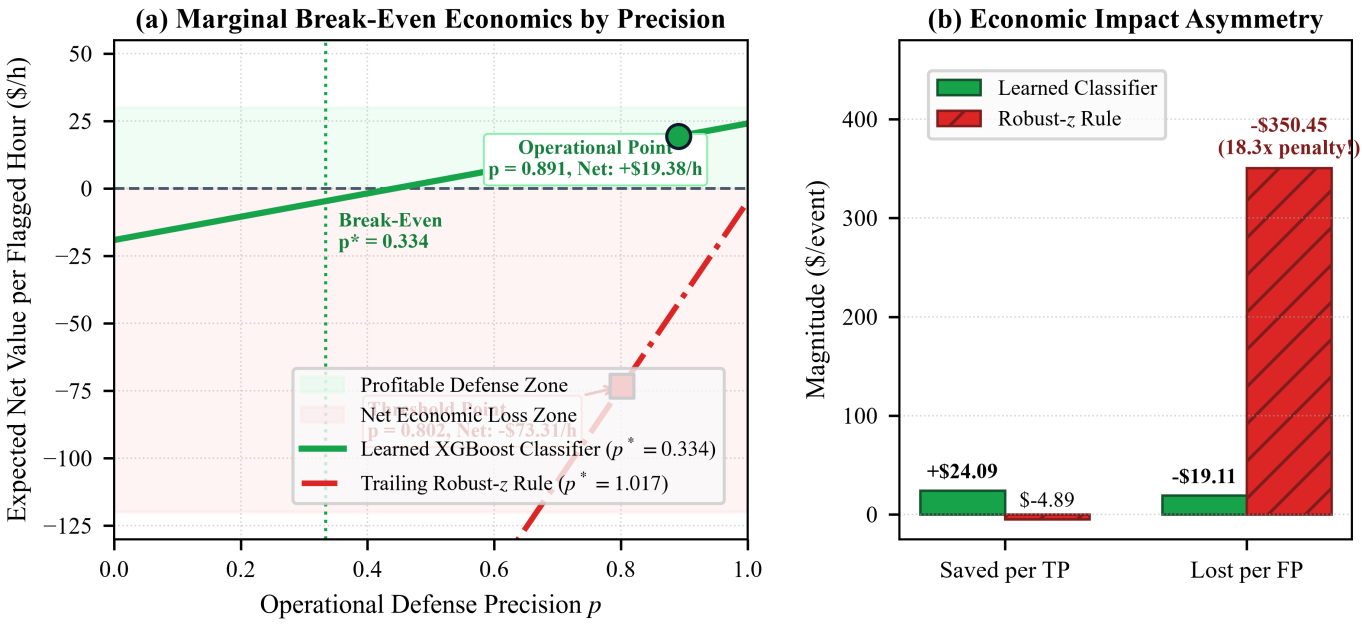


Fig. 5. Break-even precision trade-off. (a) Net cash flow versus precision p for the learned classifier ($p^* = 0.611$, operating at $p = 0.765$) against the simple threshold rule ($p^* = 0.928$). (b) The asymmetry in false-alarm penalties: a threshold false alarm costs 3.7× as much as the classifier (−$240.35 vs. −$64.28).

TABLE VII
Cross-Attack Transfer Performance Across Source and Target Threat Types (5-Seed Average)

Source Training Attack	Target Test Attack	AUROC	Precision	Recall	Recovery %
Naive	Naive	0.951	0.943	0.698	34.6
Naive	Adaptive	0.915	0.942	0.411	−58.3
Naive	Sinusoidal	0.888	0.907	0.220	4.0
Adaptive	Naive	0.960	0.933	0.688	19.3
Adaptive	Adaptive	0.965	0.974	0.702	−24.0
Adaptive	Sinusoidal	0.907	0.947	0.289	−10.5
Sinusoidal	Naive	0.876	0.584	0.415	24.3
Sinusoidal	Adaptive	0.856	0.724	0.277	−12.4
Sinusoidal	Sinusoidal	0.971	0.905	0.805	71.6
Adaptive + Sinusoidal	Naive	0.958	0.765	0.732	49.0
Naive + Sinusoidal	Adaptive	0.953	0.960	0.465	−17.4
Naive + Adaptive	Sinusoidal	0.922	0.974	0.181	−6.1

profitability remains the decisive standard. Because wholesale market price spikes exceed marginal cell degradation costs by orders of magnitude, the economic superiority of anomaly-informed dispatch remains invariant across realistic chemistries (e.g., LFP and NMC). Nonetheless, integrating non-linear rainflow cycle-depth counting with cell thermal dynamics remains an important avenue for optimizing multi-year asset lifespan.

While tabular Q-learning is robust, continuous-space DQN is prone to market disturbances and high reward variance. To achieve profitable, tamper-resilient energy arbitrage and decentralized trading, this paper investigates price anomaly detection for battery dispatch and transactive P2P prosumer networks in wholesale electricity markets. We propose feeding deep recurrent autoencoder anomaly signals into a tabular Q-learning dispatch controller. Tested under strict causality without synthetic data injection, the framework leverages hourly day-ahead market (DAM) data as a verifiable foundation for multi-hub analysis.

Recurrent neural networks proved superior for single-hub anomaly detection, with GRU-AE (AUROC = 0.882) outperforming static baselines; and using this signal led to a Q-learning profit increase to $11,957 (Window 1). Thus, mentioned methods show greater efficiency, both statistically and economically without modifying existing power market clearing rules, enabling operators to safeguard prosumer revenue streams.

The extension to Fifteen Minute Market (FMM) and Real-Time Dispatch (RTD) at a resolution of five minutes will enable storage systems and transactive prosumers to benefit from frequent sub-hour volatilities in the market.

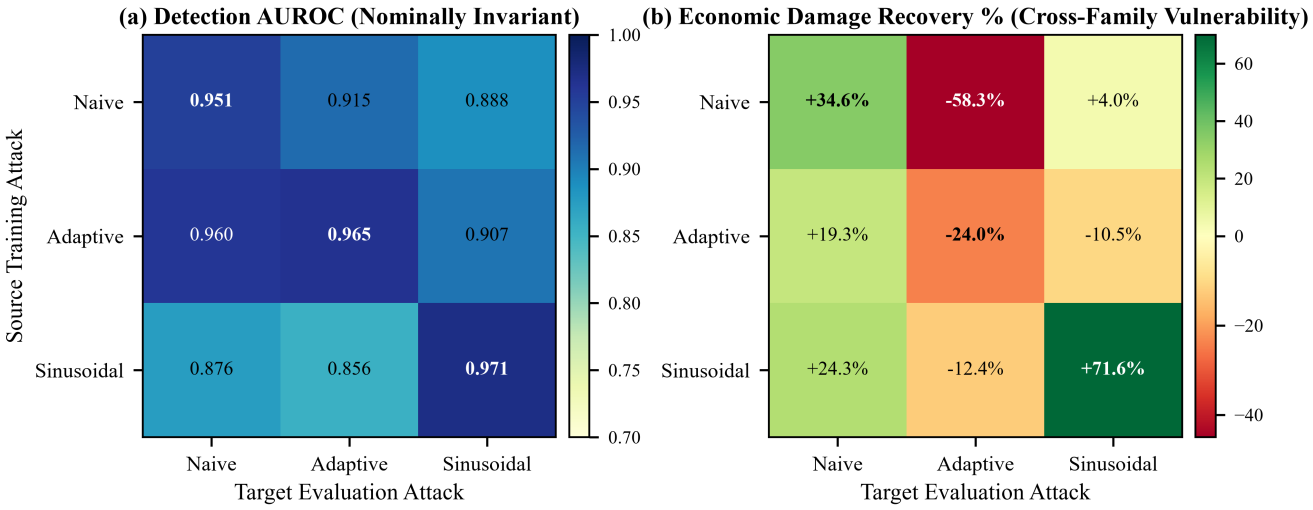


Fig. 6. Cross-attack transfer evaluation. (a) The detection AUROC Matrix shows that all values remain high (≥ 0.856). (b) Economic Recovery Matrix reveals serious cross-attack vulnerabilities; for example, a value of -58.3% between Naive and Adaptive attacks, and -12.4% between Sinusoidal and Adaptive attacks.

Data and Code Availability

The software implementation, simulation pipelines, and trained model weights are available at https://github.com/k-keshav-aggarwal/Genuine-Price-Anomaly-Detection-and-Q-Learning-Dispatch-for-Battery-Storage. Wholesale market settlement data are publicly accessible via CAISO OASIS [7].

References

[1] T. Chen, S. Bu, X. Liu, J. Kang, F. R. Yu, and Z. Han, "Peer-to-peer energy trading and energy conversion in local energy systems with distributed energy resources," IEEE Transactions on Smart Grid, vol. 12, no. 5, pp. 4187–4198, Sep. 2021.

[2] R. Steinmetz and K. Wehrle, Eds., Peer-to-Peer Systems and Applications, ser. Lecture Notes in Computer Science. Berlin, Heidelberg, Germany: Springer-Verlag, 2005, vol. 3485.

[3] A. Dey and M. V. Salapaka, "Reinforcement learning-based electricity market vulnerability analysis under cyber-topology attack," in Proc. IEEE Power & Energy Society Innovative Smart Grid Technologies Conf. (ISGT), 2023, pp. 1–5.

[4] M. Flavio, C. B. do Prado, L. F. R. da Costa Carmo, A. O. de Sá, P. Ferrari, and M. Pasetti, "Autoencoder-based approach to detect stealth cyberattacks in battery energy storage systems," in Proc. IEEE Int. Workshop on Metrology for Industry 4.0 & IoT (MetroInd4.0&IoT), 2024, pp. 452–457.

[5] L. Xie, Y. Mo, and P. R. Kumar, "False data injection attacks in electricity markets: A cyber-physical approach," IEEE Transactions on Smart Grid, vol. 2, no. 1, pp. 149–158, Mar. 2011.

[6] M. N. Kurt, Y. Yilmaz, and X. Wang, "Real-time detection of false data injection attacks on power grid state estimation," IEEE Transactions on Information Forensics and Security, vol. 13, no. 2, pp. 449–462, Feb. 2018.

[7] California Independent System Operator, "Day-ahead market locational marginal prices," https://www.caiso.com/market-operations/market-data-and-reporting, 2025, accessed: Dec. 2025.

[8] J. Lago, G. Marcjasz, B. De Schutter, and R. Weron, "Forecasting day-ahead electricity prices: A review of state-of-the-art algorithms, best practices and an open-access benchmark," Applied Energy, vol. 293, p. 116983, Jul. 2021.

[9] J. Audibert, P. Michiardi, F. Guyard, S. Marti, and M. A. Zuluaga, "USAD: Unsupervised anomaly detection on multivariate time series," in Proc. 26th ACM SIGKDD Int. Conf. on Knowledge Discovery and Data Mining (KDD), 2020, pp. 3395–3404.

[10] D. P. Kingma and M. Welling, "Auto-encoding variational Bayes," arXiv preprint arXiv:1312.6114, Dec. 2013.

[11] J. Ho, A. Jain, and P. Abbeel, "Denoising diffusion probabilistic models," in Advances in Neural Information Processing Systems (NeurIPS), vol. 33, 2020, pp. 6840–6851.

[12] J. Cao, D. Harrold, Z. Fan, T. Morstyn, D. Healey, and K. Li, "Deep reinforcement learning-based energy storage arbitrage with accurate lithium-ion battery degradation model," IEEE Transactions on Smart Grid, vol. 11, no. 5, pp. 4513–4521, Sep. 2020.

[13] Y. Shi, B. Xu, D. Wang, and B. Zhang, "Using battery storage for peak shaving and frequency regulation: Joint optimization for superlinear gains," IEEE Transactions on Power Systems, vol. 33, no. 3, pp. 2882–2894, May 2018.

[14] G. He, Q. Chen, C. Kang, P. Pinson, and Q. Xia, "Optimal investment and dispatch planning of battery energy storage systems in transmission-constrained markets," IEEE Transactions on Power Systems, vol. 33, no. 4, pp. 3831–3842, Jul. 2018.

[15] R. S. Sutton and A. G. Barto, Reinforcement Learning: An Introduction, 2nd ed. Cambridge, MA, USA: MIT Press, 2018.

[16] B. Xu, J. Zhao, T. Zheng, E. Litvinov, and D. S. Kirschen, "Factoring the cycle aging cost of batteries into optimal power flow," IEEE Transactions on Power Systems, vol. 33, no. 2, pp. 2240–2248, Mar. 2018.

[17] F. T. Liu, K. M. Ting, and Z.-H. Zhou, "Isolation forest," IEEE Transactions on Knowledge and Data Engineering, vol. 25, no. 6, pp. 1619–1632, Jun. 2012.

[18] P. Veličković, G. Cucurull, A. Casanova, A. Romero, P. Liò, and Y. Bengio, "Graph attention networks," in Proc. Int. Conf. on Learning Representations (ICLR), 2018, pp. 1–12.

[19] V. Mnih, K. Kavukcuoglu, D. Silver, A. A. Rusu, J. Veness, M. G. Bellemare, A. Graves, M. Riedmiller, A. K. Fidjeland, G. Ostrovski et al., "Human-level control through deep reinforcement learning," Nature, vol. 518, no. 7540, pp. 529–533, Feb. 2015.

[20] T. Chen and C. Guestrin, "XGBoost: A scalable tree boosting system," in Proc. 22nd ACM SIGKDD Int. Conf. on Knowledge Discovery and Data Mining, 2016, pp. 785–794.