


offline — compile once per (model, ABI) runtime — link at any position, no re-evaluation for single-module linking

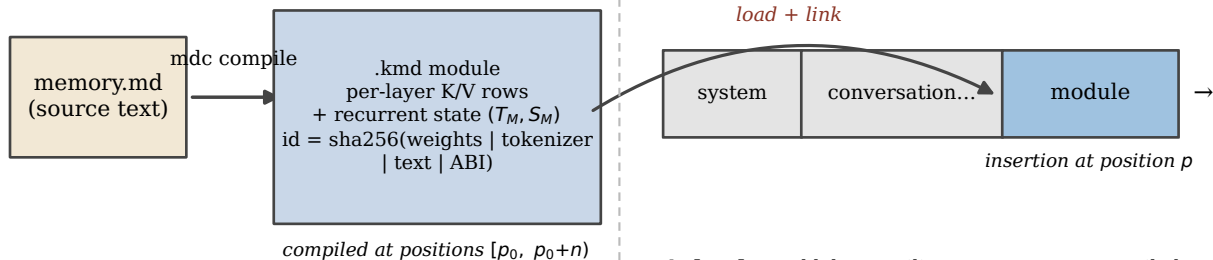

1. load blob $\rightarrow$ auxiliary sequence, at compiled positions p_0

2. rebase RoPE re-rotation of K by $\Delta = p - p_0$

3. fuse merge sequences; recurrent state
 $S \leftarrow S_M$ (naive) or $T_M S_P + S_M$ (affine)

cost = $O(\text{module bytes})$, not $O(\text{prefill compute})$; multi-module composition adds splice-k ($\sim 1/3$ of the incoming module recomputed)