



## TDM (TEST DATA MANAGEMENT) UPGRADE PROCEDURE TO V9.3.1 HF1

- This document describes the following:
  - How to upgrade TDM to the present version - V9.3.1 HF1
  - How to re-implement the modified product's features.

### Notes:

- This document does not cover the Fabric server topology changes, such as addition of nodes, data centers, changes of replication factors or consistency level.
- The TDM upgrade procedure should be performed on testing environments prior to applying it on your production deployment.
- Perform a sanity test upon completion of the upgrade procedure, such as running a few TDM tasks and conducting other checks per the sanity procedure defined in your project.

## SOFTWARE UPGRADE PROCEDURE

### 1 TDM 9.3.1 HF1 Installation - Prerequisites

- Upgrade Fabric to the latest V8.2.X and above.

### 2 Related Documents

- [FABRIC UPGRADE PROCEDURE TO V8.2](#)
  - Note that Step 1 of the Fabric Upgrade Procedure document is irrelevant for a TDM project as the latter does not contain the iidFinder process.
- For more information about the TDM V9.3.x installation, please read the TDM Installation article in the [TDM Configuration](#).

### 3 Fabric Upgrade

- Upgrade the Fabric version.
- If your current Fabric version is older than Fabric 8.0, perform the following:
  - Before upgrading the project, edit the config.ini file and uncomment the PACKAGE\_NAMES\_CLASS\_LOADING\_FILTER parameter. Set it to be empty in order to disable the isolation feature between Fabric's dependencies and the project's dependencies.
  - After upgrading the project, the PACKAGE\_NAMES\_CLASS\_LOADING\_FILTER parameter needs to be commented.
  - For more information, read [FABRIC UPGRADE PROCEDURE TO V8.0](#).




# TDM UPGRADE PROCEDURE

## 4 TDM Upgrade from Version 9 and above to 9.3.1 HF1

### 4.1 Import the TDM 9.3.1 HF1 Library

#### 4.1.1 Web Studio – the Source TDM Version is Installed by an Extension

- Open the TDM project in Fabric Studio. The Fabric Studio will upgrade the code to the latest Fabric version.
- Deleting the TDM LU from the project would also delete it from the local Fabric server and remove the history of previous executions stored in the local fabric (development environment). If you wish to **keep the TDM LU with the previous executions information in your development environment**, do the following before uninstalling the current (source) TDM version in order to prevent the deletion of the TDM LU:
  - Open the **installed\_extensions.json** file in your project:

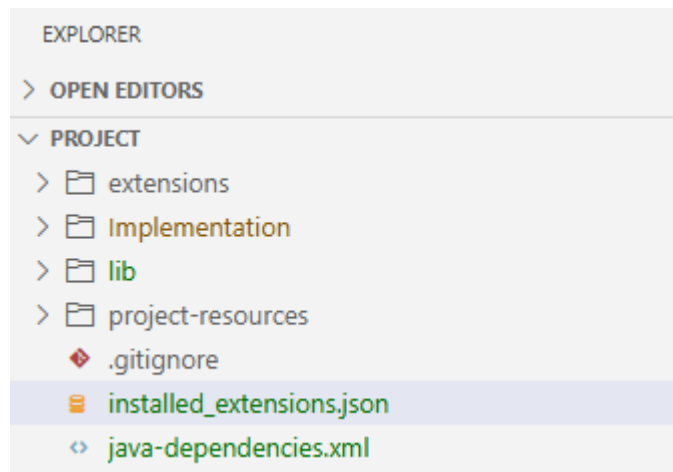


- Edit the **installed\_extensions.json** file: delete all the artifacts related to "id": "k2view.tdm". The "k2view.tdm" must have an empty array for the "artifacts" attribute. See an example:

```
{  
  "id": "k2view.tdm",  
  "version": "9.1.6",  
  "artifacts": []  
}
```


- Click the Extensions icon - , select the TDM under the Installed list and uninstall the old TDM version:




# TDM UPGRADE PROCEDURE

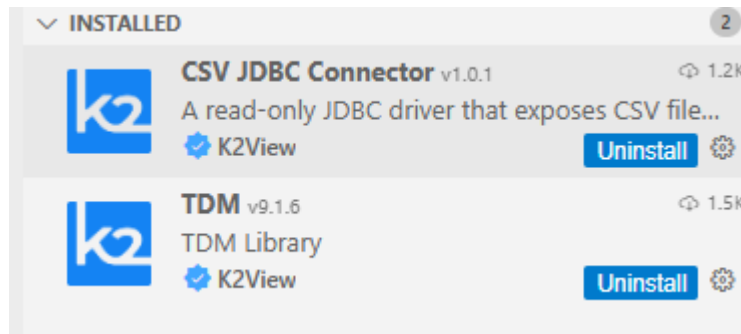

- Click the Reload Window button next to the uninstalled TDM:

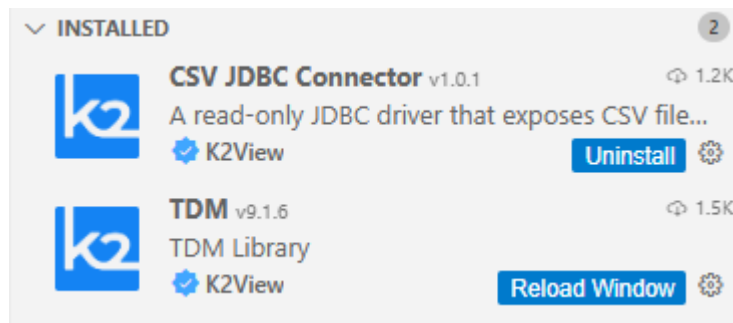

- If you edited the `installed_extensions.json` file in order to prevent the deletion of the TDM LU, delete the TDM subfolder located under the TDM/Web folder in order to delete the current version of the TDM Portal from the TDM LU **before** clicking the Extensions icon:

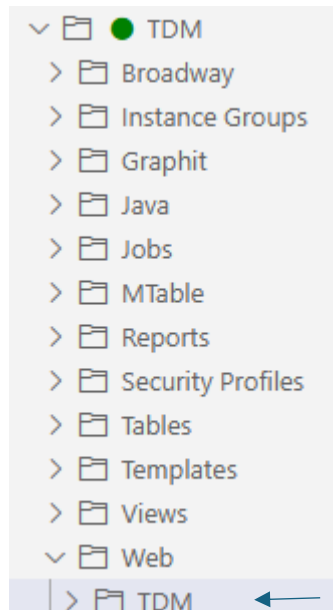


- Click the Extensions icon -  - and select TDM to install the TDM 9.3.1 HF1 library. **Override the existing objects.**
- Redeploy the TDM and TDM\_TableLevel LUs.



# TDM UPGRADE PROCEDURE

## 4.1.2 Web Studio – the Source TDM Version is not Installed by an Extension

- Open the TDM project in Fabric Studio. The Fabric Studio will upgrade the code to the latest Fabric version.
- Delete the TDM subfolder located under the TDM/Web folder in order to delete the current version of the TDM Portal from the TDM LU **before** clicking the Extensions icon:

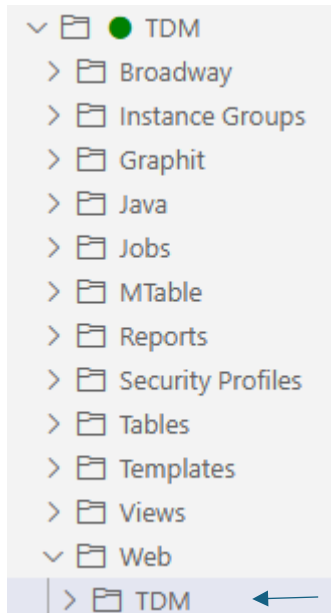

- Note that you **must not delete the entire TDM LU** from the project if you wish to **keep the history of previous task executions in your development environment**. Deleting the TDM LU from the project would delete it from Fabric and remove the history of previous executions stored in the local Fabric.
- Click the Extensions icon -  - and select TDM to install the TDM 9.3.1 HF1 library. **Override the existing objects.**
- Redeploy the TDM and TDM\_TableLevel LUs.

## 4.1.3 .Net (desktop) Studio

### Step 1 – Back up the Project’s Populated TDM Objects

- Back up the following objects in your project:
  - CustomLogicFlows.actor
  - TDMFilterOutTargetTables.actor
  - TDMSeqList.actor
  - TDMSeqSrc2TrgMapping.actor
  - TDMTargetTablesNames.actor
  - TableLevelInterfaces.csv

### Step 2 – Open the TDM Project in Fabric Studio



# TDM UPGRADE PROCEDURE

- Open the TDM project in Fabric Studio. The Fabric Studio will upgrade the code to the latest Fabric version.
- Manually delete the following:
  - TDM LU
  - TDM\_LIBRARY LU
  - If your current version is 9.0, delete the TDM\_Reference LU. Else, delete the TDM\_TableLevel LU.

## Step 3 – Import the TDM 9.3.1 HF1 Library into the Project

- Import the TDM LUs export file into your project using the 'Import All' option for importing the following LUs:
  - TDM
  - TDM\_LIBRARY LU
  - TDM\_TableLevel LU
- Custom import the **Web Services** into your project.
- Custom import the following **Shared Objects** into the Fabric project:
  - Templates
  - Broadway
  - Java
- If your current version is 9.0, custom import the following **MTable** to the project under the **References** LU: TableLevelDefinitions.csv.
- Note that the TableLevelInterfaces.csv will be updated by the TDM deploy flow.
- Optional – AI Interfaces:
  - If you would like to add the AI-based generation configuration to the TDM project, do the following:
    - Import and edit the AI interfaces to the TDM project in the Studio.
    - Add the AI environment to the Studio.
  - Click [here](#) for more information about the AI implementation.

## 4.2 Manual Updates

- Manually delete the **TDM\_LU\_TYPE\_RELATION\_EID** and **TDM\_LU\_TYPE\_REL\_TAR\_EID** tables from the LUs or run the **RemoveRelationTables** flow (located under TDM LU/Broadway/Upgrade directory). These tables are no longer in use by TDM 9.3.x.
- Optional - edit the TDMDB\_SCHEMA Global with the TDM DB schema name if you do **not** use the 'public' schema for the TDM DB.
-



## 4.3 Upgrade the TDM DB

### Development Environment

- Open, save, and redeploy the Environments file for the purpose of refreshing the updated Globals in the Environments.
- Deploy the updated **References** LU.
- Deploy the updated **TDM** LU. The TDM deploy flow runs the **TDMDBUgradeScripts** flow in order to upgrade the TDM DB.
- Note that the current version is taken from the TDM\_GENERAL\_PARAMETERS TDM DB table, and the target version is taken from the TARGET\_TDM\_VERSION Global.
- Commit the updated project to GitHub.

### Non - Development Environment

- Prerequisite: The upgraded TDM project must be committed to GitHub.
- Pull the updated TDM project from GitHub and deploy the updated TDM LU. The TDM deployment upgrades the TDM DB.
- Redeploy the entire project, including the project's LUs.

## 4.4 Optional – Supporting a Vertical Execution Mode

### 4.4.1 Upgrade the LUs to Support a Vertical Execution

- Run the UpgradeFabricTDMRootPopulation flow to upgrade the FABRIC\_TDM\_ROOT LU table's population in all LUs.
- The upgrade population is required in order to support Vertical execution of the LUs.
- Redeploy all LUs.

### 4.4.2 TDM Portal – Update the Execution Mode in the Business Entities

- Open the Business Entity window for the Business Entities for which you need to set the execution mode to Vertical and update it.

## 5 TDM Upgrade from Older TDM Versions to 9.3.1 HF1

- If your current TDM version is older than TDM 9.0.x, take the following steps:



## 5.1 Optional – TDM Portal – Update the Load and Delete Tasks Before Running the TDM Upgrade Flow

- TDM 9 does not support selecting the Delete option together with either option - the Replace IDs for the copied entities or the Generate clones for an entity.
- If you have tasks with Delete and Load task actions, whose Replace Sequence is selected or their selection method is entity clone, open them in the TDM portal before running the upgrade flow, and update them as follows:
  - Delete + Load + Replace Sequence task — clear either the Delete or the Replace Sequence option.
  - Delete + Load + Entity clone — clear the Delete option.

## 5.2 Import the TDM 9.3.1 HF1 Library

### 5.2.1 Web Studio

#### Step 1 – Open the TDM Project in Fabric Studio

- Open the TDM project in Fabric Studio (8.2.x). Fabric Studio will upgrade the code to the latest Fabric version.
- Click the Extensions icon -  - and select TDM to install the TDM 9 library. Override the existing objects.
- Delete all Broadway flows that are located directly under the TDM LU (not those that are located under TDM LU's subfolders). This deletion will avoid flow duplications.

### 5.2.2 .Net (desktop) Studio

#### Step 1 – Open the TDM Project in Fabric Studio

- Open the TDM project in Fabric Studio (8.2.x version). Fabric Studio will upgrade the code to the latest Fabric version.
- Copy the following .jar files into the \K2View Fabric Studio\Projects\<project name>\lib folder:
  - json-20231013
  - handlebars-4.3.0
  - cron-utils-9.2.1
  - commons-lang3-3.11
- Note that commons-lang3-3.11 is needed only for the upgrade flows, and it must be removed from the lib folder after the TDM upgrade process has been completed, since the TDM 9 code no longer uses the StringUtils object.
- Manually delete the following:
  - TDM LU



# TDM UPGRADE PROCEDURE

- TDM\_LIBRARY LU
- TDM\_Reference LU
- If the legacy project is based on a Fabric version that is older than 7.2, open the Environment window in the Studio, resave it, and redeploy the environments to the Fabric debug server.

## Step 2 – Import the TDM 9.3.1 HF1 Library into the Project

- Import the TDM LUs export file into your project using the 'Import All' option as a way to import the following LUs:
  - TDM
  - TDM\_LIBRARY LU
  - TDM\_TableLevel LU
- Custom import the **Web Services** into your project.
- Custom import the following **Shared Objects** into the Fabric project:
  - Templates
  - Broadway
  - Java
- Custom import the **MTables** to the project under the **References** LU. If the current TDM version is 8.1 => remove the conflicting MTables from the import.
- Optional – AI Interfaces:
  - If you would like to add the AI-based generation configuration to the TDM project, do the following:
    - Import and edit the AI interfaces to the TDM project in the Studio.
    - Add the AI environment to the Studio.
- Note that the import process creates duplicate objects in the project due to TDM 9 locating the TDM objects in subfolders in the **Shared Objects'** Broadway and Java folders. The duplicate objects will be removed by the next step (running the UpgradeTDMProjectToTDM9 flow).

## Step 3 – Optional - Edit the Masking DB Global

- A new Global has been added in TDM 8.1 - SEQ\_CACHE\_INTERFACE. This Global is populated with the DB interface of the k2masking DB (PostgreSQL or Cassandra) and must be aligned with Fabric's system DB. TDM 9 sets the **POSTGRESQL\_ADMIN** as a **default** value in this Global:





# TDM UPGRADE PROCEDURE

- If you use **Cassandra** as Fabric's system DB, you must edit the `SEQ_CACHE_INTERFACE` Global and update its value to **DB\_CASSANDRA**.
- If you would like to use the **PostgreSQL** DB as Fabric's system DB, perform the following:
  - Open Fabric's **config.ini** file and edit the **[system\_db]** section's attributes, including the `SYSTEM_DB_DATABASE` attribute, to be aligned with the **POSTGRESQL\_ADMIN** DB interface.
  - Restart Fabric.

## 5.3 Optional Steps

### 5.3.1 Rerun the Extract Tasks for Tables

- TDM 9 changes the way tables are stored in Fabric. The tables are now stored in a new LU - **TDM\_TableLevel**. The previous LU - **TDM\_Reference** - is no longer in use.

### 5.3.2 Add Catalog-based Masking to the LU Populations

- Open the LU populations and the data generation flows and add the **CatalogMaskingMapper** Actor to the flows if you wish to use Catalog masking. Get the value from the `SEQ_CACHE_INTERFACE` Global and send it to the interface parameter of the **CatalogMaskingMapper** Actor.

### 5.3.3 Update the Tasks with the Creator's Fabric Role

- This step is needed when the users are managed by an external IDP (e.g., SAML). This step should be implemented if you wish the TDM portal to enable executing tasks created by all users, including users that belong to the task creator's group (Fabric role).
- From TDM 9.0 onwards, the user's Fabric role is concatenated to the user name in the **Tasks** TDM DB table. This is required for the purpose of identifying the task creator's Fabric role and deciding whether a tester user can execute a task created by another user, when all users are managed and kept by the organization's IDP.
- Populate the **UserRolesUpgrade** MTable with the list of the TDM users and their Fabric roles before running the **TDMDBUpgradeScripts** flow. This flow will concatenate the user's Fabric role to the **task\_created\_by** and the **task\_last\_updated\_by** fields of the **Tasks** TDM DB table.
- Redeploy the **References** LU.

## 5.4 Run the UpgradeTDMProjectToTDM9 Flow

- Take the following steps **before** running the upgrade flow:
  - Back up the TDM DB.



# TDM UPGRADE PROCEDURE

- Open, save, and redeploy the Environments file for the purpose of refreshing the updated Globals in the Environments.
- **Deploy all LUs, including the TDM LU**, to the Fabric server. It is recommended to use the soft deploy option in order to avoid starting the TDM jobs.
- Stop all TDM jobs on Fabric, in case they are up and running, to avoid locking the TDM DB tables by parallel executions of the upgrade flow and the TDM jobs. Use the Web Admin to stop the TDM jobs:


| Type     | Name                             | UID                        | Status    | Creation Time       | Start Time          | End Time            |
|----------|----------------------------------|----------------------------|-----------|---------------------|---------------------|---------------------|
| USER_JOB | TDM.tdmExecuteTask               | tdmExecuteTask             | SCHEDULED | 2023-09-18 08:34:48 | 2023-09-18 08:34:50 | 2023-09-18 08:34:50 |
| USER_JOB | TDM.TDMDB_CleanUp                | TDMDB_CleanUp              | SCHEDULED | 2023-09-18 08:34:48 | 2023-09-18 08:34:50 | 2023-09-18 08:34:52 |
| USER_JOB | TDM.fnCheckMigrateAndUpdateTDMDB | checkMigrateAndUpdateTDMDB | SCHEDULED | 2023-09-18 08:34:48 | 2023-09-18 08:34:50 | 2023-09-18 08:34:50 |
| USER_JOB | TDM.tdmTaskScheduler             | tdmTaskScheduler           | SCHEDULED | 2023-09-18 08:34:48 | 2023-09-18 08:34:50 | 2023-09-18 08:34:50 |

- Open and run the **UpgradeTDMProjectToTDM9** flow as a way to update the TDM project with the updated TDM library, convert the legacy TDM translations to MTables and upgrade the TDM DB.




# TDM UPGRADE PROCEDURE

- Notes:
  - The upgrade process retrieves the **current TDM version** from the **tdm\_general\_parameters** TDB DB table.
  - If you get any compilation errors, run Clean Java command:
    - Click View > Command Palette:

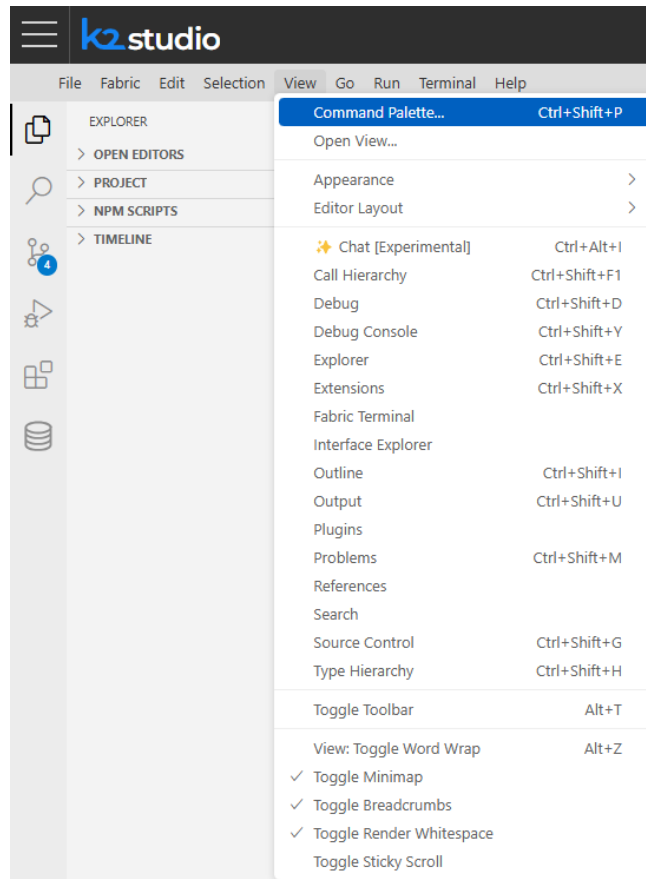

- Select the 'Clean Java Language Server Workspace' option in the pop-up window:



## UPGRADE THE TDM DB IN THE EXECUTION SERVER

- If you do not have access to the TDM DB from the Studio debug server, perform the following actions to upgrade the TDM DB:
  - Open the **UpgradeTDMProjectToTDM9** flow and disable the **TDMDBUpgradeScripts**.
  - Open the **Upgrade80\_to\_81** flow for editing and disable the **convertLuTranslations** Actor.



# TDM UPGRADE PROCEDURE

- Open the **Upgrade81\_to\_90** flow for editing and disable the **UpdatePostProcessList** Actor.
- Deploy the TDM LU to the Fabric execution server.
- Open a Fabric console in the Fabric execution server and run the **TDMDBUgradeScripts** flow using the following command:

Broadway TDM.TDMDBUgradeScripts;

Note that the current version is taken from the TDM\_GENERAL\_PARAMETERS TDM DB table, and the target version is taken from the TARGET\_TDM\_VERSION Global.

- Run the following flows in the Studio to convert the translations to MTables and the old post-process actor to the new one, if needed:
  - **convertLuTranslations**
  - **UpdatePostProcessList**

## 5.5 Validate the Upgraded TDM Objects After the Upgrade Flow Execution

- The following objects are now located in the Implementation/SharedObjects/Broadway/TDM/TDMImplementorActors directory. Open the following objects and verify that they have the same values as before the upgrade:
  - CustomLogicFlows.actor
  - TDMFilterOutTargetTables.actor
  - TDMSeqList.actor
  - TDMSeqSrc2TrgMapping.actor
  - TDMTargetTablesNames.actor
- Open the PostAndPreExecutionProcess object and verify that it is populated with the project's post-execution processes.
- TDM 9.0 locates the TDM library shared Globals under the TDM subfolder as a way to separate them from the project's Globals. The upgrade flow moves the TDM Globals from the 'regular' shared Globals file into the new file (Implementation/SharedObjects/Java/src/com/k2view/cdbms/usercode/common/TDM/SharedGlobals.java). Open the TDM/SharedGlobals file and verify that the TDM Globals contain the required values.
- Open the following MTables and verify that they are populated properly:
  - ChildLink.csv
  - LuParams.csv
  - MigrateList.csv
  - MigrateListQueryFormats.csv
  - RefList.csv



# TDM UPGRADE PROCEDURE

## 5.6 Upgrade Flow – Error Handling

- If the upgrade flow fails, rerun the flow, and reverify the objects as specified in the previous step. Recopy the backed-up objects in case the rerun of the flow empties these objects.

## 5.7 Manual Updates

- Manually delete the **TDM\_LU\_TYPE\_RELATION\_EID** and **TDM\_LU\_TYPE\_REL\_TAR\_EID** tables from the LUs or run the **RemoveRelationTables** flow (located under TDM LU/Broadway/Upgrade directory). These tables are no longer in use by TDM 9.3.x.
- Optional - edit the TDMDB\_SCHEMA Global with the TDM DB schema name if you do **not** use the 'public' schema for the TDM DB.
- 

## 5.8 Optional – Supporting a Vertical Execution Mode

### 5.8.1 Upgrade the LUs to Support a Vertical Execution

- Run the UpgradeFabricTDMRootPopulation flow to upgrade the FABRIC\_TDM\_ROOT LU table's population in all LUs.
- The upgrade population is required for supporting a vertical execution of the LUs.
- Redeploy all LUs.

### 5.8.2 TDM Portal – Update the Execution Mode in the Business Entities

- Open the Business Entity window for Business Entities for which you need to set the execution mode to Vertical and update it.

## 5.9 Additional Steps – the Current TDM Version is Older than 8.1

### 5.9.1 TDM Portal – Resaving Tasks with Parameters Selection Method

- TDM 8.1 changed the way tasks with Parameters selection method are saved in the TDM DB. It is therefore required to open and resave the TDM tasks with the Parameters selection method after upgrading TDM and before executing the TDM tasks.

### 5.9.2 Rerun an Extract Task to Repopulate the LUs Parameters' Tables



# TDM UPGRADE PROCEDURE

- The upgrade script **updates** the **<LU name>\_params table, and it is based on the task\_execution\_entities**. By default, the task\_execution\_entities table contains executions of only the last 7 days (=0.25 month). Consequently, **the <LU name>\_params table will also contain the entities of only the last 7 days of executions** (if the related task\_execution\_entities record is not found, the upgrade job would delete the related <LU name>\_params record as well).
- If the <LU name>\_param table must contain execution history longer than the last 7 days, rerun an Extract task on a large population following completion of the TDM upgrade process as a way to repopulate the missing <LU name>\_params records.

## 5.9.3 Manual Updates

- Open the **TDMFilterOutTargetTables** Actor and add the Boolean column - **generator\_filterout** - if it is missing. Set it to **true** for all TDM product tables and for the \_TAR table.
- Open **CustomLogicFlows** Actor and add the Boolean column - **DIRECT\_FLOW** - if it is missing. Leave this field clear for the existing records.  
Click [here](#) for more information about Custom Logic implementation.
- Note that the TDM translations will be converted to MTables by running the **TDMDBUpgradeScripts** flow.

## 5.10 Deployment

- Deploy all LUs in the project, including the References and Web Services LUs.
- Verify that the TDM jobs are up and running.

## 6 Optional Settings

### 6.1 Optional - Change Fabric Storage to a Storage that does not Support a TTL

- TDM enables creating tasks with a retention period (TTL) on the task's entities as a way of saving these entities in Fabric only for a limited period. However, if the Fabric storage does not support TTL for the LUIs (such as PG DB), TDM needs to limit the TDM task's retention period options to either 'Do not Delete' or 'Do not Retain'.
- Run the following steps to limit the TDM retention period:  
I. Update the tdm\_general\_parameters TDM DB to limit the TDM task's retention period options to either 'Do not Delete' or 'Do not Retain'.



# TDM UPGRADE PROCEDURE

View the Update statements in

[https://support.k2view.com/Academy/articles/TDM/tdm\\_configuration/02\\_tdmdb\\_general\\_parameters.html](https://support.k2view.com/Academy/articles/TDM/tdm_configuration/02_tdmdb_general_parameters.html)

II. Open the TDM portal, then open the TDM tasks and update them with a retention period other than 'Do not Delete' or 'Do not Retain'.

## 6.2 Change the Parameters mode to Parameters Coupling

- From TDM 9.1 onwards, when the selection of an entity subset for a TDM task is based on business parameters, it can be based on the newly added mode - *Parameters Coupling*.
- Click [here](#) for more information about the Parameters Coupling mode.
- The following steps should be taken if you would like to set the parameter's mode to Parameters Coupling:

### 6.2.1 Set, Create and Alter Schema and Table Permissions for the TDM User

- The Parameters Coupling mode uses the MDB export Fabric command in order to export the parameters' info of each LU into a dedicated schema in the TDM DB. A separate schema is created in the TDM DB for each LU.
- Verify that the TDM DB user, which is set in the TDM interface, has permissions to create and edit schemas and tables.

### 6.2.2 Run the UpgradeToParamsCouplingMode Flow

- The UpgradeToParamsCouplingMode flow -
  - Updates the TDM\_GENERAL\_PARAMETERS TDM DB table – sets the PARAM\_COUPLING parameter to 'true'.
  - Creates a backup table for the tdm\_params\_distinct\_values TDM DB table.
  - Truncates the tdm\_params\_distinct\_values in the TDM DB table.
  - Renames the <lu>\_params tables in the TDM DB – adds a \_bck suffix to these tables since they are no longer needed for the Parameters Coupling mode.
  - Converts the LuParams.csv to the LuParamsMapping.csv, where applicable.
  - Adds the TDM\_BE\_IDS LU table to the LUs.
  - Updates the FABRIC\_TDM\_ROOT table in the LU – adds a PK to this table in order to support the MDB export of the LU into the TDM DB.

### 6.2.3 Update the LU Implementation

- Verify that the linked fields are defined as either PKs or unique indexes in the parent LU table for supporting the MDB export of these tables. All parent LU table's PKs/unique index fields must be linked to the child LU table. This is required when creating the FK relation in the PG DB for the exported LU tables.



# TDM UPGRADE PROCEDURE

- Verify that the linked fields in the LU tables have identical data types. This is required as it supports the MDB export of the LU schema into the TDM DB.
- Add a table to the LU for calculated parameters. For example, the total open debt amount is based on the accumulation of all open invoices. Each parameter in the Parameters Coupling mode must be mapped to an LU table's field. Unlike in the regular mode, in the Parameters Coupling mode you cannot define an SQL query to get a parameter from the LuParamsMapping Mtable.
- This new table with the calculated parameters should be added to the **TDMFilterOutTargetTables.actor** in a way that it would be excluded from creating the load, delete, and data generation flows for it.

Verify that all the LU tables in the LuParamsMapping are linked to parent tables. This is required when creating FKs on the exported tables when they are exported to the TDM DB.

- Update the LuParamsMapping.csv MTable – add the parameters that are based on the newly created business tables.
- Redeploy the implementation, including the References LU.

## 6.2.4 Rerun the Extract Tasks

- Re-extract an entity subset for each Business Entity (BE) as a means to:
  - Create LU schemas in the TDM DB and export the entities' data into these schemas.
  - Repopulate the tdm\_params\_distinct\_values in the TDM DB table.