Code No: 131AE

## JAWAHARLAL NEHRU TECHNOLOGICAL UNIVERSITY HYDERABAD B.Tech I Year I Semester Examinations, May/June - 2017 ENGINEERING MECHANICS

(Common to CE, EEE, ME, ECE, CSE, EIE, IT, MCT, MMT, MIE, CEE, MSNT)
Time: 3 hours

Max. Marks: 75

**Note:** This question paper contains two parts A and B.


Part A is compulsory which carries 25 marks. Answer all questions in Part A. Part B consists of 5 Units. Answer any one full question from each unit. Each question carries 10 marks and may have a, b, c as sub questions.

### Part- A (25 Marks)

1.a)	Define the term free body diagram and state the importance of drawing such diagram.	agram.
,		[2]
b)	A force $F = (10 i + 8 j - 5 k) N$ acts at point A $(2, 5, 6)$ m. What is the moment	of the
	force about the point B (3, 1, 4).	[3]
c)	Define angle of friction and angle of repose.	[2]
d)	The force required to pull a body of weight 100 N on a rough horizontal plane is 30 N.	
	Determine the coefficient friction if the force applied is at an angle of 15 <sup>0</sup> wi	th the
	horizontal.	[3]
e)	Find the centrodal coordinates of rectangular area of width w and depth d.	[2]
f)	Determine the moment of inertia of an area of semi-circle of radius 2.5 cm about	out the
	centroidal x and y axes.	[3]
g)	State parallel axis theorem as applied to mass moment of inertia.	[2]
h)	Mention the forces which are generally omitted while applying the principle of virtual	
	work.	[3]
i)	Write the impulse-momentum equation and mention its application.	[2]
j)	Show that when a particle moves with simple harmonic motion, it's time for complete	
	oscillation is independent of the amplitude of its motion.	[3]

#### Part-B (50 Marks)

2.a) A bracket is constructed by attaching member ABC to wall CD with a frictionless hinge at C and a horizontal cable at A, as shown in Figure 1. A smooth cylinder of weight 1.2 kN is placed in the bracket as shown. Determine the force acting on the cylinder at contact points B and D and the tension in the cable and reactions at support C.

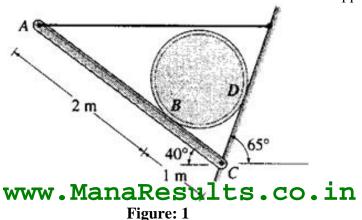





Figure: 2 OR

3.a) Find the reactions at supports A and B for the force system acting on the beam as shown in Figure 3.

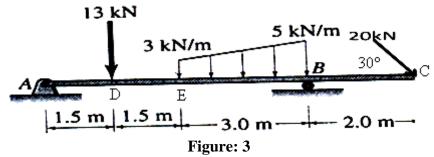

b) A crate of weight W = 1.5 kN is supported as shown in figure 4, by members AO and AB and cable AC. Determine the force in the cable AC and in members AO and AB. [5+5]

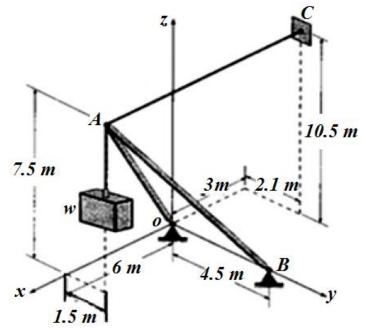


Figure: 4

# www.ManaResults.co.in

4.a) As shown in figure 5, two blocks each weighing 20 kN and resting on a horizontal surface, are to be pushed apart by a 30° wedge. The angle of friction is 15° for all contact surfaces. What value of P is required to start movement of the blocks?




Figure: 5

b) A screw jack has square threads of mean diameter 6 cm, of helix angle 10<sup>0</sup> and coefficient of friction 0.25. Determine the force that must be applied to the end of 50 cm lever to i) rise ii) lower a weight of 2500 N. [5+5]

OR

- 5.a) A ladder 5 m long rests on a horizontal ground and leans against a smooth vertical wall at an angle of 70<sup>0</sup> with the horizontal. The weight of the ladder is 300 N. The ladder is on the verge of sliding when a man weighing 750 N stands on a rung 1.5 m along the ladder. Calculate the coefficient of friction between the ladder and the floor.
  - b) What should be the value of  $\theta$  in figure 6 which will make the motion of 900 N block down the plane to impend? The coefficient of friction for all contact surfaces is 0.3. [5+5]




Figure: 6

6.a) Find the centroidal coordinates of the area of the plane as shown in figure 7. Given a = 30 cm, b = 30 cm, c = 60 cm, d = 40 cm, and c = 20 cm.



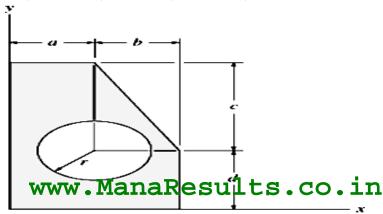


Figure: 7


b) For the shaded area as shown in figure 8, determine the Moment of Inertia of an area of plane figure about their centroidal axes. All units are in centimeters. [5+5]




7.a) Determine the centroidal coordinates of shade area with respect to x and y axes as shown in figure 9.



b) Determine the moment of inertia an area of a triangle with a rectangular cut as shown in figure 10, about the base *A-B* and the centroidal axis parallel to *AB*. (All dimensions are in Centimetres). [5+5]

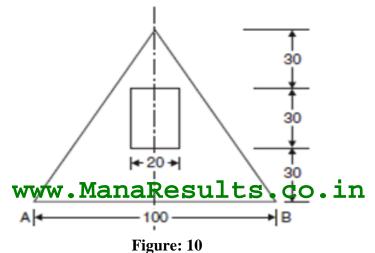

- 8.a) Find the mass moment of inertia of a solid sphere of radius r and mass m about any axis.
  - The arrangement as shown in figure 11 is required to remain in state of equilibrium. b) Derive an expression for tension in the cable in terms of  $\theta$  and W. Use method of virtual work.



OR

- 9.a) Find the mass moment of inertia of a solid cylinder of radius r, height h and mass m about centroidal x and y axes.
  - A uniform ladder of 200 N weights rests against a smooth vertical wall and a rough horizontal floor making an angle of 60° with the horizontal. Use the method of virtual work, find the frictional force between the foot of the ladder and the rough horizontal floor. [5+5]
- An elevator gross weight 15 kN is moving in the upward direction, such that the displacement is given by  $x = t^3 4t^2 + 6t + 7m$ . Determine the tension in the cable 10.a) supporting the elevator at t = 2 seconds.
  - b) A car starts from rest on a curved road of 250 m radius and accelerates at a constant tangential acceleration of 0.6 m/sec<sup>2</sup>. Determine the distance and time for which that car travel before the magnitude of total acceleration attained it becomes 0.75 m/sec<sup>2</sup>. [5+5]

#### OR

- A body of mass 10 kg is suspended by a string of length 1m. It is struck by a bullet 11.a) travelling horizontally with a velocity of 450 m/sec. The bullet weights 30 grams and gets embedded into the body after striking it. Determine the maximum angle through which the body swings.
  - A body moving with simple harmonic motion has amplitude of 1 m and a period of oscillation of 2 seconds. What will be its velocity and acceleration 0.4 seconds after passing an extreme position? [5+5]