@eshaaldev

Day 12

CSS

Additional topics

Inheritance

It is a tool that passes styles from parent to child. We can inherit color, font-family, line-height but not margin, padding, border, width.

```
p {
  font-family: inherit;
}
```

Float

The float property lets elements "float" to the left or right, allowing text or other elements to wrap around it.

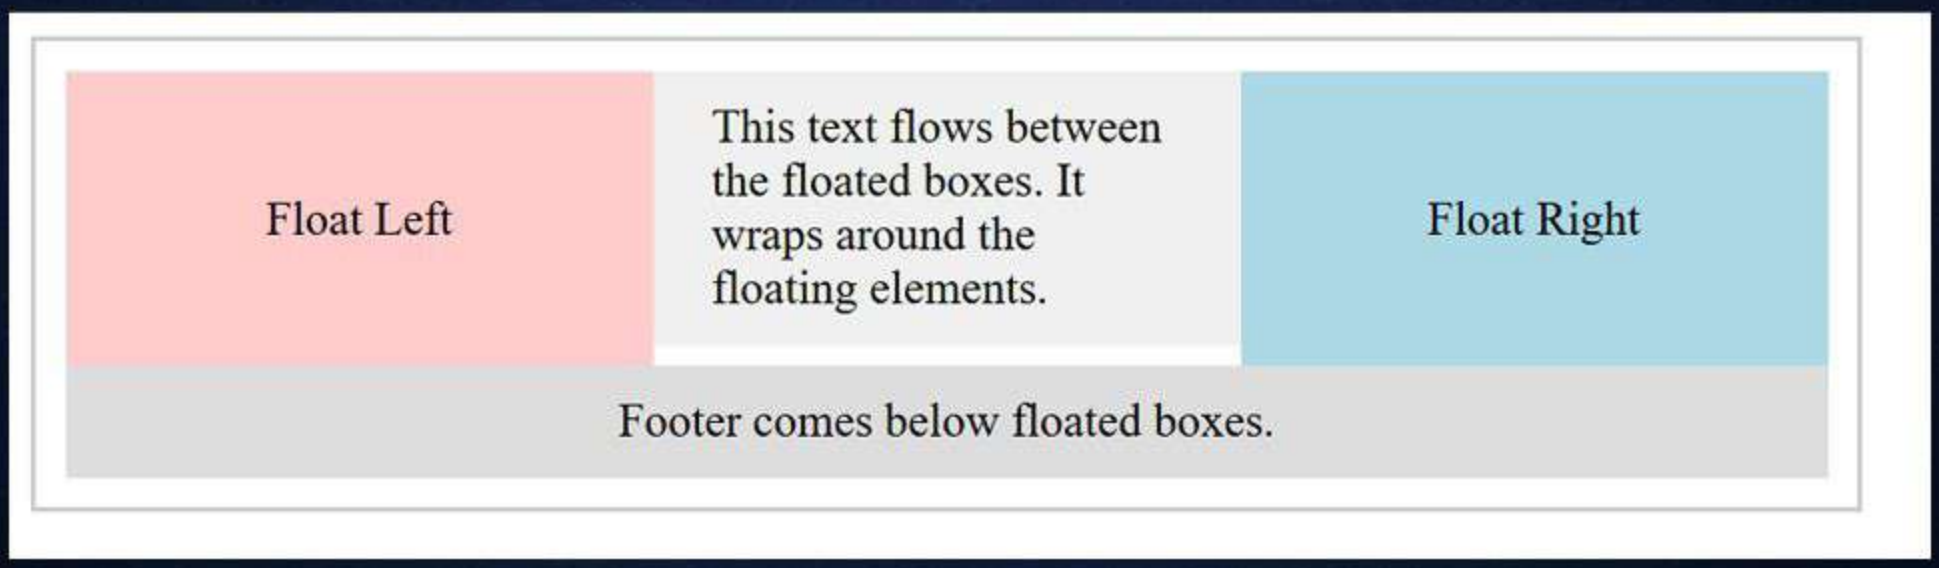

Clear

Floated elements are removed from the normal document flow, so their parent containers might collapse.

📉 That's why we need **clear** or **clearfix**. It tells an element to not allow floating elements beside it.

@eshaaldev

Example Use

```html
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>Float & Clear Example</title>
  <style>
    .container {
      width: 600px;
      border: 2px solid #ccc;
      padding: 10px;
    }
    .box-left {
      float: left;
      width: 200px;
      height: 100px;
      background-color: #ffcccb;
      margin-right: 20px;
      text-align: center;
      line-height: 100px;
    }

    .box-right {
      float: right;
      width: 200px;
      height: 100px;
      background-color: #add8e6;
      margin-left: 20px;
      text-align: center;
      line-height: 100px;
    }
    .text {
      background-color: #f0f0f0;
      padding: 10px;
    }
    .clear {
      clear: both;
    }
    .footer {
      background-color: #ddd;
      padding: 10px;
      text-align: center;
    }
  </style>
</head>
<body>
  <div class="container">
    <div class="box-left">Float Left</div>
    <div class="box-right">Float Right</div>
    <div class="text">
      This text flows between the floated boxes. It wraps around the floating elements.
    </div>
    <div class="clear"></div>
    <div class="footer">
      Footer comes below floated boxes.
    </div>
  </div>
</body>
</html>
```

@eshaaldev

WebKit

To experiment with CSS across all browsers.

CSS Property	Description	Example
`-webkit-border-radius`	Rounded corners	`-webkit-border-radius: 10px;`
`-webkit-box-shadow`	Shadow around elements	`-webkit-box-shadow: 2px 2px 5px #000;`
`-webkit-transform`	2D/3D transformations	`-webkit-transform: rotate(45deg);`
`-webkit-transition`	Smooth transitions	`-webkit-transition: all 0.3s ease;`
`-webkit-animation`	CSS animations	`-webkit-animation: slide 2s ease;`
`-webkit-user-select`	Control text selection	`-webkit-user-select: none;`
`-webkit-text-stroke`	Adds stroke to text	`-webkit-text-stroke: 1px black;`
`-webkit-line-clamp`	Limit text lines (used with flexbox)	`-webkit-line-clamp: 3;`
`-webkit-appearance`	Alters default UI of form elements	`-webkit-appearance: none;`
`-webkit-box-reflect`	Reflect element below it (Safari only)	`-webkit-box-reflect: below 10px;`
`-webkit-background-clip`	Clips background to content/text	`-webkit-background-clip: text;`
`-webkit-mask-image`	Applies a mask over an element	`-webkit-mask-image: url(mask.png);`
`-webkit-filter`	Apply visual effects (blur, grayscale)	`-webkit-filter: blur(5px);`

@eshaaldev

More Features

`contain`	`contain: layout paint;`	Boosts performance by isolating an element's rendering and layout.
`accent-color`	`accent-color: #ff6347;`	Styles native form controls (checkbox, radio, etc.) to match your design.
`aspect-ratio`	`aspect-ratio: 16 / 9;`	Maintains width-to-height ratio without padding hacks.
`scroll-snap-type`	`scroll-snap-type: x mandatory;`	Enables snap scrolling for horizontal or vertical containers.
`scroll-snap-align`	`scroll-snap-align: start;`	Specifies how a child aligns when snapping into view.
`will-change`	`will-change: transform;`	Optimizes animations by telling the browser what will change.
`margin-inline-start`	`margin-inline-start: 1rem;`	Logical property: supports bidirectional layouts (LTR/RTL).
`:is()`	`:is(h1, h2, h3) { color: red; }`	Groups multiple selectors with manageable specificity.
`:where()`	`:where(.card, .panel) { padding: 1rem; }`	Like `:is()`, but with zero specificity — perfect for default styles.
`env()` / `constant()`	`padding-top: env(safe-area-inset-top);`	Adds safe spacing on notched devices like iPhones.
`view-transition-name`	`view-transition-name: fadeCard;`	Enables seamless page transitions in SPAs (used with View Transitions API).