@eshaaldev

Day 4

HTML

Media Tags

What are Media Tags ?

These are the tags that allow you to display visuals on browsers.

5

@eshaaldev

Image tag

The <img> tag is used to embed images in an HTML page.

```html
<!DOCTYPE html>
<html lang="en">
  <head>
    <title>Media Tags</title>
  </head>
   <body>
    <img src="flower.jpg" alt="">
   </body>
</html>
```

Key Attributes

src (required): Specifies the path to the image file (URL or local file).

alt (required): alternative text for the image if it cannot be displayed. It's also important for accessibility.

width:(in pixels or percentage).

height:(in pixels or percentage).

title: Specifies additional information about the image when the user hovers over it.

loading: Specifies whether the image should be loaded lazily (lazy) or eagerly (eager).

@eshaaldev

Audio Tag

The <audio> tag is used to embed sound content, such as music or spoken word.

```html
<!DOCTYPE html>
<html lang="en">
  <head>
    <title>Media Tags</title>
  </head>
   <body>
    <audio controls>
      <source src="audio-file.mp3" type="audio/mp3">
    </audio>

   </body>
</html>
```

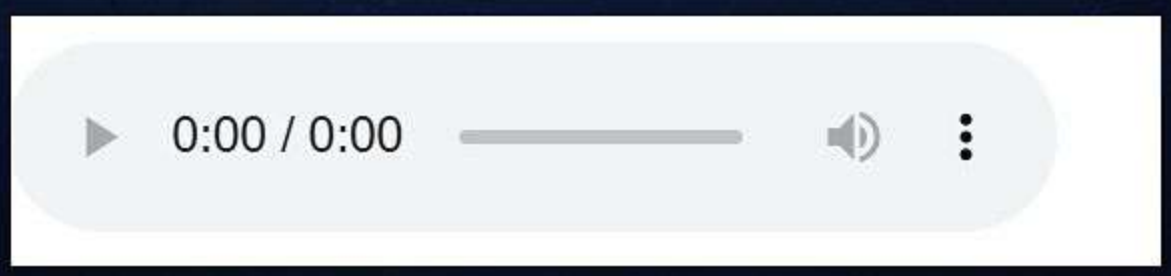

Key Attributes

controls: Adds basic controls (play, pause, volume, etc.) for the user.

autoplay: Makes the audio start playing automatically as soon as it's loaded.

loop: Repeats the audio indefinitely.

muted: Mutes the audio by default.

preload: Specifies if and how the audio should be preloaded when the page loads. Options: auto, metadata, none.

src: Specifies the audio file's URL.

type: Specifies the MIME type

@eshaaldev

Video Tag

The <video> tag is used to embed video content.

```html
<!DOCTYPE html>
<html lang="en">
  <head>
    <title>Media Tags</title>
  </head>
   <body>
    <video controls width="640" height="360">
      <source src="movie.mp4" type="video/mp4">
      <source src="movie.ogg" type="video/ogg">
      Your browser does not support the video element.
    </video>

   </body>
</html>
```

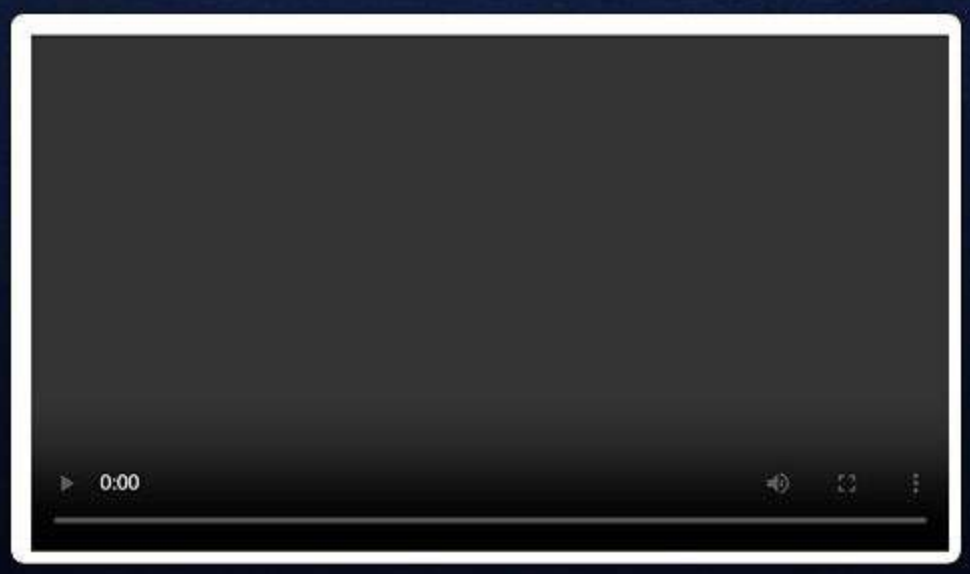

Key Attributes

controls: (play, pause, volume, fullscreen).

autoplay

loop: Repeats the video indefinitely.

muted: Mutes the video by default.

poster: Specifies an image to show before the video is played.

preload: Options: auto, metadata, none.

track: subtitles

width and height: Specifies the dimensions of the video.

src: Specifies the video file's URL.

type: Specifies the MIME type of the video file.

SVG Tag

The <svg> tag is used to embed SVG graphics directly in HTML documents.

SVGs are vector graphics that can be scaled without losing quality.

```html
<!DOCTYPE html>
<html lang="en">
  <head>
    <title>Media Tags</title>
  </head>
  <body>
    <svg>
      <circle cx="50" cy="50" r="40" fill="red" />
    </svg>
  </body>
</html>
```

Embed Tag

The <embed> tag is used to embed external content such as multimedia, interactive applications, or files directly into an HTML document.

```html
<!DOCTYPE html>
<html lang="en">
  <head>
    <title>Media Tags</title>
  </head>
  <body>
    <h1>The embed element</h1>

    <embed type="image/jpg" src="pic_trulli.jpg" width="300" height="200">
  </body>
</html>
```

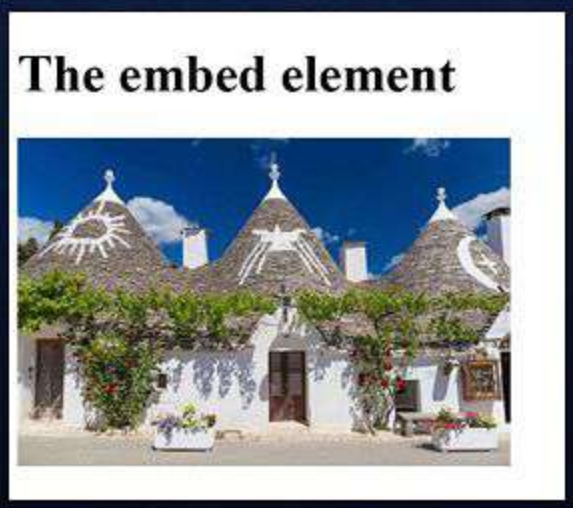

@eshaaldev

Iframe Tag

The <iframe> tag is used to embed another HTML document or webpage inside the current webpage.

```html
<!DOCTYPE html>
<html lang="en">
  <head>
    <title>Media Tags</title>
  </head>
  <body>
    <iframe width="560"
    height="315"
    src="https://www.youtube.com/embed/RstRhkvrPtQ?si=YCSEFgk34KE_adiZ"
     title="YouTube video player"
     frameborder="0"
     allow="accelerometer; autoplay; clipboard-write; encrypted-media;
     gyroscope; picture-in-picture; web-share"
     referrerpolicy="strict-origin-when-cross-origin" allowfullscreen></iframe>


  </body>
</html>
```

@eshaaldev

Anchor Tag

defines hyperlinks that allow users to navigate from one page to another, or to specific sections within the same page.

```html
<!DOCTYPE html>
<html lang="en">
  <head>
    <title>Media Tags</title>
  </head>
  <body>
    <a href="www.instagram.com">Instagram</a>
  </body>
</html>
```

Instagram

Key Attributes

href: It defines the destination of the link.

target: Defines where to open the linked document.

_blank: Opens the link in a new tab or window.

_self: Opens the link in the same frame as it was clicked.

_parent: Opens the link in the parent frame.

_top: Opens the link in the full body of the window.

noopener: Prevents the new page from accessing the original page's window object

noreferrer: Prevents the browser from sending the referrer header when navigating to the link.

nofollow: Tells search engines not to follow the link for SEO purposes.

download: triggers download