

CSS (Cascading Style Sheet)

➤ What is mean by CSS ?

- CSS stands for Cascading Style Sheet.

Where,

C (Cascading) – Flow of Execution

S (Style) – Design

S (Sheet) – HTML Document / Web Document

- CSS is used to design HTML tags.
- CSS is a widely used language on the web.
- CSS was developed by Hakon Wium Lie in 1994.
- HTML, CSS and JavaScript are used for web designing. It helps the web designers to apply style on HTML tags.



```
<style>
h1
{
  color:white;
  background-color:red;
}
</style>
```

```
<h1>Cascading Stylesheet</h1>
```

➤ How many Ways to insert CSS :-

- There are three ways to CSS are as follows:

Ways to insert CSS



1) Inline CSS –



- Inline CSS is used to apply CSS on a single line or element.

```
<p style="color:red">Welcome</p>
```

```
<h1 style="color:blue">Welcome</h1>
```

2) Internal CSS –



- It is written inside the style tag within head section of html.

```
<style>
h1
{
  color:white;
  background-color:red;
}
</style>
```

```
<h1>Cascading Stylesheet</h1>
```

3) External CSS –



- Here, we write all the CSS code in a css file.
- Its extension must be .css

```
<link rel="stylesheet" type="text/css" href="style.css">
```


The link tag must be used inside head section of html.

style.css


```
P
{
  color:blue;
}
```

➤ CSS Selectors –

- A CSS Selector is a pattern used to select HTML elements for applying styles.
- It tells the browser *which element(s)* should get the CSS properties.
- Selectors help in separating design from content in web pages.

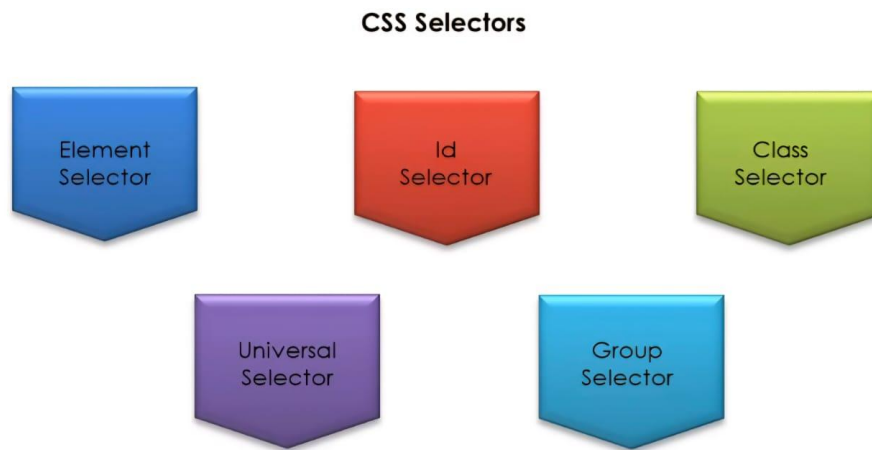

➤ Syntax of Selector –

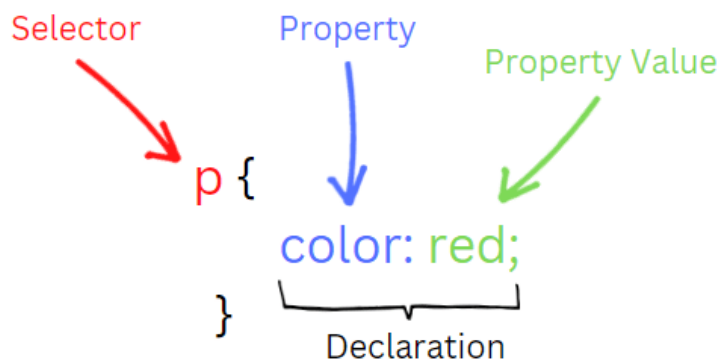

➤ Types of Selectors –

There are Following types of Selector :

1. Simple Selector

- Selects elements by name, id, class, or attribute.

2. Combinator Selector

- Selects elements based on their relationship with other elements.

3. Pseudo Selector

- Selects elements in a special state or condition.

4. Pseudo Elements

- Selects and styles a specific part of an element.

1) Id Selector –

Id Selector

- The id selector selects the id attribute of an HTML element to select a specific element.
- An id is always unique within the page

```
<style>
#abc
{
  color:red;
}
</style>
```

```
<h1 id="abc">Cascading Stylesheet</h1>
<h1>Cascading Stylesheet</h1>
```

2) Class Selector –

Class Selector

- The class selector selects HTML elements with a specific class attribute.
- It is used with a . (full stop symbol)

```
<style>
.xyz
{
  color:red;
}
</style>
```

```
<h1 class="xyz">Cascading Stylesheet</h1>
<h1>Cascading Stylesheet</h1>
```

3) Element / Tag Selector –

Element Selector

- The element selector selects the HTML element by name.

```
<style>
h1
{
  color:white;
  background-color:red;
}
</style>
```

```
<h1>Cascading Stylesheet</h1>
```

4) Group / Grouping Selector –

Group Selector

- It select all the elements with the same style definitions
- Grouping selector is used to minimize the code.
- Commas are used to separate each selector in grouping.

```
<style>
h1,h2,p
{
  color: blue;
}
</style>
```

```
<h1>Cascading Stylesheet</h1>
<h2>Cascading Stylesheet</h2>
<p>This is heading</p>
```

5) Universal Selector –

Universal Selector

- It selects all the elements on the pages.

```
<style>
*
{
  color:red;
}
</style>
```

```
<h1>Cascading Stylesheet</h1>
<p>This is heading</p>
```