

CSS (Cascading Style Sheet)

Properties in CSS :-

1) Text Properties –

- i. **color** → Sets the text color.
`p { color: blue; }`
- ii. **text-align** → Aligns text horizontally.
Values: left, right, center, justify
`h1 { text-align: center; }`
- iii. **text-decoration** → Adds/Removes decoration.
Values: none, underline, overline, line-through
`{ text-decoration: none; }`
- iv. **text-transform** → Controls capitalization.
Values: uppercase, lowercase, capitalize, none
`h2 { text-transform: uppercase; }`
- v. **text-indent** → Adds indentation to the first line.
`p { text-indent: 50px; }`
- vi. **text-shadow** → Adds shadow to text.
Syntax: `text-shadow: x-offset y-offset blur color;`
`h1 { text-shadow: 2px 2px 5px gray; }`



- This CSS property adds shadows to the text.

```
<style>
P
{
    text-shadow: 3px 3px red;
}
</style>
```

`<p>Text Shadow </p>`

2) Font Properties –

- i. **font-family** → Defines the font type (primary & fallback).
p { font-family: Arial, Helvetica, sans-serif; }



```
<style>
h1 { font-family: sans-serif; }
h2 { font-family: serif; }
p { font-family: monospace; }
</style>
```

```
<h1>This is heading 1</h1>
<h2>This is heading 2</h2>
<p>This is a paragraph.</p>
```

- ii. **font-size** → Sets the size of the font.
Units: px, em, rem, %, larger, smaller

```
h1 { font-size: 32px; }
```



- CSS font size property is used to change the size of the font.

```
<style>
p
{
font-size:xx-small;
}
</style>
```

```
<p>This is a paragraph.</p>
```

xx-small

x-small

small

medium

large

x-large

xx-large

smaller

larger

size in pixels or %

- iii. **font-style** → Defines the style of the font.
Values: normal, italic, oblique

```
p { font-style: italic; }
```

Font Style

- CSS Font style property defines what type of font you want to display.
- It may be italic, oblique, or normal.

```
<style>
  h1 { font-style: italic; }
  h2 { font-style: oblique; }
  p { font-style: normal; }
</style>
```

```
<h1>This is heading 1</h1>
<h2>This is heading 2</h2>
<p>This is a paragraph.</p>
```

- iv. **font-weight** → Defines the thickness of the text.
Values: normal, bold, lighter, bolder, 100–900

```
h2 { font-weight: bold; }
```

- v. **font-color** → Defines the color of the text (font).
Values: color names, HEX, RGB, RGBA, HSL, HSLA

```
p { color: red; }
```

```
h1 { color: #0000ff; } /* using HEX code */
```

```
h2 { color: rgb(0, 128, 0); } /* using RGB */
```

Font Color

- It is used to change the color of the text.
- There are three different formats to define a color:
 - By a color name
 - By hexadecimal value
 - By RGB

```
<style>
  h1 { color: red; }
  h2 { color: #9000A1; }
  p { color: rgb(0, 220, 98); }
</style>
```

```
<h1>This is heading 1</h1>
<h2>This is heading 2</h2>
<p>This is a paragraph.</p>
```

- vi. **font-variant** → Controls special font display.
Values: normal, small-caps

```
p { font-variant: small-caps; }
```

3) Background Properties –

- i. **background-color** → Sets the background color.

```
body { background-color: lightblue; }
```



- The background-color property is used to specify the background color of the element.

```
<style>
p
{
  background-color: #b0d4de;
}
</style>
```

```
<p>This is an example of CSS background
-color.</p>
```

- ii. **background-image** → Sets an image as background.

```
body { background-image: url("bg.jpg"); }
```



- The background-image property is used to set an image as a background of an element.

```
<style>
body {
  background-image: url("test.jpg");
}
</style>
```

```
<body>
</body>
```

- iii. **background-repeat** → Defines how background image repeats.
Values: repeat (default), repeat-x, repeat-y, no-repeat

```
body { background-repeat: no-repeat; }
```

- iv. **background-position** → Sets position of the background image.
Values: left top, center center, right bottom, or px/ %

```
body { background-position: center top; }
```

- v. **background-size** → Defines the size of background image.

Values: auto, cover, contain, px, %

```
body { background-size: cover; }
```

- vi. **background-attachment** → Controls whether background scrolls or stays fixed.

Values: scroll, fixed, local

```
body { background-attachment: fixed; }
```

4) image Properties –

- i. **width & height** → Defines the size of the image.

```
img {  
width: 300px;  
height: auto; /* keeps aspect ratio */  
}
```

- ii. **border** → Adds border around an image.


```
img {  
border: 3px solid black;  
}
```



- It is used to set the border on an element.

```
<style>  
p {  
border-style: dotted;  
}  
</style>
```

```
<p>Cascading Stylesheet</p>
```

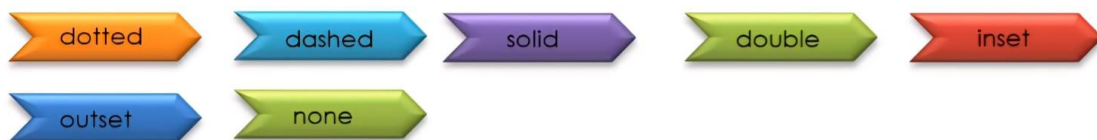

- iii. **border-radius** → Rounds image corners (can make circle images).

```
img {  
  
border-radius: 50%; /* circle */  
}
```

border-radius

- This CSS property sets the rounded borders and provides the rounded corners around an element, tags, or div.

```
<style>
div
{
border-radius: 90px;
background: lightgreen;
}
</style>
```

```
<div>
  <h2>CSS border-radius property</h2>
</div>
```

- iv. **box-shadow** → Adds shadow effect to the image.

```
img {
box-shadow: 5px 5px 15px gray;
}
```

Box - Shadow

- It is used to add shadow-like effects around the frame of an element.

```
<style>
img
{
box-shadow: 5px 10px 10px 10px orange;
}
</style>
```

```

```

- v. **opacity** → Controls image transparency.

```
img {
opacity: 0.7; /* 70% visible */
}
```

CSS Opacity

- The CSS opacity property is used to specify the transparency of an element.
- Opacity is defined as degree in which light is allowed to travel through an object.

```
<style>
img
{
opacity: 0.5;
}
</style>
```

```

```