


JavaScript

Control Statement in JavaScript :-


- Control statements in JavaScript are used to control the flow of execution in a program.
- They allow decision-making, looping, and jumping.

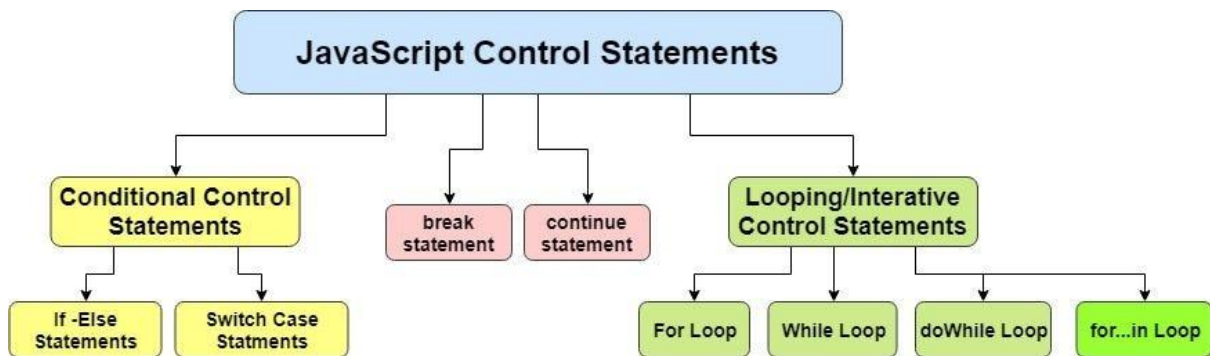

1. Conditional (Decision-Making) Statements -

These statements allow the program to make decisions based on conditions.

- 1) **if** - Runs block if condition is true.

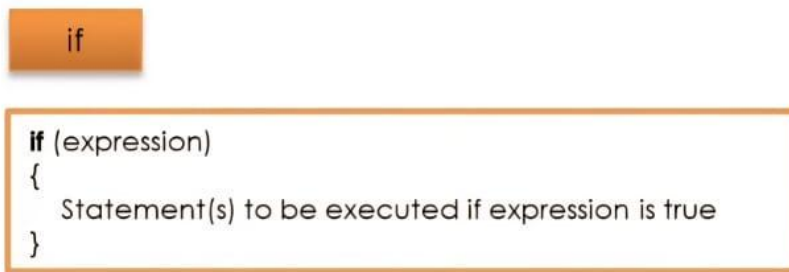

Example –

```
if(num%2==0){
  console.log("Even Number");
}
```

Output –

Even Number

2) **if else** - Chooses between two blocks.

if...else

```
if (expression)
{
    Statement(s) to be executed if expression is true
}
else
{
    Statement(s) to be executed if expression is false
}
```

Example –

```
let number=18;
```

```
if(number>0){
    console.log("Positive Number");
}
else{
    console.log("Negative Number");
}
```

Output –

Positive Number

3) if else if – Checks multiple conditions.

if...else if...

```
if (expression 1)
{
    Statement(s) to be executed if expression 1 is true
}
else if (expression 2)
{
    Statement(s) to be executed if expression 2 is true
}
else if (expression 3)
{
    Statement(s) to be executed if expression 3 is true
}
else
{
    Statement(s) to be executed if no expression is true
}
```

Example –

```
let day=prompt("Enter Day:");
if(day==1){
    console.log("Monday");
}
else if(day==2){
    console.log("Tuesday");
}
else if(day==3){
    console.log("Wednesday");
}
else if(day==4){
    console.log("Thursday");
}
else{
    console.log("Sunday");
}
```

Output –

Enter Day: 4

Thursday

4) Switch - Selects one case from many options.

switch

```
switch (expression)
{
    case condition 1:
        statement(s)
        break;

    case condition 2:
        statement(s)
        break;

    ...

    case condition n:
        statement(s)
        break;

    default:
        statement(s)
}
```

Example –

```
let time=parseInt(prompt("Enter Time:"));
```

```
switch(time){
    case 9:
        console.log("Good Morning");
        break;
    case 12:
        console.log("Good Afternoon");
        break;
    case 4:
        console.log("Goog Evening");
        break;
    case 10:
        console.log("Good Night");
        break;
```

default:

```
    console.log("Wrong Time");
```

```
}
```

Output –

Enter Time: 10

Good Night

2. Looping (Iteration) Statement –

These are used to execute a block of code repeatedly.

1) For Loop – When we know the count of iteration.

for

```
for (initialization; test condition; iteration statement)
{
    Statement(s) to be executed if test condition is true
}
```

Example –

```
for(let i=1;i<11;i++){
    document.writeln("Fortune Cloud<br>");
}
```

Output –

[illegible]

2) While Loop – When we don't know the count of iteration.

while

```
while (expression)
{
    Statement(s) to be executed
}
```

Example –

```
let i=1;
```

```
let j=10;
```

```
while(i<=j){
    document.writeln(i);
    i++;
}
```

Output –

1 2 3 4 5 6 7 8 9 10

3) **Do – While Loop** - Runs at least once, then checks condition.

do...while

```
do
{
    Statement(s) to be executed;
} while (expression);
```

Example –

```
let i=1;
```

```
do{
    document.writeln("Fortune Cloud");
    i++;
}
while(i<=10)
```

Output –

Fortune Cloud Fortune Cloud Fortune Cloud Fortune Cloud Fortune Cloud Fortune Cloud
Fortune Cloud Fortune Cloud Fortune Cloud Fortune Cloud