

JavaScript

jQuery :-

- jQuery is a framework built using Javascript capabilities.
- you can use all the functions and other capabilities available in Javascript.
- jQuery is a small and lightweight Javascript library.
- jQuery simplifies DOM manipulation.

Syntax of jQuery –

```
$(document).ready(function(){  
  
$("selector").click(function(){  
  
    // action to perform  
  
});  
  
});
```

Here ,

- **\$(document).ready(function(){ ... })** - Ensures the jQuery code runs only after the webpage (DOM) is fully loaded.
- **\$("selector")** - Selects the HTML element (by id, class, or tag).
- **click(function(){ ... })** - Attaches a click event handler to the selected element.

Example –


Example

```
<html>  
<head>  
    <title>Home Page</title>  
    <script type="text/javascript" src="http://ajax.googleapis.com/ajax/libs/jquery  
/2.1.3/jquery.min.js"></script>  
  
    <script type="text/javascript" language="javascript">  
        $(document).ready(function() {  
            $("p").css("background-color", "cyan");  
        });  
    </script>  
</head>  
<body>  
  
    <p>The first paragraph is selected.</p>  
  
</body>  
</html>
```

Steps to Link jQuery in HTML Page -

- Download jQuery from jquery.com.
- Save the downloaded file (e.g., jquery-3.6.0.min.js) inside your project folder → make a folder named js.
- Link it in HTML like this:

```
<script src="js/jquery-3.6.0.min.js"></script>
```

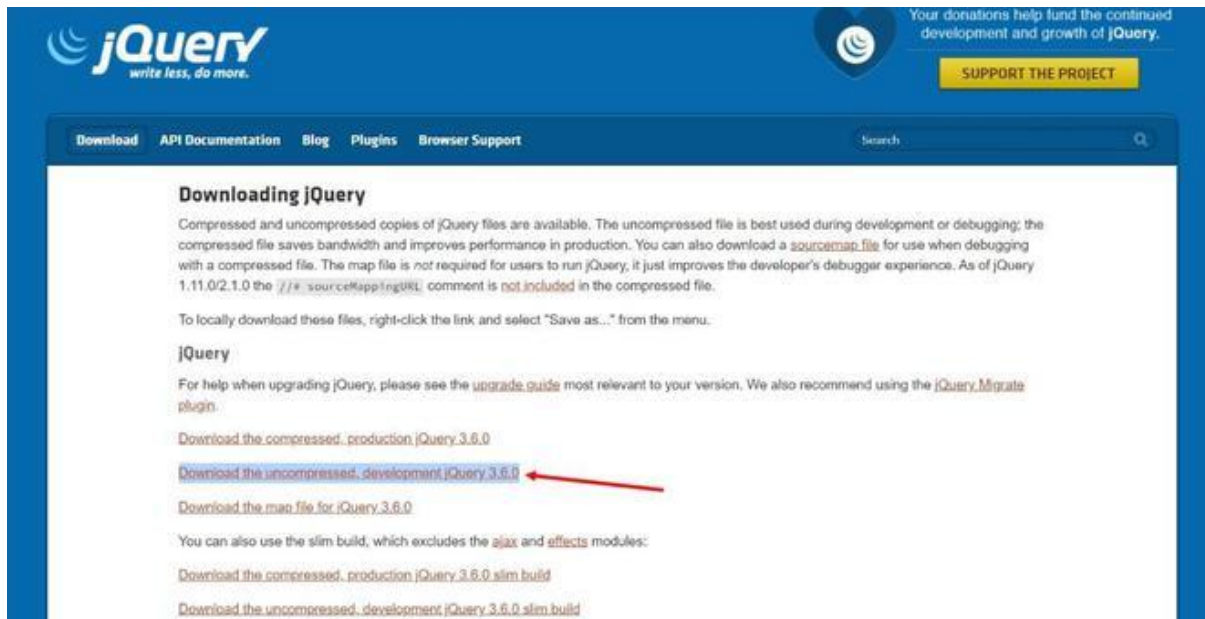

Methods in jQuery :-

- Methods in jQuery are built-in functions used to perform actions on selected elements.
- They allow us to manipulate HTML content, CSS styles, attributes, events, and effects easily.
- Methods are always applied on the elements selected by jQuery selectors.

Some Methods are:

1) Hide & Show

Hide & Show

```
<script>
$(document).ready(function(){

    $("#hide").click(function(){
        $("p").hide();
    });

    $("#show").click(function(){
        $("p").show();
    });

});
</script>
```

<p> Hello JQuery </p>

<button id="hide">Hide</button>
<button id="show">Show</button>

2) toggle

toggle

```
<script>
$(document).ready(function(){

    $("button").click(function(){
        $("p").toggle();
    });

});
</script>
```

<p> Hello JQuery </p>

<button>Toggle</button>

- It shows the hidden elements and hides the shown element.

3) slideDown

slideDown

- jQuery slideDown() method is used to slide down an element.

```
<script>
$(document).ready(function(){

    $("#p1").click(function(){
        $("#p2").slideDown("slow");
    });

});
</script>
```

```
<style>
#p2
{
    display: none;
}
</style>
```

<p id="p1"> Click Here </p>

<p id="p2"> Hello JQuery </p>

4) slideUp

slideUp

- jQuery slideDown() method is used to slide up an element.

```
<script>
$(document).ready(function(){

    $("#p1").click(function(){
        $("#p2").slideUp("slow");
    });

});
</script>
```

<p id="p1"> Click Here </p>

<p id="p2"> Hello JQuery </p>

5) slideToggle

slideToggle

- If the element is slide down, it will slide up the element and if it is slide up, it will slide down.

```
<script>
$(document).ready(function(){

    $("#p1").click(function(){
        $("#p2").slideToggle("slow");
    });

});
</script>
```

```
<style>
#p2
{
    display: none;
}
</style>
```

<p id="p1"> Click Here </p>

<p id="p2"> Hello JQuery </p>

6) html

html

- It replaces the selected element content with new contents.

```
<script>
$(document).ready(function(){

    $("button").click(function(){
        $("p").html("jQuery");
    });

});
</script>
```

<button>Click here**</button>**

<p>This is a paragraph.**</p>**

7) val

val

- It is used to set the value of every matched element.
- Get current value of the first element in the set of matched elements.

```
<script>
function show()
{
    var sel = $( "#dropdown" ).val();
    alert(sel);
}

$( "select" ).change(show);
show();
</script>
```

<select id="dropdown">
 <option>Abc**</option>**
 <option>Pqr**</option>**
 <option>Lmn**</option>**
 <option>Xyz**</option>**
</select>

8) append

append

- Insert specified content as the last child

```
<script>
$(document).ready(function(){
    $("button").click(function(){
        $("ol").append("<li>New item</li>" );
    });
});
</script>
```

 ****Abc****
 ****Pqr****
 ****Lmn****
 ****Xyz****

<button>Append**</button>**

9) clone

Clone

- It also makes copies of their child nodes

```
<script>
$(document).ready(function(){
  $("button").click(function(){
    $("p").clone().appendTo("body");
  });
});
</script>
```

<p>I am clone method</p>

<button>Clone</button>

10) remove

remove

```
<script>
$(document).ready(function(){
  $("button").click(function(){
    $("p").remove();
  });
});
</script>
```

<p>I am remove method</p>

<button>Remove</button>

11) empty

empty

- Remove all content from the selected elements.

```
<script>
$(document).ready(function(){
  $("button").click(function(){
    $("div").empty();
  });
});
</script>
```

<div style="height:150px;background-color:red">
I am empty
</div>

<button>Empty</button>

12) addClass

addClass

- The addClass() method is used to add one or more class name to the selected element.

```
<script>
$(document).ready(function(){
    $("button").click(function(){
        $("p").addClass("test");
    });
});
</script>
```

```
<style>
.test
{
    font-size: 50px;
    color: red;
}
</style>
```

```
<p>This is a paragraph.</p>
```

```
<button>addClass</button>
```