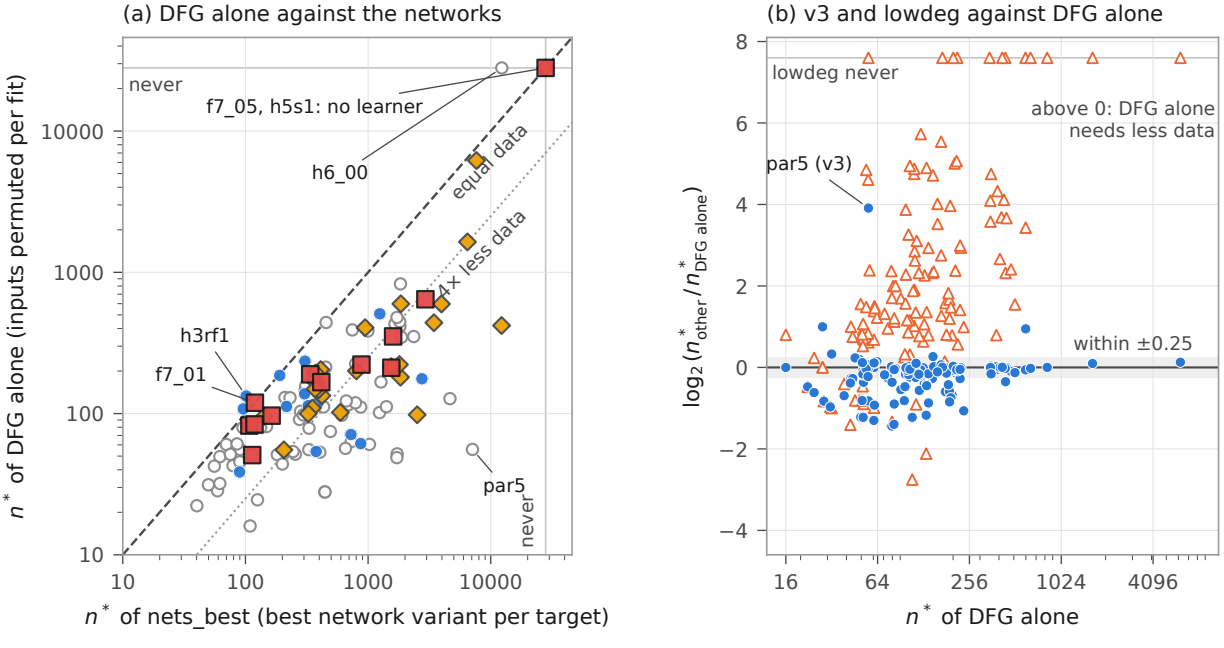
(a) DFG alone against the networks
never
f7_05, h5s1: no learner
h6_00
equal data
4× less data
h3rf1
f7_01
par5
never
10000
1000
100
10
10
100
1000
10000
n* of DFG alone (inputs permuted per fit)
n* of nets_best (best network variant per target)
(b) v3 and lowdeg against DFG alone
lowdeg never
above 0: DFG alone
needs less data
par5 (v3)
within ±0.25
8
6
4
2
0
−2
−4
16
64
256
1024
4096
log2 (n*other / n*DFG alone)
n* of DFG alone
suites by status for DFG v1.3 (targets plotted)
development (73)
held out for an earlier version (17)
v1.2 built after exposure (24)
held out for v1.3 (dlheld7) (12)
lowdeg (characters and test only)
v3 (DFG v1.3 inside the Part 10 portfolio)