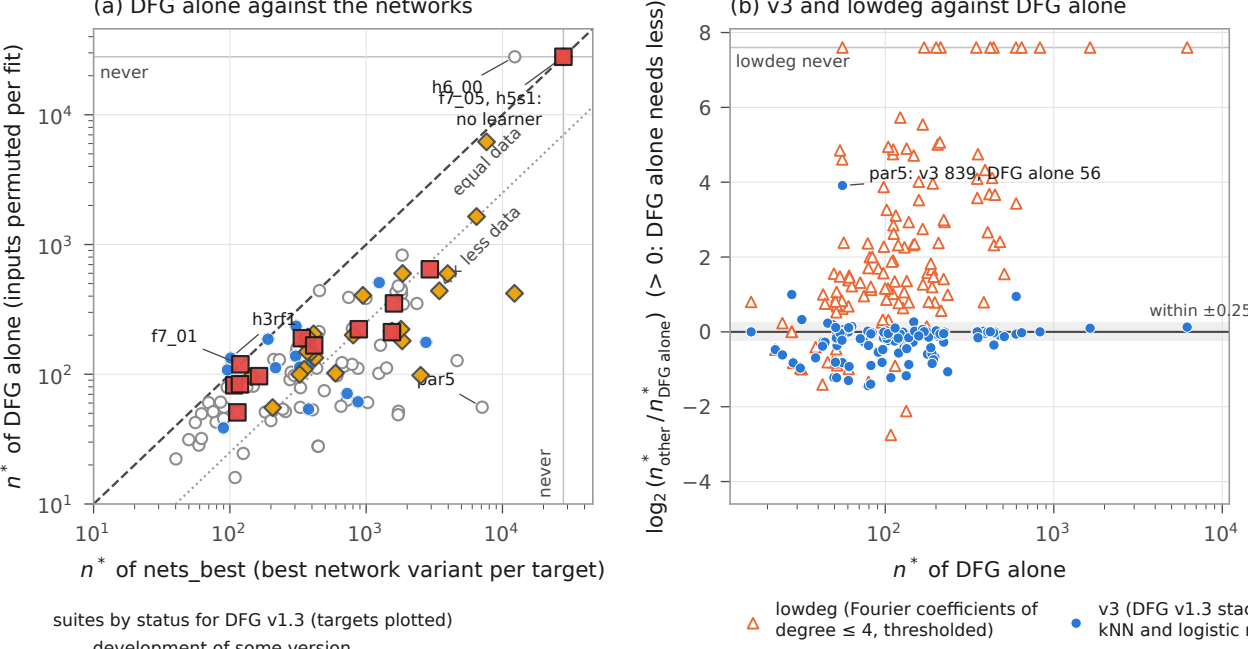
(a) DFG alone against the networks
never
h6_00
f7_05, h5s1:
no learner
equal data
less data
f7_01
h3rf1
par5
never
10^1
10^2
10^3
10^4
n^* of DFG alone (inputs permuted per fit)
n^* of nets_best (best network variant per target)
(b) v3 and lowdeg against DFG alone
lowdeg never
par5: v3 839, DFG alone 56
within ±0.25
8
6
4
2
0
−2
−4
$\log_2(n^*_{\text{other}}/n^*_{\text{DFG alone}})$ (> 0: DFG alone needs less)
n^* of DFG alone
suites by status for DFG v1.3 (targets plotted)
development of some version of DFG (73)
held out for an earlier version only (17)
v1.2 built after exposure (24)
held out for v1.3 (12)
lowdeg (Fourier coefficients of degree ≤ 4, thresholded)
v3 (DFG v1.3 stac
kNN and logistic r