

# Cucumber Report

10 Oct, 2021 10:32:15 AM

**Start : Oct 10, 10:32:13.008 AM**

**End : Oct 10, 10:32:13.461 AM**

**Duration : 0.453 s**

*Features*

*Scenarios*

*Steps*

**PASSED - 1**

**FAILED - 0**

**SKIPPED - 0**

**PASSED - 1**




**FAILED - 0**


**SKIPPED - 0**

**PASSED - 2**


**FAILED - 0**

**SKIPPED - 0**

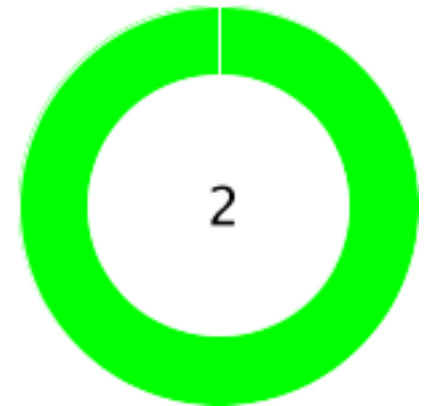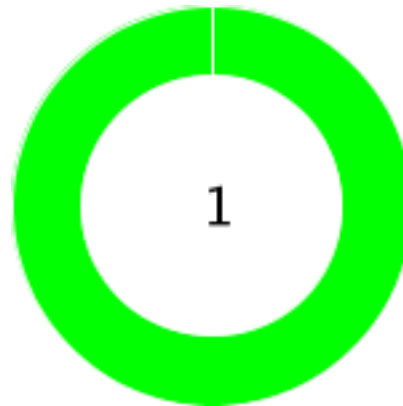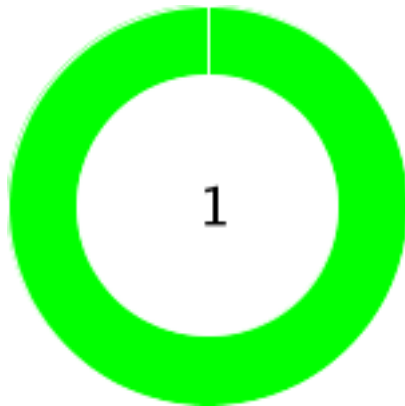

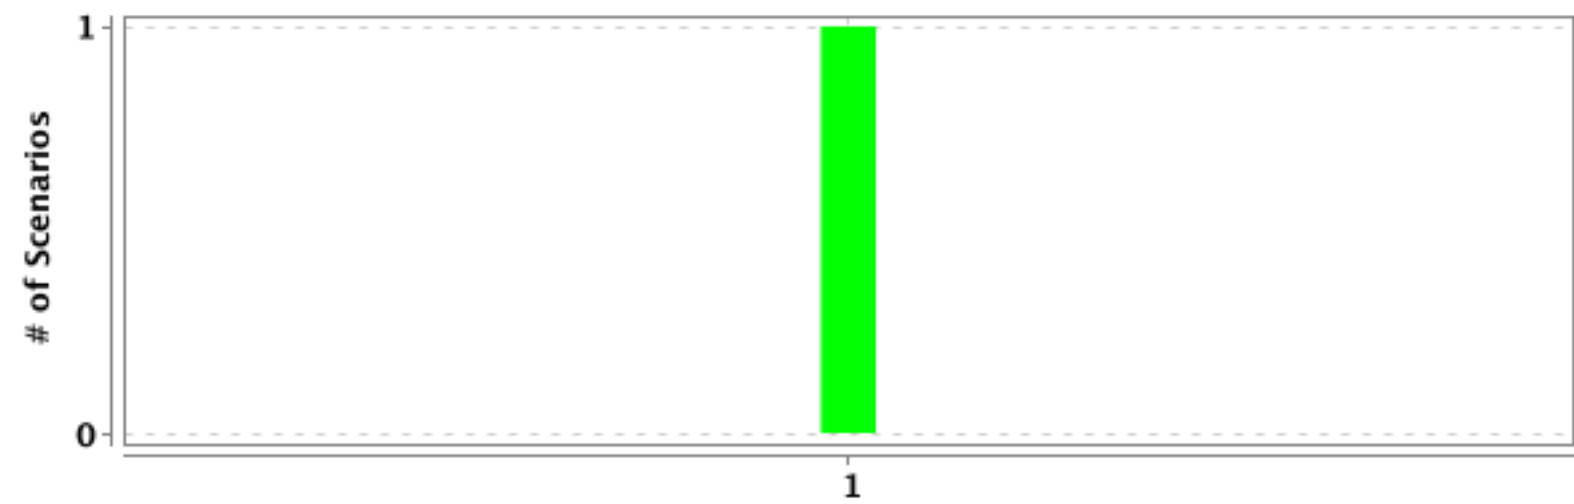

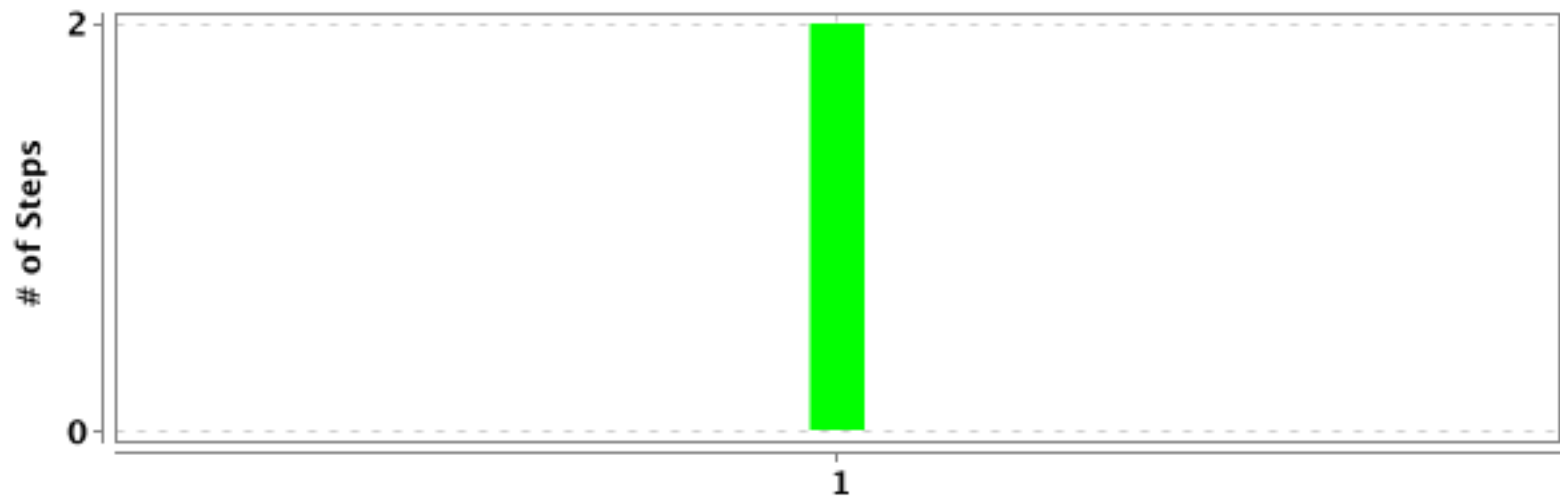

#	Feature Name	T	P	F	S	Duration
1	Hello World Example	1	1	0	0	0.453 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Hello World Example	Simple Hello World Test	2	2	0	0	0.448 s

(F)- Hello World Example

<div>PASSED</div> <div>DURATION - 0.453 s</div>	<div>Scenarios</div> <div>Total - 1</div> <div>Pass - 1</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>	<div>Steps</div> <div>Total - 2</div> <div>Pass - 2</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
/ 10:32:13.008 AM // 10:32:13.461 AM /				

(S)- Simple Hello World Test

<div>PASSED</div> <div>DURATION - 0.448 s</div>		<div>Steps</div> <div>Total - 2</div> <div>Pass - 2</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
/ 10:32:13.013 AM // 10:32:13.461 AM /			
Hello World Example			
@hello			

#	Step / Hook Details	Status	Duration
1	Given I initialise a field with Hello World string	PASSED	0.002 s
2	Then Print Hello world	PASSED	0.001 s