



VIT[®]

Vellore Institute of Technology

(Deemed to be University under section 3 of UGC Act, 1956)

School of Computer Science and Engineering

Law Firm Management Website

Done by

19BCE2322 – Jaivant Vassan

19BCE2337 – Divakar A S

19BCE2339 – Kabhilan S

19BCE2344 – Prithvi Saran S

Under the Guidance of

Prof. A. Vijayarani

For the course

Course Code: CSE3002

Course Name: Internet and Web Programming

Semester: Winter 2021

CONTENTS

Sno.	Topic	Page Number
1	<u>Abstract</u>	3
2	<u>Introduction</u>	4
3	<u>ER Diagram</u>	7
4	<u>PROCESS FLOW DIAGRAM</u>	9
5	<u>Database Design</u>	13
6	<u>Code</u>	16
7	<u>Screenshots</u>	159
8	<u>Conclusion</u>	164
9	<u>References</u>	165

ABSTRACT

As the world increasingly progresses towards a technology driven environment, the legal sector isn't to be left behind. In the past years, clients get to know about lawyers through recommendation and there would be no easy way to contact the lawyer and exchange information on a case other than direct contact. Work was slow and tedious as paperwork piled up and had to be marked and filed so that it could be referred later on. The basis of this project is to bridge the technology gap between the lawyers and clients in India. Firms that deal with legal services will most likely handle huge quantities of inventory and have to make sure that these files are readily available at a moment's notice. Records kept on paper in files are no longer feasible. Details of clients and employees, information on cases and hearings etc thus need a better mode of management. It has therefore become necessary for these firms to use a way which will securely handle this massive data and readily avail it to over one person at a time, quickly and instantly, even though they are in different locations. Our project "Law Firm Management Website" aims to provide the client and employees of a law firm with an easy to access, secure and direct means of accessing the resources of a law firm.

INTRODUCTION

The different tasks endowed on lawyers have made legal practice an inevitable venture in today's world. Tasks like providing advising services on legal rights and responsibilities, the representation of clients in civil and criminal cases and furthermore other matters concerning business transactions, family advising and firm consulting. Over the years, law firms have seen the necessity to include technology in these practices. Lawyers from various parts of the planet are adopting technologies for research, collaboration, and communication. The introduction of technology was a breakthrough for lawyers because it eliminated the out of location limitation by helping lawyers handle large volume of cases whether in office or not. Database technology for legal professionals has been in use since the 1980s. This was within the sort of simple data field screens that were designed to trace legal entity information. During this era, when attorneys/lawyers needed some information from the database, their request was channelled through the database gatekeepers for the various sections of the legal body like the entity information, litigation, property, contracts and lots more. However, within the early 2000s the online based software became a workable option for firms that were technologically advanced and well-funded, primarily law firms within the west. Throughout this era the lawyers within the Indian context lagged behind thanks to the undeveloped technology.

The only web based client relationship management and client intake system designed exclusively for law firms, most law firms have adopted some technology into their processes already, but the acceptance of technology is still in its infancy. This is evident in the thousands of law firms found in India today. They have long been related to piles of text files with receipts flying everywhere the office. Neglecting the bad state of affairs, file bring ups and notifications need to be manually entered into an enormous office diary. The same office diary has got to be duplicated in order that more than one officer can access the data. This is a time and energy consuming process. Small firms employ between one to eight free earners whose work was just registration, searching for files or compiling each of the lawyer's individual diary for synchronization purposes. This amount of money spent on employing relatively high numbers of subordinate staff is a further waste of expenses and labour. This challenge is projected to most law firms across India.

Currently, several applications are developed to deal with the difficulty of low technology consumption in law firms but a number of the lawyers still recoil from using technology in their practice albeit these application are tested and endorsed by the body of lawyers to enhance the work efficiency and therefore the profitability of the firm. However, the attempts to include technology within the legal sector have failed due to a couple of factors. Firstly, lawyers are ready to see the positive effect of incorporating technology into their business as soon as possible. this is often evident because data processing systems were quickly adapted to the law firms as compared to management applications because these lawyers saw

immediate value in changing their current style. this is often also very practical because lawyers have cut their cost through the utilization of technology by eradicating a great deal of their employees.

In the plan to appeal to law firms to use technology in their practice the “Law Firm Management Website” aims to extend the usage of the web and decreasing the necessity for employees to sit in a physical office, this also allows the access of files from anywhere within the world. It also grants clients who want to use the firm a simple method of requesting a consultation and for returning clients a user-friendly means of accessing their data. This website allows the users to access the knowledge wherever they are and this will be through different platforms like the phone, tablet and personal computers. The backend database also supports unlimited users as different law firms have a varied number of employees and clients. Such a system is more aware of clients because it doesn't only ease the law firms’ work but also that of the client.

Modules:

Index Page – The landing page of the website containing info and other details of the lawfirm and with an option to login which redirects to login page

Login page – Portal for clients/employees/admins to login

Signup page – Clients must fill a form and give details on their appointment request related to their case to sign up for an account

Client portal – Clients can choose whether they want to see case details, their cases or hearings for their cases.

Employee portal – Employees(Lawyers) can choose whether they want to see their details, cases, clients or hearings

Admin portal - Administrators have access to all data and can choose to see or manipulate whatever they choose

Client Details – The client can see their personal information

Client Cases – Clients can see information on their cases

Client Hearings – Clients can see information on hearings for their cases

Employee details – Employees can see their personal information

Employee Cases – Employees can see information on cases they are handling

Employee Clients – Employees can see information on clients they are representing

Employee Hearings – Employees can see information on hearings for cases they are representing

Admin Clients – Administrators can see client data or choose to add/update/delete data from the table

Admin Employees – Administrators can see employee data or choose to add/update/delete data from the table


Admin Cases – Administrators can see case data or choose to add/update/delete data from the table

Admin Hearings – Administrators can see hearing data or choose to add/update/delete data from the table

Admin Courts - Administrators can see court data or choose to add/update/delete data from the table

Admin Documents - Administrators can see document data or choose to add/update/delete data from the table

ER DIAGRAM

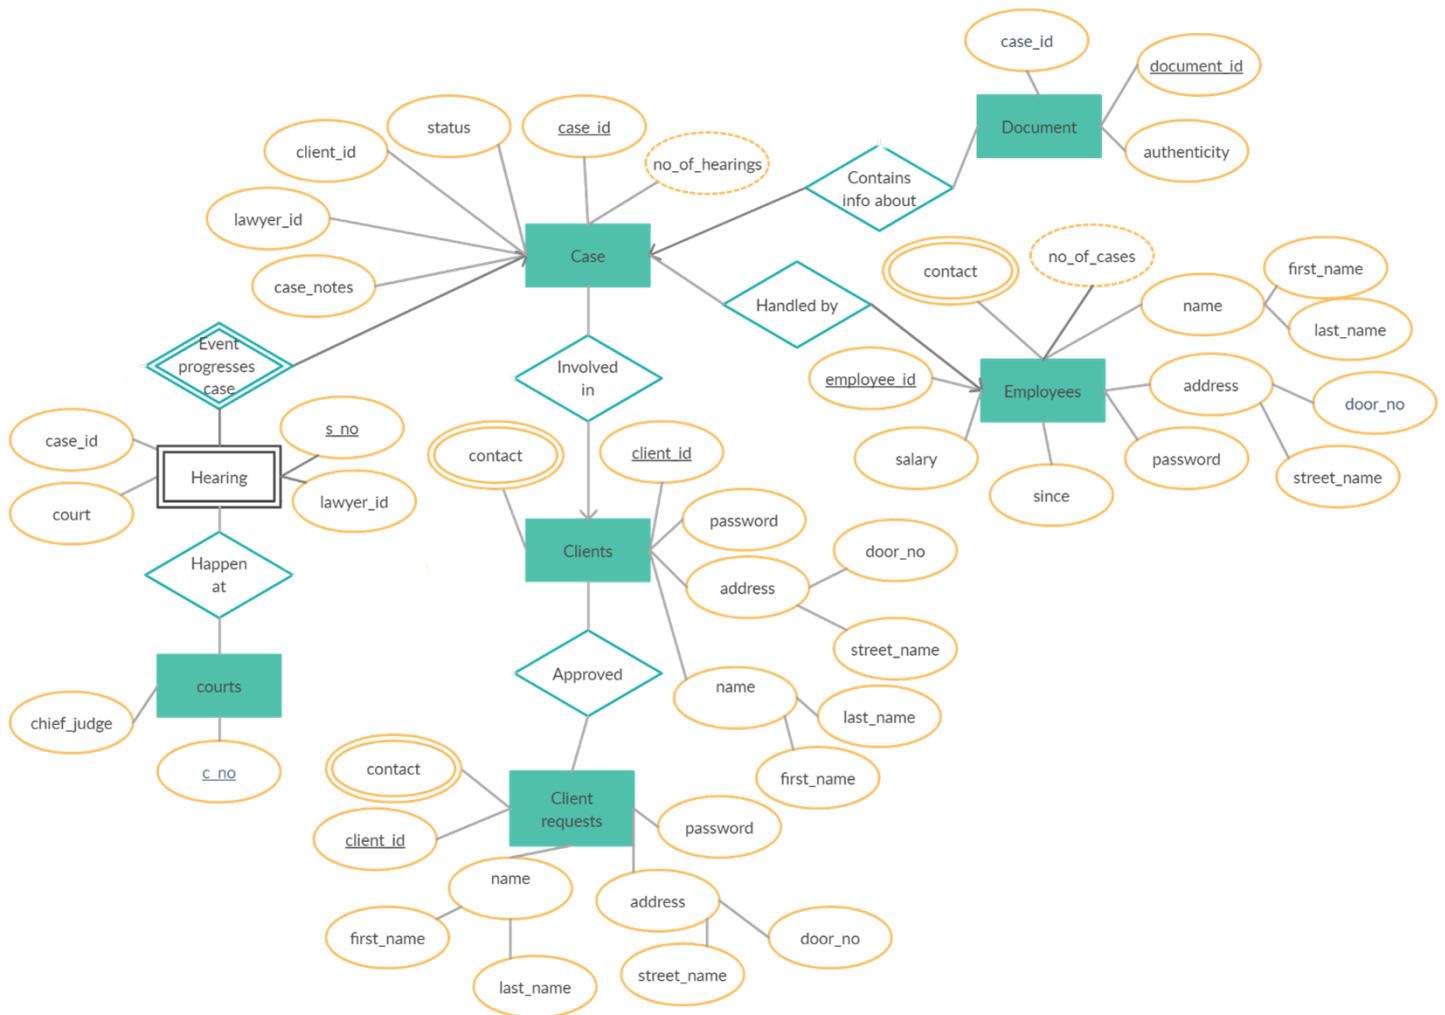

Case:

Case is a strong entity set containing 6 attributes. The underlined attribute case_id is the primary key and it contains a derived attribute no_of_hearings which is derived from the count of the number of instances of the case id in the hearings table.

Clients:

Clients is a strong entity set containing 5 attributes. It is connected to Case through the relationship 'Involved in'. The underlined attribute client_id is the primary key. It contains a multivalued attribute contact since one client may have multiple contact numbers. It also contains two composite attributes for name and address which split into first_name, last_name and door_no, street_name respectively.

Client Requests:

Client requests is a strong entity set containing 5 attributes. It is connected to Clients through the relationship 'Approved'. The underlined attribute client_id is the primary key. It contains a multivalued attribute contact since one client may have multiple contact numbers. It also contains two composite attributes for name and address which split into first_name, last_name and door_bo, street_name respectively.

Employees:

Employees is a strong entity set containing 8 attributes. It is connected to Case entity set through the relationship 'Handled by'. The underlined attribute case_id is the primary key of the entity set. It contains a multivalued attribute contact since one employee may have multiple contact numbers. It also contains two composite attributes for name and address which split into first_name, last_name and door_bo, street_name respectively. Further there is a derived attribute no_of_cases which is derived from the count of all cases associated with the particular lawyer.

Documents:

Documents is a strong entity set containing 3 attributes. It is related to Case entity set through the relationship 'Contains info about'. The primary key of the entity set is the underlined attribute document_id.


Hearings:

Hearings is a weak entity set containing 4 attributes. It is related to Case entity set through the weak relationship 'Event progresses case'. The underlined attribute s_no is the primary key of the entity set.


Courts:

Courts is a strong entity set containing 2 attributes. It is related to Hearings entity set through the relationship 'Happen at'. The underlined attribute c_no is the primary key of the entity set.

PROCESS FLOW DIAGRAM

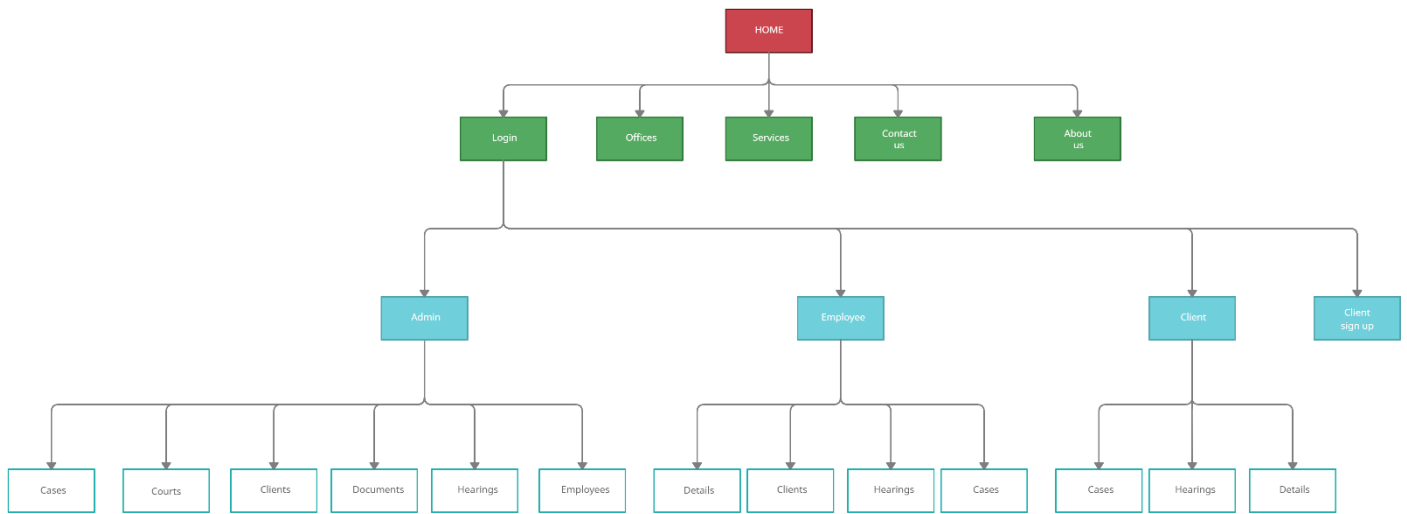

Home Page:

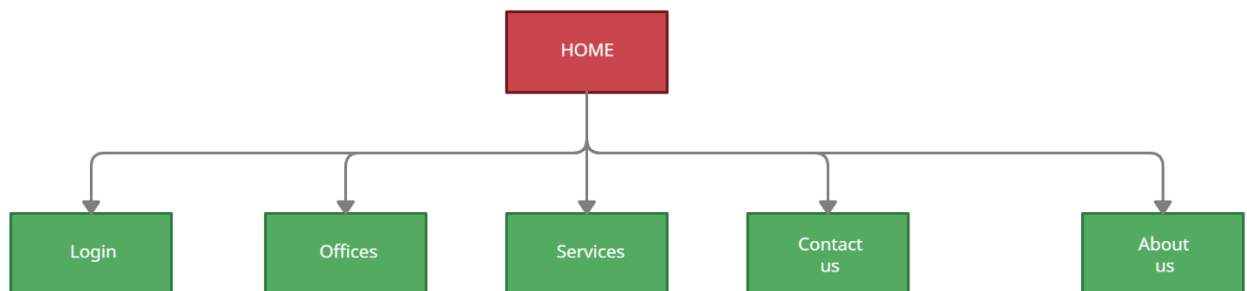

The home page of the website is structured such that the user may choose to be redirected to the login page or they may view information about the firm presented as 4 interchangeable sections.


Offices: Information about the locations where the law firm has offices

Services: Information about the different legal services provided by the law firm

Contact Us: Phone numbers and email addresses needed to contact the law firm directly

About Us: General information about the history, motto and spirit of the law firm

Login Page:

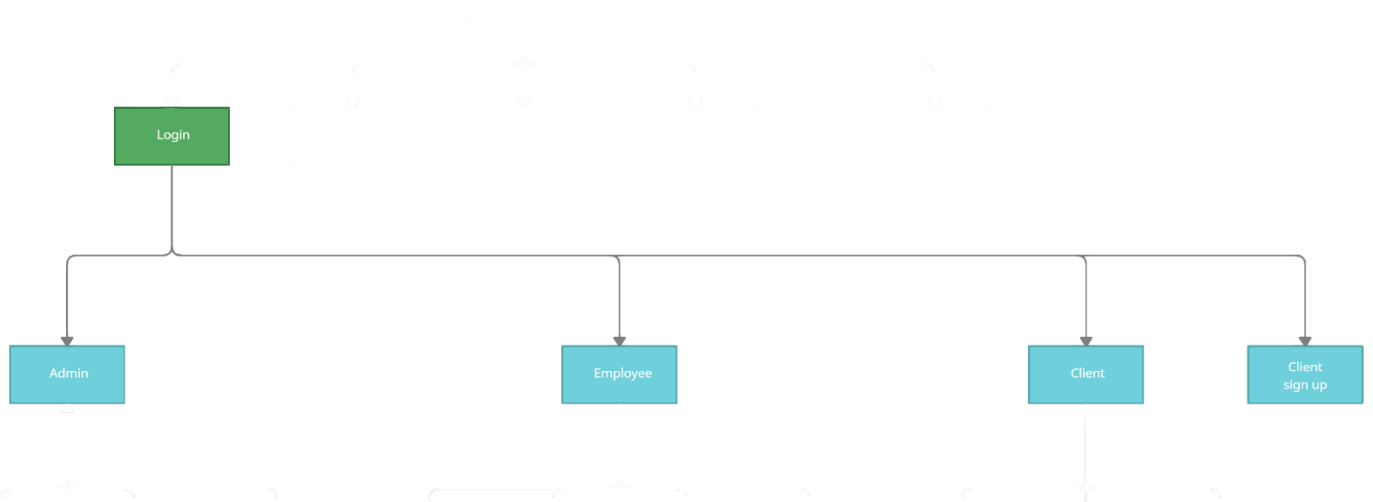


The login page redirects the user to one of three portals:

- Admin
- Employee
- Client

If the correct password is entered for the associated user id the user is redirected according to the user id.

New clients can choose the sign-up option to get redirected to the sign-up page

Admin Page:

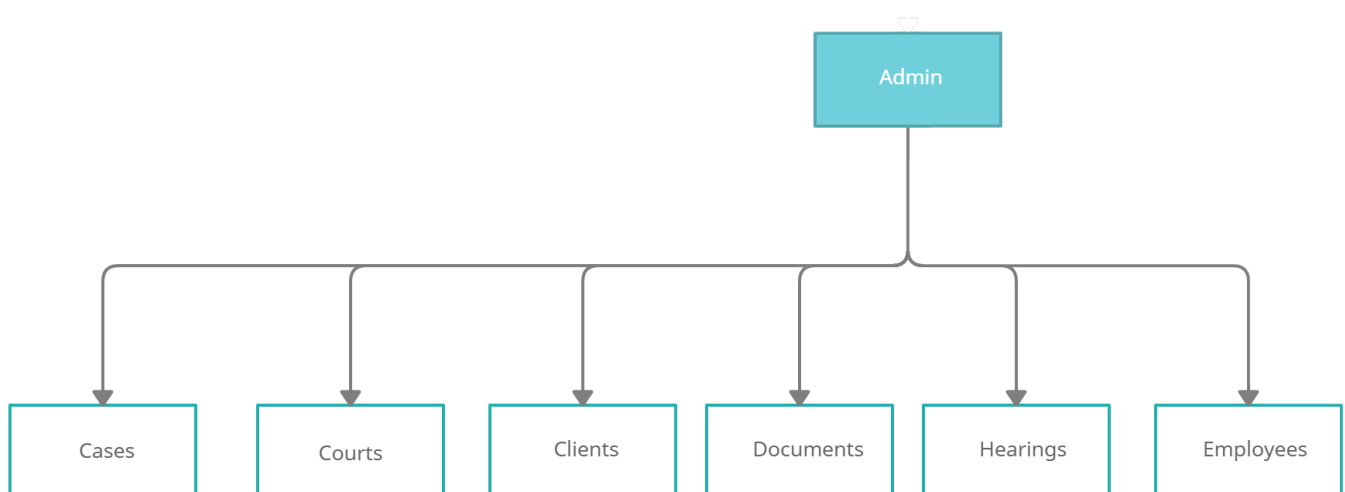


Administrators can access data for 6 different sections:

- Cases

- Courts
- Clients
- Documents
- Hearings
- Employees

They can view the data as a table and may add, remove and edit any of the data

Employee Page:

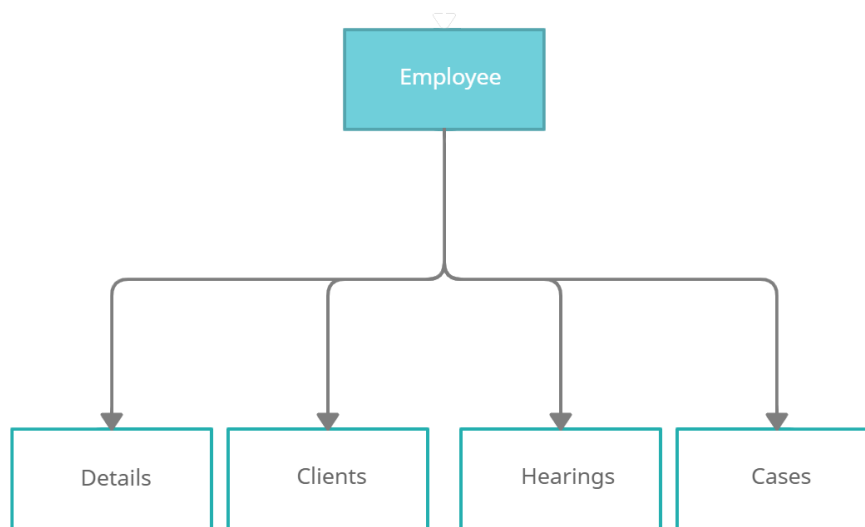


Employees can access data for 4 different sections:

- Details
- Clients
- Hearings
- Cases

Employees can only access their own details and details related to cases and clients they are handling.

Client Page:

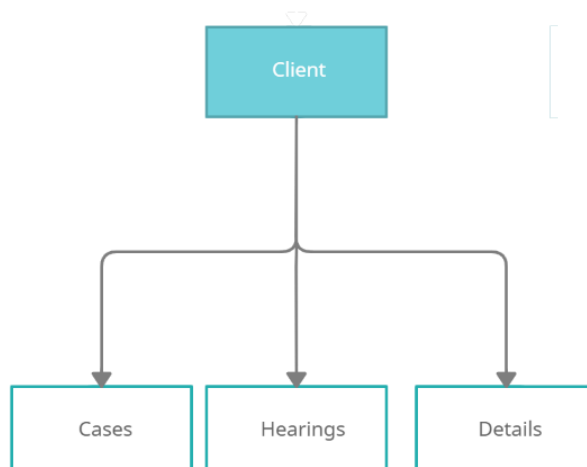


Clients can access data for 3 different sections:

- Cases
- Hearings
- Details

Clients can only view their own personal details along with data related to cases which are being represented by the firm

DATA BASE DESIGN

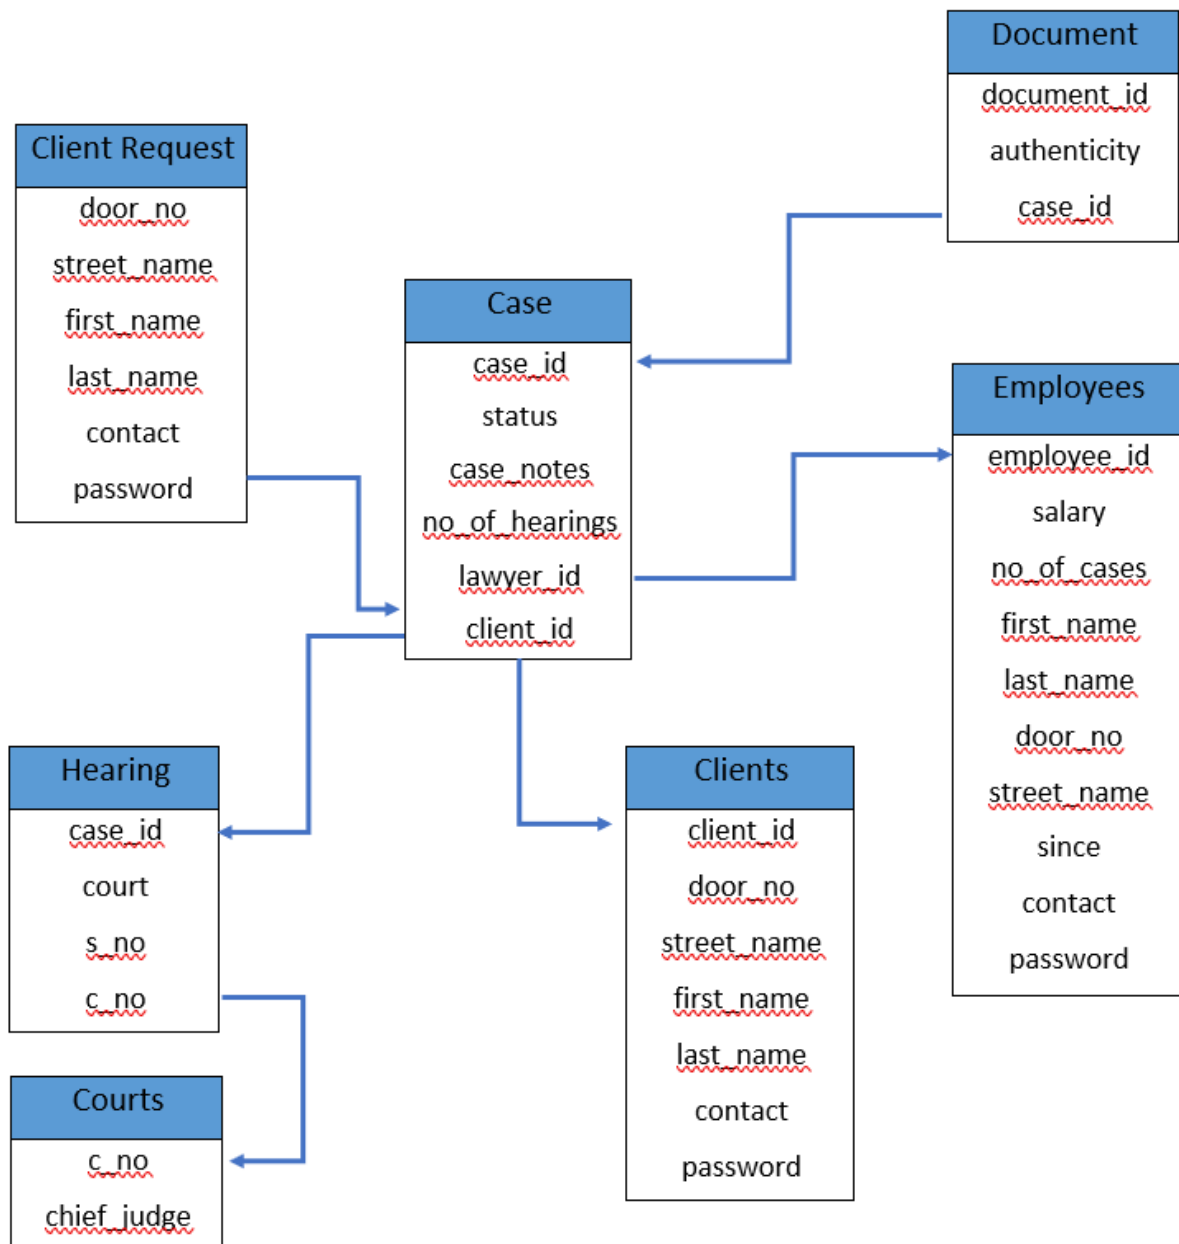

The Law Firm Database consists of 7 tables each with multiple attributes

1. Cases

- i. Case_id – The unique identifying id the case
- ii. Client_id – The unique identifying id of the client represented
- iii. Lawyer_id – The unique identifying id of the employee(lawyer) handling the case
- iv. Case_notes – Notes on the happenings of the case
- v. Status – Status of the case i.e., whether it is open or closed

- vi. No_of_hearings – Total hearings taken place for the case

2. Clients

- i. Client_id – The unique identifying id of the client
- ii. Name – first_name, last_name – First and last name of the client
- iii. Password – The login password of the client
- iv. Contact - The phone number of the client
- v. Address – door_no, street_name – The current address of the client

3. Employees

- i. Employee_id - The unique identifying id of the employee
- ii. Name – first_name, last_name - First and last name of the employee
- iii. Salary – The salary of the employee
- iv. Since – The date on which the employee joined the firm
- v. Contact – The phone number of the employee
- vi. Password – The login password of the employee
- vii. Address – door_no, street_name – The current address of the employee
- viii. No_of_cases – The total number of cases being handled by the employee

4. Courts

- i. c_no – The unique identifying id of a court
- ii. Chief_judge – The name of the chief judge of the court

5. Documents

- i. Document_id – The unique name assigned to the document
- ii. Case_id – The unique id assigned to the case referenced in the document
- iii. Authenticity – Whether the document is an original or copy

6. Hearings

- i. S_no – Unique identifying number of the hearing
- ii. Case_id – Unique identifying id of the case being heard in court
- iii. Lawyer_id – Unique identifying id of the lawyer representing the case
- iv. Court - The unique identifying id of the court where the hearing is taking place

7. Client Requests

- i. Name – first_name, last_name – The first and last name of the potential client

- ii. Contact – The phone number of the potential client
- iii. Password – The chosen password by the potential client
- iv. Address – door_no, street_name – The current address of the potential client

CODE

Index.html

```
<!DOCTYPE html>
```

<html>

<head>

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

<title>

[Home page](#)

</title>

<style>

.container

 $\{$

```
overflow: hidden;
```

border-top: none;

padding-top: 5px;

padding-left: 30px;

$$\}$$

.tabContent

$$\{$$

```
display: none;
```

padding: 6px 12px;

border-top: none;

padding-top: 40px;

padding-left: 100px;

padding-right: 100px;

```
animation: fade 1s;
```

```
column-count: 2;
```

font-size: 150%;

$$\}$$


```
.tabContent1
{
    display: none;
    padding: 6px 12px;
    border-top: none;
    padding-top: 40px;
    padding-left: 100px;
    padding-right: 100px;
    animation: fade 1s;
    column-count: 1;
    font-size: 150%;
}

@keyframes fade
{
    from { opacity: 0;}
    to { opacity: 1;}
}

.button
{
    border: none;
    color: white;
    padding: 16px 32px;
    text-align: center;
    display: inline-block;
    font-size: 16px;
    float: right;
    transition-duration: 0.4s;
    cursor: pointer;
}

.buttonEffect
```

```

{
    background-color: #082f61;
    color: rgb(255, 255, 255);
    border: none;
}
.buttonEffect:hover
{
    background-color: white;
    color: #082f61;
}
.layer {
    background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255, 255,
255, 0));
    position: absolute;
    top: 0;
    left: 0;
    width: 100%;
    height: 120%;
}
#bg
{
    background-image: url('images/bgwhite.jpg');
    background-repeat: no-repeat;
    background-attachment: fixed;
    background-size: cover;
}
</style>
</head>
<body id="bg">
    <div class="layer">
        <div class="container" >

```

```

        <button          type="button"          class="button          buttonEffect"
onclick="location.href='portal.php'" >Login</button>

        <button  type="button"  class="button  buttonEffect"  onclick="openTab(event,
'offices')">Offices</button>

        <button  type="button"  class="button  buttonEffect"  onclick="openTab(event,
'Services')">Services</button>

        <button  type="button"  class="button  buttonEffect"  onclick="openTab(event,
'contactUs')">Contact us</button>

        <button  type="button"  class="button  buttonEffect"  onclick="openTab(event,
'AboutUs')">About us</button>

</div>

```

```

<div id="AboutUs" class="tabContent" >

```

To learn more about J. P. Morgan’s investment business, including our accounts, products and services, as well as our relationship with you, please review our J.P. Morgan Securities LLC Form CRS and Guide to Investment Services and Brokerage Products.

This website is for informational purposes only, and not an offer, recommendation or solicitation of any product, strategy service or transaction. Any views, strategies or products discussed on this site may not be appropriate or suitable for all individuals and are subject to risks. Prior to making any investment or financial decisions, an investor should seek individualized advice from a personal financial, legal, tax and other professional advisors that take into account all of the particular facts and circumstances of an investor's own situation.

This website provides information about the brokerage and investment advisory services provided by J.P. Morgan Securities LLC (JPMS). When JPMS acts as a broker-dealer, a client's relationship with us and our duties to the client will be different in some important ways than a client's relationship with us and our duties to the client when we are acting as an investment advisor. A client should carefully read the agreements and disclosures received (including our Form ADV disclosure brochure, if and when applicable) in connection with our provision of services for important information about the capacity in which we will be acting.

```

<br>

```

Investments in alternative investment strategies is speculative, often involves a greater degree of risk than traditional investments including limited liquidity and limited transparency, among other factors and should only be considered by sophisticated investors with the financial capability to accept the loss of all or part of the assets devoted to such strategies.

Borrowing with securities as collateral involves certain risks, including the possibility that you may need to deposit additional securities and/or cash in the account to meet a maintenance call, and that securities in the account may be sold to meet the maintenance call. Proper management of your account and a thorough understanding of the conditions that may affect your investments will assist you in effectively using the margin lending program.

J.P. Morgan Wealth Management is a business of JPMorgan Chase & Co., which offers investment products and services through J.P. Morgan Securities LLC (JPMS), a registered broker-dealer and investment advisor, member FINRA and SIPC. Annuities are made available through Chase Insurance Agency, Inc. (CIA), a licensed insurance agency, doing business as Chase Insurance Agency Services, Inc. in Florida. Certain custody and other services are provided by JPMorgan Chase Bank, N.A. (JPMCB). JPMS, CIA and JPMCB are affiliated companies under the common control of JPMorgan Chase & Co. Products not available in all states.

</div>

<div id="contactUs" class="tabContent">

<p> Sales Support - Toll Free

(800) 932-8242

Tech Support - Toll Free

(877) 843-3444

Local

801-770-7089

Address

765 E 340 S Suite #105

American Fork, UT 84003</p>

</div>

<div id="Services" class="tabContent">

<p>We have diversified areas of practice as below :

 a. Advisory — Our full-service law firm advises in every law with a specialization in Indirect taxes, IPR, Contracts, International Trade Laws, Corporate Laws, Commercial Laws etc

 b. Mediation & Arbitration — We handle all Alternative methods of Disputes resolution where differences lead to mediation & conciliation as well as disputes leading to commercial arbitration for our domestic & international clients

 c. Non Litigation – We carry out Contract Drafting, Trademarks and Copyrights Registrations, Various Agreements & Legal Vetting, Due Diligence Reports, etc.

d. Litigation – The law firm provides the litigation services in the following areas of law :

Other areas of work include the following:

Advance Rulings

Anti Dumping Duty

Competition Laws,

Companies Law

Contracts Laws,

Consumer Protection & Product Liability,

Corporate/Commercial Advisory,

Environment Laws and climate change,

Export & Import

Infrastructure,

Intellectual Property Rights (IPR)

Insolvency

Insurance

International Trade Laws & Disputes,

Indirect & Direct Taxation,

Mining and Energy,

Pharmaceutical Laws

Real Estate

Regulatory & Public Policy,

Retail,

Sales Tax & VAT

SEZ

TMT,

Trade Law

Trusts, etc.</p>

</div>

<div id="offices" class="tabContent">

<p>North America

United States

+ Chicago (Headquarters)

+ Santa Barbara

Europe

France

+ Paris

Germany

+ Hamburg

United Kingdom

+ Belfast

+ Cheshire

+ Maidenhead

Asia-Pacific

China

+ Guangdong

India

+ Bangalore

Singapore

+ Singapore

</p>

</div>

</div>

<script>

function openTab(evt, tabName)

{

var i, tabcontent, button;

tabcontent = document.getElementsByClassName("tabContent");

for (i = 0; i < tabcontent.length; i++)

{

tabcontent[i].style.display = "none";

}

button = document.getElementsByClassName("button buttonEffect");

for (i = 0; i < button.length; i++)

{

button[i].className = button[i].className.replace(" active", "");

}

document.getElementById(tabName).style.display = "block";

}

</script>

</body>

</html>

Por.php

<!DOCTYPE html>

<html>

<?php

```
$user ='root';
```

```
$pw ='';
```

```
$db='law_firm';
```

```
$db= mysqli_connect('localhost',$user,$pw,$db) or die("Connection error");
```

```
/*echo "check print".$_GET["userid"].$_GET["ph"];*/
```

```
$user=$_GET["ph"];
```

```
$id=$_GET["userid"];
```

```
setcookie("id", $id, time() + (86400 * 30), "/") ;
```

```
$p=$_GET["pw"];
```

```
if($user=="admin")
```

```
{
```

```
    if($id=="admin")
```

```
    {
```

```
        if($p=="root")
```

```
        {
```

```
            header("Location: admin.php");
```

```
        }
```

```
    }
```

```
}
```

```
else
```

```
if($user=="employee")
```

```
{
```

```
    $data= mysqli_query($db,"SELECT employee_password FROM employees  
WHERE employee_id = '$id'") or die("Failed".mysql_error());
```



```

while($i= mysqli_fetch_assoc($data))
{
    if($i["employee_password"]== $p)
    {
        header("Location: emp.php");
    }
    else
    {
        echo "incorrect password";
    }
    echo " Password:". $i["employee_password"];
}

}

else
{
    $data= mysqli_query($db,"SELECT client_password FROM clients WHERE
client_id = '$id'" ) or die("Failed".mysql_error());
    while($i= mysqli_fetch_assoc($data))
    {
        if($i["client_password"]== $p)
        {
            header("Location: client.php");
        }
        else
        {
            echo "incorrect password";
        }
        echo " Password:". $i["client_password"];
    }
}

```

```
    }  
    ?>  
</html>
```

Portal.php

```
<html>  
  <head>  
    <title>  
      Portal  
    </title>  
  
    <style>  
      .login  
      {  
        position: absolute;  
        left: 50%;  
        top: 40%;  
        overflow: hidden;  
        border-top: none;  
        transform: translate(-50%, -50%);  
        border: 1px solid rgb(151, 146, 146);  
      }  
      .button  
      {  
        border: none;  
        color: white;  
        padding: 16px 32px;  
        text-align: center;  
        display: inline-block;  
        font-size: 16px;
```

```
    transition-duration: 0.4s;
    cursor: pointer;
}
.buttonEffect
{
    background-color: #555555;
    color: rgb(255, 255, 255);
    border: none;
}
.buttonEffect:hover
{
    background-color: transparent;
    color: rgb(0, 0, 0);
}

* {
    box-sizing: border-box;
}

input[type=text], input[type=password]
{
    width: 100%;
    padding: 12px;
    border: 1px solid #ccc;
    border-radius: 4px;
    resize: vertical;
}

label
{

```

```
padding: 12px 12px 12px 0;
display: inline-block;
}
```

```
input[type=submit],input[type=button]
{
background-color: #4CAF50;
color: white;
padding: 12px 20px;
border: none;
border-radius: 4px;
cursor: pointer;
}
```

```
input[type=submit]:hover,input[type=button]:hover
{
background-color: #45a049;
}
```

```
.container
{
display: none;
border-radius: 5px;
background-color: #f2f2f2;
padding: 20px;
size: 120%;
animation: fade 1s;
}
```

```
.col-25
```

```
{  
    float: left;  
    width: 50%;  
    margin-top: 6px;  
}
```

.col-75

```
{  
    float: left;  
    width: 75%;  
    margin-top: 6px;  
}
```

.row:after

```
{  
    content: "";  
    display: table;  
    clear: both;  
}
```

@keyframes fade

```
{  
    from {opacity: 0;}  
    to {opacity: 1;}  
}
```

```
@media screen and (max-width: 600px) {  
    .col-25, .col-75, input[type=submit], .button {
```

```

        width: 100%;
        margin-top: 0;
    }
}

.layer {
    background-image: linear-gradient(to right, rgba(255, 255, 255, 0.377), rgba(255,
255, 255, 0));
    position: absolute;
    top: 0;
    left: 0;
    width: 100%;
    height: 100%;
}

#bg
{
    background-image: url('images/bg.jpg');
    background-repeat: no-repeat;
    background-attachment: fixed;
}

</style>
</head>
<body id="bg" >
    <div class="layer">
        <h1 align="center" style="padding: 20px;">LOGIN</h1>
        <form action="por.php">
            <div class="login" >
                <button type="button" name="cl" class="button buttonEffect" onclick="tabOpen();
getid(this.id);" id="client">Client</button>
                <button type="button" name="em" class="button buttonEffect" onclick="tabOpen();
getid(this.id);" id="employee">Employee</button>
                <button type="button" name="ad" class="button buttonEffect" onclick="tabOpen();
getid(this.id);" id="admin">Admin</button>
            
```

```
<div class="container" id="sign-in">

    <div class="row">
        <div class="col-25">
            <label id="mutable" name="ui" for="userid">USER ID:</label>
        </div>
        <div class="col-75">
            <input type="text" id="userid" name="userid" placeholder="USER ID">
        </div>
    </div>

    <div class="row">
        <div class="col-25">
            <label for="pw">PASSWORD:</label>
        </div>
        <div class="col-75">
            <input type="password" id="pw" name="pw" placeholder="Password">
        </div>
    </div>

    <div class="row" align="center">
        <input type="hidden" name="ph" value="" id="did">
        <br/><input type="submit" value="Submit">
        <input type="button" id="su" onclick="location.href='signup.php'"
style="width:auto;" value="Signup">
    </div>

</div>

</div>

</div>

</form>
```

</div>

<script>

var uid;

function tabOpen(id)

{

document.getElementById('sign-in').style.display = "block";

}

function getid(id)

{

uid=id;

switch(uid)

{

case "client":

document.getElementById("mutable").innerHTML="Client ID:";

document.getElementById("su").style.display="inline";

document.getElementById("did").value = "client";

break;

case

document.getElementById("mutable").innerHTML="Employee ID:";

"employee":

document.getElementById("su").style.display="none";

document.getElementById("did").value = "employee";

break;

case "admin": document.getElementById("mutable").innerHTML="Admin ID:";

document.getElementById("su").style.display="none";

document.getElementById("did").value = "admin";

break;

}

}

function nextpage()

{


```
switch(uid)
{
    case "client":
        $(document).ready(function () {createCookie("usert", "client", "10");});
        break;
    case "employee":
        $(document).ready(function () {createCookie("usert", "employee", "10");});
        break;
    case "admin":
        $(document).ready(function () {createCookie("usert", "admin", "10");});
        break;
}
}
```

</script>

</body>

</html>

Signup.php

<!DOCTYPE html>

<html>

<style>

body {font-family: Arial, Helvetica, sans-serif;}

* {box-sizing: border-box;}

/* Full-width input fields */

input

{

width: 100%;

```
padding: 15px;
margin: 5px 0 22px 0;
display: inline-block;
border: none;
background: #f1f1f1;
}
```

```
/* Set a style for all buttons */
```

```
button
{
background-color: #4CAF50;
color: white;
padding: 14px 20px;
margin: 8px 0;
border: none;
cursor: pointer;
width: 100%;
opacity: 0.9;
}
```

```
button:hover {
opacity:1;
}
```

```
/* Extra styles for the cancel button */
```

```
.cancelbtn {
padding: 14px 20px;
background-color: #f44336;
}
```

```
/* Float cancel and signup buttons and add an equal width */
```

```
.cancelbtn, .signupbtn {  
    float: left;  
    width: 50%;  
}
```

```
/* Add padding to container elements */
```

```
.container {  
    padding: 16px;  
}
```

```
/* The Modal (background) */
```

```
.modal {  
    display: block; /* Hidden by default */  
    position: fixed; /* Stay in place */  
    z-index: 1; /* Sit on top */  
    left: 0;  
    top: 0;  
    width: 100%; /* Full width */  
    height: 100%; /* Full height */  
    overflow: auto; /* Enable scroll if needed */  
  
    padding-top: 50px;  
}
```

```
/* Modal Content/Box */
```

```
.modal-content {  
    background-color: #fefefe;  
    margin: 5% auto 15% auto; /* 5% from the top, 15% from the bottom and centered */
```

```

border: 1px solid #888;

width: 80%; /* Could be more or less, depending on screen size */
}

/* Style the horizontal ruler */
hr {
    border: 1px solid #f1f1f1;
    margin-bottom: 25px;
}

/* Clear floats */
.clearfix::after {
    content: "";
    clear: both;
    display: table;
}

.layer {
    background-image: linear-gradient(to right, rgba(255, 255, 255, 0.377), rgba(255, 255, 255, 0));
    position: absolute;
    top: 0;
    left: 0;
    width: 100%;
    height: 100%;
}

#bg
{
    background-image: url('images/bg.jpg');
}

</style>

<body id="bg">

```

```
<div id="id01" class="modal layer" >
```

```
<form class="modal-content" action="su.php">
```

```
<div class="container">
```

```
<h1>Sign Up</h1>
```

```
<p>Please fill in this form to create an account.</p>
```

```
<label for="first_name"><b>First name</b></label>
```

```
<input type="text" placeholder="Enter your first name" name="first_name" required>
```

```
<label for="last_name"><b>Last name</b></label>
```

```
<input type="text" placeholder="Enter your last name" name="last_name" required>
```

```
<p> <b>Address:</b> </p>
```

```
<label for="add_l1"><b>Line 1</b></label>
```

```
<input type="text" placeholder="eg: door number" name="add_l1" required>
```

```
<label for="add_l2"><b>Line 2</b></label>
```

```
<input type="text" placeholder="eg: street name, city" name="add_l2" required>
```

```
<label for="ph"><b>Contact number</b></label>
```

```
<input type="tel" placeholder="Enter your phone number" name="ph" required  
pattern="[0-9]{10}">
```

```
<label for="pw"><b>Password</b></label>
```

```
<input type="password" placeholder="Enter desired password" name="pw" required>
```

```
<label for="rep_pw"><b>Repeat Password</b></label>
```

```
<input type="password" placeholder="Repeat password" name="rep_pw" required>
```

```
<div class="clearfix">
```

```
<button type="button" onclick="history.back()" class="cancelbtn">Cancel</button>

<button type="submit" class="signupbtn" >Sign Up</button>


</div>

</div>

</form>

</div>

</body>

</html>
```

Su.php

```
<!DOCTYPE html>

<html>

  <head><title>Thank you!</title></head>

  <div style="text-align:center;">

    <h1>Thank you!</h1>

    <p>Your submission has been received.</p>

    <p><span id="timer"></span></p>

  </div>

  <script type="text/javascript">

    var count = 5;

    var redirect = "index.php";

    function countDown(){

      var timer = document.getElementById("timer");

      if(count > 0){

        count--;

        timer.innerHTML = "This page will redirect in "+count+" seconds.";

        setTimeout("countDown()", 1000);

      }else{

        window.location.href = redirect;
```

```

    }
}

countDown();
</script>
</html>
<?php
$user = 'root';

$pw = "";

$db = 'law_firm';

$db = mysqli_connect('localhost', $user, $pw, $db) or die("Connection error");

$fn = $_GET["first_name"];
$ln = $_GET["last_name"];
$ad1 = $_GET["add_11"];
$ad2 = $_GET["add_12"];
$pn = $_GET["ph"];
$pw = $_GET["pw"];

$num = mysqli_query($db, "SELECT MAX(client_id) AS counts FROM client_request");
$s_no = mysqli_fetch_assoc($num);
$send = $s_no["counts"] + 1;

echo $send;

$query = mysqli_query($db, "insert into client_request
values('$send', '$fn', '$ln', '$pw', '$ad2', '$ad1', '$pn')");
?>

```

Tab_css.css

```

.container
{
    overflow: hidden;

    border-top: none;

    padding-top: 5px;

```

```
padding-left: 30px;
}
.tabContent
{
display: none;
padding: 6px 12px;
border-top: none;
padding-top: 40px;
padding-left: 100px;
padding-right: 100px;
animation: fade 1s;
column-count: 2;
font-size: 150%;
}
@keyframes fade
{
from {opacity: 0;}
to {opacity: 1;}
}
.button
{
border: none;
color: white;
padding: 16px 32px;
text-align: center;
display: inline-block;
font-size: 16px;
float: right;
transition-duration: 0.4s;
cursor: pointer;
```



```

}
.buttonEffect
{
    background-color: transparent;
    color: black;
    border: none;
}
.buttonEffect:hover
{
    background-color: #555555;
    color: white;
}
.layer {
    background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255, 255, 255,
0));
    position: absolute;
    top: 0;
    left: 0;
    width: 100%;
    height: 100%;
}
#bg
{
    background-image: url('images/bg.jpg');
}

```

Tnks.php

```

<!DOCTYPE html>
<html>
<div style="text-align:center;">
    <h1>Thank you!</h1>

```

```

    <p>Your request has been sent.</p>
    <p><span id="timer"></span></p>
</div>
<script type="text/javascript">
    var count = 5;
    var redirect = "index.php";
    function countDown(){
        var timer = document.getElementById("timer");
        if(count > 0){
            count--;
            timer.innerHTML = "This page will redirect in "+count+" seconds.";
            setTimeout("countDown()", 1000);
        }else{
            window.location.href = redirect;
        }
    }
    countDown();
</script>
</html>

```

A_add_client.php

```

<!DOCTYPE html>
<head>
    <title>
        Update
    </title>
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <style>
        #table
        {

```

```

        margin-top: 100px;
    }
    .layer
    {
        background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255,
255, 255, 0));
        position: absolute;
        top: 0;
        left: 0;
        width: 100%;
        height: 120%;
    }
    #bg
    {
        background-image: url('images/bg.jpg');
        font-family: Helvetica, sans-serif;
        background-attachment: fixed;
    }
    table, td, th
    {
        border: 1px solid rgb(221, 221, 221);
        text-align: center;
    }

    table
    {
        border-collapse: collapse;

    }
    tr:nth-child(even)
    {

```

```
background-color: #f2f2f2;

}

tr:nth-child(odd)
{
    background-color: #ffffff;
}

th, td
{
    padding: 20px;
}

th
{
    background-color: #414141;
    color: white;
}

input[type=text],input[type=number]
{
    font-size: 18px;
}

.container
{
    height: 60px;
    position: relative;
}

.center
{
    margin: 0;
    position: absolute;
```

```
    top: 50%;
    left: 50%;
    -ms-transform: translate(-50%, -50%);
    transform: translate(-50%, -50%);
}

.button
{
    border: none;
    color: white;
    padding: 16px 32px;
    text-align: center;
    display: inline-block;
    font-size: 16px;
    transition-duration: 0.4s;
    cursor: pointer;
}

.buttonEffect
{
    background-color: #555555;
    color: rgb(255, 255, 255);
    border: none;
}

.buttonEffect:hover
{
    background-color: transparent;
    color: rgb(0, 0, 0);
}

.tabContent
{
    display: block;
```

```

border-top: none;

animation: fade 1s;

}

@keyframes fade
{
    from {opacity: 0;}
    to {opacity: 1;}
}

#HomeButton
{
    background-color: #d4d4d4;
    margin-left: 50px;
    margin-top: 20px;
    color: rgb(0, 0, 0);
}

#HomeButton:hover
{
    background-color: transparent;
    margin-left: 50px;
    margin-top: 20px;
    color: white;
}

</style>

</head>

<body id="bg">

    <div class="layer">

        <button    onclick="location.href='admin.php'"    id="HomeButton"    class="button
buttonEffect" >Home</button>

        <form action="casedetadd.php" method="POST" >

            <div id="table" class="tabContent">

```

```

<table align="center">

  <tr >

    <th>Attributes</th>

    <th>Input</th>

  </tr>


  <tr>

    <td>Status</td>

    <td><input type="text" name="two_column"></td>

  </tr>

  <tr>

    <td>Case Notes</td>

    <td><textarea    rows="4"    cols="50"                name="three_column">
</textarea></td>

  </tr>


  <tr>

    <td>Lawyer ID</td>

    <td><input type="number" name="five_column"></td>

  </tr>

  <tr>

    <td>Client ID</td>

    <td><input type="number" name="six_column"></td>

  </tr>

  <tr>

    <td>Fee</td>

    <td><input type="number" name="seven_column"></td>

  </tr>

</table>

<div id="ip_id" align="center" style="margin-top: 80px;" >

```

```

        <div class="container">

            <div class="center">

                <button name="Update" type="submit" onclick="window.alert('Update
successful')" id="center" class="button buttonEffect" >ADD</button>

            </div>

        </div>

    </div>

</div>

</form>

</div>

</body>

<script>


</script>

</html>

```

A_add_cases.php

```

<!DOCTYPE html>

<head>

    <title>

        Update

    </title>

    <meta name="viewport" content="width=device-width, initial-scale=1.0">

    <style>

        #table

        {

            margin-top: 100px;

        }

        .layer

```



```
{
    background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255,
255, 255, 0));
    position: absolute;
    top: 0;
    left: 0;
    width: 100%;
    height: 120%;
}
```

#bg

```
{
    background-image: url('images/bg.jpg');
    font-family: Helvetica, sans-serif;
    background-attachment: fixed;
}
```

table, td, th

```
{
    border: 1px solid rgb(221, 221, 221);
    text-align: center;
}
```

table

```
{
    border-collapse: collapse;
}
```

tr:nth-child(even)

```
{
    background-color: #f2f2f2;
}
```

```
tr:nth-child(odd)
{
    background-color: #ffffff;
}
th, td
{
    padding: 20px;
}
th
{
    background-color: #414141;
    color: white;
}

input[type=text],input[type=number]
{
    font-size: 18px;
}
.container
{
    height: 60px;
    position: relative;
}
.center
{
    margin: 0;
    position: absolute;
    top: 50%;
    left: 50%;
    -ms-transform: translate(-50%, -50%);
```

```
        transform: translate(-50%, -50%);
    }
.button
{
    border: none;
    color: white;
    padding: 16px 32px;
    text-align: center;
    display: inline-block;
    font-size: 16px;
    transition-duration: 0.4s;
    cursor: pointer;
}
.buttonEffect
{
    background-color: #555555;
    color: rgb(255, 255, 255);
    border: none;
}
.buttonEffect:hover
{
    background-color: transparent;
    color: rgb(0, 0, 0);
}
.tabContent
{
    display: block;
    border-top: none;
    animation: fade 1s;
```



```

        <th>Input</th>
    </tr>

    <tr>
        <td>Status</td>
        <td><input type="text" name="two_column"></td>
    </tr>

    <tr>
        <td>Case Notes</td>
        <td><textarea    rows="4"    cols="50"                name="three_column">
</textarea></td>
    </tr>

    <tr>
        <td>Lawyer ID</td>
        <td><input type="number" name="five_column"></td>
    </tr>

    <tr>
        <td>Client ID</td>
        <td><input type="number" name="six_column"></td>
    </tr>

    <tr>
        <td>Fee</td>
        <td><input type="number" name="seven_column"></td>
    </tr>
</table>

<div id="ip_id" align="center" style="margin-top: 80px;" >

    <div class="container">
        <div class="center">

```

```
        <button name="Update" type="submit" onclick="window.alert('Update
successful')" id="center" class="button buttonEffect" >ADD</button>
```

```
    </div>
```

```
  </div>
```

```
</div>
```

```
</div>
```

```
</form>
```

```
</div>
```

```
</body>
```

```
<script>
```

```
</script>
```

```
</html>
```

A_add_courts.php

```
<!DOCTYPE html>
```

```
<head>
```

```
  <title>
```

```
    Update
```

```
  </title>
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<style>
```

```
  #table
```

```
  {
```

```
    margin-top: 100px;
```

```
  }
```

```
  .layer
```

```
  {
```

```
background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255, 255, 255, 0));
```

```
position: absolute;
```

```
top: 0;
```

```
left: 0;
```

```
width: 100%;
```

```
height: 120%;
```

```
}
```

```
#bg
```

```
{
```

```
background-image: url('images/bg.jpg');
```

```
font-family: Helvetica, sans-serif;
```

```
background-attachment: fixed;
```

```
}
```

```
table, td, th
```

```
{
```

```
border: 1px solid rgb(221, 221, 221);
```

```
text-align: center;
```

```
}
```

```
table
```

```
{
```

```
border-collapse: collapse;
```

```
}
```

```
tr:nth-child(even)
```

```
{
```

```
background-color: #f2f2f2;
```

```
}
```

```
tr:nth-child(odd)
```

```
{
```

```
        background-color: #ffffff;
    }
    th, td
    {
        padding: 20px;
    }
    th
    {
        background-color: #414141;
        color: white;
    }

    input[type=text],input[type=number]
    {
        font-size: 18px;
    }
    .container
    {
        height: 60px;
        position: relative;
    }
    .center
    {
        margin: 0;
        position: absolute;
        top: 50%;
        left: 50%;
        -ms-transform: translate(-50%, -50%);
        transform: translate(-50%, -50%);
    }
```



```
.button
{
    border: none;
    color: white;
    padding: 16px 32px;
    text-align: center;
    display: inline-block;
    font-size: 16px;
    transition-duration: 0.4s;
    cursor: pointer;
}

.buttonEffect
{
    background-color: #555555;
    color: rgb(255, 255, 255);
    border: none;
}

.buttonEffect:hover
{
    background-color: transparent;
    color: rgb(0, 0, 0);
}

.tabContent
{
    display: block;
    border-top: none;
    animation: fade 1s;
}

@keyframes fade
```

```

    {
        from {opacity: 0;}
        to {opacity: 1;}
    }
#HomeButton
{
    background-color: #d4d4d4;
    margin-left: 50px;
    margin-top: 20px;
    color: rgb(0, 0, 0);
}
#HomeButton:hover
{
    background-color: transparent;
    margin-left: 50px;
    margin-top: 20px;
    color: white;
}
</style>
</head>
<body id="bg">
    <div class="layer">
        <button    onclick="location.href='admin.php'"    id="HomeButton"    class="button
buttonEffect" >Home</button>
        <form action="codetadd.php" method="POST" >
            <div id="table" class="tabContent">
                <table align="center">
                    <tr >
                        <th>Attributes</th>
                        <th>Input</th>
                    </tr>

```

```

        <tr>
            <td>Cheif judge</td>
            <td><input type="text" name="two_column"></td>
        </tr>
        <tr>
            <td>District</td>
            <td><input type="text" name="three_column"></td>
        </tr>
    </table>
    <div id="ip_id" align="center" style="margin-top: 80px;" >

        <div class="container">
            <div class="center">
                <button name="Update" type="submit" onclick="window.alert('Update
successful')" id="center" class="button buttonEffect" >ADD</button>
            </div>
        </div>
    </div>
</div>
</form>
</div>

</body>
<script>

</script>
</html>

```

A_add_document

```
<!DOCTYPE html>

<head>

  <title>

    Update

  </title>

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <style>

    #HomeButton

    {

      background-color: #d4d4d4;

      margin-left: 50px;

      margin-top: 20px;

      color: rgb(0, 0, 0);

    }

    #HomeButton:hover

    {

      background-color: transparent;

      margin-left: 50px;

      margin-top: 20px;

      color: white;

    }

    #table

    {

      margin-top: 100px;

    }

    .layer

    {

      background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255,

255, 255, 0));

      position: absolute;

      top: 0;
```

```
    left: 0;
    width: 100%;
    height: 120%;
}
#bg
{
    background-image: url('images/bg.jpg');
    font-family: Helvetica, sans-serif;
    background-attachment: fixed;
}
table, td, th
{
    border: 1px solid rgb(221, 221, 221);
    text-align: center;
}

table
{
    border-collapse: collapse;
}
tr:nth-child(even)
{
    background-color: #f2f2f2;
}
tr:nth-child(odd)
{
    background-color: #ffffff;
}
th, td
```

```
{
  padding: 20px;
}

th
{
  background-color: #414141;
  color: white;
}

input[type=text],input[type=number]
{
  font-size: 18px;
}

.container
{
  height: 60px;
  position: relative;
}

.center
{
  margin: 0;
  position: absolute;
  top: 50%;
  left: 50%;
  -ms-transform: translate(-50%, -50%);
  transform: translate(-50%, -50%);
}

.button
{
  border: none;
```

```
    color: white;
    padding: 16px 32px;
    text-align: center;
    display: inline-block;
    font-size: 16px;
    transition-duration: 0.4s;
    cursor: pointer;
}

.buttonEffect
{
background-color: #555555;
color: rgb(255, 255, 255);
border: none;
}

.buttonEffect:hover
{
background-color: transparent;
color: rgb(0, 0, 0);
}

#bg
{
    background-image: url('images/bg.jpg');
    font-family: Helvetica, sans-serif;
    background-attachment: fixed;
    background-repeat: no-repeat;
}

.tabContent
{
    display: block;
```

```

border-top: none;

animation: fade 1s;

}

@keyframes fade
{
    from {opacity: 0;}
    to {opacity: 1;}
}

</style>
</head>
<body id="bg">
    <div class="layer">
        <button onclick="location.href='admin.php'" id="HomeButton" class="button
buttonEffect" >Home</button>

        <form action="docadd.php" method="POST" enctype="multipart/form-data">
            <div id="table" class="tabContent">
                <table align="center">
                    <tr >
                        <th>Attributes</th>
                        <th>Input</th>
                    </tr>
                    <tr>
                        <td>Case ID</td>
                        <td><input type="number" name="one_column"></td>
                    </tr>

                    <tr>
                        <td>Document name</td>
                        <td><input type="text" name="three_column"></td>
                    </tr>

```



```

        <tr>
            <td>Authenticity</td>
            <td><input type="text" name="four_column"></td>
        </tr>
        <tr>
            <td>Document file</td>
            <td><input type="file" name="up" id="up" ></td>

    </tr>
</table>
<div id="ip_id" align="center" style="margin-top: 80px;" >

    <div class="container">
        <div class="center">
            <button name="Update" type="submit" onclick="window.alert('Update
successful')" id="center" class="button buttonEffect" >ADD</button>
        </div>
    </div>
</div>
</div>
</div>
</form>
</div>

</body>
<script>

</script>
</html>

```

A_add_emp.php

```
<!DOCTYPE html>
```

```
<head>
```

```
<title>
```

```
    Update
```

```
</title>
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<style>
```

```
    #table
```

```
    {
```

```
        margin-top: 100px;
```

```
    }
```

```
    .layer
```

```
    {
```

```
        background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255, 255, 255, 0));
```

```
        position: absolute;
```

```
        top: 0;
```

```
        left: 0;
```

```
        width: 100%;
```

```
        height: 150%;
```

```
    }
```

```
    #bg
```

```
    {
```

```
        background-image: url('images/bg.jpg');
```

```
        font-family: Helvetica, sans-serif;
```

```
        background-attachment: fixed;
```

```
    }
```

```
    table, td, th
```

```
    {
```

```
        border: 1px solid rgb(221, 221, 221);
```

```
        text-align: center;
    }

table
{
    border-collapse: collapse;

}
tr:nth-child(even)
{
    background-color: #f2f2f2;
}
tr:nth-child(odd)
{
    background-color: #ffffff;
}
th, td
{
    padding: 20px;
}
th
{
    background-color: #414141;
    color: white;
}

input[type=text],input[type=number]
{
    font-size: 18px;
}
```

```
.container
{
    height: 60px;
    position: relative;
}

.center
{
    margin: 0;
    position: absolute;
    top: 50%;
    left: 50%;
    -ms-transform: translate(-50%, -50%);
    transform: translate(-50%, -50%);
}

.button
{
    border: none;
    color: white;
    padding: 16px 32px;
    text-align: center;
    display: inline-block;
    font-size: 16px;
    transition-duration: 0.4s;
    cursor: pointer;
}

.buttonEffect
{
    background-color: #555555;
    color: rgb(255, 255, 255);
    border: none;
```

```
}  
  
.buttonEffect:hover  
{  
    background-color: transparent;  
    color: rgb(0, 0, 0);  
}  
  
.tabContent  
{  
    display: block;  
    border-top: none;  
    animation: fade 1s;  
  
}  
  
@keyframes fade  
{  
    from { opacity: 0; }  
    to { opacity: 1; }  
}  
  
#HomeButton  
{  
    background-color: #d4d4d4;  
    margin-left: 50px;  
    margin-top: 20px;  
    color: rgb(0, 0, 0);  
}  
  
#HomeButton:hover  
{  
    background-color: transparent;  
    margin-left: 50px;  
    margin-top: 20px;
```

```

        color: white;
    }
</style>
</head>
<body id="bg">
    <div class="layer">
        <button    onclick="location.href='admin.php'"    id="HomeButton"    class="button
buttonEffect" >Home</button>

        <form action="empdetadd.php" method="POST" >
            <div id="table" class="tabContent">
                <table align="center">
                    <tr >
                        <th>Attributes</th>
                        <th>Input</th>
                    </tr>
                    <tr>
                        <td>First Name</td>
                        <td><input type="text" name="one_column"></td>
                    </tr>
                    <tr>
                        <td>Last Name</td>
                        <td><input type="text" name="two_column"></td>
                    </tr>
                    <tr>
                        <td>Employee Password</td>
                        <td><input type="text" name="three_column"></td>
                    </tr>
                    <tr>
                        <td>Salary</td>
                        <td><input type="number" name="five_column"></td>

```

```

        </tr>

        <tr>

            <td>Door number</td>

            <td><input type="number" name="six_column"></td>

        </tr>

        <tr>

            <td>Street Name</td>

            <td><input type="text" name="seven_column"></td>

        </tr>

        <tr>

            <td>Contact</td>

            <td><input type="number" name="eight_column"></td>

        </tr>
    </table>

    <div id="ip_id" align="center" style="margin-top: 80px;" >

        <div class="container">

            <div class="center">

                <button name="Update" type="submit" onclick="window.alert('Addition
successful')" id="center" class="button buttonEffect" >ADD</button>

            </div>

        </div>

    </div>

</div>

</form>

</div>

</body>

<script>

```

```
</script>
</html>
```

A_add_hearings.php

```
<!DOCTYPE html>
<head>
  <title>
    Update
  </title>
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <style>
    #table
    {
      margin-top: 100px;
    }
    .layer
    {
      background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255,
255, 255, 0));
      position: absolute;
      top: 0;
      left: 0;
      width: 100%;
      height: 120%;
    }
    #bg
    {
      background-image: url('images/bg.jpg');
      font-family: Helvetica, sans-serif;
      background-attachment: fixed;
    }
```



```
table, td, th
{
    border: 1px solid rgb(221, 221, 221);
    text-align: center;
}
```

```
table
{
    border-collapse: collapse;
}
```

```
tr:nth-child(even)
{
    background-color: #f2f2f2;
}
```

```
tr:nth-child(odd)
{
    background-color: #ffffff;
}
```

```
th, td
{
    padding: 20px;
}
```

```
th
{
    background-color: #414141;
    color: white;
}
```

```
input[type=text],input[type=number]
```

```
{
    font-size: 18px;
}

.container
{
    height: 60px;
    position: relative;
}

.center
{
    margin: 0;
    position: absolute;
    top: 50%;
    left: 50%;
    -ms-transform: translate(-50%, -50%);
    transform: translate(-50%, -50%);
}

.button
{
    border: none;
    color: white;
    padding: 16px 32px;
    text-align: center;
    display: inline-block;
    font-size: 16px;
    transition-duration: 0.4s;
    cursor: pointer;
}

.buttonEffect
{

```

```
background-color: #555555;
color: rgb(255, 255, 255);
border: none;
}
.buttonEffect:hover
{
background-color: transparent;
color: rgb(0, 0, 0);
}
.tabContent
{
display: block;
border-top: none;
animation: fade 1s;

}
@keyframes fade
{
from {opacity: 0;}
to {opacity: 1;}
}
#HomeButton
{
background-color: #d4d4d4;
margin-left: 50px;
margin-top: 20px;
color: rgb(0, 0, 0);
}
#HomeButton:hover
{
```

```

        background-color: transparent;

        margin-left: 50px;

        margin-top: 20px;

        color: white;

    }

</style>

</head>

<body id="bg">

    <div class="layer">

        <button    onclick="location.href='admin.php'"    id="HomeButton"    class="button
buttonEffect" >Home</button>

        <form action="heardetadd.php" method="POST" >

            <div id="table" class="tabContent">

                <table align="center">

                    <tr >

                        <th>Attributes</th>

                        <th>Input</th>

                    </tr>

                    <tr>

                        <td>Case ID</td>

                        <td><input type="number" name="two_column"></td>

                    </tr>

                    <tr>

                        <td>Hearing Date</td>

                        <td><input type="text" name="three_column"></td>

                    </tr>

                    <tr>

                        <td>Court</td>

                        <td><input type="text" name="five_column"></td>

```



```

.layer
{
    background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255,
255, 255, 0));
    position: absolute;
    top: 0;
    left: 0;
    width: 100%;
    height: 120%;
}
#bg
{
    background-image: url('images/bg.jpg');
    font-family: Helvetica, sans-serif;
    background-attachment: fixed;
}
table, td, th
{
    border: 1px solid rgb(221, 221, 221);
    text-align: center;
}

table
{
    border-collapse: collapse;
}
tr:nth-child(even)
{
    background-color: #f2f2f2;
}

```

```
tr:nth-child(odd)
{
    background-color: #ffffff;
}
th, td
{
    padding: 20px;
}
th
{
    background-color: #414141;
    color: white;
}

input[type=text],input[type=number]
{
    font-size: 18px;
}
.container
{
    height: 60px;
    position: relative;
}
.center
{
    margin: 0;
    position: absolute;
    top: 50%;
    left: 50%;
    -ms-transform: translate(-50%, -50%);
```

```
    transform: translate(-50%, -50%);
}

.button
{
    border: none;
    color: white;
    padding: 16px 32px;
    text-align: center;
    display: inline-block;
    font-size: 16px;
    transition-duration: 0.4s;
    cursor: pointer;
}

.buttonEffect
{
    background-color: #555555;
    color: rgb(255, 255, 255);
    border: none;
}

.buttonEffect:hover
{
    background-color: transparent;
    color: rgb(0, 0, 0);
}

.tabContent
{
    display: block;
    border-top: none;
    animation: fade 1s;
```



```

    }

    @keyframes fade
    {
        from {opacity: 0;}
        to {opacity: 1;}
    }

    #HomeButton
    {
        background-color: #d4d4d4;
        margin-left: 50px;
        margin-top: 20px;
        color: rgb(0, 0, 0);
    }

    #HomeButton:hover
    {
        background-color: transparent;
        margin-left: 50px;
        margin-top: 20px;
        color: white;
    }
</style>
</head>
<body id="bg">
    <div class="layer">
        <button onclick="location.href='admin.php'" id="HomeButton" class="button
buttonEffect">Home</button>

        <form action="casdet.php" method="POST" >
            <div id="ip_id" align="center" style="margin-top: 80px;" >
                <label for="id_input">Enter the id:</label>
                <input type="number" name="case_id" required><br /><br />

```

```
<button type="submit" onclick="window.alert('Delete successful')" name="del"
class="button buttonEffect">DELETE</button>
```

```
</div>
```

```
<div id="table" class="tabContent">
```

```
<table align="center">
```

```
<tr >
```

```
<th>Attributes</th>
```

```
<th>Input</th>
```

```
</tr>
```

```
<tr>
```

```
<td>Status</td>
```

```
<td><input type="text" name="two_column"></td>
```

```
</tr>
```

```
<tr>
```

```
<td>Case Notes</td>
```

```
<td><input type="text" name="three_column"></td>
```

```
</tr>
```

```
<tr>
```

```
<td>Lawyer ID</td>
```

```
<td><input type="number" name="five_column"></td>
```

```
</tr>
```

```
<tr>
```

```
<td>Fee</td>
```

```
<td><input type="number" name="six_column"></td>
```

```
</tr>
```

```
</table>
```

```
<div class="container">
```

```
<div class="center">
```

```

        <button name="Update" type="submit" onclick="window.alert('Update
successful')" id="center" class="button buttonEffect" >Update</button>

    </div>

</div>

</div>

</form>

</div>

</body>

<script>


</script>

</html>

```

A_update_client.php

```

<html>

<head>

    <title>

        Update

    </title>

    <meta name="viewport" content="width=device-width, initial-scale=1.0">

    <style>

        .layer

        {

            background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255,
255, 255, 0));

            position: absolute;

            top: 0;

            left: 0;

            width: 100%;

            height: 120%;

```

```
}  
#bg  
{  
    background-image: url('images/bg.jpg');  
    font-family: Helvetica, sans-serif;  
    background-attachment: fixed;  
}
```

```
table, td, th  
{  
    border: 1px solid rgb(221, 221, 221);  
    text-align: center;  
}
```

```
table  
{  
    border-collapse: collapse;  
  
}
```

```
tr:nth-child(even)  
{  
    background-color: #f2f2f2;  
}
```

```
tr:nth-child(odd)  
{  
    background-color: #ffffff;  
}
```

```
th, td  
{
```

```
padding: 20px;
}
th
{
background-color: #414141;
color: white;
}
```

```
input[type=text],input[type=number]
```

```
{
font-size: 18px;
}
```

```
.container
```

```
{
height: 60px;
position: relative;
}
```

```
.center
```

```
{
margin: 0;
position: absolute;
top: 50%;
left: 50%;
-ms-transform: translate(-50%, -50%);
transform: translate(-50%, -50%);
}
```

```
.button
```

```
{
border: none;
color: white;
```

```
padding: 16px 32px;
text-align: center;
display: inline-block;
font-size: 16px;
transition-duration: 0.4s;
cursor: pointer;
}
.buttonEffect
{
background-color: #555555;
color: rgb(255, 255, 255);
border: none;
}
.buttonEffect:hover
{
background-color: transparent;
color: rgb(0, 0, 0);
}
.tabContent
{
display: block;
border-top: none;
animation: fade 1s;

}
@keyframes fade
{
from {opacity: 0;}
to {opacity: 1;}
}
```

```

#HomeButton
{
    background-color: #d4d4d4;
    margin-left: 50px;
    margin-top: 20px;
    color: rgb(0, 0, 0);
}

#HomeButton:hover
{
    background-color: transparent;
    margin-left: 50px;
    margin-top: 20px;
    color: white;
}

</style>
</head>
<body id="bg">
    <div class="layer">
        <button    onclick="location.href='admin.php'"    id="HomeButton"    class="button
buttonEffect" >Home</button>

        <form action="cldet.php" method="POST" >
            <div id="ip_id" align="center" style="margin-top: 80px;" >
                <label for="id_input">Enter the id:</label>
                <input type="number" name="client_id" required><br /><br />

                <button type="submit" onclick="window.alert('Delete successful')" name="del"
class="button buttonEffect" ">DELETE</button>
            </div>

            <div id="table" class="tabContent">

```

```
<table align="center">

  <tr >

    <th>Fields</th>

    <th>Input</th>
  </tr>

  <tr>

    <td>First name</td>

    <td><input type="text" name="one_column"></td>
  </tr>

  <tr>

    <td>Last name</td>

    <td><input type="text" name="two_column"></td>
  </tr>

  <tr>

    <td>Door number</td>

    <td><input type="number" name="three_column"></td>
  </tr>

  <tr>

    <td>Street name</td>

    <td><input type="text" name="four_column"></td>
  </tr>

  <tr>

    <td>Contact</td>

    <td><input type="number" name="five_column"></td>
```



```

        </tr>

        <tr>

            <td>Password</td>


            <td><input type="text" name="six_column"></td>

        </tr>

        <tr>

            <td>Since</td>


            <td><input type="text" name="seven_column"></td>

        </tr>
    </table>

    <div class="container">

        <div class="center">

            <button name="Update" type="submit" onclick="window.alert('Update
successful')" id="center" class="button buttonEffect" >Update</button>

        </div>

    </div>

</div>

</form>

</div>

</body>

<script>


</script>

</html>

```

A_update_courts.php

```
<!DOCTYPE html>
```

```
<head>
```

```
<title>
```

```
    Update
```

```
</title>
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<style>
```

```
    .layer
```

```
    {
```

```
        background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255, 255, 255, 0));
```

```
        position: absolute;
```

```
        top: 0;
```

```
        left: 0;
```

```
        width: 100%;
```

```
        height: 120%;
```

```
    }
```

```
#bg
```

```
{
```

```
    background-image: url('images/bg.jpg');
```

```
    font-family: Helvetica, sans-serif;
```

```
    background-attachment: fixed;
```

```
}
```

```
table, td, th
```

```
{
```

```
    border: 1px solid rgb(221, 221, 221);
```

```
    text-align: center;
```

```
}
```

```
table
{
    border-collapse: collapse;

}
tr:nth-child(even)
{
    background-color: #f2f2f2;
}
tr:nth-child(odd)
{
    background-color: #ffffff;
}
th, td
{
    padding: 20px;
}
th
{
    background-color: #414141;
    color: white;
}

input[type=text],input[type=number]
{
    font-size: 18px;
}
.container
{
    height: 60px;
```

```
    position: relative;
}
.center
{
    margin: 0;
    position: absolute;
    top: 50%;
    left: 50%;
    -ms-transform: translate(-50%, -50%);
    transform: translate(-50%, -50%);
}
.button
{
    border: none;
    color: white;
    padding: 16px 32px;
    text-align: center;
    display: inline-block;
    font-size: 16px;
    transition-duration: 0.4s;
    cursor: pointer;
}
.buttonEffect
{
    background-color: #555555;
    color: rgb(255, 255, 255);
    border: none;
}
.buttonEffect:hover
{

```

```
        background-color: transparent;
        color: rgb(0, 0, 0);
    }
.tabContent
{
    display: block;
    border-top: none;
    animation: fade 1s;

}
@keyframes fade
{
    from {opacity: 0;}
    to {opacity: 1;}
}
#HomeButton
{
    background-color: #d4d4d4;
    margin-left: 50px;
    margin-top: 20px;
    color: rgb(0, 0, 0);
}
#HomeButton:hover
{
    background-color: transparent;
    margin-left: 50px;
    margin-top: 20px;
    color: white;
}
</style>
```

```

</head>

<body id="bg">

    <div class="layer">

        <button    onclick="location.href='admin.php'"    id="HomeButton"    class="button
buttonEffect" >Home</button>

        <form action="codet.php" method="POST" >

            <div id="ip_id" align="center" style="margin-top: 80px;" >

                <label for="id_input">Enter the court number:</label>

                <input type="number" name="court_id" required><br /><br />

                <button type="submit" onclick="window.alert('Delete successful')" name="del"
class="button buttonEffect">DELETE</button>

            </div>

            <div id="table" class="tabContent">

                <table align="center">

                    <tr >

                        <th>Attributes</th>

                        <th>Input</th>

                    </tr>

                    <tr>

                        <td>Cheif judge</td>

                        <td><input type="text" name="two_column"></td>

                    </tr>

                    <tr>

                        <td>District</td>

                        <td><input type="text" name="three_column"></td>

                    </tr>

                </table>

                <div class="container">

                    <div class="center">

```

```

        <button name="Update" type="submit" onclick="window.alert('Update
successful')" id="center" class="button buttonEffect" >Update</button>

    </div>

</div>

</div>

</form>

</div>

</body>

<script>


</script>

</html>

```

A_update_documents.php

```

<!DOCTYPE html>

<head>

    <title>

        Update

    </title>

    <meta name="viewport" content="width=device-width, initial-scale=1.0">

    <style>

        .layer

        {

            background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255,
255, 255, 0));

            position: absolute;

            top: 0;

            left: 0;

            width: 100%;

            height: 120%;

```

```
}  
#bg  
{  
    background-image: url('images/bg.jpg');  
    font-family: Helvetica, sans-serif;  
    background-attachment: fixed;  
}
```

```
table, td, th  
{  
    border: 1px solid rgb(221, 221, 221);  
    text-align: center;  
}
```

```
table  
{  
    border-collapse: collapse;  
  
}
```

```
tr:nth-child(even)  
{  
    background-color: #f2f2f2;  
}
```

```
tr:nth-child(odd)  
{  
    background-color: #ffffff;  
}
```

```
th, td  
{  
    padding: 20px;
```



```
}  
th  
{  
  background-color: #414141;  
  color: white;  
}
```

```
input[type=text],input[type=number]  
{  
  font-size: 18px;  
}
```

```
.container  
{  
  height: 60px;  
  position: relative;  
}
```

```
.center  
{  
  margin: 0;  
  position: absolute;  
  top: 50%;  
  left: 50%;  
  -ms-transform: translate(-50%, -50%);  
  transform: translate(-50%, -50%);  
}
```

```
.button  
{  
  border: none;  
  color: white;  
  padding: 16px 32px;
```

```
    text-align: center;
    display: inline-block;
    font-size: 16px;
    transition-duration: 0.4s;
    cursor: pointer;
}
.buttonEffect
{
    background-color: #555555;
    color: rgb(255, 255, 255);
    border: none;
}
.buttonEffect:hover
{
    background-color: transparent;
    color: rgb(0, 0, 0);
}
.tabContent
{
    display: block;
    border-top: none;
    animation: fade 1s;

}
@keyframes fade
{
    from {opacity: 0;}
    to {opacity: 1;}
}
#HomeButton
```

```

{
    background-color: #d4d4d4;
    margin-left: 50px;
    margin-top: 20px;
    color: rgb(0, 0, 0);
}
#HomeButton:hover
{
    background-color: transparent;
    margin-left: 50px;
    margin-top: 20px;
    color: white;
}
</style>
</head>
<body id="bg">
    <div class="layer">
        <button    onclick="location.href='admin.php'"    id="HomeButton"    class="button
buttonEffect" >Home</button>

        <form action="cldet.php" method="POST" >
            <div id="ip_id" align="center" style="margin-top: 80px;" >
                <label for="id_input">Enter the id:</label>
                <input type="number" name="client_id" required><br /><br />

                <button type="submit" onclick="window.alert('Delete successful')" name="del"
class="button buttonEffect">DELETE</button>
            </div>
            <div id="table" class="tabContent">
                <table align="center">
                    <tr >

```

```

        <th>Attributes</th>
        <th>Input</th>
    </tr>

    <tr>

        <td>Case ID</td>
        <td><input type="number" name="one_column"></td>
    </tr>

    <tr>

        <td>Document ID</td>
        <td><input type="number" name="two_column"></td>
    </tr>

    <tr>

        <td>Document name</td>
        <td><input type="text" name="three_column"></td>
    </tr>

    <tr>

        <td>Authenticity</td>
        <td><input type="text" name="four_column"></td>
    </tr>
</table>

<div class="container">
    <div class="center">
        <button name="Update" type="submit" onclick="window.alert('Update
successful')" id="center" class="button buttonEffect" >UPDATE</button>
    </div>
</div>
</div>
</form>
</div>

</body>

```

```
<script>
```

```
</script>
```

```
</html>
```

A_update_emp.php

```
<!DOCTYPE html>
```

```
<head>
```

```
<title>
```

```
    Update
```

```
</title>
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<style>
```

```
    #HomeButton
```

```
    {
```

```
        background-color: #d4d4d4;
```

```
        margin-left: 50px;
```

```
        margin-top: 20px;
```

```
        color: rgb(0, 0, 0);
```

```
    }
```

```
    #HomeButton:hover
```

```
    {
```

```
        background-color: transparent;
```

```
        margin-left: 50px;
```

```
        margin-top: 20px;
```

```
        color: white;
```

```
    }
```

```
    .layer
```

```
{
    background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255,
255, 255, 0));
    position: absolute;
    top: 0;
    left: 0;
    width: 100%;
    height: 160%;
}
```

#bg

```
{
    background-image: url('images/bg.jpg');
    font-family: Helvetica, sans-serif;
    background-attachment: fixed;
}
```

table, td, th

```
{
    border: 1px solid rgb(221, 221, 221);
    text-align: center;
}
```

table

```
{
    border-collapse: collapse;
}
```

tr:nth-child(even)

```
{
    background-color: #f2f2f2;
```

```
}  
tr:nth-child(odd)  
{  
    background-color: #ffffff;  
}  
th, td  
{  
    padding: 20px;  
}  
th  
{  
    background-color: #414141;  
    color: white;  
}  
  
input[type=text],input[type=number]  
{  
    font-size: 18px;  
}  
.container  
{  
    height: 60px;  
    position: relative;  
}  
.center  
{  
    margin: 0;  
    position: absolute;  
    top: 50%;  
    left: 50%;
```

```
-ms-transform: translate(-50%, -50%);
transform: translate(-50%, -50%);
}
.button
{
    border: none;
    color: white;
    padding: 16px 32px;
    text-align: center;
    display: inline-block;
    font-size: 16px;
    transition-duration: 0.4s;
    cursor: pointer;
}
.buttonEffect
{
    background-color: #555555;
    color: rgb(255, 255, 255);
    border: none;
}
.buttonEffect:hover
{
    background-color: transparent;
    color: rgb(0, 0, 0);
}
.tabContent
{
    display: block;
    border-top: none;
    animation: fade 1s;
```



```

    }
    @keyframes fade
    {
        from { opacity: 0;}
        to { opacity: 1;}
    }
</style>
</head>
<body id="bg">
    <div class="layer">
        <button    onclick="location.href='admin.php'"    id="HomeButton"    class="button
buttonEffect" >Home</button>
        <form action="empdet.php" method="POST" >
            <div id="ip_id" align="center" style="margin-top: 80px;" >
                <label for="id_input">Enter the id:</label>
                <input type="number" name="emp_id" required><br /><br />
                <button type="submit" onclick="window.alert('Delete successful')" name="del"
class="button buttonEffect">DELETE</button>
            </div>
            <div id="table" class="tabContent">
                <table align="center">
                    <tr >
                        <th>Attributes</th>
                        <th>Input</th>
                    </tr>
                    <tr>
                        <td>First Name</td>
                        <td><input type="text" name="one_column"></td>

```

```
</tr>

<tr>

  <td>Last Name</td>

  <td><input type="text" name="two_column"></td>

</tr>

<tr>

  <td>Employee Password</td>

  <td><input type="text" name="three_column"></td>

</tr>

<tr>

  <td>Salary</td>

  <td><input type="number" name="five_column"></td>

</tr>

<tr>

  <td>Door number</td>

  <td><input type="number" name="six_column"></td>

</tr>

<tr>

  <td>Street Name</td>

  <td><input type="text" name="seven_column"></td>

</tr>

<tr>

  <td>Contact</td>

  <td><input type="number" name="eight_column"></td>

</tr>

</table>

<div class="container">

  <div class="center">
```

```
        <button name="Update" type="submit" onclick="window.alert('Update
successful')" id="center" class="button buttonEffect" >Update</button>
```

```
    </div>
```

```
</div>
```

```
</div>
```

```
</form>
```

```
</div>
```

```
</body>
```

```
<script>
```

```
</script>
```

```
</html>
```

A_update_hearings.php

```
<!DOCTYPE html>
```

```
<head>
```

```
    <title>
```

```
        Update
```

```
    </title>
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<style>
```

```
    #HomeButton
```

```
    {
```

```
        background-color: #d4d4d4;
```

```
        margin-left: 50px;
```

```
        margin-top: 20px;
```

```
        color: rgb(0, 0, 0);
```

```
    }
```

```

#HomeButton:hover
{
    background-color: transparent;
    margin-left: 50px;
    margin-top: 20px;
    color: white;
}

.layer
{
    background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255,
255, 255, 0));
    position: absolute;
    top: 0;
    left: 0;
    width: 100%;
    height: 120%;

}

#bg
{
    background-image: url('images/bg.jpg');
    font-family: Helvetica, sans-serif;
    background-attachment: fixed;
}

table, td, th
{
    border: 1px solid rgb(221, 221, 221);
    text-align: center;
}

table

```

```
{
    border-collapse: collapse;

}

tr:nth-child(even)
{
    background-color: #f2f2f2;
}

tr:nth-child(odd)
{
    background-color: #ffffff;
}

th, td
{
    padding: 20px;
}

th
{
    background-color: #414141;
    color: white;
}

input[type=text],input[type=number]
{
    font-size: 18px;
}

.container
{
    height: 60px;
    position: relative;
```

```
}  
  
.center  
{  
    margin: 0;  
    position: absolute;  
    top: 50%;  
    left: 50%;  
    -ms-transform: translate(-50%, -50%);  
    transform: translate(-50%, -50%);  
}  
  
.button  
{  
    border: none;  
    color: white;  
    padding: 16px 32px;  
    text-align: center;  
    display: inline-block;  
    font-size: 16px;  
    transition-duration: 0.4s;  
    cursor: pointer;  
}  
  
.buttonEffect  
{  
    background-color: #555555;  
    color: rgb(255, 255, 255);  
    border: none;  
}  
  
.buttonEffect:hover  
{  
    background-color: transparent;
```

```

        color: rgb(0, 0, 0);
    }

    .tabContent
    {
        display: block;
        border-top: none;
        animation: fade 1s;

    }
    @keyframes fade
    {
        from {opacity: 0;}
        to {opacity: 1;}
    }
</style>
</head>
<body id="bg">
    <div class="layer">
        <button    onclick="location.href='admin.php'"    id="HomeButton"    class="button
buttonEffect" >Home</button>
        <form action="heardet.php" method="POST" >
            <div id="ip_id" align="center" style="margin-top: 80px;" >
                <label for="id_input">Enter the id:</label>
                <input type="number" name="hid" required><br /><br />
                <button type="submit" onclick="window.alert('Delete successful')" name="del"
class="button buttonEffect">DELETE</button>
            </div>
            <div id="table" class="tabContent">
                <table align="center">
                    <tr >

```

<th>Attributes</th>

<th>Input</th>

</tr>

<tr>

<td>Hearing Date</td>

<td><input type="text" name="three_column"></td>

</tr>

<tr>

<td>Lawyer ID</td>

<td><input type="number" name="five_column"></td>

</tr>

</table>

<div class="container">

<div class="center">

<button name="Update" type="submit" onclick="window.alert('Update successful')" id="center" class="button buttonEffect" >UPDATE</button>

</div>

</div>

</div>

</form>

</div>

</body>

<script>


```
</script>
</html>
```

Admin.php

```
<!DOCTYPE html>
<html>
  <head>
    <title>
      Admin page
    </title>
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <style>
      table, td, th
      {
        border: 1px solid rgb(221, 221, 221);
        text-align: center;
      }

      table
      {
        border-collapse: collapse;
      }

      tr:nth-child(even)
      {
        background-color: #f2f2f2;
      }

      tr:nth-child(odd)
```

```
{
    background-color: #ffffff;
}
th, td
{
    padding: 20px;
}
th
{
    background-color: #414141;
    color: white;
}
.container
{
    overflow: hidden;
    border-top: none;

    padding-top: 5px;
    padding-left: 30px;
}
#b_container
{
    height: 60px;
    position: relative;
}
#b_center
{
    margin: 0;
    position: absolute;
    top: 50%;
```

```
    left: 50%;  
    -ms-transform: translate(-50%, -50%);  
    transform: translate(-50%, -50%);  
}  
.tabContent  
{  
    display: none;  
    border-top: none;  
    animation: fade 1s;  
  
}  
@keyframes fade  
{  
    from {opacity: 0;}  
    to {opacity: 1;}  
}  
.button  
{  
    border: none;  
    color: white;  
    padding: 16px 32px;  
    text-align: center;  
    display: inline-block;  
    font-size: 16px;  
    float: none;  
    transition-duration: 0.4s;  
    cursor: pointer;  
}  
.buttonEffect  
{
```

```
background-color: #555555;
color: rgb(255, 255, 255);
border: none;
}

.buttonEffect:hover
{
background-color: transparent;
color: rgb(0, 0, 0);
}

#bg
{
background-image: url('images/bg.jpg');
font-family: Helvetica, sans-serif;
background-attachment: fixed;
background-repeat: no-repeat;
}

.layer {
background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255,
255, 255, 0));
position: absolute;
top: 0;
left: 0;
width: 100%;
height: 100%;
}

.w3-grey
{
background-color: #5555557e;
color: rgb(0, 0, 0);
}
```

</style>

</head>

<body id="bg">

<div class="layer">

<div class="container" align="center">

<button type="button" class="button buttonEffect" onclick="openTab(event, 'clients')">Clients</button>

<button type="button" class="button buttonEffect" onclick="openTab(event, 'hearings')">Hearings</button>

<button type="button" class="button buttonEffect" onclick="openTab(event, 'employees')">Employees</button>

<button type="button" class="button buttonEffect" onclick="openTab(event, 'documents')">Documents</button>

<button type="button" class="button buttonEffect" onclick="openTab(event, 'courts')">Courts</button>

<button type="button" class="button buttonEffect" onclick="openTab(event, 'cases')">Cases</button>

</div>

<div id="clients" class="tabContent" >

<table align="center">

<tr>

<th>Id</th>

<th>First Name</th>

<th>Last Name</th>

<th>Door number</th>

<th>Street</th>

<th>Contact</th>

<th>Since</th>

```

</tr>

<?php
    $conn = mysqli_connect("localhost", "root", "", "law_firm");

    $ex = mysqli_query($conn, "SELECT * FROM clients");

    while($row = mysqli_fetch_assoc($ex))
    {
        echo "<tr><td>" . $row["client_id"]. "</td><td>" . $row["first_name"].
"</td><td>" . $row["last_name"]. "</td><td>" . $row["door_no"] . "</td><td>".
$row["street_name"]. "</td><td>" . $row["contact"]. "</td><td>" . $row["since"].
"</td></tr>";

    }

?>

</table>

<div id="b_container">

    <div id="b_center">

        <button type="submit" id="center" class="button buttonEffect"
onclick="location.href='a_add_client.php'">Add</button>

        <button type="submit" id="center" class="button buttonEffect"
onclick="location.href='a_update_client.php'">Update and delete</button>

    </div>

</div>

</div>

<div id="hearings" class="tabContent">

    <table align="center">

        <tr>

            <th>Serial Number</th>

            <th>Case ID</th>

            <th>Hearing date</th>

            <th>Lawyer ID</th>

            <th>Court</th>

        </tr>

```

```

<?php
    $conn2 = mysqli_connect("localhost", "root", "", "law_firm");
    $sex2 = mysqli_query($conn2,"SELECT * FROM hearing");
    while($row2 = mysqli_fetch_assoc($sex2))
    {
        echo " <tr><td>" . $row2["s_no"]. " </td><td>" . $row2["case_id"].
"</td><td>" . $row2["hearing_date"]. " </td><td>" . $row2["lawyer_id"] . " </td><td>".
$row2["court"] . " </td></tr>";
    }
?>

</table>

<div id="b_container">
    <div id="b_center">
        <button type="submit" id="center" class="button buttonEffect"
onclick="location.href='a_add_hearings.php'">Add</button>
        <button type="submit" id="center" class="button buttonEffect"
onclick="location.href='a_update_hearings.php'">Update and delete</button>
    </div>
</div>

</div>

<div id="employees" class="tabContent">
    <table align="center">
        <tr>
            <th>Employee ID</th>
            <th>First Name</th>
            <th>Last Name</th>
            <th>Employee Password</th>
            <th>Since</th>
            <th>Salary</th>
            <th>Door number</th>
            <th>Street name</th>
        </tr>
    </table>

```

```

        <th>Contact</th>

        <th>Number of cases</th>

    </tr>

    <?php
        $conn1 = mysqli_connect("localhost", "root", "", "law_firm");
        $ex1 = mysqli_query($conn1, "SELECT * FROM employees");
        while($row1 = mysqli_fetch_assoc($ex1))
        {
            echo    "<tr><td>"        .    $row1["employee_id"].    "</td><td>"        .
            $row1["first_name"].    "</td><td>"        .    $row1["last_name"].    "</td><td>"        .
            $row1["employee_password"] . "</td><td>" . $row1["since"]. "</td><td>" . $row1["salary"].
            "</td><td>" . $row1["door_no"] . "</td><td>" . $row1["street_name"]. "</td><td>" .
            $row1["contact"]. "</td><td>" . $row1["no_of_cases"]. "</td></tr>";
        }
    ?>

</table>

<div id="b_container">

    <div id="b_center">

        <button    type="submit"    id="center"    class="button    buttonEffect"
onclick="location.href='a_add_emp.php'">Add</button>

        <button    type="submit"    id="center"    class="button    buttonEffect"
onclick="location.href='a_update_emp.php'">Update and delete</button>

    </div>

</div>

</div>

<div id="documents" class="tabContent">

    <table align="center">

        <tr>

            <th>Case ID</th>

            <th>Document ID</th>

            <th>Document Name</th>

```



```

        <th>Authenticity</th>

        <th>File</th>

    </tr>

    <?php
        $conn2 = mysqli_connect("localhost", "root", "", "law_firm");
        $ex2 = mysqli_query($conn2, "SELECT * FROM document");
        while($row2 = mysqli_fetch_assoc($ex2))
        {
            echo "<tr><td>" . $row2["case_id"]. "</td><td>" . $row2["document_id"].
"</td><td>" . $row2["document_name"]. "</td><td>" . $row2["authenticity"] . "</td><td>".
"<a href='/ldb/documents/" . $row2["document_id"] . ".pdf"> Download </a>" . "</td></tr>";
        }
    ?>
</table>

<div id="b_container">

    <div id="b_center">

        <button type="submit" id="center" class="button buttonEffect"
onclick="location.href='a_add_document.php'">Add</button>

    </div>

</div>

</div>

</div>

<div id="courts" class="tabContent">

    <table align="center">

        <tr>

            <th>Court Number</th>

            <th>Cheif Judge</th>

            <th>District</th>

        </tr>

```

```

<?php
    $conn3 = mysqli_connect("localhost", "root", "", "law_firm");
    $ex3 = mysqli_query($conn3,"SELECT * FROM courts");
    while($row3 = mysqli_fetch_assoc($ex3))
    {
        echo "<tr><td>" . $row3["c_no"]. " </td><td>" . $row3["cheif_judge"].
"</td><td>" . $row3["district"] . " </td></tr>";
    }
?>
</table>

<div id="b_container">
    <div id="b_center">
        <button type="submit" id="center" class="button buttonEffect"
onclick="location.href='a_add_courts.php'">Add</button>
        <button type="submit" id="center" class="button buttonEffect"
onclick="location.href='a_update_courts.php'">Update and delete</button>
    </div>
</div>
</div>

<div id="cases" class="tabContent">
    <table align="center">
        <tr>
            <th>Case ID</th>
            <th>Status</th>
            <th>Case Notes</th>
            <th>Number of hearings</th>
            <th>Lawyer ID</th>
            <th>Client ID</th>
            <th>Fee</th>
        </tr>

```

```

<?php
    $conn4 = mysqli_connect("localhost", "root", "", "law_firm");
    $sex4 = mysqli_query($conn4,"SELECT * FROM case_");
    while($row4 = mysqli_fetch_assoc($sex4))
    {
        echo "<tr><td>" . $row4["case_id"]. "</td><td>" . $row4["status"].
"</td><td>" . $row4["case_notes"]. "</td><td>" . $row4["no_of_hearings"] . "</td><td>".
$row4["lawyer_id"]. "</td><td>". $row4["client_id"]. "</td><td>". $row4["fee"] .
"</td></tr>";
    }
?>
</table>

<div id="b_container">
    <div id="b_center">
        <button type="submit" id="center" class="button buttonEffect"
onclick="location.href='a_add_cases.php'">Add</button>
        <button type="submit" id="center" class="button buttonEffect"
onclick="location.href='a_update_cases.php'">Update and delete</button>
    </div>
</div>
</div>
</div>
<script>
function openTab(evt, tabName)
{
    var i, tabcontent, button;
    tabcontent = document.getElementsByClassName("tabContent");
    for (i = 0; i < tabcontent.length; i++)
    {
        tabcontent[i].style.display = "none";
    }
    button = document.getElementsByClassName("button buttonEffect");

```

```

        for (i = 0; i < button.length; i++)
        {
            button[i].className = button[i].className.replace(" w3-grey", "");
        }

        document.getElementById(tabName).style.display = "block";
        evt.currentTarget.className += " w3-grey";
    }
</script>
</body>
</html>

```

Casdet.php

```

<html>
<head><title>Change</title></head>
<body>
<p>Check</p>
<?php
    $lin=mysqli_connect("localhost","root","","law_firm");

    $i2=$_POST["two_column"];
    $i3=$_POST["three_column"];

    $i5=$_POST["five_column"];

    $i6=$_POST["six_column"];
    $id=$_POST["case_id"];

    if(isset($_POST["Update"]))
    {
        mysqli_query($lin,"UPDATE                                case_
status='$i2',case_notes='$i3',lawyer_id='$i5',fee='$i6' WHERE case_.case_id='$id'");
SET

```

```

    }
else
{
    mysqli_query($lin,"DELETE from case_ where case_id=$id");
}

$num1=mysqli_query($lin,"SELECT  count(*) AS counts FROM case_ where
lawyer_id='$i5'");

$s_no1=mysqli_fetch_assoc($num1);

$send1=$s_no1["counts"];

mysqli_query($lin,"UPDATE  employees  SET  no_of_cases='$send1'  WHERE
employees.employee_id='$i5'");

header("Location: a_update_cases.php");

?>
</body>
</html>

```

Casedetadd.php

```

<html>
<head><title>Change</title></head>
<body>
<p>Check</p>
<?php
    $lin1=mysqli_connect("localhost","root","","law_firm");

    $i2=$_POST["two_column"];
    $i3=$_POST["three_column"];

    $i5=$_POST["five_column"];
    $i6=$_POST["six_column"];
    $i7=$_POST["seven_column"];

```

```

$num=mysqli_query($lin,"SELECT MAX(case_id) AS counts FROM case_");
$s_no=mysqli_fetch_assoc($num);
$send=$s_no["counts"];
$id=$send+1;

mysqli_query($lin,"INSERT INTO case_
VALUES('$id','$i2','$i3',0,'$i5','$i6','$i7')");

$num1=mysqli_query($lin,"SELECT count(*) AS counts FROM case_ where
lawyer_id='$i5'");
$s_no1=mysqli_fetch_assoc($num1);
$send1=$s_no1["counts"];

mysqli_query($lin,"UPDATE employees SET no_of_cases='$send1' WHERE
employees.employee_id='$i5'");

header("Location: a_add_cases.php");
?>
</body>
</html>

```

Cldet.php

```

<html>
<head><title>Change</title></head>
<body>
<p>Check</p>
<?php
$lin=mysqli_connect("localhost","root","","law_firm");
$i1=$_POST["one_column"];
$i2=$_POST["two_column"];
$i3=$_POST["three_column"];
$i4=$_POST["four_column"];
$i5=$_POST["five_column"];
$i6=$_POST["six_column"];

```

```

    $i7=$_POST["seven_column"];

    $id=$_POST["client_id"];

    if(isset($_POST["Update"]))
    {
        mysqli_query($lin,"UPDATE clients SET
first_name='$i1',last_name='$i2',door_no='$i3',street_name='$i4',contact='$i5',client_passwo
rd='$i6',since='$i7' WHERE clients.client_id='$id'");
    }
    else
    {
        mysqli_query($lin,"DELETE from clients where client_id='$id'");
    }

    header("Location: a_update_client.php");
?>
</body>
</html>

```

Client.php

```

<!DOCTYPE html>
<html>
    <head>
        <title>
            Client
        </title>
        <meta name="viewport" content="width=device-width, initial-scale=1.0">
        <style>
            .ptable table,.ptable table td, .ptable table th
            {
                border: 1px solid rgb(221, 221, 221);
                text-align: center;
            }

```

```
.ptable table
{
    border-collapse: collapse;
}

.ptable table tr:nth-child(even)
{
    background-color: #f2f2f2;
}

.ptable table tr:nth-child(odd)
{
    background-color: #ffffff;
}

.ptable table th, .ptable table td
{
    padding: 20px;
}

.ptable table th
{
    background-color: #414141;
    color: white;
}

table
{
    border: 1px solid black;
    background-color: aliceblue;
    padding: 20px;
    margin-top: 20px;
    width: 15%;
}
```



```
tr, td
{
    padding-bottom: 20px;
    text-align: left;
}
```

```
.container
{
    overflow: hidden;
    border-top: none;

    padding-top: 5px;
    padding-left: 30px;
}
```

```
.tabContent
{
    display: none;
    border-top: none;
    animation: fade 1s;

}
```

```
@keyframes fade
{
    from {opacity: 0;}
    to {opacity: 1;}
}
```

```
.button
{
    border: none;
    color: white;
    padding: 16px 32px;
```

```
text-align: center;
display: inline-block;
font-size: 16px;
float: none;
transition-duration: 0.4s;
cursor: pointer;
margin: 10px;
}
.buttonEffect
{
background-color: #555555;
color: rgb(255, 255, 255);
border: none;
}
.buttonEffect:hover
{
background-color: transparent;
color: rgb(0, 0, 0);
}
.layer
{
background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255,
255, 255, 0));
position: absolute;
top: 0;
left: 0;
width: 100%;
height: 100%;
}
#bg
{
```

```

        background-image: url('images/bg.jpg');
        background-attachment: fixed;
        font-family: Helvetica, sans-serif;
        font-size: large;
    }
.w3-grey
{
    background-color: #5555557e;
    color: rgb(0, 0, 0);
}
</style>
</head>
<body id="bg">
    <div class="layer">
        

        <div class="container" align="center">
            <button type="button" class="button buttonEffect" onclick="openTab(event,
'details')">Details</button>
            <button type="button" class="button buttonEffect" onclick="openTab(event,
'hearings')">Hearings</button>
            <button type="button" class="button buttonEffect" onclick="openTab(event,
'cases')">Cases</button>
        </div>

        <div id="details" class="tabContent " >
            <h4 align="center">PERSONAL INFORMATION</h4>
            <table align="center">
                <?php

```

```

$lin=mysqli_connect("localhost","root","","law_firm");
$id=$_COOKIE["id"];
$sex = mysqli_query($lin,"SELECT * FROM clients where client_id='$id'");
$ab=mysqli_fetch_assoc($sex);
echo "<tr><td>Client id: </td><td>".$id."</td></tr>";
echo "<tr><td>First name: </td><td>".$ab["first_name"]."</td></tr>";
echo "<tr><td>Last name: </td><td>".$ab["last_name"]."</td></tr>";
echo "<tr><td>Door no.: </td><td>".$ab["door_no"]."</td></tr>";
echo "<tr><td>Street name:</td><td>".$ab["street_name"]."</td></tr>";
echo "<tr><td>Contact:</td><td>".$ab["contact"]."</td></tr>";
echo "<tr><td>Since:</td><td>".$ab["since"]."</td></tr>";
?>
</table>
</div>

```

```

<div id="hearings" class="tabContent ptable">
  <h4 align="center">HEARINGS</h4>
  <table align="center">
    <tr>
      <th>Serial Number</th>
      <th>Case ID</th>
      <th>Hearing Date</th>
      <th>Lawyer ID</th>
      <th>Court</th>
    </tr>
  <?php
    $conn2 = mysqli_connect("localhost", "root", "", "law_firm");
    $id=$_COOKIE["id"];

    $sex2 = mysqli_query($conn2,"SELECT * FROM hearing WHERE case_id IN
(SELECT case_id FROM case_ WHERE client_id = '$id');");

```

```

while($row2 = mysqli_fetch_assoc($ex2))
{
    echo "<tr><td>" . $row2["s_no"]. "</td><td>" . $row2["case_id"].
"</td><td>" . $row2["hearing_date"]. "</td><td>" . $row2["lawyer_id"] . "</td><td>".
$row2["court"] . "</td></tr>";
}
?>
</table>
</div>

```

```

<div id="cases" class="tabContent ptable">
<h4 align="center">CASES</h4>
<table align="center">
<tr>
<th>Case ID</th>
<th>Status</th>
<th>Case notes</th>
<th>Number of hearings</th>
<th>Lawyer ID</th>
<th>Client ID</th>
<th>Fee</th>
</tr>
<?php
$conn4 = mysqli_connect("localhost", "root", "", "law_firm");
$id=$_COOKIE["id"];
$ex4 = mysqli_query($conn4,"SELECT * FROM case_ where
client_id='$id'");

while($row4 = mysqli_fetch_assoc($ex4))
{
    echo "<tr><td>" . $row4["case_id"]. "</td><td>" . $row4["status"].
"</td><td>" . $row4["case_notes"]. "</td><td>" . $row4["no_of_hearings"] . "</td><td>".

```

```

$row4["lawyer_id"]. "</td><td>". $row4["client_id"]. "</td><td>". $row4["fee"] .
"</td></tr>";

    }

?>

```

```

</table>

</div>

</div>

<script>

function openTab(evt, tabName)
{
    var i, tabcontent, button;

    tabcontent = document.getElementsByClassName("tabContent");

    for (i = 0; i < tabcontent.length; i++)
    {
        tabcontent[i].style.display = "none";
    }

    button = document.getElementsByClassName("button buttonEffect");

    for (i = 0; i < button.length; i++)
    {
        button[i].className = button[i].className.replace(" w3-grey", "");
    }

    document.getElementById(tabName).style.display = "block";

    evt.currentTarget.className += " w3-grey";

}

</script>

</body>

</html>

```

Codet.php

```

<html>

```

```

<head><title>Change</title></head>

<body>

<p>Check</p>

<?php
    $lin1=mysqli_connect("localhost","root","","law_firm");

    $i2=$_POST["two_column"];
    $i3=$_POST["three_column"];
    $id=$_POST["court_id"];
    if(isset($_POST["Update"]))
    {

        mysqli_query($lin1,"UPDATE courts SET cheif_judge='$i2',district='$i3' WHERE
courts.c_no='$id' ");
    }
    else
    {
        mysqli_query($lin1,"DELETE from courts where c_no=$id");
    }
    header("Location: a_update_courts.php");
?>

</body>

</html>

```

Codetadd.php

```

<html>

<head><title>Change</title></head>

<body>

<p>Check</p>

<?php
    $lin1=mysqli_connect("localhost","root","","law_firm");

```

```

    $i2=$_POST["two_column"];
    $i3=$_POST["three_column"];
    $num=mysqli_query($lin1,"SELECT MAX(c_no) AS counts FROM courts");
    $s_no=mysqli_fetch_assoc($num);
    $send=$s_no["counts"];
    $id=$send+1;
    mysqli_query($lin1,"INSERT INTO courts VALUES('$id','$i2','$i3')");
    header("Location: a_add_courts.php");
?>
</body>
</html>

```

Docoadd.php

```

<?php

    $i1=$_POST["one_column"];

    $i3=$_POST["three_column"];
    $i4=$_POST["four_column"];

    $lin1=mysqli_connect("localhost","root","","law_firm");
    $num=mysqli_query($lin1,"SELECT MAX(document_id) AS counts FROM document");
    $s_no=mysqli_fetch_assoc($num);
    $send=$s_no["counts"];
    $id=$send+1;
    mysqli_query($lin1,"INSERT INTO document VALUES('$i1','$id','$i3','$i4')");
    $location = "documents/";

```



```
$to = $location.$id.".pdf";

$flag = 1;
$FileType = strtolower(pathinfo($to,PATHINFO_EXTENSION));

if($FileType != "pdf")
{
    echo "Only PDF files are allowed.";
    $flag = 0;
}
echo "<br><br>";
if ($flag == 1)
{
    if (move_uploaded_file($_FILES["up"]["tmp_name"], $to))
    {
        echo "The file has been uploaded.";
    }
    else
    {
        echo "Sorry, there was an error uploading your file.";
    }
}
else
{
    echo "Failed to upload";
}
header("Location: a_add_document.php");
?>
```

Emp.php

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<title>
```

```
    Employee
```

```
</title>
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<style>
```

```
    .ptable table,.ptable table td, .ptable table th
```

```
    {
```

```
        border: 1px solid rgb(221, 221, 221);
```

```
        text-align: center;
```

```
    }
```

```
    .ptable table
```

```
    {
```

```
        border-collapse: collapse;
```

```
    }
```

```
    .ptable table tr:nth-child(even)
```

```
    {
```

```
        background-color: #f2f2f2;
```

```
    }
```

```
    .ptable table tr:nth-child(odd)
```

```
    {
```

```
        background-color: #ffffff;
```

```
    }
```

```
    .ptable table th, .ptable table td
```

```
    {
```

```
        padding: 20px;
```

```
}  
  
.ptable table th  
{  
    background-color: #414141;  
    color: white;  
}  
  
table  
{  
    border: 1px solid black;  
    background-color: aliceblue;  
    padding: 20px;  
    margin-top: 20px;  
    width: 20%;  
}  
  
tr, td  
{  
    padding-bottom: 20px;  
    text-align: left;  
}  
  
.container  
{  
    overflow: hidden;  
    border-top: none;  
  
    padding-top: 5px;  
    padding-left: 30px;  
}  
  
.tabContent  
{  
    display: none;
```

```
border-top: none;

animation: fade 1s;

}

@keyframes fade
{
    from {opacity: 0;}
    to {opacity: 1;}
}

.button
{
    border: none;
    color: white;
    padding: 16px 32px;
    text-align: center;
    display: inline-block;
    font-size: 16px;
    float: none;
    transition-duration: 0.4s;
    cursor: pointer;
    margin: 10px;
}

.buttonEffect
{
    background-color: #555555;
    color: rgb(255, 255, 255);
    border: none;
}

.buttonEffect:hover
{

```

```

        background-color: transparent;
        color: rgb(0, 0, 0);
    }
    .layer
    {
        background-image: linear-gradient(to right,rgba(255, 255, 255, 0.377),rgba(255,
255, 255, 0));
        position: absolute;
        top: 0;
        left: 0;
        width: 100%;
        height: 150%;
    }
    #bg
    {
        background-image: url('images/bg.jpg');
        background-attachment: fixed;
        font-family: Helvetica, sans-serif;
        font-size: large;
    }
</style>
</head>
<body id="bg">
    <div class="layer">
        

        <div class="container" align="center">
            <button type="button" class="button buttonEffect" onclick="openTab(event,
'details')" >Details</button>

            <button type="button" class="button buttonEffect" onclick="openTab(event,
'client')">Clients</button>

```

```
<button type="button" class="button buttonEffect" onclick="openTab(event,
'hearing')">Hearings</button>
```

```
<button type="button" class="button buttonEffect" onclick="openTab(event,
'cases')">Cases</button>
```

```
</div>
```

```
<div id="details" class="tabContent" >
```

```
<h4 align="center">PERSONAL INFORMATION</h4>
```

```
<table align="center">
```

```
<?php
```

```
$lin=mysqli_connect("localhost","root","","law_firm");
```

```
$id=$_COOKIE["id"];
```

```
$ex = mysqli_query($lin,"SELECT * FROM employees where
employee_id=$id");
```

```
$ab=mysqli_fetch_assoc($ex);
```

```
echo "<tr><td>Employee id: </td><td>".$id."</td></tr>";
```

```
echo "<tr><td>First name: </td><td>".$ab["first_name"]."</td></tr>";
```

```
echo "<tr><td>Last name: </td><td>".$ab["last_name"]."</td></tr>";
```

```
echo "<tr><td>Since: </td><td>".$ab["since"]."</td></tr>";
```

```
echo "<tr><td>Salary: </td><td>".$ab["salary"]."</td></tr>";
```

```
echo "<tr><td>Door no.: </td><td>".$ab["door_no"]."</td></tr>";
```

```
echo "<tr><td>Street name:</td><td>".$ab["street_name"]."</td></tr>";
```

```
echo "<tr><td>Contact:</td><td>".$ab["contact"]."</td></tr>";
```

```
echo "<tr><td>No. of cases:</td><td>".$ab["no_of_cases"]."</td></tr>";
```

```
?>
```

```
</table>
```

```
</div>
```

```
<div id="client" class="tabContent ptable" >
```

```
<h4 align="center">CLIENT</h4>
```

```
<table align="center">
```

```

<tr>

    <th>Client ID</th>

    <th>First Name</th>

    <th>Last Name</th>

    <th>Door number</th>

    <th>Street name</th>

    <th>Contact</th>

    <th>Since</th>

</tr>

<?php

    $conn = mysqli_connect("localhost", "root", "", "law_firm");

    $id=$_COOKIE["id"];

    $ex = mysqli_query($conn,"SELECT * FROM clients WHERE client_id IN
(SELECT client_id FROM case_ WHERE lawyer_id ='$id')");

    while($row = mysqli_fetch_assoc($ex))
    {

        echo "<tr><td>" . $row["client_id"]. "</td><td>" . $row["first_name"].
"</td><td>" . $row["last_name"]. "</td><td>" . $row["door_no"] . "</td><td>".
$row["street_name"]. "</td><td>" . $row["contact"]. "</td><td>" . $row["since"].
"</td></tr>";

    }

?>

</table>

</div>

<div id="hearing" class="tabContent ptable">

    <h4 align="center">HEARINGS</h4>

    <table align="center">

        <tr>

            <th>Serial Number</th>

            <th>Case ID</th>


```

```

        <th>Hearing Date</th>
        <th>Court</th>
    </tr>
<?php
    $conn2 = mysqli_connect("localhost", "root", "", "law_firm");
    $id=$_COOKIE["id"];

    $sex2 = mysqli_query($conn2,"SELECT * FROM hearing WHERE lawyer_id
= '$id'");

    while($row2 = mysqli_fetch_assoc($sex2))
    {
        echo " <tr><td>" . $row2["s_no"]. " </td><td>" . $row2["case_id"].
"</td><td>" . $row2["hearing_date"]. " </td><td>" . $row2["court"] . " </td></tr>";
    }
?>
</table>
</div>

```

```

<div id="cases" class="tabContent ptable">

```

```

    <h4 align="center">CASES</h4>

```

```

    <table align="center">

```

```

        <tr>

```

```

            <th>Case ID</th>

```

```

            <th>Status</th>

```

```

            <th>Case notes</th>

```

```

            <th>Number of hearings</th>

```

```

            <th>Client ID</th>

```

```

            <th>Fee</th>

```

```

        </tr>

```

```

    <?php

```

```

        $conn4 = mysqli_connect("localhost", "root", "", "law_firm");

```



```

        $id=$_COOKIE["id"];

        $sex4 = mysqli_query($conn4,"SELECT * FROM case_ where
lawyer_id='$id'");

        while($row4 = mysqli_fetch_assoc($sex4))
        {
            echo "<tr><td>" . $row4["case_id"]. "</td><td>" . $row4["status"].
"</td><td>" . $row4["case_notes"]. "</td><td>" . $row4["no_of_hearings"] . "</td><td>".
$row4["client_id"]. "</td><td>" . $row4["fee"] . "</td></tr>";

        }

        ?>

    </table>

</div>

</div>

<script>

function openTab(evt, tabName)
{
    var i, tabcontent, button;
    tabcontent = document.getElementsByClassName("tabContent");
    for (i = 0; i < tabcontent.length; i++)
    {
        tabcontent[i].style.display = "none";
    }
    button = document.getElementsByClassName("button buttonEffect");
    for (i = 0; i < button.length; i++)
    {
        button[i].className = button[i].className.replace(" active", "");
    }
    document.getElementById(tabName).style.display = "block";
}

</script>

```

```
</body>
</html>
```

Empdet.php

```
<html>
<head><title>Change</title></head>
<body>
<p>Check</p>
<?php
    $lin1=mysqli_connect("localhost","root","","law_firm");
    $i1=$_POST["one_column"];
    $i2=$_POST["two_column"];
    $i3=$_POST["three_column"];
    $i5=$_POST["five_column"];
    $i6=$_POST["six_column"];
    $i7=$_POST["seven_column"];
    $i8=$_POST["eight_column"];
    $id=$_POST["emp_id"];

    if(isset($_POST["Update"]))
    {

        mysqli_query($lin1,"UPDATE employees SET
first_name='$i1',last_name='$i2',employee_password='$i3',salary='$i5',door_no='$i6',street_
name='$i7',contact='$i8' WHERE employees.employee_id='$id' ");
    }
    else
    {
        mysqli_query($lin1,"DELETE from employees where employee_id=$id");
    }
    header("Location: a_update_emp.php");
```

Empdetadd.php

Check

```
<?php
```

```
$lin1=mysqli_connect("localhost","root","","law_firm");
```

```
$i1=$_POST["one_column"];
```

```
$i2=$_POST["two_column"];
```

```
$i3=$_POST["three_column"];
```

```
$i5=$_POST["five_column"];
```

```
$i6=$_POST["six_column"];
```

```
$i7=$_POST["seven_column"];
```

```
$i8=$_POST["eight_column"];
```

```
$num=mysqli_query($lin1,"SELECT MAX(employee_id) AS counts FROM employees");
```

```
$s_no=mysqli_fetch_assoc($num);
```

```
$send=$s_no["counts"];
```

```
$id=$send+1;
```

```
$since=strval(date("Y-m-d"));
```

```
mysql_query($lin1,"INSERT INTO employees
VALUES('$id','$i1','$i2','$i3','$since','$i5','$i6','$i7','$i8',0)");
```

```
header("Location: a_add_emp.php");
```

?

</body>

Heardet.php

```
<html>

<head><title>Change</title></head>

<body>

<p>Check</p>

<?php

    $lin=mysqli_connect("localhost","root","","law_firm");


    $i3=$_POST["three_column"];


    $id=$_POST["hid"];


    if(isset($_POST["Update"]))
    {
        mysqli_query($lin,"UPDATE  hearing  SET  hearing_date='$i3'  WHERE
hearing.s_no='$id'");
    }
    else
    {
        mysqli_query($lin,"DELETE from hearing where s_no=$id");
    }

    $num1=mysqli_query($lin,"SELECT case_id FROM hearing where s_no='$id'");
    $s_no1=mysqli_fetch_assoc($num1);
    $send1=$s_no1["case_id"];

    $num2=mysqli_query($lin,"SELECT  count(*) AS counts FROM hearing  where
case_id='$send1'");
    $s_no2=mysqli_fetch_assoc($num2);
```

```

        $send2=$s_no2["counts"];

        mysqli_query($lin,"UPDATE case_ SET no_of_hearings='$send2' WHERE
case_.case_id='$send1'");

        header("Location: a_update_cases.php");

?>

</body>

</html>

```

Heardetadd.php

```

<html>

<head><title>Change</title></head>

<body>

<p>Check</p>

<?php

        $lin1=mysqli_connect("localhost","root","","law_firm");

        $i2=$_POST["two_column"];

        $i3=$_POST["three_column"];

        $i5=$_POST["five_column"];

        $en=mysqli_query($lin1,"SELECT lawyer_id from case_ where case_id='$i2'");

        $dat=mysqli_fetch_assoc($en);

        $i4=$dat["lawyer_id"];

        $num=mysqli_query($lin1,"SELECT MAX(s_no) AS counts FROM hearing");

        $s_no=mysqli_fetch_assoc($num);

        $send=$s_no["counts"];

        $id=$send+1;

        mysqli_query($lin1,"INSERT INTO hearing VALUES('$id','$i2','$i3','$i4','$i5')");

```

```

        $num1=mysqli_query($lin1,"SELECT count(*) AS counts FROM hearing where
case_id='$i2'");

        $s_no1=mysqli_fetch_assoc($num1);

        $send1=$s_no1["counts"];

        mysqli_query($lin1,"UPDATE case_ SET no_of_hearings='$send1' WHERE
case_.case_id='$i2'");

        header("Location: a_add_hearings.php");

?>

</body>

</html>

```

law_firm.sql

```

-- phpMyAdmin SQL Dump
-- version 5.1.0
-- https://www.phpmyadmin.net/
--
-- Host: 127.0.0.1
-- Generation Time: May 29, 2021 at 07:29 AM
-- Server version: 10.4.18-MariaDB
-- PHP Version: 7.3.27

SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
START TRANSACTION;
SET time_zone = "+00:00";

/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT
*/;

/*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS SET
*/;

/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION
*/;

```

```
/*!40101 SET NAMES utf8mb4 */;
```

```
--
```

```
-- Database: `law_firm`
```

```
--
```

```
-- -----
```

```
--
```

```
-- Table structure for table `case_`
```

```
--
```

```
CREATE TABLE `case_` (  
  `case_id` int(11) NOT NULL,  
  `status` varchar(40) DEFAULT NULL,  
  `case_notes` varchar(1000) DEFAULT NULL,  
  `no_of_hearings` int(11) DEFAULT NULL,  
  `lawyer_id` int(11) DEFAULT NULL,  
  `client_id` int(11) DEFAULT NULL,  
  `fee` decimal(10,3) DEFAULT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

```
--
```

```
-- Dumping data for table `case_`
```

```
--
```

```
INSERT INTO `case_` (`case_id`, `status`, `case_notes`, `no_of_hearings`, `lawyer_id`,  
  `client_id`, `fee`) VALUES  
(1, 'active', 'Involuntary manslaughter', 2, 1, 1, '3000.000'),  
(2, 'active', 'Accused of medical malpractice', 2, 1, 4, '5006.000'),  
(3, 'active', ' Murder charges agaibns defendant', 0, 2, 5, '4000.000');
```

--

-- Table structure for table `clients`

--

```
CREATE TABLE `clients` (  
  `client_id` int(11) NOT NULL,  
  `first_name` varchar(40) DEFAULT NULL,  
  `last_name` varchar(40) DEFAULT NULL,  
  `door_no` int(11) DEFAULT NULL,  
  `street_name` varchar(40) DEFAULT NULL,  
  `contact` bigint(20) DEFAULT NULL,  
  `client_password` varchar(40) DEFAULT NULL,  
  `since` date DEFAULT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

--

-- Dumping data for table `clients`

--

```
INSERT INTO `clients` (`client_id`, `first_name`, `last_name`, `door_no`, `street_name`,  
  `contact`, `client_password`, `since`) VALUES  
(1, 'James', 'Albert', 67, 'Booth ave', 8978898910, 'pwdn', '1999-04-23'),  
(2, 'Martin', 'Rodgers', 42, 'Cliff ave', 9812378231, 'pwd3', '2021-05-26'),  
(3, 'Martha', 'Johnson', 45, 'East ave', 9123456789, 'pwd6', '2021-05-26'),  
(4, 'Gregory', 'House', 13, 'Plainsboro ave', 8978898910, 'lupus', '1999-04-23'),  
(5, 'Rachel', 'Brennen', 34, 'CCC', 9812378231, 'pwd8', '2021-05-27'),  
(6, 'Tom', 'Quincy', 13, 'East lane', 8821345667, 'pwd5', '2021-05-27'),  
(7, 'Rick', 'Sanchez', 56, 'Clifton park', 8889223145, 'pwd5', '2021-05-27'),
```



```
(8, 'Carl', 'Johnson', 45, 'Grove street', 8821345667, 'pwd4', '2021-05-27');
```

```
-----
```

```
--
```

```
-- Table structure for table `client_request`
```

```
--
```

```
CREATE TABLE `client_request` (  
  `client_id` varchar(40) NOT NULL,  
  `first_name` varchar(40) DEFAULT NULL,  
  `last_name` varchar(40) DEFAULT NULL,  
  `client_request_password` varchar(40) DEFAULT NULL,  
  `street_name` varchar(40) DEFAULT NULL,  
  `door_no` varchar(40) DEFAULT NULL,  
  `contact` bigint(20) DEFAULT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

```
--
```

```
-- Dumping data for table `client_request`
```

```
--
```

```
INSERT INTO `client_request` (`client_id`, `first_name`, `last_name`,  
`client_request_password`, `street_name`, `door_no`, `contact`) VALUES  
(1, 'John', 'Adams', 'pwd1', 'North street', '34', 9842732098);
```

```
-----
```

```
--
```

```
-- Table structure for table `courts`
```

```
--
```

```
CREATE TABLE `courts` (  
  `c_no` int(11) NOT NULL,  
  `cheif_judge` varchar(40) DEFAULT NULL,  
  `district` varchar(40) DEFAULT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

```
--
```

```
-- Dumping data for table `courts`
```

```
--
```

```
INSERT INTO `courts` (`c_no`, `cheif_judge`, `district`) VALUES  
(1, 'Rick Martin', 'City A');
```

```
-- -----
```

```
--
```

```
-- Table structure for table `document`
```

```
--
```

```
CREATE TABLE `document` (  
  `case_id` int(11) NOT NULL,  
  `document_id` int(11) NOT NULL,  
  `document_name` varchar(40) DEFAULT NULL,  
  `authenticity` varchar(40) DEFAULT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

```
--
```

```
-- Dumping data for table `document`
```

```
--
```

```
INSERT INTO `document` (`case_id`, `document_id`, `document_name`, `authenticity`)
VALUES
```

```
(1, 1, 'FIR', 'duplicate'),
```

```
(1, 2, 'FIR', 'duplicate'),
```

```
(3, 3, 'Bond', 'original');
```

```
-- -----
```

```
--
```

```
-- Table structure for table `employees`
```

```
--
```

```
CREATE TABLE `employees` (
  `employee_id` int(11) NOT NULL,
  `first_name` varchar(40) DEFAULT NULL,
  `last_name` varchar(40) DEFAULT NULL,
  `employee_password` varchar(40) DEFAULT NULL,
  `since` date DEFAULT NULL,
  `salary` decimal(10,3) DEFAULT NULL,
  `door_no` int(11) DEFAULT NULL,
  `street_name` varchar(50) DEFAULT NULL,
  `contact` bigint(20) DEFAULT NULL,
  `no_of_cases` int(11) DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

```
--
```

```
-- Dumping data for table `employees`
```

```
--
```

```
INSERT INTO `employees` (`employee_id`, `first_name`, `last_name`,
`employee_password`, `since`, `salary`, `door_no`, `street_name`, `contact`, `no_of_cases`)
VALUES
```

```
(1, 'Neil', 'Roberts', 'pwd6', '1990-04-04', '34000.000', 4, 'Lincoln park', 1234567891, 2),
(2, 'Piper', 'McLean', 'pwd1', '2021-05-27', '23232.000', 4, 'Luckville', 9842323231, 0),
(3, 'Ricardo', 'Rodriguez', 'pwd6', '2021-05-27', '66000.000', 6, 'Medici', 9812543028, 0),
(4, 'Neil', 'Cormack', 'pwd6', '2021-05-28', '40000.000', 12, 'Medici', 9821345728, 0);
```

```
-----
```

```
--
```

```
-- Table structure for table `hearing`
```

```
--
```

```
CREATE TABLE `hearing` (
  `s_no` int(11) NOT NULL,
  `case_id` int(11) NOT NULL,
  `hearing_date` date DEFAULT NULL,
  `lawyer_id` int(11) DEFAULT NULL,
  `court` int(11) DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

```
--
```

```
-- Dumping data for table `hearing`
```

```
--
```

```
INSERT INTO `hearing` (`s_no`, `case_id`, `hearing_date`, `lawyer_id`, `court`) VALUES
(1, 1, '2011-05-04', 1, 1),
(2, 1, '1999-04-01', 1, 1),
(3, 2, '1999-04-02', 1, 1),
(4, 2, '2020-12-12', 2, 1);
```

```
--  
  
-- Indexes for dumped tables  
  
--  
  
--  
  
-- Indexes for table `case_`  
  
--  
  
ALTER TABLE `case_`  
  ADD PRIMARY KEY (`case_id`),  
  ADD KEY `lawyer_id` (`lawyer_id`),  
  ADD KEY `client_id` (`client_id`);  
  
--  
  
-- Indexes for table `clients`  
  
--  
  
ALTER TABLE `clients`  
  ADD PRIMARY KEY (`client_id`);  
  
--  
  
-- Indexes for table `client_request`  
  
--  
  
ALTER TABLE `client_request`  
  ADD PRIMARY KEY (`client_id`);  
  
--  
  
-- Indexes for table `courts`  
  
--  
  
ALTER TABLE `courts`  
  ADD PRIMARY KEY (`c_no`);
```

```

--
-- Indexes for table `document`
--
ALTER TABLE `document`
  ADD PRIMARY KEY (`case_id`,`document_id`);

--
-- Indexes for table `employees`
--
ALTER TABLE `employees`
  ADD PRIMARY KEY (`employee_id`);

--
-- Indexes for table `hearing`
--
ALTER TABLE `hearing`
  ADD PRIMARY KEY (`s_no`,`case_id`),
  ADD KEY `lawyer_id` (`lawyer_id`),
  ADD KEY `court` (`court`);

--
-- Constraints for dumped tables
--

--
-- Constraints for table `case_`
--
ALTER TABLE `case_`
  ADD CONSTRAINT `case__ibfk_1` FOREIGN KEY (`lawyer_id`) REFERENCES
`employees` (`employee_id`) ON DELETE SET NULL,

```

```
ADD CONSTRAINT `case__ibfk_2` FOREIGN KEY (`client_id`) REFERENCES `clients`  
(`client_id`) ON DELETE SET NULL;
```

```
--
```

```
-- Constraints for table `hearing`
```

```
--
```

```
ALTER TABLE `hearing`
```

```
ADD CONSTRAINT `hearing_ibfk_1` FOREIGN KEY (`lawyer_id`) REFERENCES  
`employees` (`employee_id`) ON DELETE SET NULL,
```

```
ADD CONSTRAINT `hearing_ibfk_2` FOREIGN KEY (`court`) REFERENCES `courts`  
(`c_no`) ON DELETE SET NULL;
```



```
COMMIT;
```



```
/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;
```

```
/*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
```

```
/*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;
```

SCREENSHOTS

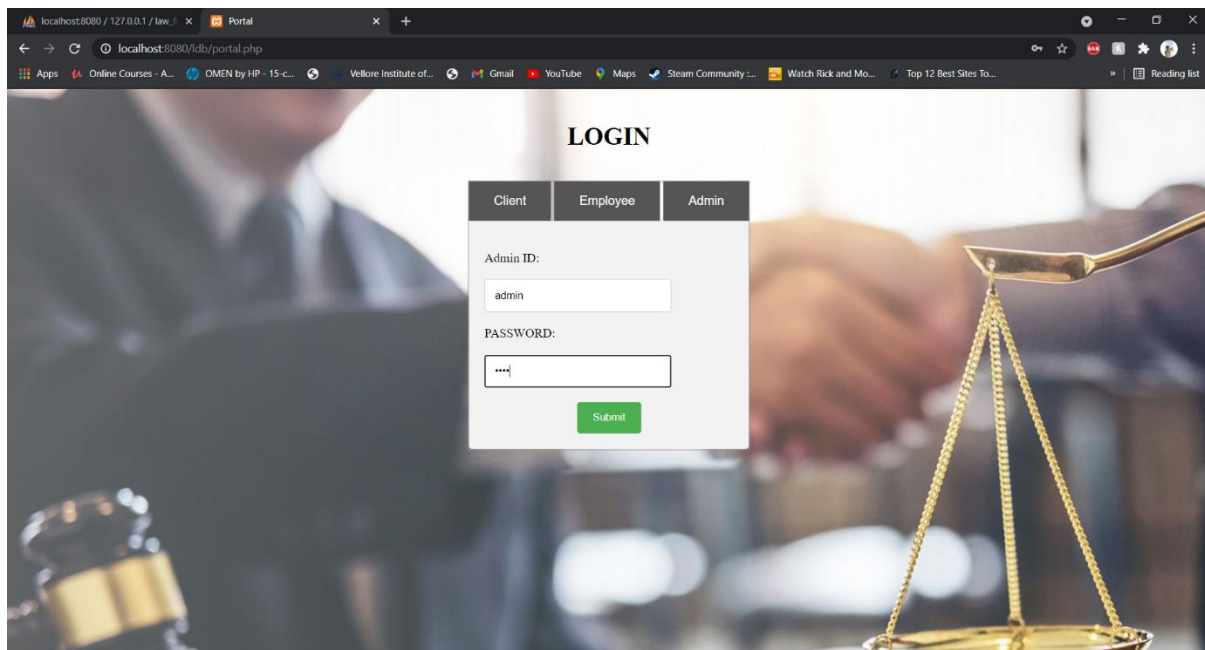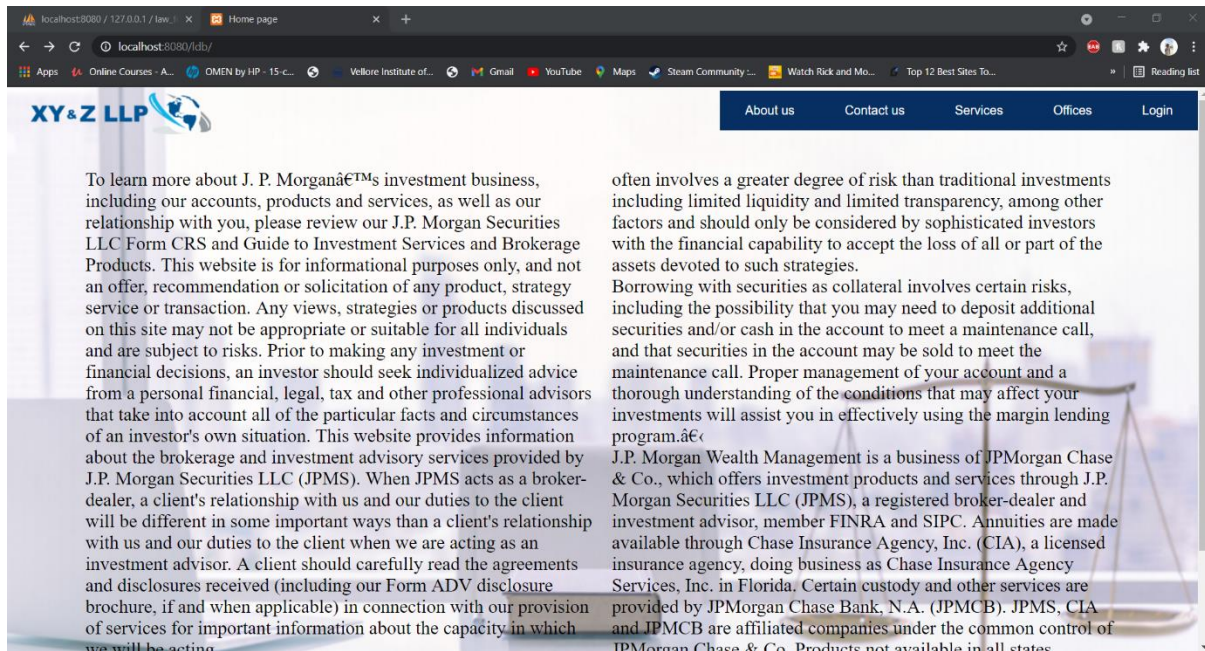

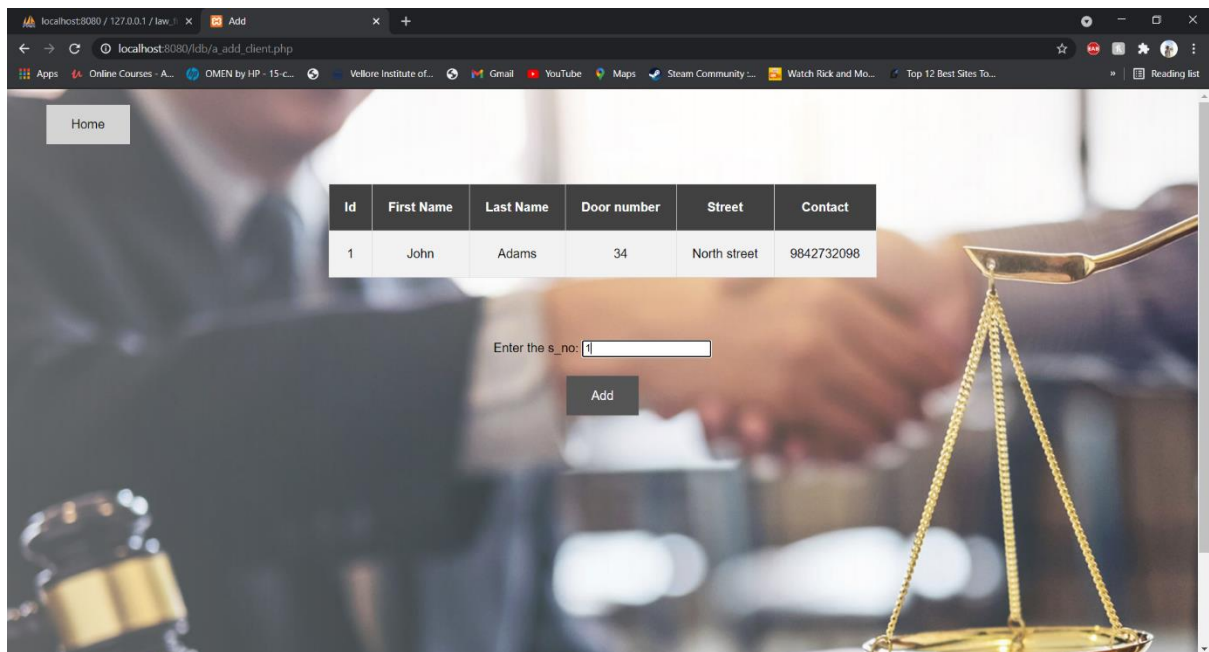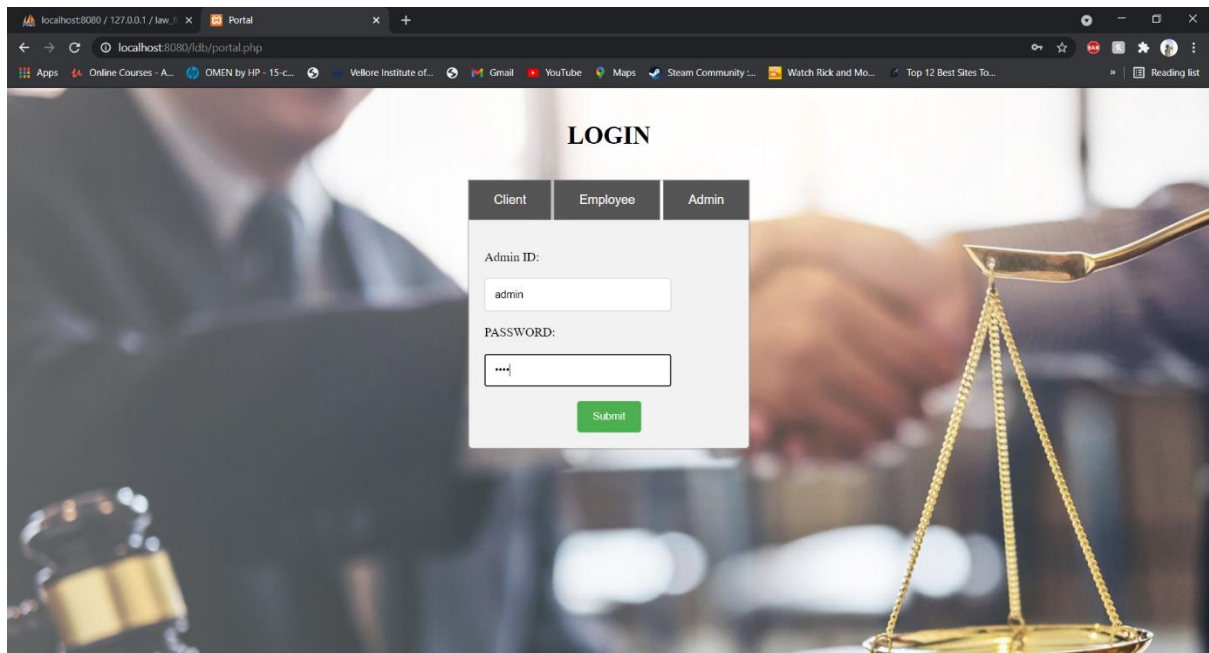

localhost8080 / 127.0.0.1 / law... Update

localhost8080/db/a_update_client.php

Home

Enter the id:

DELETE

Fields	Input
First name	<input type="text"/>
Last name	<input type="text"/>
Door number	<input type="text"/>
Street name	<input type="text"/>
Contact	<input type="text"/>
Password	<input type="text"/>

localhost8080 / 127.0.0.1 / law... Admin page

localhost8080/db/admin.php

XY&Z LLP

Clients	Hearings	Employees	Documents	Courts	Cases
Case ID	Document ID	Document Name	Authenticity	File	
1	1	FIR	duplicate	Download	
1	2	FIR	duplicate	Download	
3	3	Bond	original	Download	

Add

localhost:8080 / 127.0.0.1 / law... Client

localhost:8080/db/client.php

XY&Z LLP

Details Hearings Cases

PERSONAL INFORMATION

Client id: 1

First name: James

Last name: Albert

Door no.: 67

Street name: Booth ave

Contact: 8978898910

Since: 1999-04-23

localhost:8080 / 127.0.0.1 / law... Employee

localhost:8080/db/emp.php

XY&Z LLP

Details Clients Hearings Cases

HEARINGS

Serial Number	Case ID	Hearing Date	Court
1	1	2011-05-04	1
2	1	1999-04-01	1
3	2	1999-04-02	1

CONCLUSION

In this project we've managed to create a working website that is easy to use for client and the law firm. All the records of the law firm are easily accessible and secure to the user through a secure login portal. The clients are only privy to the information they are allowed to see and employees only for clients and cases under their domain. Admins can control all data in the databases of the law firm. They have full control over adding/updating/removing records. Thus we have created an efficient system to manage the law firm through the "Law Firm Management Website".

REFERENCES

- [1] <https://medium.com/@sapphdek/learn-how-to-build-a-website-using-html-css-php-mysql-af385524a5d6>
- [2] <http://www.aui.ma/sse-capstone-repository/pdf/E-Lawyer%20Web%20Application.pdf>
- [3] https://air.ashesi.edu.gh/bitstream/handle/20.500.11988/277/Lydia%20Kinyari_27352_assignment_file_Kinyari%20Lydia%20Kemuma%20Capstone%20Report.pdf?sequence=1&isAllowed=y