

Using Waister


Waitster is a web application that uses food ordering APIs to determine the average wait time at a restaurant. This will allow customers to view how packed restaurants or cafes are, whether they want to have a quick meal or hold a study session.

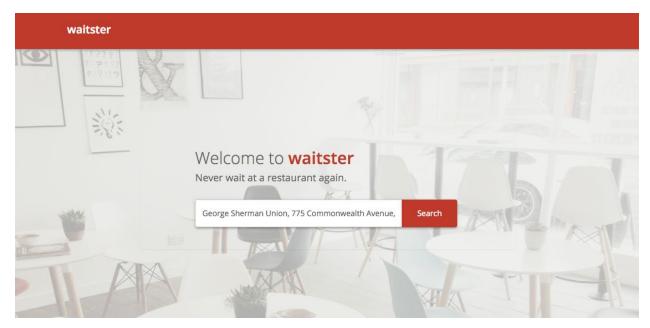


Location is autoloaded into the search bar using Google Maps API. Party animal also has an option to type in alternative location.

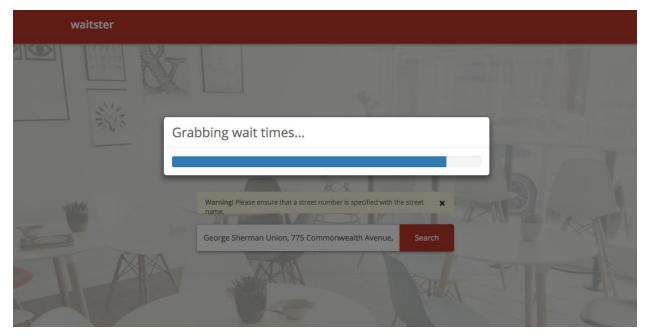


When Party Animal presses enter, a progress bar pops up while the next page loads.

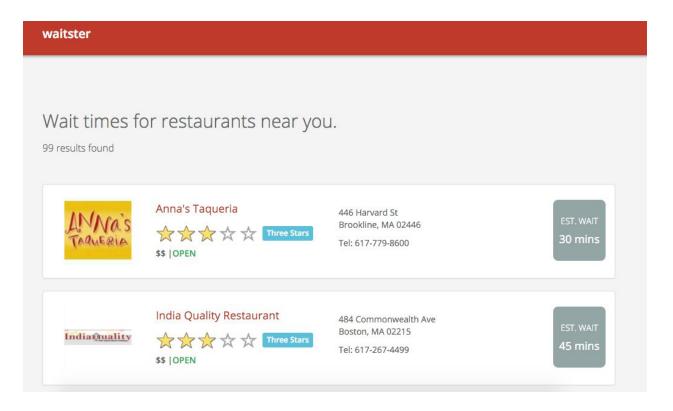


A new page is displayed with a list of restaurants near or in the entered location. The estimated wait time is displayed. The Party Animal can click on the restaurant name for more information on another page.

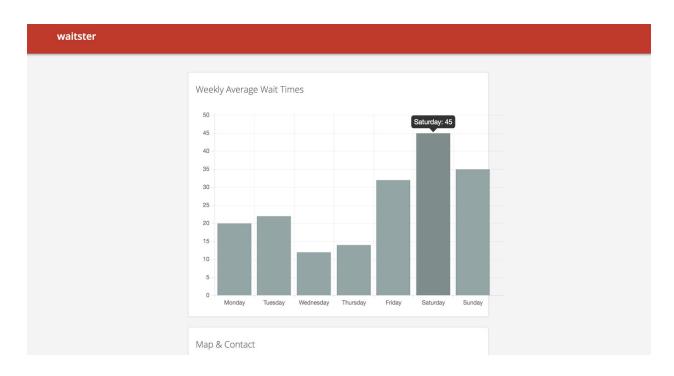

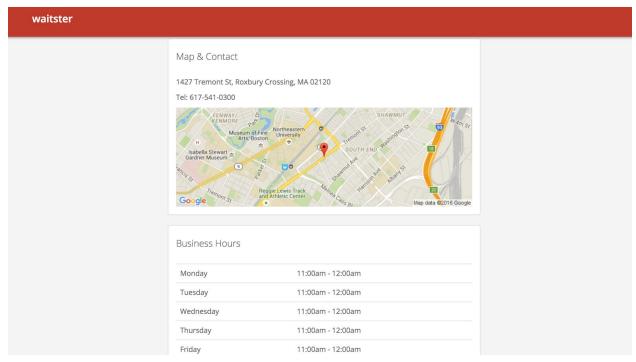

When Party Animal clicks on the restaurant name, this page is loaded to display information about the restaurant. Information regarding weekly average wait times, map and contact, and business hours are displayed.

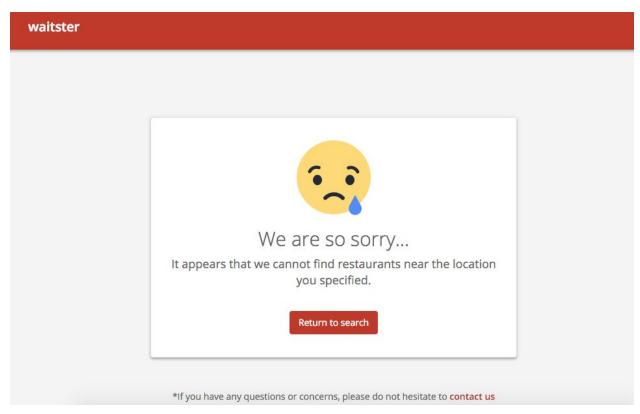

If no restaurants are in the location entered, or the location entered is invalid, an error page is loaded.