


Memory Diagram: likes and ptrLikes

A pointer stores the memory address of a variable.

```
int likes = 500;  
int *ptrLikes = &likes;
```

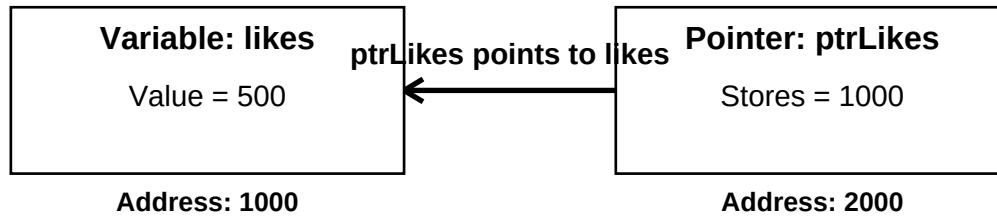

Meaning:

- likes contains the value 500.
- likes is stored at address 1000.
- ptrLikes stores the address 1000.
- Therefore, *ptrLikes gives the value 500.