

Lab title: Multithreading in Python.

Learning outcomes: Learn the basics of multithreading and thread synchronization in Python.

Module: CMT202

Lecturer: Padraig Corcoran

Part 1 - Creating threads in Python

A process is a program in execution. A single program in execution will consist of a single process. A thread is also a program in execution. A single program in execution may consist of one or more threads.

Multithreading is defined as the ability of a processor to execute multiple threads concurrently. In a simple single-core CPU, it is achieved using frequent switching between threads.

Let us consider an example using the Python threading module.

```
import threading # import the threading module

def print_cube(num):
    # function to print cube of given num
    print("Cube: {}".format(num * num * num))

def print_square(num):
    # function to print square of given num
    print("Square: {}".format(num * num))

if __name__ == "__main__":
    # creating thread
    t1 = threading.Thread(target=print_square, args=(10,))
    t2 = threading.Thread(target=print_cube, args=(10,))

    t1.start() # starting thread 1
    t2.start() # starting thread 2

    t1.join() # wait until thread 1 is completely executed
    t2.join() # wait until thread 2 is completely executed

    print("Done!") # both threads completely executed
```

threading_1.py

Let us try to understand the above code:

To import the threading module, we do:

```
import threading
```

To create a new thread, we create an object of Thread class. It takes the following arguments:

target: the function to be executed by thread

args: the arguments to be passed to the target function

In the above example, we created 2 threads with different target functions:

```
t1 = threading.Thread(target=print_square, args=(10,))
```

```
t2 = threading.Thread(target=print_cube, args=(10,))
```

To start a thread, we use the start method of Thread class.

```
t1.start()
```

```
t2.start()
```

Once the threads start, the current program (you can think of it like a main thread) also keeps on executing. In order to stop execution of current program until a thread is complete, we use join method:

```
t1.join()
```

```
t2.join()
```

As a result, the current program will first wait for the completion of t1 and t2. Once they are finished, the remaining statements of the current program are executed.

Part 2 - Race Conditions

All threads in a given program in execution share global variables within that program. Thread synchronization is defined as a mechanism which ensures that two or more concurrent threads do not simultaneously execute some particular program segment known as critical section. A *critical section* is a part of the program where the shared resource is accessed. Please read the following Wikipedia article for more info https://en.wikipedia.org/wiki/Critical_section

Concurrent accesses to a shared resource can lead to a race condition. A race condition occurs when two or more threads can access shared data and they try to change it at the same time. As a result, the values of variables may be unpredictable and vary depending on the timings of context switches of the threads. Please read the following Wikipedia article for more info https://en.wikipedia.org/wiki/Race_condition

To illustrate the concept of race condition run the following program.

```
import threading
x = 0 # global variable x

def increment():
    # function to increment global variable x
    global x
    x += 1

def thread_task():
    # task for thread
```

```
    for _ in range(100000):
        increment()

def main_task():
    global x
    x = 0 # setting global variable x as 0

    # creating threads
    t1 = threading.Thread(target=thread_task)
    t2 = threading.Thread(target=thread_task)

    # start threads
    t1.start()
    t2.start()

    # wait until threads finish their job
    t1.join()
    t2.join()


if __name__ == "__main__":
    for i in range(10):
        main_task()
        print("Iteration {0}: x = {1}".format(i,x))
```

threading_2.py

In the above program two threads t1 and t2 are created in main_task function and the global variable x is set to 0. Each thread has a target function thread_task in which increment function is called 100000 times. This increment function will increment the global variable x by 1 in each call.

The expected final value of x is 200000, but what we get in 10 iterations of main_task function is some different values. This happens due to concurrent access of threads to the shared variable x. This unpredictability in value of x is the consequence of a race condition.

Below is a diagram which shows how a race condition can occur in the above program. Notice that, given two increments the expected value of x is 12 but due to the race condition, it turns out to be 11! Therefore, we need a tool for synchronization between multiple threads and prevent race conditions.

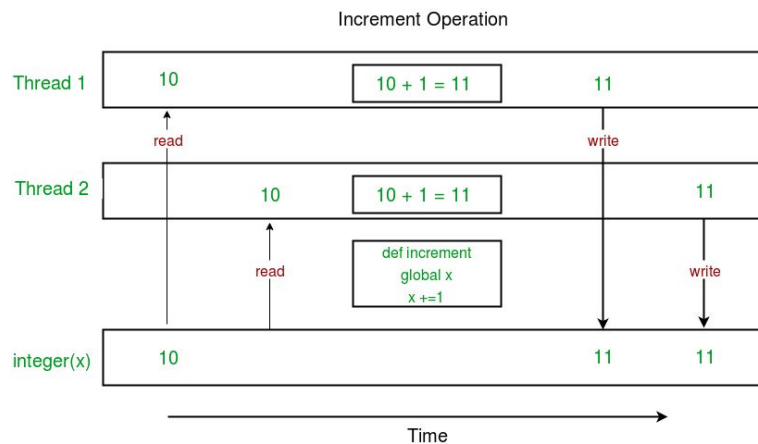Figure 1. Example of a race condition in the program `threading_2.py`.

Part 3 - Using Locks

The Python `threading` module provides a `Lock` class to deal with the race conditions. A lock (also known as a semaphore) is used to control access to a common resource by multiple threads and prevent race conditions. Please read the following Wikipedia article for more info [https://en.wikipedia.org/wiki/Semaphore_\(programming\)](https://en.wikipedia.org/wiki/Semaphore_(programming))

A lock is in one of two states: “locked” or “unlocked”. It is created in an unlocked state. It has two basic methods, `acquire()` and `release()`. When the state is unlocked, `acquire()` changes the state to locked and returns immediately. When the state is locked, `acquire()` blocks until a call to `release()` in another thread changes it to unlocked, then the `acquire()` call resets it to locked and returns.

The `release()` method should only be called in the locked state; it changes the state to unlocked and returns immediately. If an attempt is made to release an unlocked lock, a `RuntimeError` will be raised.

To illustrate the concept of locks run the following program.

```
import threading

x = 0 # global variable x

def increment():
    # function to increment global variable x
    global x
    x += 1

def thread_task(lock):
    # task for thread. calls increment function 100000 times.
    for _ in range(100000):
        lock.acquire()
        increment()
        lock.release()
```

```
def main_task():
    global x
    x = 0 # setting global variable x as 0

    lock = threading.Lock() # creating a lock

    # creating threads
    t1 = threading.Thread(target=thread_task, args=(lock,))
    t2 = threading.Thread(target=thread_task, args=(lock,))

    # start threads
    t1.start()
    t2.start()

    # wait until threads finish their job
    t1.join()
    t2.join()

if __name__ == "__main__":
    for i in range(10):
        main_task()
        print("Iteration {0}: x = {1}".format(i,x))
```

Threading_3.py

Let us try to understand the above code step by step:

Firstly, a Lock object is created using:

```
lock = threading.Lock()
```

Then, lock is passed as target function argument:

```
t1 = threading.Thread(target=thread_task, args=(lock,))
t2 = threading.Thread(target=thread_task, args=(lock,))
```

In the critical section of the target function, we apply lock using lock.acquire() method. As soon as a lock is acquired, no other thread can access the critical section (here, increment function) until the lock is released using lock.release() method.

```
lock.acquire()
increment()
lock.release()
```

As you can see in the results, the final value of x comes out to be 200000 every time (which is the expected final result).

The diagram below illustrates the implementation of locks in above program:

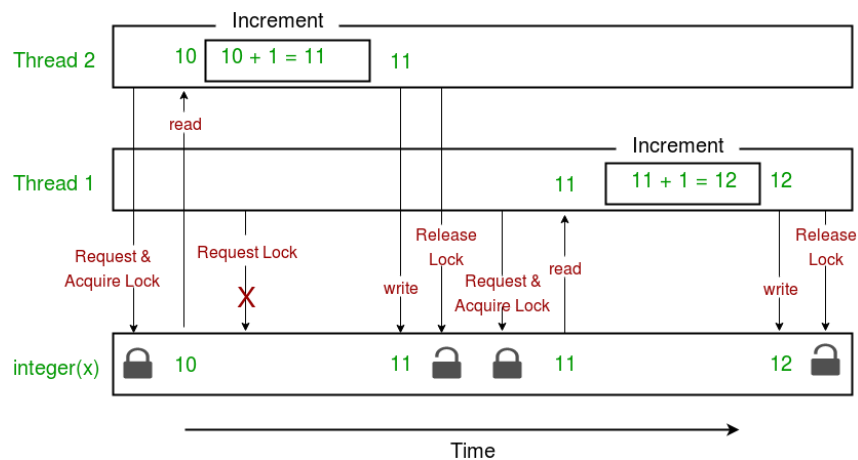


Figure 2. Example of lock in program threading_3.py.

Part 4 - Reflection

Compare the running times of the Python programs threading_2.py and threading_3.py. Are the running times different and if so why?

Review the lecture slides from the section entitled *Processes*. Describe how the theory in these slides relates to the computer programs you have considered during this lab.

Part 5 - Downloading web pages with multithreading

Write a Python program which downloads a list of webpages using multithreading. Compare how the program execution time varies as a function of the number of threads used. Tip - use the Python library urllib.

References

<https://docs.python.org/3.8/library/threading.html>

<https://www.geeksforgeeks.org/multithreading-python-set-1/>

<https://www.geeksforgeeks.org/multithreading-in-python-set-2-synchronization/>