

Flexible Global Optimization with Simulated-Annealing

by Kai Husmann, Alexander Lange (and Elmar Spiegel)

Abstract An abstract of less than 150 words.

Introduction

As early computer-based optimization methods developed contemporaneously with the first digital computers (Corana et al., 1987), nowadays numerous optimization methods for various purposes are available (Wegener, 2005). One of the main challenges in Operations Research is therefore to match the optimization problem with a reasonable method. The complexity of the problem thereby qualifies the possible methods. Optimization procedures in general can be distinguished into exact methods and heuristics (Kirkpatrick et al., 1983). For simple optimization problems, exact methods are often meaningful tools of choice. If all assumptions on model loss and restrictions are met, these methods will obligatorily find the exact solution without need for further parameters. They are the easiest way of solving optimization problems. The *Linear Simplex-Method* (Dantzig et al., 1959) as an example which only needs the loss-function and optional restrictions as model input. If, however, any of the model assumptions, e.g. linearity or unimodality, is violated, exact methods are unable to solve problems validly. With developing computer power, heuristics like the Savings-Algorithm (Clarke and Wright, 1964) and metaheuristics like *Simulated Annealing* (SA) (Kirkpatrick et al., 1983) became popular. They enable solving more complex optimization problems. Metaheuristics are a generalization of heuristics with aim to be even more flexible and efficient (Blum and Roli, 2003) such that they can solve complex optimization problems, like nonlinear problems. Depending on the method of choice, more or less assumptions on the loss function can be neglected on the one hand. On the other hand, heuristics and metaheuristics will always solve problems approximately. Precision of the solution depends on the optimization method and further parameters. There is even no guaranty of approximating the actual optimum since the solution also depends, by contrast to exact methods, on parameterization (Blum and Roli, 2003). Definition of proper parameters is thus a crucial point of those methods. The complexity of parameterization will by trend increase with flexibility of the method while efficiency trends to decrease. Direct search heuristics like the *Nelder-Mead* (NM) algorithm are comparatively efficient methods which directly converge to the functions optimum and need relatively less settings (Geiger and Kanzow, 1999). Random search methods are able to cope with multimodal objective functions. The efficiency and accuracy of such models is strongly sensitive to their parameter specification (Corana et al., 1987). Heuristics are often programmed for multi-purpose usage such that there is a suitable method for many optimization problems. For complex optimization problems, however, multi-purpose optimizers often fail to find solutions. Furthermore multi-purpose optimizers are usually not suitable or not efficient for highly complex problems like problems with restricted parameter space. Whenever general-purpose optimizers are too restrictive or inflexible to solve a problem properly, specific methods are advantageous. Those offer a lot of variable parameters such that they be parameterized very specific to the optimization problem. They represent the most flexible and the most complex optimization methods (Blum and Roli, 2003).

SA (Kirkpatrick et al., 1983) is known to be one of the oldest and most flexible metaheuristic method, though the term metaheuristic was established after initial publication of SA (Blum and Roli, 2003). It is known to be favorable against many other methods for multimodal loss functions with a very high number of covariates (Corana et al., 1987). The method was applied in many studies among several fields covering e.g. chemistry (Agostini et al., 2006), econometrics (Ingber, 1993) or forest sciences (Baskent and Jordan, 2002). Since its first implementation by Kirkpatrick et al. (1983), many authors have modified the algorithm in order to adopt it for specific problems (e.g. DeSarbo et al., 1989; Goffe et al., 1996) or make it more general (e.g. Xiang et al., 2013). It basically combines systematic and a stochastic components, thus enables escaping local optima. It is hence typically used for global optimization of multimodal functions. As it offers a lot of options, SA can be named as hybrid method between a general optimizer (when default values are chosen) and a problem specific optimization algorithm (Wegener, 2005). Corana et al. (1987) developed a dynamic adoption method for the variation of the stochastic component during the optimization process. Their modification affects the efficiency as well as the accuracy of the SA algorithm. It has potential to substantially improve the method. Pronzato et al. (1984) suggest to decrease the search-domain of the random component with increasing number of iterations. The stochastic component in general is the most sensitive part of the method since it actually determines the loss variables modification during the iterations.

The R software environment provides platform for simple and effective distribution of statistical models to a huge user community (Xiang et al., 2013). Thus, not surprisingly, several optimization packages of high quality can currently be purchased via *Comprehensive R Archive Network* (Theussl and Borchers, 2016) where even the SA method is recently listed 5 times. We, however, believe, there is need for a specific stochastic optimization package for complex optimization problems. A package coping with very flexible user definable loss functions with multiple options could be an advantageous extension for R. There is demand for specifically definable optimization problems. We therefore present the package **optimization** which is basically a modified version of SA. We used the properties of SA to program a random search optimization method for specific purposes. We therefore focused on flexibility and implemented many user specifiable parameters. Our method is, in its default configuration, usually not immediately efficient on the one but flexibly adoptable to specific purposes on the other hand. Main advantages of the package are the possibilities to specifically adjust covariate changing rules as well as the robustness of the loss function. The changing rule allows the user e.g. to define an integer parameter space. The loss function can return any value, even Na or NaN are possible. Several further user specifications help to parameterize the model problem-specific such that the user can influence accuracy and speed very detailed. It is moreover the first R function where the improvements of Corana et al. (1987) and Pronzato et al. (1984) are implemented into an SA based optimization software. This means, the search domain of the stochastic component of SA dynamically shrinks with increasing iterations. We also implemented a generic plot function for post-hoc inspection of the model convergence assessment and the solution quality. In the following, we briefly introduce the algorithm methodologically and explain the most relevant parameters. We show in 4 examples where our model is favorable against existing methods or where other methods may fail and explain how it can be parameterized. We develop examples to illustrate the basic model behavior and usage of the covariate changing rule. We give hints how to adopt the numerous options to specific problems. Two practical examples where our function is recently used display which kind of problems can be solved efficiently via our specific-purpose method.

Method

Simulated Annealing and its derivations are well document in the scientific literature (e.g. in Hansen, 2012; Kirkpatrick et al., 1983; Xiang et al., 2013). We thus mainly concentrate in our methods description on modified and novel implementations. Since the basic idea of Simulated Annealing is derived from the physical process of metal annealing, the nomenclature of SA comes particularly from metallurgy. The classic SA is composed of an inner for and an outer while loop (Kirkpatrick et al., 1983). The number of iterations in both loops are user predefined.

Goal of the inner loop of our model (Algorithm 1) is basically to draw covariate combinations randomly and to compare the returns. The loop is repeated n_{inner} times. After saving the covariate combination of the last inner iteration as x_j , the variation function is called to create a new temporary combination x_{i*} . In the classical SA approach, the covariates are changed by a uniform distributed random number around x_j (Kirkpatrick et al., 1983) which is also the default in our function. The variation function can be changed by the user. It is allowed to depend on a vector with random factors rf , x_j and the temperature t . By default, the entries in rf determine the lower and upper limit of the uniformly distributed random number relative to the current expression of the covariate. A random factor of 0.1 and a covariate expression of 3 for x_j e.g. leads to a random number between 2.7 and 3.3 for x_{i*} if the covariate vector has one entry. The dynamic adaption of rf after Corana et al. (1987) and Pronzato et al. (1984) is one of the major novelties of our function. If all entries in x_{i*} after their variation are within the allowed boundaries, the response is calculated. Otherwise the invalid entries of x_{i*} are drawn again until all entries are valid. According to Corana et al. (1987), the number of invalid trials can be used for dynamical adjustment of the rf . The numbers of invalid trials are thus, distinctively for each covariate, counted and stored. If the return of current variables combination $f(x_{i*})$ is better than $f(x_j)$, x_{i*} and $f(x_{i*})$ are stored. Main idea of the SA is to cope with local optima. For this, even if the return of x_{i*} is worse than the return of x_j there is a chance of keeping x_{i*} . The former optimal covariate combination is stored before it is overwritten. The likelihood of keeping worse responses decreases with decreasing temperature t thus with increasing number of outer loop iterations. The detailed calculation of the Monte-Carlo approach by Metropolis et al. (1953) can i.a. be found in Kirkpatrick et al. (1983). Storing the development of covariates and response can be help improving the performance of SA (Lin et al., 1995; Hansen, 2012). We implemented a modification of the threshold accepting strategy (Dueck and Scheuer, 1990) which enables reducing the total number of calculations. This is archived by simply calculating and storing the improvement as absolute difference of $f(x_i)$ and $f(x_j)$. If the response oscillates for user defined number of repetitions within a

user defined threshold, the inner loop breaks.

```

initialize  $t, vf$  with user specifications
calculate  $f(x_0)$  with initial parameter vector  $x_0$ 
while  $t > t_{min}$  do
  for  $i$  in  $c(1: n_{inner})$  do
     $x_j \leftarrow x_{(i-1)}$ 
    call the variation function to generate  $x_{i*}$  in dependence of  $x_j, rf$  and  $t$ 
    check if all entries in  $x_{i*}$  are within the boundaries
    if all  $x_i$  valid then
      calculate  $f(x_{i*})$ 
    else
      while any( $x_{i*}$  invalid) do
        call the variation function again
        count invalid combinations
      end
    end
    if  $f(x_{i*}) < f(x_j)$  then
       $x_i \leftarrow x_{i*}; f(x_i) \leftarrow f(x_{i*})$ 
    else
      calculate Metropolis Probability in dependence of  $t$ 
      if random number  $<$  Metropolis probability then
        store  $x_j$  and  $f(x_j)$ 
         $x_i \leftarrow x_{i*}; f(x_i) \leftarrow f(x_{i*})$ 
      else
         $x_i \leftarrow x_j; f(x_i) \leftarrow f(x_j)$ 
      end
    end
    if threshold accepting criterion fulfilled then
      break inner loop
    end
  end
  reduce  $t$  for the next iteration
   $vf$  adaptation for the next iteration
end
return optimized parameter vector, function value and some additional informations

```

Algorithm 1: Pseudocode of the modified Simulated Annealing method in the **optimization** package exemplary for a minimization.

Main functions of the outer loop are calling the inner loop as well as specifying t and vf for the next iteration of the outer loop. As t obligatory decreases in our derivation of SA, the number of iterations is implicitly user predefined by initial temperature t_0 and minimum temperature t_{min} . t is necessary for the stochastic part within the inner loop (Kirkpatrick et al., 1983). As each covariate can have its own random factor, the vector with random factors rf is of the same dimension as x_i . Dividing the counted number of invalid trials of a covariate by the total number of trials of the respective covariate gives the ratio of invalid trials distinctively for each covariate. Summing up the valid and invalid trials of all inner loop repetitions gives the mean ratio of invalid trials per outer loop repetition. According to (Corana et al., 1987), this ratio can be used to find a trade-off between accuracy on the one and size of the search-domain on the other side. They argument that if there were only valid covariate combinations, the search domain could be too small for multimodal function. They suggest ratios between 0.4 and 0.6. If any observed ratio is < 0.4 or > 0.6 , the respective random factors are modified following the suggested nonlinear equation by Corana et al. (1987) such that they are dynamically adjusted for the next iteration. Pronzato et al. (1984), who developed the Adaptive Random Search method, propose a time decreasing search domain. We combined the two methods by linearly shrinking the favorable range of ratios from 0.4-0.6 to 0.04-0.06. If the default variation function is chosen, the search domain of the covariates reduces with increasing number of outer loop iterations.

The package optimization

The function optim_sa

As the function is mainly written in C++, it requires **Rcpp**. `optim_sa` shall be able to solve very specific optimization problems, several parameters can be defined by the user. Quality of solution and speed

of convergence will thus substantially depend on accurate parametrization. In the following, we will explain the important parameters briefly giving hints for useful specification. A complete parameter list can be found in the vignette.

- `fun`: loss function to be optimized. The function must depend on a vector of covariates and return one numeric value. There are no assumptions on covariates and return. They are not necessarily continuous. Missing (NA) or undefined (NaN) returns are allowed as well. Any restriction on the parameter space, e.g. specific invalid covariate values within the boundaries, can be integrated in the loss function directly by simply returning NA. Restrictions on the state space can be defined analogously. We will be more specific on this in the practical examples.
- `start`: obligatory numeric vector with initial covariate combination. It must be ensured that at least the initial covariate combination leads to a defined numeric response. The loss function at the start variables combination must therefore return a defined numeric value. This might be relevant when the starting values are determined stochastically.
- `maximization`: logical value with default FALSE which indicates whether the loss function is to be maximized or minimized.
- `trace`: logical value with default FALSE. If TRUE, the last inner loop iteration of each outer loop iteration is stored as row in the trace matrix. This might help evaluating the solutions quality. However, storing interim results increases calculation time up to 10 %. Disabling trace can thus improve efficiency when the convergence of an optimization problem is known to be stable.
- `lower`: numeric vector with lower boundaries of the covariates. The boundaries are obligatory since the dynamic rf adjustment (Corana et al., 1987; Pronzato et al., 1984) depends on the number of invalid covariate combinations.
- `upper`: numeric vector with upper boundaries of the covariates.
- `control`: a list with optional further parameters.

All parameters in the list with `control` arguments have a default value. They are pre-parameterized for loss functions of medium complexity. `control` arguments are:

- `vf`: function that determines the variation of covariates during the iterations. It is allowed to depend on `rf`, temperature and a vector of covariates of the current iteration. The variation function is a crucial element of `optim_sa` which enables flexible programming. It is (next to the loss function itself) the second possibility to define restrictions. The parameter space of the optimization program can be defined `vf`. Per default, the covariates are changed by a continuous, uniform distributed random number. It must be considered that defining specific `rf` can increase the calculation time. The default `rf` is a compiled C++ function whereas user specified `rf` must be defined as R functions. User specified are e.g. useful for optimization problems with non-continuous parameter space.
- `rf`: numeric vector with random factors. The random factors determine the range of the random number in the variation function `vf` relative to the dimension of the function variables. The `rf` can be stated separately for each variable. Default is a vector of ones. If `dyn_rf` is enabled, the entries in `rf` change dynamically over time.
- `dyn_rf`: logical. Default is TRUE `rf` change dynamically over time to ensure increasing precision with increasing number of iterations. Default is TRUE. `dyn_rf` ensures a relatively wide search domain at the beginning of the optimization process that shrinks over time (Corana et al., 1987; Pronzato et al., 1984). Disabling `dyn_rf` can be useful when `rf` with high performance are known. The development of `rf` is documented in the trace matrix. Evaluation of former optimizations with dynamic `rf` can thus help finding reasonable fixed `rf`. Self-specified `vf` may not depend on `rf`. In this cases activating `dyn_rf` makes no sense.
- `t0`: initial temperature. Default is 1000. The temperature directly influences the likelihood of accepting worse responses thus the stochastic part of the optimization. `t0` should be adopted to the loss function complexity. Higher temperatures lead to higher ability of coping with local optima on the one but also to more time-consuming function calls on the other hand.
- `t_min`: numeric value that determines the temperature where outer loop stops. Default is 0.1. As there is approximately no chance of leaving local optima in iterations with low temperature `t_min` mainly affects accuracy of the solution. Higher `t_min` yields to lower accuracy and less function calls.
- `nlimit`: integer value which determines the maximum number of inner loops iterations. Default is 100. If the break criterion `stopac` is not fulfilled, `nlimit` is the exact number of inner loops repetitions.

- `r`: numeric value that determines the reduction of the temperature at the end of the outer loop. Slower temperature reduction leads to increasing number of function calls. It should be parameterized with respect to `nlimit`. High `nlimit` in combination with low `r` lead to many iterations with the same acceptance likelihood of worse responses. Low `nlimit` in combination with `r` near 1, by contrast, lead to continuously decreasing acceptance likelihood of worse responses.
- `k`: numeric value. Constant for the Metropolis function (Kirkpatrick et al., 1983). Default is 1. `k` determines the global, non-dynamic likelihood of accepting worse responses. The higher `k` the higher the likelihood of accepting worse responses.
- `stopac`: number of repetitions when the threshold accepting criterion is fulfilled. Can break the inner but not the outer loop.
- `ac_acc`: respective accuracy for the threshold accepting criterion in relation to the response. Very useful for optimization problems without high requirements on accuracy. Lower accuracy can speed-up the solution substantially.

Examples

We briefly explain where the `optim_sa` function is advantageous.

Himmelblau Function with continuous parameter space

Himmelblau's function (Himmelblau, 1972) was chosen as initial example since it is a very simple multimodal equation which is widely known in Operations Research. It has 4 equal minimum values ($\min(f(x_1, x_2)) = 0$) at $\{-2.8, 3.1\}$, $\{3.0, 2.0\}$, $\{3.6, -1.8\}$ and $\{-3.8, -3.3\}$ (Equation 1). In order to display the advantages and basic behavior of `optimization`, it was compared with 2 other SA methods from the packages `stats` and `GenSA`. Himmelblau's function is relatively simple. We therefore also included the NM optimization method (Nelder and Mead, 1965) which is default of `optim` from the `stats` package to examine the advantages of random against direct search.

$$f(x_1, x_2) = (x_1^2 + x_2 - 11)^2 + (x_1 + x_2^2 - 7)^2 \quad (1)$$

We performed 10,000 optimizations with each function in order to investigate quality and speed of the solutions using parameters for relatively simple optimization problems for all examined methods. The optimizations were performed having the following parameters:

```
# stats package: optim (NM)
stats::optim(fn = hi, par = c(10, 10), method = "Nelder-Mead")

# optimization package: optim_sa
optimization::optim_sa(fun = hi, start = (c(10, 10)), trace = TRUE,
  lower = c(-40, -40), upper=c(40, 40),
  control = list(t0 = 500, nlimit = 50, r = 0.85,
    rf = 3, ac_acc = 0.1, dyn_rf = TRUE))

# stats package optim (SA)
stats::optim(fn = hi, par = c(10, 10), method = "SANN",
  control = list(tmax = 500, reltol = 0.1, temp = 50, trace = TRUE))

# GenSA package: GenSA
GenSA::GenSA(fn = hi, par = c(10, 10), lower = c(-40, -40), upper = c(40, 40),
  control = list(temperature = 50, nb.stop.improvement = 30, maxit = 500))
```

Since we have a multimodal optimization problem with multiple equal solutions, evaluation of solutions quality is composed of response accuracy and covariate combination. With fixed starting parameters, the methods should be able to find all possible solutions. We defined the problem to be solved with sufficient accuracy when the response was ≤ 0.01 . We also looked at the frequency distribution of the covariate combination after minimization. Subsequent to investigation of quality, we also compared the efficiencies by measuring calculation times using `microbenchmark`.

It could be seen that parameterization of NM was quite easy. It only needed a vector with starting values. The other functions needed much more settings. With view to accuracy each method performed well. All functions returned in mean of 10,000 calls responses ≤ 0.01 . With view to frequency distribution, the functions performed indifferent (Table 1). `optim_sa` and `optim` (SA) returned each

Table 1: Relative frequencies of covariate combinations in % after optimization for the 4 examined methods. Number of repetitions: 10,000. We used the parameters given in the example except for deactivated trace option.

Method	Result (rounded)			
	{-2.8, 3.1}	{3.0, 2.0}	{3.6, -1.8}	{-3.8, -3.3}
optim_sa	22.19	33.49	28.05	16.27
optim (SA)	25.91	30.89	24.08	19.12
GenSA	0.00	0.00	0.00	100.00
optim (NM)	0.00	0.00	0.00	100.00

possible solutions. The combination {-3.8, -3.3} was consistently least frequent. GenSa and optim (NM), however, solely returned {-3.8, -3.3}. Further investigation revealed the solutions of GenSa and optim (NM) to be sensitive of the starting values. If GenSa and optim (NM) were parameterized with randomly drawn starting values, all 4 results would have been possible. Advantage of optim_sa and optim (SA) against GenSa and optim (NM) is, in this example, thus its independence from starting values.

As all functions were practically able to minimize equation 1, comparison of calculation times appears to be another important point for quality assessment. As expected, the direct search method optim NM was by far faster than all random search methods (Figure 1). The within-group ranking of random search methods revealed GenSA to be fastest. It was in average 3.5 times faster than optim_sa. The 2 functions able coping with equally valued optima (optim (SA) and optim_sa) were slower than GenSA (Table 1, Figure 1).

All functions were, to conclude, in general able to solve the problem. The flexible random search-grid of optim (SA) and optim_sa enabled archiving each of the 4 solutions. Practically, in case users are in doubt whether a problem has multiple solutions with equal responses, optim (SA) and optim_sa can simply be repeated without re-parameterization. If well-specified, they will return all possible solutions. They are thus advantageous for complex multimodal problems of that kind on the one hand, but slower on the other hand. Due to the multiple additional options, which all have to be called in the code, optim_sa is slowest. This example clearly reveals that higher flexibility and generality leads to significantly higher calculation times. Specific algorithms are advantageous for complex problems while more general functions are useful for optimization problems with simple responses.

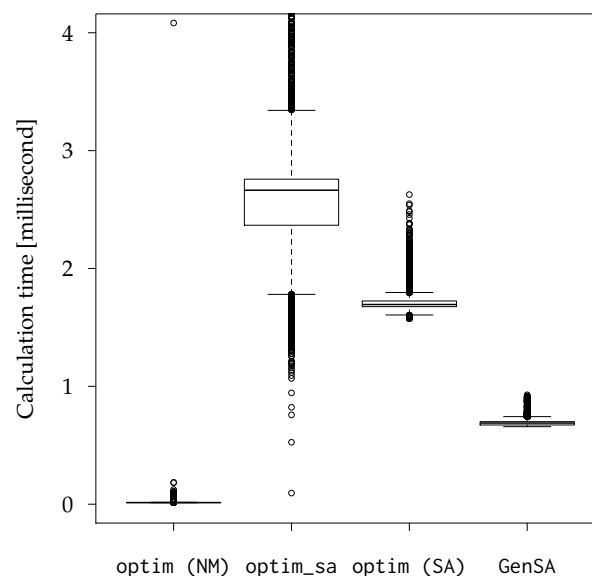


Figure 1: Calculation times of the 4 examined optimization algorithms. Note that the y-axis is truncated since every method showed outliers above 4 milliseconds. optim_sa and optim (SA) showed much outliers than optim (NM) and GenSA.

Himmelblau Function with discrete parameter space

A second example illustrating the advantage of flexibly defining the parameter spaces also bases on the function by [Himmelblau \(1972\)](#). If a user is interested in integer covariate combinations only, `vf` option can be used to restrict the parameter space accordingly. The following simple example shows a variation rule for integer programming problems. The simple `var_fun_int` from the example returns a vector of integer covariates varying in dimension of `vf` around the passed covariates `para_0`. The `fun_length` is passed explicitly, although it is implicitly given by the length of `para_0` because it might help simplifying the `vf`. `rf` and `temp` are optionally. If `vf` does not need a dynamic part, i. e. if the stochastic part shall be fixed during the entire iterations, `temp` and `rf` can separately be disabled by passing `NA`. If `vf` does not depend on `rf`, the option `dyn_rf` will not be useful any more.

```
# Define vf
var_fun_int <- function(para_0, fun_length, rf, temp = NA){
  ret_var_fun <- para_0 + sample.int(rf, fun_length, replace = TRUE) *
    ((rbinom(fun_length, 1, 0.5) * -2) + 1)
  return (ret_var_fun)
}

# Call optim_sa
int_programming <- optimization::optim_sa(fun = hi, start = (c(10, 10)), trace = TRUE,
  lower = c(-40, -40), upper=c(40, 40),
  control = list(t0 = 500, nlimit = 50, r = 0.85, rf = 3, ac_acc = 0.1,
    dyn_rf = TRUE, vf = var_func_int
  )
)
```

Calling the minimization function always led to the only integer solution 3, 2. The generic plot function of optimization helps interpreting the convergence and thus the solution quality as well as the algorithm behavior. Since the used example is 2-dimensional, a `contour_plot` could be created. It became obvious that only integer covariate combinations were calculated during optimization (Figure 2, right). Figure 2 additionally helps explaining the stochastic part. It becomes clear that though the response of iteration 10 (parameter combination {2, 2}) was already quite near the optimum, iteration 11 ended with a relatively worse intermediate result. The likelihood of keeping worse solutions shrined over time till it became practically 0 after iteration 25 (Figure 2, left).

`optim_sa` is advantageous against all other SA based algorithms when the parameter space of the optimization problem underlies extended restrictions. The user can define the valid parameter space within the lower and upper limits. To archive this, the user must define a changing rule in form of a R function. Users must thus examine their optimization problem very carefully and translate it into suitable functions. This example exhibits the properties of `optim_sa` as an example for specific optimization. Its parameterization is quite complex and time extensive but enables adopting the optimizer to problem specific needs. Other restrictions such as mixed integer problems may be defined analogously. `vf` can thus be used to flexibly restrict the parameter space. Further hints for interpretation can be found in the package documentation.

A complexer function?

Hat jemand eine Idee für eine weiteres Bsp.?

SVAR

Alex

Forest harvesting schedule optimization

Popularity of optimizing forestry activities, a traditionally knowledge-based field with optimization methods playing only minor role, is steadily rising. While Linear Programs are nowadays used in some states, e.g. Finland ([Redsven et al., 2012](#)), stochastic optimization programs are quite novel in forestry ([Kangas et al., 2015](#)). Our function is integral part of the first stochastic optimization software of forest operation in Germany and one of the first softwares worldwide. Optimization of forest harvesting planning thus represents an interesting and innovative practical example where `optim_sa` is recently used. `optimization` is part of the ForestPlanner based decision support software for forest enterprises by [Hansen and Nagel \(2014\)](#). ForestPlanner is a user front end for TreeGrowthOpenSourceSoftware

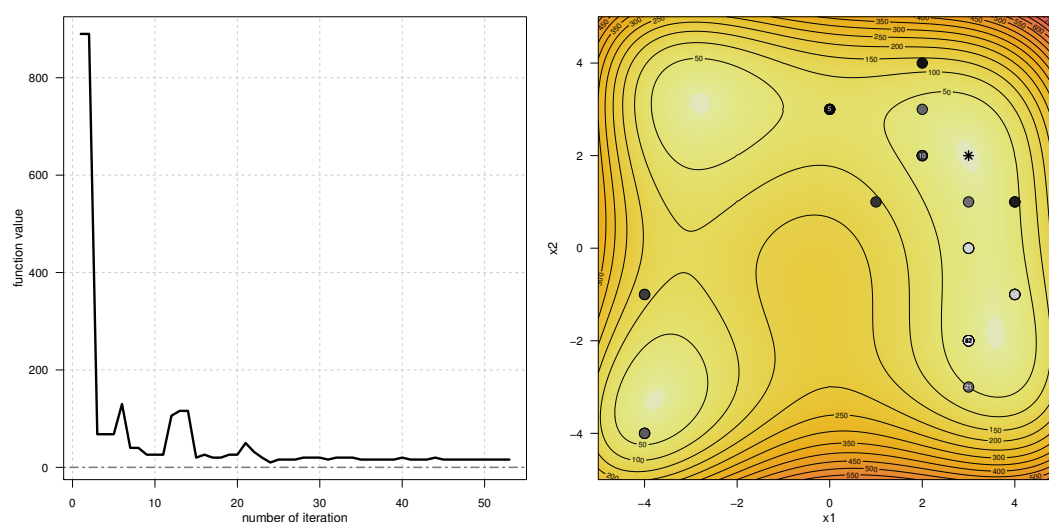


Figure 2: Examination plots created with the generic plot function. The left diagram shows the current optimal response over iteration of the outer loop. The left diagram displays the succession of the covariate values. The star points the covariate combination at optimum.

(TreeGrOSS) which is a complex Java written tree growth and yield simulation software used to forecast forest stands developments. It is a tool able to simulate forest enterprises with hundreds of forest stands simultaneously where the smallest simulation element is the single tree. Each tree in the system is thus simulated individually. Optimization of forest activities is accordingly not trivial since TreeGrOSS is a complex network of rules and functions which are predominantly nonlinear. The entire optimization process is composed of TreeGrOSS, [optimization](#) and a data warehouse. This multi-factorial composition implies high demand for flexibility of the optimization function. Loss function, which represents in this example the interface between the 3 elements of the optimization system, must be composed of R, Java (using [rJava](#)) and SQL (using [RPostgreSQL](#)). Main tasks of the interface are enabling communication between TreeGrOSS and optimization algorithm and rating the TreeGrOSS output in terms of costs and revenue such that the TreeGrOSS output is translated into an optimizable response. Flexibility of loss and variation functions is hence a prerequisite for forest harvesting schedule optimization via TreeGrOSS simulations. Each loss function call causes a TreeGrOSS simulation and a database operation. In order to save time, parts of the loss are therefore programmed parallel. The response is, accordingly, nonlinear and particularly non-continuous. Random search methods are of therefore favorable for the problem. Obligatory sustainability of forest stand treatment is also considered in form of restrictions. Each function call returns, next to the actual response, a sustainability index. This index is used to restrict the optimization by simply defining NA responses whenever sustainability is violated.

It showed that forest treatment optimization was actually possible using [optimization](#). We developed a loss function able translating the TreeGrOSS in- and output into interpretable variables for `optim_sa`. Sensitivity analysis using an exemplary forest enterprise comprised of 5 forest stands, with known global maximum, reinforced reliability of `optim_sa` for harvesting optimization. A solution sufficiently near the global maximum was found in arguable time on a standard personal computer. To test the practical usability, the optimization system was additionally tested on a real forest enterprise with 100 forest stands. The problem was solved within 12 hours using a cluster computer. Repeating the optimization 3 times led to equal responses but different harvesting volumes (thus covariate combinations). This again reveals the complexity of the problem and further reinforces the need for specific stochastic methods.

Discussion and outlook

It does not guarantee, of course, to find the global minimum, but if the function has many good near-optimal solutions, it should find one. In particular, this method is able to discriminate between gross behavior of the function and finer wrinkles. First, it reaches an area in the function domain where a global minimum should be present, following the gross behavior irrespectively of small local minima found on the way. It then develops finer details, finding a good, near-optimal local minimum, if not the global minimum itself.

Every method has advantages and disadvantages: GenSA for example is by far most efficient. It should be used for problems with 1 global optimum. `optim_sa` has its niche -> mult. equal opt. = flexible loss; NA returns -> enrichment of the optimization procedures in R This section may contain a figure such as Figure This file is only a basic article template. For full details of *The R Journal* style and information on how to prepare your article for submission, see the [Instructions for Authors](#).

Bibliography

- F. P. Agostini, D. D. O. Soares-Pinto, M. A. Moret, C. Osthoff, and P. G. Pascutti. Generalized simulated annealing applied to protein folding studies. *Journal of computational chemistry*, 27(11):1142–1155, 2006. [p1]
- E. Z. Baskent and G. A. Jordan. Forest landscape management modeling using simulated annealing. *Forest Ecology and Management*, 165(1):29–45, 2002. [p1]
- C. Blum and A. Roli. Metaheuristics in combinatorial optimization: Overview and conceptual comparison. *ACM Computing Surveys (CSUR)*, 35(3):268–308, 2003. [p1]
- G. Clarke and J. W. Wright. Scheduling of vehicles from a central depot to a number of delivery points. *Operations research*, 12(4):568–581, 1964. [p1]
- A. Corana, M. Marchesi, C. Martini, and S. Ridella. Minimizing multimodal functions of continuous variables with the “simulated annealing” algorithm. *ACM Trans. Math. Softw.*, 13(3):262–280, 1987. [p1, 2, 3, 4]
- G. B. Dantzig, D. R. Fulkerson, and S. M. Johnson. On a linear-programming, combinatorial approach to the traveling-salesman problem. *Operations Research*, 7(1):58–66, 1959. [p1]
- W. S. DeSarbo, R. L. Oliver, and A. Rangaswamy. A simulated annealing methodology for clusterwise linear regression. *Psychometrika*, 54(4):707–736, 1989. [p1]
- G. Dueck and T. Scheuer. Threshold accepting: a general purpose optimization algorithm appearing superior to simulated annealing. *Journal of computational physics*, 90(1):161–175, 1990. [p2]
- C. Geiger and C. Kanzow. Das nelder-mead-verfahren. *Numerische Verfahren zur Lösung unregestrierter Optimierungsaufgaben*, 1999. [p1]
- W. L. Goffe et al. Simann: A global optimization algorithm using simulated annealing. *Studies in Nonlinear Dynamics and Econometrics*, 1(3):169–176, 1996. [p1]
- J. Hansen and J. Nagel. *Waldwachstumskundliche Softwaresysteme auf Basis von TreeGrOSS: Anwendung und theoretische Grundlagen*. Beiträge aus der Nordwestdeutschen Forstlichen Versuchsanstalt / Nordwestdeutsche Forstliche Versuchsanstalt. - Göttingen : Univ.-Verl. Göttingen, 2007- ; 11Universitätsdrucke Göttingen. Univ.-Verl., Göttingen, 2014. ISBN 978-3-86395-149-8. [p7]
- J. H. Hansen. *Modellbasierte Entscheidungsunterstützung für den Forstbetrieb: Optimierung kurzfristiger Nutzungsoptionen und mittelfristiger Strategien unter Verwendung metaheuristischer Verfahren und parallelen Rechnens*. Cuvillier, Göttingen, 1. aufl. edition, 2012. [p2]
- D. M. Himmelblau. *Applied nonlinear programming*. McGraw-Hill Companies, 1972. [p5, 7]
- L. Ingber. Simulated annealing: Practice versus theory. *Mathematical and computer modelling*, 18(11): 29–57, 1993. [p1]
- A. Kangas, M. Kurttila, T. Hujala, K. Eyvindson, and J. Kangas. *Decision Support for Forest Management*. Number 30 in Managing Forest Ecosystems. Springer International Publishing, Cham, 2nd ed edition, 2015. [p7]
- S. Kirkpatrick, C. D. Gelatt, M. P. Vecchi, et al. Optimization by simulated annealing. *science*, 220(4598): 671–680, 1983. [p1, 2, 3, 5]
- C. Lin, K. Haley, and C. Sparks. A comparative study of both standard and adaptive versions of threshold accepting and simulated annealing algorithms in three scheduling problems. *European Journal of Operational Research*, 83(2):330–346, 1995. [p2]
- N. Metropolis, A. W. Rosenbluth, M. N. Rosenbluth, A. H. Teller, and E. Teller. Equation of state calculations by fast computing machines. *The journal of chemical physics*, 21(6):1087–1092, 1953. [p2]

- J. Nelder and R. Mead. A simplex method for function minimization. *Computer Journal*, 7(4):308–313, 1965. [p5]
- L. Pronzato, E. Walter, A. Venot, and J.-F. Lebruchec. A general-purpose global optimizer: Implimentation and applications. *Mathematics and Computers in Simulation*, 26(5):412–422, 1984. ISSN 03784754. doi: 10.1016/0378-4754(84)90105-8. [p1, 2, 3, 4]
- V. Redsven, H. Hirvelä, K. Härkönen, O. Salminen, and M. Siitonen. *MELA2012 Reference Manual (2nd edition)*. The Finnish Forest Research Institute, 2012. [p7]
- S. Theussl and H. W. Borchers. CRAN Task View: Optimization and Mathematical Programming. Oct. 2016. URL <https://CRAN.R-project.org/view=Optimization>. [p2]
- I. Wegener. Simulated annealing beats metropolis in combinatorial optimization. In *International Colloquium on Automata, Languages, and Programming*, pages 589–601. Springer, 2005. [p1]
- Y. Xiang, S. Gubian, B. Suomela, and J. Hoeng. Generalized simulated annealing for global optimization: the gensa package. *The R Journal Volume 5(1)*:13–29, June 2013, 2013. [p1, 2]

Author One

Affiliation

Address

Country

author1@work

Author Two

Affiliation

Address

Country

author2@work

Author Three

Affiliation

Address

Country

author3@work