


SESSION 6

Question 1: Escape Sequences and Special Characters

Question: Write and execute shell commands to handle escaped spaces, special symbols, and escape sequences.

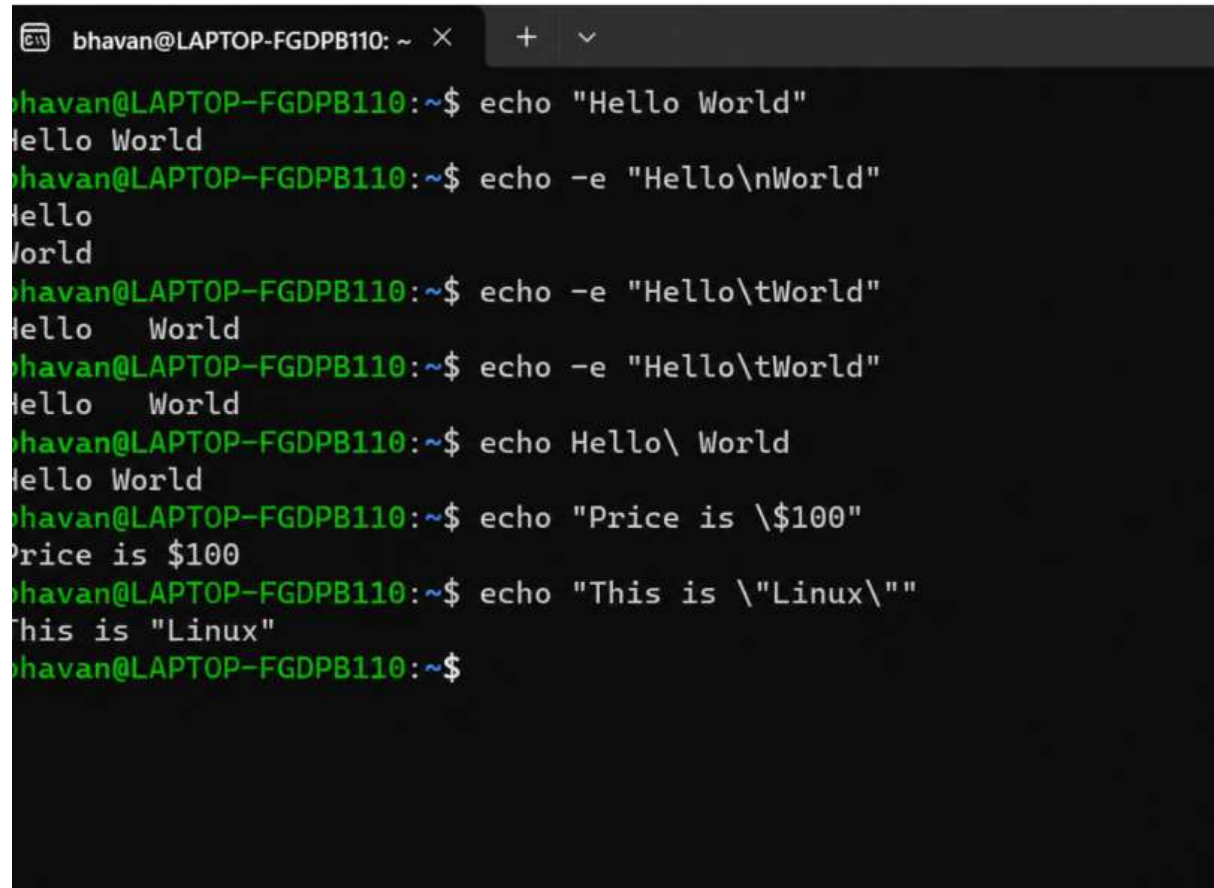

```
bhavan@LAPTOP-FGDPB110: ~ × + v
bhavan@LAPTOP-FGDPB110:~$ echo "Hello World"
Hello World
bhavan@LAPTOP-FGDPB110:~$ echo -e "Hello\nWorld"
Hello
World
bhavan@LAPTOP-FGDPB110:~$ echo -e "Hello\tWorld"
Hello    World
bhavan@LAPTOP-FGDPB110:~$ echo -e "Hello\tWorld"
Hello    World
bhavan@LAPTOP-FGDPB110:~$ echo Hello\ World
Hello World
bhavan@LAPTOP-FGDPB110:~$ echo "Price is \$100"
Price is $100
bhavan@LAPTOP-FGDPB110:~$ echo "This is \"Linux\""
This is "Linux"
bhavan@LAPTOP-FGDPB110:~$
```

Short Theory: `fork()` creates a child process and `exec()` is used by the child to execute another program. The parent can use `wait()` to wait for the child to complete.



```
GNU nano 2.2 child.c
echo "Hello World"
echo -e "Hello\nWorld"
echo -e "Hello\\ World"
echo Hello\\ World
echo "Price is \\$100"
echo "This is \\\"linux\\\""
echo 'Hello $USER'
echo "Hello $USER"
```

Short Theory: `fork()` creates a child process and `exec()` is used by the child to execute another program. The parent can use `wait()` to wait for the child to complete.