

| Feature | | | Scenario | | | | Step | | | | |
|--|----------|----|----------|----|---|----|------|----|----|--|--|
| Name | Duration | T | P | F | S | T | P | F | S | | |
| SalesforceLoginSepsisapp | 10.293 s | 1 | 0 | 1 | 0 | 4 | 0 | 1 | 3 | | |
| Validating the New Patient information | 10.516 s | 5 | 0 | 5 | 0 | 15 | 4 | 5 | 6 | | |
| Validitate Existing Morbidities | 0.135 s | 13 | 0 | 13 | 0 | 44 | 10 | 13 | 21 | | |
| Validating Medication and Vitals Information | 0.066 s | 9 | 0 | 9 | 0 | 27 | 9 | 9 | 9 | | |
| Validating the New Patient form with Valid/Invalid/MissingData | 0.103 s | 9 | 0 | 9 | 0 | 28 | 8 | 9 | 11 | | |
| Validitate Blood Profile upload files | 0.007 s | 1 | 0 | 1 | 0 | 3 | 0 | 1 | 2 | | |

FAIL & SKIP SCENARIOS -- 3 --

| # | Feature Name | Scenario Name | | | | |
|----|--|--|--|--|--|--|
| 1 | SalesforceLoginSepsisapp | Validate loginPage | | | | |
| 2 | Validating the New Patient information | Validating the PersonalInfo | | | | |
| 3 | | Validating the contactinfo | | | | |
| 4 | | Validating the EmergencyContact | | | | |
| 5 | Validating the ProviderInformation | | | | | |
| 6 | | Validating the EmergencyContact | | | | |
| 7 | Validitate Existing Morbidities | Validate Existing Morbidities available to chosen | | | | |
| 8 | | Validate the Undo button on Existing Morbidities | | | | |
| 9 | | Validate the Other textbox | | | | |
| 10 | | Validate the Allergy Checkbox | | | | |
| 11 | | Validate the Other textbox in Existing Infections | | | | |
| 12 | | Validate selecting Habits options from available to chosen | | | | |
| 13 | | Validate selecting Physical fitness options from available to chosen | | | | |

FAIL & SKIP SCENARIOS -- 4 --

| # | Feature Name | Scenario Name |
|----|--|--|
| 14 | Validitate Existing Morbidities | Validate selecting Family History options more than one from available to chosen |
| 15 | | Validate selecting Family History left arrow from chosen to available |
| 16 | | Validate Fitness Frequency DropDown |
| 17 | | Validate the Surgeries Checkbox |
| 18 | | Validate Immunization DropDown |
| 19 | | Validate the International Travel Checkbox |
| 20 | Validating Medication and Vitals Information | The Patient is logged in to Saleforce app(Sepsis) |
| 21 | | Validate Temperature |
| 22 | | Validate Heart Rate |
| 23 | | Validate Respiratory Rate |
| 24 | | Validate BP |
| 25 | | Validate Glucose |

FAIL & SKIP SCENARIOS -- 5 --

| # | Feature Name | Scenario Name |
|----|--|---|
| 26 | Validating Medication and Vitals Information | Validate Glucose Value |
| 27 | | Validate WBC |
| 28 | | Validate Save Button |
| 29 | Validating the New Patient form with Valid/Invalid/MissingData | Validate the patient information form submission with missing data |
| 30 | | Validate the patient information form submission with invalid phonefield |
| 31 | | Validate the patient information form submission with invalid character |
| 32 | | Validate the patient information form submission with invalid data for BP |
| 33 | | Validate the patient information form submission with invalid data |
| 34 | | Validate the patient information form submission with invalid data |
| 35 | | Validate patient information form submission with invalid data |
| 36 | | Validate patient information form submission with valid data for risk of Sepsis |
| 37 | | Validate attendance form submission with valid data for Critical risk |
| 3/ | | valuate attenuance form submission with valid data for Critical risk |

FAIL & SKIP SCENARIOS -- 6 --


| # Feature Name | Scenario Name |
|---------------------------------------|---------------------------------------|
| Validitate Blood Profile upload files | Validitate Blood Profile upload files |

| TAG | | Scei | nario | | | Fea | ture | |
|--|----|------|-------|---|---|-----|------|---|
| Name | T | P | F | S | T | P | F | S |
| @TS_01LoginPage | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @Login | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_01_ValidatePersonalInfo | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @NewPatientInformation | 5 | 0 | 5 | 0 | 1 | 0 | 1 | 0 |
| @TS_02_ValidateContactInfo | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_03_ValidateEmergencycontact | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_04_ValidateProviderInformation | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_05_ValidateMedicalHistory | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_01ValidateExistingMorbidities-availabletochosen | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @ExistingMorbidities | 13 | 0 | 13 | 0 | 1 | 0 | 1 | 0 |
| @TS_02ValidateUndoExistingMorbidities | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_03ValidateTheotherTextbox | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_04ValidateTheAllergyCheckbox | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_05ValidateTheotherTextboxinExistingInfections | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_06ValidateHabitsOption-availabletochosen | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_07ValidatePhysicalFitnessoption-availabletochosen | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_08ValidateFamilyHistory-moreoptionsavailabletochosen | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |

| TAG | | Scei | nario | | | Fea | ture | |
|--|---|------|-------|---|---|-----|------|---|
| Name | T | P | F | S | Т | P | F | S |
| @TS_09ValidateFamilyHistory-leftarrowbtn | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_10ValidateFitnessFrequencyDropDown | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_11ValidateTheSurgeriesCheckbox | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_12ValidateImmunizationDropDown | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_13ValidateInternationalTravelCheckbox | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_02Medication | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @Vitals | 9 | 0 | 9 | 0 | 1 | 0 | 1 | 0 |
| @TS_03Temparature | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_04HeartRate | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_05RespiratoryRate | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_06BP | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_07Glucose | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_08GlucoseValue | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_09WBC | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_10ValidateSaveButton | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @PatientInformationWithValidandInvalidAndMissingData | 9 | 0 | 9 | 0 | 1 | 0 | 1 | 0 |
| @TS_01ValidatingtheNewPatientformWithMissingData | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |


| TAG | | Scei | nario | | | Fea | ture | |
|---|---|------|-------|---|---|-----|------|---|
| Name | T | P | F | S | T | P | F | S |
| @TS_02ValidatingtheNewPatientformWithInvalidData | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_03ValidatingtheNewPatientformWithInvalidCharacter | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_04ValidatingtheNewPatientformWithInvalidBPdata | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_05ValidatingtheNewPatientformWithInvalidDOB | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_06ValidatingtheNewPatientformWithInvalidExisMorb | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_07ValidatingtheNewPatientformWithInValidEmail | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_08ValidatingtheNewPatientformWithValidDataForSepsisStatus | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_09ValidatingtheNewPatientformWithValidDataForCritical | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TS_01ValiditateBloodProfileuploadfiles | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @UploadBloodReport | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |

FEATURES SUMMARY -- 10 --

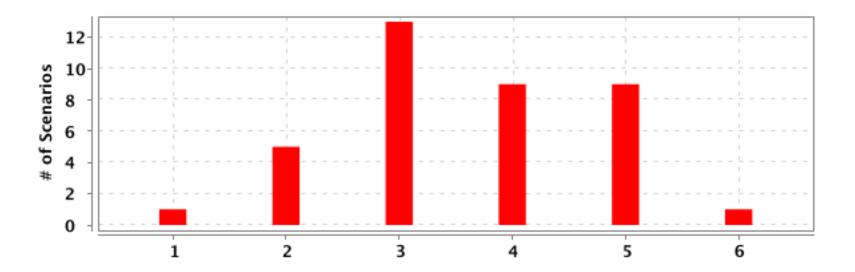


| # | Feature Name | T | P | F | S | Duration |
|---|--|----|---|----|---|----------|
| 1 | SalesforceLoginSepsisapp | 1 | 0 | 1 | 0 | 10.293 s |
| 2 | Validating the New Patient information | 5 | 0 | 5 | 0 | 10.516 s |
| 3 | Validitate Existing Morbidities | 13 | 0 | 13 | 0 | 0.135 s |
| 4 | Validating Medication and Vitals Information | 9 | 0 | 9 | 0 | 0.066 s |
| 5 | Validating the New Patient form with Valid/Invalid/MissingData | 9 | 0 | 9 | 0 | 0.103 s |
| 6 | Validitate Blood Profile upload files | 1 | 0 | 1 | 0 | 0.007 s |

SCENARIOS SUMMARY -- 11 --

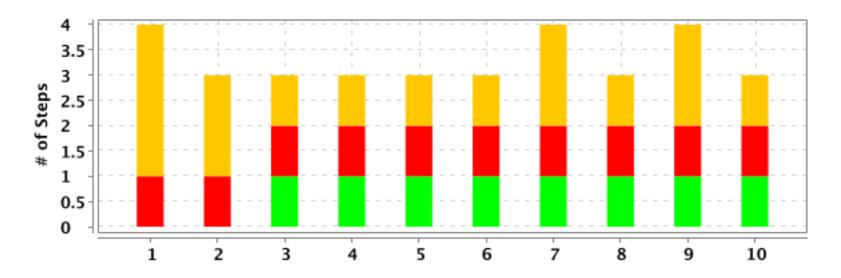

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--|---|---|---|---|---|----------|
| 1 | SalesforceLoginSepsisapp | Validate loginPage | 4 | 0 | 1 | 3 | 10.292 s |
| 2 | Validating the New Patient information | Validating the PersonalInfo | 3 | 0 | 1 | 2 | 10.433 s |
| 3 | | Validating the contactinfo | 3 | 1 | 1 | 1 | 0.009 s |
| 4 | | Validating the EmergencyContact | 3 | 1 | 1 | 1 | 0.006 s |
| 5 | | Validating the ProviderInformation | 3 | 1 | 1 | 1 | 0.005 s |
| 6 | | Validating the EmergencyContact | 3 | 1 | 1 | 1 | 0.005 s |
| 7 | Validitate Existing Morbidities | Validate Existing Morbidities available to chosen | 4 | 1 | 1 | 2 | 0.006 s |
| 8 | | Validate the Undo button on Existing Morbidities | 3 | 1 | 1 | 1 | 0.004 s |
| 9 | | Validate the Other textbox | 4 | 1 | 1 | 2 | 0.005 s |
| 10 | | Validate the Allergy Checkbox | 3 | 1 | 1 | 1 | 0.004 s |


SCENARIOS SUMMARY -- 12 --

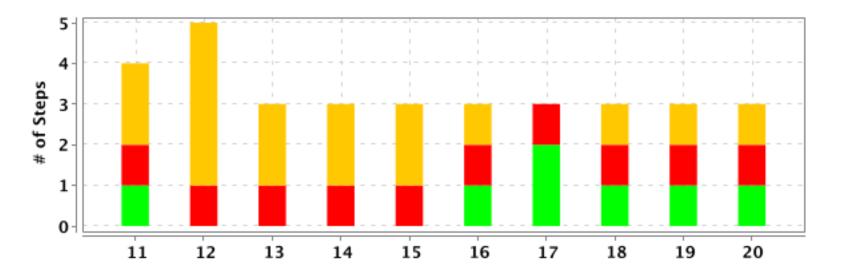

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|---------------------------------|--|---|---|---|---|----------|
| 11 | Validitate Existing Morbidities | Validate the Other textbox in Existing Infections | 4 | 1 | 1 | 2 | 0.005 s |
| 12 | | Validate selecting Habits options from available to chosen | 5 | 0 | 1 | 4 | 0.004 s |
| 13 | | Validate selecting Physical fitness options from available to chosen | 3 | 0 | 1 | 2 | 0.004 s |
| 14 | | Validate selecting Family History options more than one from available to chosen | 3 | 0 | 1 | 2 | 0.004 s |
| 15 | | Validate selecting Family History left arrow from chosen to available | 3 | 0 | 1 | 2 | 0.008 s |
| 16 | | Validate Fitness Frequency DropDown | 3 | 1 | 1 | 1 | 0.004 s |
| 17 | | Validate the Surgeries Checkbox | 3 | 2 | 1 | 0 | 0.007 s |
| 18 | | Validate Immunization DropDown | 3 | 1 | 1 | 1 | 0.004 s |
| 19 | | Validate the International Travel Checkbox | 3 | 1 | 1 | 1 | 0.004 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--|---|---|---|---|---|----------|
| 20 | Validating Medication and Vitals Information | The Patient is logged in to Saleforce app(Sepsis) | 3 | 1 | 1 | 1 | 0.003 s |

SCENARIOS SUMMARY

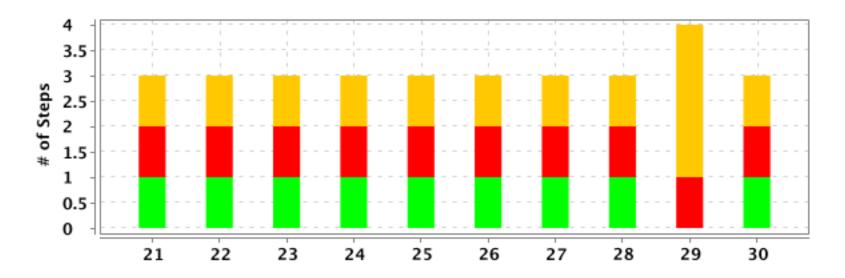


-- 14 --

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--|--|---|---|---|---|----------|
| 21 | Validating Medication and Vitals Information | Validate Temperature | 3 | 1 | 1 | 1 | 0.003 s |
| 22 | | Validate Heart Rate | 3 | 1 | 1 | 1 | 0.003 s |
| 23 | | Validate Respiratory Rate | 3 | 1 | 1 | 1 | 0.003 s |
| 24 | | Validate BP | 3 | 1 | 1 | 1 | 0.004 s |
| 25 | | Validate Glucose | 3 | 1 | 1 | 1 | 0.003 s |
| 26 | | Validate Glucose Value | 3 | 1 | 1 | 1 | 0.004 s |
| 27 | | Validate WBC | 3 | 1 | 1 | 1 | 0.004 s |
| 28 | | Validate Save Button | 3 | 1 | 1 | 1 | 0.005 s |
| 29 | Validating the New Patient form with Valid/Invalid/MissingData | Validate the patient information form submission with missing data | 4 | 0 | 1 | 3 | 0.011 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--------------|--|---|---|---|---|----------|
| 30 | | Validate the patient information form submission with invalid phonefield | 3 | 1 | 1 | 1 | 0.005 s |

SCENARIOS SUMMARY -- 16 --

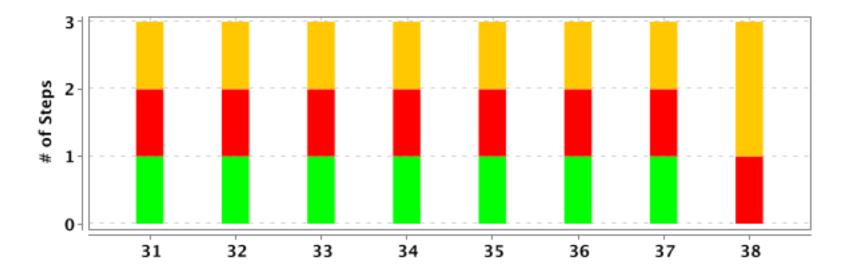

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--|---|---|---|---|---|----------|
| 31 | Validating the New Patient form with Valid/Invalid/MissingData | Validate the patient information form submission with invalid character | 3 | 1 | 1 | 1 | 0.005 s |
| 32 | | Validate the patient information form submission with invalid data for BP | 3 | 1 | 1 | 1 | 0.006 s |
| 33 | | Validate the patient information form submission with invalid data | 3 | 1 | 1 | 1 | 0.005 s |
| 34 | | Validate the patient information form submission with invalid data | 3 | 1 | 1 | 1 | 0.009 s |
| 35 | | Validate patient information form submission with invalid data | 3 | 1 | 1 | 1 | 0.005 s |
| 36 | | Validate patient information form submission with valid data for risk of Sepsis | 3 | 1 | 1 | 1 | 0.004 s |
| 37 | | Validate attendance form submission with valid data for Critical risk | 3 | 1 | 1 | 1 | 0.005 s |


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|---------------------------------------|---------------------------------------|---|---|---|---|----------|
| 38 | Validitate Blood Profile upload files | Validitate Blood Profile upload files | 3 | 0 | 1 | 2 | 0.007 s |

DETAILED SECTION -- 18 --

SalesforceLoginSepsisapp

| FAILED | DURATION - 10.293 s | Scenarios | | Steps | |
|----------------------|---------------------|-----------|---|-----------|-------|
| | | Total - 1 | | Total - 4 | |
| / 10:32:02.024 PM // | ′ 10:32:12.317 PM / | Pass - 0 | 1 | Pass - 0 | 4 |
| | | Fail - 1 | | Fail - 1 | 🖊 ' 🕖 |
| | | Skip - 0 | | Skip - 3 | |
| | | | | | |

Validate loginPage

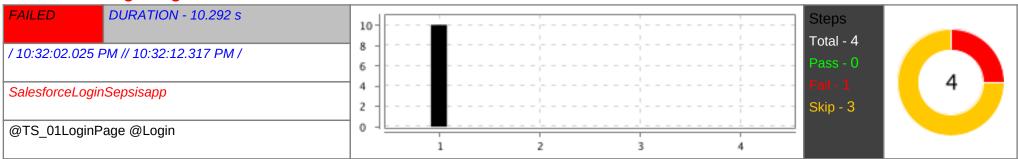


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given The patient is on Signin page of salesforce application | FAILED | 10.037 s |
| | org.openqa.selenium.TimeoutException: timeout: Timed out receiving message from renderer: -0.005 (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, get {url=https://login.salesforce.com/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:490) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |

DETAILED SECTION -- 19 --


| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:304) | | |
| | at pageObjects.SalesforceLoginSepsis.SalesForcelogin_page(SalesforceLoginSepsis.java:48) | | |
| | at stepDefinitions.SalesforceLoginSepsisSD.the_patient_is_on_signin_page_of_salesforce_application(SalesforceLoginSepsisSD.java:24) | | |
| | at ?.The patient is on Signin page of salesforce application(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/ | | |
| | features/01loginSepsis.feature:7) | | |
| | * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | PASSED | 0.242 s |
| | My screenshot | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| 2 | When The patient enter valid "username" and "password" | SKIPPED | 0.002 s |
| 3 | And The user click on login button | SKIPPED | 0.000 s |
| 4 | Then The user redirected to SalesForceHomepage | SKIPPED | 0.001 s |

Validating the New Patient information



Validating the PersonalInfo

DETAILED SECTION -- 20 --

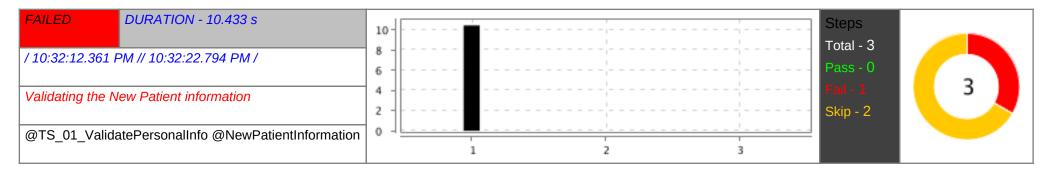

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on New patient form | FAILED | 10.424 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b" System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//div/contains(text), 'New']]] Capabilities {acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.1.09, chrome: {chromedriverVersion: 120.0.6099.1.09 (3419140ab66, userDataDir: /var/folders/375_bhvqb55bq), fedcmaccounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990/netvoc, secdpVersion: 120.0.6099.1.09, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:redBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:reff true, webauthn:vitualAuthenticators: true/Session ID: 0f4bebbda76999937c6907132ccdbe50e at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:490) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:490) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.bttpCommandExecutor.ipava:191 at org.openqa.selenium.remote.bttpCommandExecutor.ipava:191 at org.openqa.selenium.remote.emote.w6c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:171) at org.openqa.selenium.remote.emote.WebDriver. | PAILED | 10.424 S |

DETAILED SECTION -- 21 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at java.base/java.lang.StringBuilder.append(StringBuilder.java:173) at org.openqa.selenium.support.ui.ExpectedConditions\$10.toString(ExpectedConditions.java:295) at java.base/java.lang.String.valueOf(String.java:4216) at java.base/java.lang.StringBuilder.append(StringBuilder.java:173) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:227) at driverFactory.AbstractComponents.waitForElementToappear(AbstractComponents.java:26) at pageObjects.SalesforceLoginSepsis.selectNew(SalesforceLoginSepsis.java:88) at stepDefinitions.PatientObjectSD.patient_is_on_new_patient_form(PatientObjectSD.java:31) at ?.Patient is on New patient form(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/02patientObject.feature:6) * Not displayable characters are replaced by '?'. | | |
| | AFTER STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.004 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b" System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [Of4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109, old (al. 11.0.6099.109), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy. Proxy(), secdp: ws://localhost:50990/devtoc, secdp/Version: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {(implicit: 0, pageLoad: 300000, script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:credBlob: true, webauthn:extension:inlpinLength: true, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:specifical plants. True, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:credBlob: true, sebauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jaki.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/java.lang.reflect.Constructor.newInstance(WithCaller(Constructor.java:490) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.Serv | | |
| | When Patient enters "Kelly", "Rob", Gender, Race, "11/1/2023" and "atena4656" on personal information | SKIPPED | 0.001 s |
| 2 | | | |

DETAILED SECTION -- 22 --

Validating the contactinfo


| FAILED DURATION - 0.009 s | 0.15 Steps |
|---|-----------------|
| / 10:32:22.820 PM // 10:32:22.829 PM / | 0.1 - Total - 3 |
| / 10.32.22.020 PW // 10.32.22.029 PW / | Pass - 1 |
| Validating the New Patient information | os |
| | Skip - 1 |
| @TS_02_ValidateContactInfo @NewPatientInformation | 0 1 |
| | 1 2 3 |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on same patient form | PASSED | 0.001 s |
| 2 | When Patient enters the "815-456-9999", "kelly@gmail.com", "United States", "Egmore St","Bayarea" and "77433" on contact information | FAILED | 0.004 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b" System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement (sing=xpath, value=//input[@name=Phone_c]]) Capabilities {acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109 (shot90), chrome: chrome-chrome-chrome, browserVersion: 120.0.6099.109, chrome: chromedprevPersion: 120.0.6099.109, ad19140a666, userDataDir: /var/folders/r3/5_bhvqb55bq), fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: (implicit: 0, pageLoad: 300000, script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:vetension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:vetension:prf: true, vetension:prf: true, vetension:prf: true, vetension:prf: tr | | |

| | Step / Hook Details | Status | Duration |
|------------------------------------|--|--------|----------|
| T | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| | at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) | | |
| | at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) | | |
| | at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) | | |
| | at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) | | |
| | at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| | at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| | at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) | | |
| | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| | at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) | | |
| | at pageObjects.PatientObject.ContactInfo(PatientObject.java:156) | | |
| | at stepDefinitions.PatientObjectSD.patient_enters_the_and_on_contact_information(PatientObjectSD.java:64) | | |
| | at ?.Patient enters the "815-456-9999" , "kelly@gmail.com", "United States", "Egmore St","Bayarea" and "77433" on contact | | |
| - 1 | nformation(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/02patientObject.feature:18) | | |
| * | Not displayable characters are replaced by '?'. | | |
| 1 | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.002 s |
| (1 f r s | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: 0f4beb0afc998937c6907132cdbe50e, screenshot {}} Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, edcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceConstructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:171) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | Then Patient can see the "815-456-9999", "kelly@gmail.com", "United States", "Egmore St", "Bayarea" and "77433" entered on contact information | SKIPPED | 0.000 s |

Validating the EmergencyContact

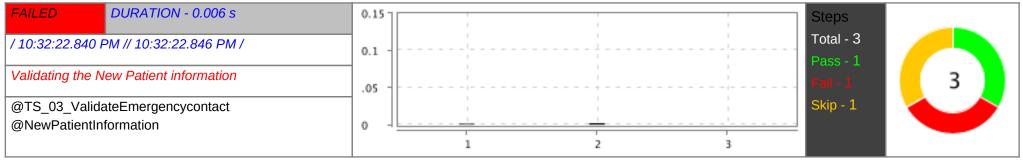

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on same patient form | PASSED | 0.001 s |
| 2 | When Patient enters "Kiya" and "716-456-7890" | FAILED | 0.002 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//input[@name=Full_Name_c']} Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:prf: true, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:prf: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: tru | | |


DETAILED SECTION -- 25 --

| | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| T | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| 1 | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| 1 | at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) | | |
| l | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| l | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| l | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| l | at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) | | |
| l | at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) | | |
| l | at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) | | |
| l | at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) | | |
| l | at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| l | at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| l | at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) | | |
| l | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| l | at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) | | |
| ı | at org.openga.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) | | |
| 1 | at pageObjects.PatientObject.emergencyInfo(PatientObject.java:203) | | |
| | at stepDefinitions.PatientObjectSD.patient_enters(PatientObjectSD.java:87) | | |
| 1 | at ?.Patient enters "Kiya" and "716-456-7890"(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/ | | |
| | 02patientObject.feature:29) | | |
| | * Not displayable characters are replaced by '?'. | | |
| † | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| ľ | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found | | |
| l | (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | | |
| l | 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openga.selenium.chrome.ChromeDriver Command: | | |
| l | [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: | | |
| l | 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, | | |
| l | fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: | | |
| l | normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, | | |
| l | strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, | | |
| l | webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, | | |
| ı | webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | l . | |

DETAILED SECTION -- 26 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | Then Patient can see the "Kiya" and "716-456-7890"entered on emergency contact info | SKIPPED | 0.000 s |

Validating the ProviderInformation

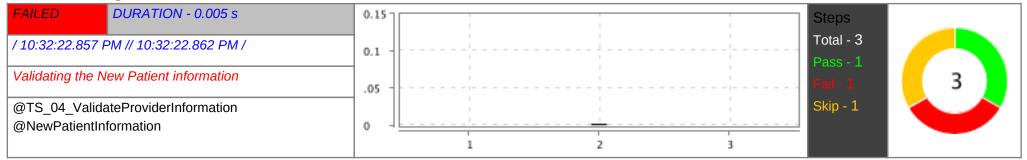

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Patient is on same patient form | PASSED | 0.000 s |
| 2 | When Patient enters "Klein" and "321-456-7890" and "BrightClinic" and "klein@gmail.com" | FAILED | 0.002 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//input[@name='Doctors_Namec']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |


DETAILED SECTION -- 27 --

| # | Step / Hook Details | Status | Duration |
|-----|--|--------|----------|
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| | at jdk.proxy2/jdk.proxy2.\$Proxy30.click(Unknown Source) | | |
| | at pageObjects.PatientObject.providerInformation(PatientObject.java:229) | | |
| | at stepDefinitions.PatientObjectSD.patient_enters_and_and(PatientObjectSD.java:104) | | |
| | at ?.Patient enters "Klein" and "321-456-7890" and "BrightClinic" and "klein@gmail.com"(file:///Users/kalai/Documents/GitLab/Sepsis- | | |
| | Application/src/test/resources/features/02patientObject.feature:41) | | |
| | * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.002 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found | | |
| | (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | | |
| | 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: | | |
| | [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: | | |
| | 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, | | |
| | fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: | | |
| | normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, | | |
| 1 | webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, | | |
| | webautini.extension.credbiob. true, webautini.extension.largebiob. true, webautini.extension.liniirini.ength. true, webautini.extension.ph. true, webautini.extension.credbiob. true, webautini.extension.ph. true, webautini.extension.credbiob. | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:489) | | |
| | at org.openga.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.w3cHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.w3cHttpResponseCodec.decode(w3cHttpResponseCodec.java.133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java.133) | | |
| | | | |
| - 1 | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |

DETAILED SECTION -- 28 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) | | |
| | at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | Then Patient can see the "Klein" and "321-456-7890" and "BrightClinic" and "klein@gmail.com" entered on provider information | SKIPPED | 0.000 s |

Validating the EmergencyContact

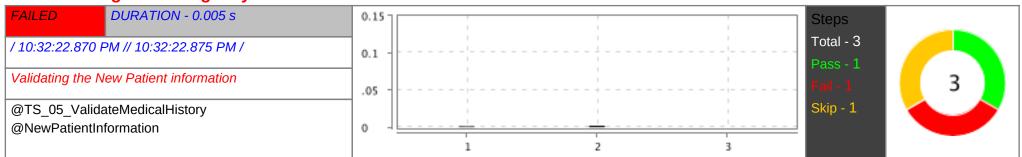

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on same patient form | PASSED | 0.001 s |
| 2 | When Patient enters "12.00" and "60" on medical history | FAILED | 0.002 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//button[contains(@aria-label,'Height')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109} (3419140ab66, userDataDir: /var/folders/r3/5_bbvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |

DETAILED SECTION -- 29 --

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| | at org.openga.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| | at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) | | |
| | at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) | | |
| | at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) | | |
| | at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) | | |
| | at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| | at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| | at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) | | |
| | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| | at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) | | |
| | at pageObjects.PatientObject.medicalHistory(PatientObject.java:258) | | |
| | at stepDefinitions.PatientObjectSD.patient_enters_and_on_medical_history(PatientObjectSD.java:123) | | |
| | at ?.Patient enters "12.00" and "60" on medical history(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/ | | |
| | 02patientObject.feature:52) | | |
| | * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found | | |
| | (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | | |
| | 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: | | |
| | [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: | | |
| | 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, | | |
| | fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: | | |
| | normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, | | |
| | strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, | | |
| | webautin.extension.credBiob. true, webautin.extension.largeBiob. true, webautin.extension.minPinLength. true, webautin.extension.pri. true, webautin.extensi | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.baserjava.iang.renect.constructor.newmstancevvitricalier(Constructor.java.499) | | |


DETAILED SECTION -- 30 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:325) at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | Then Patient can see the "12.00" and "60" entered on medical history | SKIPPED | 0.000 s |

Validitate Existing Morbidities

| FAILED | DURATION - 0.135 s | Scenarios | | Steps | |
|----------------|-------------------------|------------|----|------------|----|
| | | Total - 13 | | Total - 44 | |
| / 10:32:22.884 | PM // 10:32:23.019 PM / | Pass - 0 | 13 | Pass - 10 | 44 |
| | | Fail - 13 | | Fail - 13 | |
| | | Skip - 0 | | Skip - 21 | |

Validate Existing Morbidities available to chosen

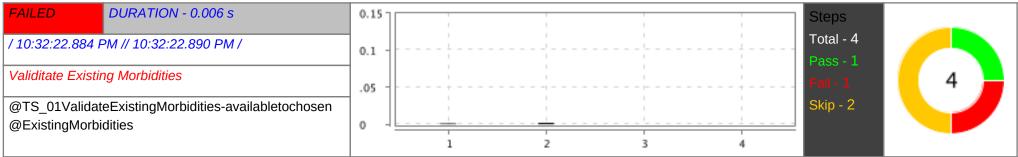

| # | Step / Hook Details | | Duration |
|---|--|--------|----------|
| 1 | Given Patient is on available list box of existing morbidities | PASSED | 0.001 s |
| 2 | When Patient selects an existing morbidity in the list available | FAILED | 0.002 s |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found | | |
| | (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | | |
| | 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: | | |
| | [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=(//span[@title='High Cholesterol'])[1]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109} | | |
| | (3419140ab66, userDataDir: /var/folders/r3/5 bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: | | |
| | localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: | | |
| | ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, | | |
| | pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, | | |
| | webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: | | |
| | true} Session ID: 0f4beb0afc998937c6907132ccdbe50e | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| | at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) | | |
| | at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) | | |
| | at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) | | |
| | at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) | | |
| | at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| | at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| | at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) | | |
| | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| | at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) | | |
| | at pageObjects.ExistingMorbidities.selectExistingMorbidity(ExistingMorbidities.java:220) | | |
| | at stepDefinitions.ExistingMorbiditiesSD.patient_selects_an_existing_morbidity_in_the_list_available(ExistingMorbiditiesSD.java:32) | | |
| | at ?.Patient_selects an existing morbidity in the list available(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/ | | |
| | features/03existingMorbidities.feature:7) | | |

DETAILED SECTION -- 32 --

| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities (acceptInsecuceTest: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109, calphost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.Constructor.newInstance(Unknown Source) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org | | |
| 3 | at applicationHooks.AppHooks.afterstep(AppHooks.java:45) And clicks the right arrow | SKIPPED | 0.000 s |
| 4 | Then Patient should able to see the selected option "High Cholesterol" in the chosen list box | SKIPPED | 0.000 s |
| _4 | Then Patient should able to see the selected option. High Cholesterol. In the chosen list box | SKIPPED | 0.000 S |

Validate the Undo button on Existing Morbidities

DETAILED SECTION -- 33 --

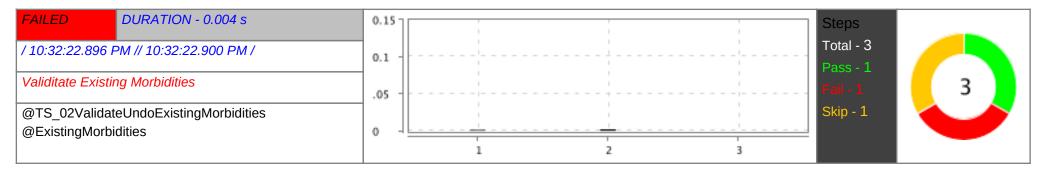

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on chosen list box of existing morbidities | PASSED | 0.001 s |
| 2 | When Patient clicks on undo button | FAILED | 0.002 s |
| 2 | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b" System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: (D4beb0afc998937c6907132cdbe50e, findElement (Jusing=xpath, value=//buttonf(@title=Undo Existing Morbidities])] Capabilities (acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: (chromedriverVersion: 120.0.6099.109) (3419140ab66, userDataDir: /var/folders/r3/5_ bhvqb55bq), fedcm:accounts: true, goog:chromeOptions: (debuggerAddress: localhost:50990), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoc, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strict=lieInteractablity: false, timeouts: (implicit: 0, pageLoad: 300000, script: 300000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:prf: tru | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) | | |
| | at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) | | |
| | at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) | | |
| | at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| | at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| | at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) | | |
| | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| | at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) | | |
| | at pageObjects.ExistingMorbidities.ClickOnUndo(ExistingMorbidities.java:236) | | |
| | at stepDefinitions.ExistingMorbiditiesSD.patient_clicks_on_undo_button(ExistingMorbiditiesSD.java:57) | | |
| | at ?.Patient clicks on undo button(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/03existingMorbidities. | | |
| | feature:14) | | |
| | * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | | |
| | 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: | | |
| | 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5 bhvqb55bq}, | | |
| | fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: | | |
| | normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, | | |
| | strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, | | |
| | webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, | | |
| | webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) | | |
| | at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| | Then Patient should be able to see the error msg "An option must be selected" | SKIPPED | 0.000 s |

DETAILED SECTION -- 35 --

Validate the Other textbox


| FAILED DURATION - 0.005 s | 0.15 Steps |
|--|--------------|
| / 10:22:22 007 DM // 10:22:22 012 DM / | Total - 4 |
| / 10:32:22.907 PM // 10:32:22.912 PM / | 0.1 Pass - 1 |
| Validitate Existing Morbidities | .os |
| | Skip - 2 |
| @TS_03ValidateTheotherTextbox @ExistingMorbidities | 0 - |
| | 1 2 3 4 |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on available list box of existing morbidities | PASSED | 0.001 s |
| 2 | When Patient selects "other" as an existing morbidity in the list available | FAILED | 0.002 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beba6re99893766907132ccdbe50e, findElement (using-xpath, value=/l/h3/span[@itle=Existing Morbidities']]] Capabilities (acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: (chromedpriors) (debuggerAddress: localhost:50990), networkConnectionEnabled: false, pageLoadStrategy: ormal, platformName: mac, proxy: Proxy(), secdp: ws://localhost:50990/devtoc, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: (implicit: 0, pageLoad: 300000, script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:prf: true, we | | |

| # | Step / Hook Details | Status | Duration |
|--------|---|--------|----------|
| | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) at pageObjects.ExistingMorbidities.ValidateExistMorbidityOther(ExistingMorbidities.java:246) at stepDefinitions.ExistingMorbiditiesSD.patient_selects_as_an_existing_morbidity_in_the_list_available(ExistingMorbiditiesSD.java:70) at ?.Patient selects "other" as an existing morbidity in the list available(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/ resources/features/03existingMorbidities.feature:20) * Not displayable characters are replaced by '?'. | | |
| \neg | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chromec.NromeDriver Command: [Ofdbeb0afce998937c6907132ccdbe50e, screensbot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdp/version: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true) Session ID: Ofdbeb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdx.lang.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(WithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:132) at org.openqa.selenium.remote.AttpCommandExecutor.invokeExecute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(PemoteWebDriver.java:675) | HAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | And clicks the right arrow of existing morbidities listbox | SKIPPED | 0.000 s |
| 4 | Then Patient should be able enter the "Sinuscitis" in the text box | SKIPPED | 0.000 s |

Validate the Allergy Checkbox

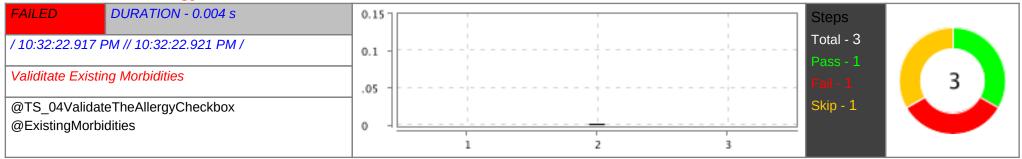


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on available list box of existing morbidities | PASSED | 0.000 s |
| 2 | When Patient selects the allergy check box | FAILED | 0.002 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//input[@type='checkbox' and @name='Allergiesc']]} Capabilities {acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109} (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jak.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.DelegatingConstructorAccessor1mpl.newInstance(DelegatingConstructorAccessor1mpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:191) at org.openqa.selenium.remote.service.DriverCommandExecu | | |

DETAILED SECTION -- 38 --

| _ | Step / Hook Details | Status | Duration |
|---------------|--|--------|----------|
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| | at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) | | |
| | at org.openga.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) | | |
| | at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) | | |
| | at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) | | |
| | at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| | at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| | at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) | | |
| | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| | at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) | | |
| | at pageObjects.ExistingMorbidities.clickAllergyBx(ExistingMorbidities.java:360) | | |
| | at stepDefinitions.ExistingMorbiditiesSD.patient_selects_the_allergy_check_box(ExistingMorbiditiesSD.java:85) | | |
| | at ?.Patient selects the allergy check box(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/ | | |
| | at the discretization and the discretization of the discretization | | |
| | 03existingMorbidities.feature:27) | | |
| | 03existingMorbidities.feature:27) * Not displayable characters are replaced by '?'. | | |
| \rightarrow | * Not displayable characters are replaced by '?'. | FAILED | 0.001 s |
| 7 | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found | FAILED | 0.001 s |
| 1 | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | FAILED | 0.001 s |
| | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: | FAILED | 0.001 s |
| | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: | FAILED | 0.001 s |
| | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, | FAILED | 0.001 s |
| | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: | FAILED | 0.001 s |
| - | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: | FAILED | 0.001 s |
| - | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, | FAILED | 0.001 s |
| - | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, | FAILED | 0.001 s |
| - | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, | FAILED | 0.001 s |
| - | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e | FAILED | 0.001 s |
| - | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | FAILED | 0.001 s |
| - | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | FAILED | 0.001 s |
| - | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptlnsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | FAILED | 0.001 s |
| - | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:burninPinLength: true, webauthn:extension:pff: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessorImpl.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | FAILED | 0.001 s |
| = | * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, scrit; 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | Then Patient should be able enter the text "peanuts" in the text box | SKIPPED | 0.000 s |

Validate the Other textbox in Existing Infections

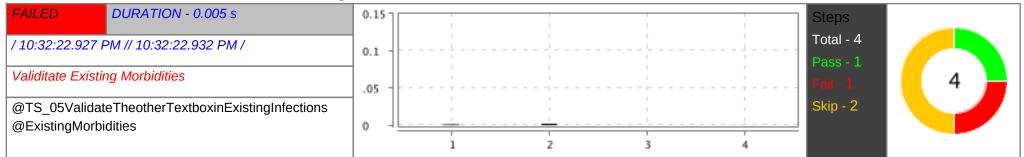


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on available list box of existing morbidities | PASSED | 0.001 s |
| 2 | When Patient selects an existing infection in the list available | FAILED | 0.002 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//div[@class='slds-dueling-list_options']//li[8]//span[@title='Others']}] Capabilities {acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |

DETAILED SECTION -- 40 --

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.ElementLocationsElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(RemoteWebDriver.java:359) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) at org.openqa.selenium.support.pagefactory.DefaultElement(RemoteWebDriver.java:353) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:39) at java.base/java.util.stream.AbstractPipeline.evaluate(Sequential(ReduceOps.java:921) at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:34) at java.base/java.util.stream.ReferencePipeline.coplett(ReferencePipeline.java:234) at java.base/java.util.stream.ReferencePipeline.collett(ReferencePipeline.java:234) at java.base/java.util.stream.ReferencePipeline.collett(ReferencePipeline.java:262) at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) at pageObjects.ExistingMorbidities.ValidateExistInfOther(E | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | And clicks the right arrow of existing Infections listbox | SKIPPED | 0.000 s |
| 4 | Then Patient should be able enter the "Pneumonia" in the text box of existing infections | SKIPPED | 0.000 s |

Validate selecting Habits options from available to chosen

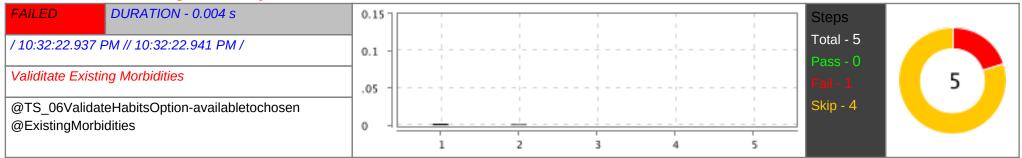


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient selects a habit in the list available | FAILED | 0.002 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//span[@title='Alcohol']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | | |

| # | Step / Hook Details | Status | Duration |
|--------|--|--------|----------|
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| | at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) | | |
| | at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) | | |
| | at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) | | |
| | at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) | | |
| | at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| | at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| | at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) | | |
| | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| | at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) | | |
| | at pageObjects.ExistingMorbidities.selectHabit(ExistingMorbidities.java:278) | | |
| | at stepDefinitions.ExistingMorbiditiesSD.patient_selects_a_habit_in_the_list_available(ExistingMorbiditiesSD.java:111) | | |
| | at ?.Patient_selects a habit in the list available(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/ | | |
| | 03existingMorbidities.feature:39) | | |
| | * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found | | |
| | (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | | |
| | 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: | | |
| | [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: | | |
| | 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: | | |
| | normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, | | |
| | strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, | | |
| | webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, | | |
| \Box | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) | | |
| | at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 2 | When Patient clicks the right arrow | SKIPPED | 0.001 s |
| 3 | And Patient selects one more option | SKIPPED | 0.000 s |
| 4 | And Patient clicks the right arrow | SKIPPED | 0.000 s |
| 5 | Then Patient should able to see the "Alcohol","Drugs" in the chosen list box | SKIPPED | 0.000 s |

Validate selecting Physical fitness options from available to chosen

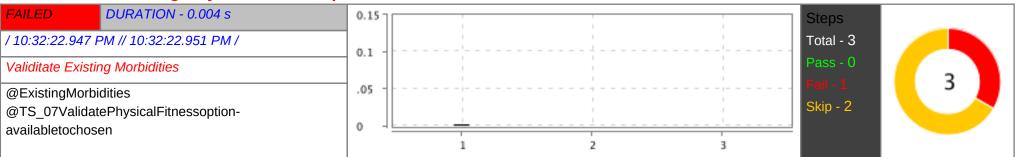


| 7 | # | Step / Hook Details | Status | Duration |
|---|---|--|--------|----------|
| 1 | | Given Patient selects a fitness option in the list available | FAILED | 0.002 s |
| | | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//span[@title='Alcohol']}] Capabilities {acceptInsecureCerts: false, | | |

| Step / Hook Details | Status | Duration |
|---|--------|----------|
| browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/ | | |
| folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: | | |
| false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, | | |
| setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss | | |
| and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, | | |
| webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e | | |
| at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | | |
| at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) | | |
| at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) | | |
| at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| $at\ or g. open qa. selenium. support. page factory. internal. Locating Element Handler. invoke (Locating Element Handler. java: 38)$ | | |
| at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) | | |
| $at\ or g. open qa. selenium. remote. internal. Web Element ToJs on Converter. apply (Web Element ToJs on Converter. java: 51)$ | | |
| at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) | | |
| at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) | | |
| at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) | | |
| at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) | | |
| at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) | | |
| at pageObjects.ExistingMorbidities.selectPFOption(ExistingMorbidities.java:307) | | |
| at stepDefinitions.ExistingMorbiditiesSD.patient selects a fitness option in the list available(ExistingMorbiditiesSD.java:135) | | |
| at ?.Patient_selects a fitness option in the list available(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/ | | |
| 03existingMorbidities.feature:47) | | |
| * Not displayable characters are replaced by '?'. | | |
| AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found |] | |
| (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [074beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog.chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdp/version: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:vitualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.DelegatingConstructorAccessor1mpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:490) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.edec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:325) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) | Status | |
| 2 | When clicks on the right arrow | SKIPPED | 0.000 s |
| 3 | Then Patient should able to see the selected option "Yoga" in the fitness chosen list box | SKIPPED | 0.000 s |
| | | | ******* |

Validate selecting Family History options more than one from available to chosen

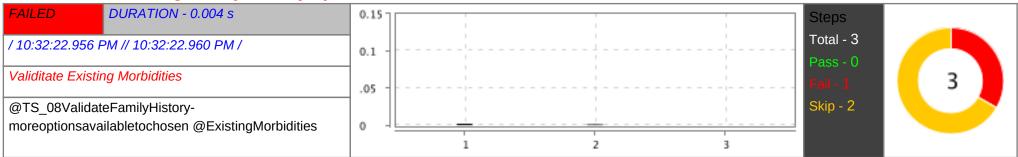


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Patient selects more than one option holding shift from the list available | FAILED | 0.002 s |

DETAILED SECTION -- 46 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.interactions.Actions.sendKeys(java.lang.CharSequence[])" because "driverFactory.AbstractComponents.a" is null at driverFactory.AbstractComponents.actionClassShiftHold(AbstractComponents.java:44) at pageObjects.ExistingMorbidities.SelMultipleOptions(ExistingMorbidities.java:326) at stepDefinitions.ExistingMorbiditiesSD. patient_selects_more_than_one_option_holding_shift_from_the_list_available(ExistingMorbiditiesSD.java:154) at ?.Patient_selects more than one option holding shift from the list available(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/03existingMorbidities.feature:53) * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chromec.ChromeDriver Command: [Of4beb0af699893766907132ccdbe50e, screenshot {}] Capabilities (acceptlnsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdp/version: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:vitualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reffect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:480) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:22) at org.openqa.selenium.remote.AttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.ope | | |
| | | CKIDDED | 0.001.0 |
| 2 | When Patient clicks on the right arrow of Family History | SKIPPED | 0.001 s |
| 3 | Then Patient should able to see the selected "Diabetes", "Thyroid" in the chosen list box | SKIPPED | 0.000 s |

DETAILED SECTION -- 47 --

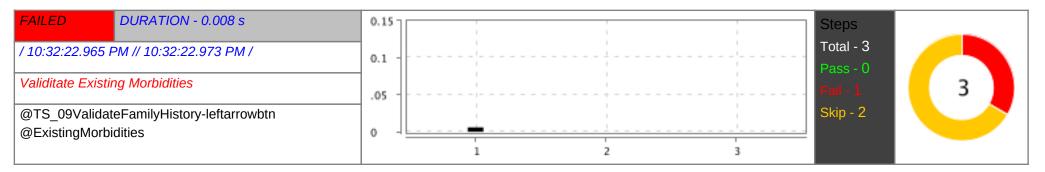

| # | Step / Hook Details | Status | Duration |
|----------|--|--------|----------|
| 1 | Given Patient selects an option holding from the list chosen | FAILED | 0.006 s |
| \vdash | Given Patient selects an option holding from the list chosen org.openqa.selenium.json.JsonException; java.lang.reflect.InvocationTargetException Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [0f4beb0afc998937c6997132ccdbe50e, actions {actions=[org.openqa.selenium.interactions.Sequence@1760e594]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109, chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), sec.dp: ws://localhost:50990/devtoo, sec.dpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 300000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true) Session ID: 0f4beb0afc998937c6907132ccdbe50e at org.openqa.selenium.json.JsonOutput.convertUsingMethod(JsonOutput.java:182) at org.openqa.selenium.json.JsonOutput.lambda\$new\$16(JsonOutput.java:182) at org.openqa.selenium.json.JsonOutput.lambda\$new\$22(3sonOutput.java:204) at java.base/java.util.stream.ForEachOps\$ForEachOps\$Gef.accept(ForEachOps.java:183) at java.base/java.util.stream.ReferencePipeline\$2\$1.accept(ReferencePipeline.java:179) at java.base/java.util.Stream.ReferencePipeline*2\$1.accept(ReferencePipeline.java:199) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:50) at java.base/java.util.stream.AbstractPipeline.CopyInto(AbstractPipeline.java:50) at java.base/ja | | + |
| | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| | at java.base/java.util.stream.ReferencePipeline.forEach(ReferencePipeline.java:596) | | |
| | at org.openqa.selenium.json.JsonOutput.lambda\$new\$23(JsonOutput.java:204) at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) | | |
| | at org.openga.selenium.json.JsonOutput.lambda\$new\$24(JsonOutput.java:222) | | |
| | at com.google.common.collect.SingletonImmutableBiMap.forEach(SingletonImmutableBiMap.java:68) | | |
| | at org.openga.selenium.json.JsonOutput.lambda\$new\$25(JsonOutput.java:217) | | |
| | at org.openga.selenium.json.JsonOutput.write0(JsonOutput.java:409) | | |

DETAILED SECTION -- 48 --

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.openqa.selenium.json.JsonOutput.write(JsonOutput.java:400) | | |
| | at org.openqa.selenium.json.Json.toJson(Json.java:133) | | |
| | at org.openqa.selenium.json.Json.toJson(Json.java:119) | | |
| | at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:273) | | |
| | at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:127) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:179) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openga.selenium.remote.RemoteWebDriver.perform(RemoteWebDriver.java:688) | | |
| | at org.openqa.selenium.interactions.Actions\$BuiltAction.perform(Actions.java:605) | | |
| | at driverFactory.AbstractComponents.actionClassMoveTo(AbstractComponents.java:39) | | |
| | at pageObjects.ExistingMorbidities.ValidateFamHisLarrowbtn(ExistingMorbidities.java:348) | | |
| | at stepDefinitions.ExistingMorbiditiesSD.patient selects an option holding from the list chosen(ExistingMorbiditiesSD.java:173) | | |
| | at ?.Patient_selects an option holding from the list chosen(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/ | | |
| | features/03existingMorbidities.feature:59) | | |
| | Suppressed: org.openga.selenium.json.JsonException: Attempting to close incomplete json stream Build info: version: '4.12.0', revision: | | |
| | '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: driver.version: | | |
| | RemoteWebDriver at org.openqa.selenium.json.JsonOutput.close(JsonOutput.java:431) at org.openqa.selenium.json.Json. | | |
| | toJson(Json.java:131) at org.openqa.selenium.json.Json.toJson(Json.java:119) at org.openqa.selenium.remote.codec. | | |
| | AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:273) at org.openqa.selenium.remote.codec. | | |
| | AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:127) at org.openqa.selenium.remote.HttpCommandExecutor. | | |
| | execute(HttpCommandExecutor.java:179) at org.openqa.selenium.remote.service.DriverCommandExecutor. | | |
| | invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor. | | |
| | execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.perform(RemoteWebDriver.java:688) at org.openqa.selenium.interactions. | | |
| | Actions\$BuiltAction.perform(Actions.java:605) at driverFactory.AbstractComponents.actionClassMoveTo(AbstractComponents.java:39) | | |
| | at pageObjects. ExistingMorbidities. ValidateFamHisLarrowbtn(ExistingMorbidities.java:348) at stepDefinitions. ExistingMorbiditiesSD. | | |
| | patient selects an option holding from the list chosen(ExistingMorbiditiesSD.java:173) at java.base/jdk.internal.reflect. | | |
| | NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl. | | |
| | invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl. | | |
| | invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java. | | |
| | Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition. | | |
| | invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io. | | |
| | cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch. | | |
| | runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io. | | |
| | cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io. | | |
| | cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner. at io.cucumber.core.runtime.CucumberRunner. at io.cucumber.core.runtime.CucumberExecutionContext. | | |
| | lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext. lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector. | | |
| | executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext. | | |
| | runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner. | | |
| | runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests. | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| # | runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:47) at java.base/jdk.internal.reflect. DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testing.internal.linvokers.MethodInvocationHelper.java:135) at org.testing.internal.invokers.MethodInvocationHelper.java:135) at org.testing.internal.invokers.TestInvoker.java:200) at org.testing.internal.invokers.TestInvoker.java:200) at org.testing.internal.invokers.TestInvoker.java:200) at org.testing.internal.invokers.MethodInvocationHelper.java:135) at org.testing.internal.invokers.TestInvoker.java:200) at org.testing.internal.invokers.MethodWorker.java:200) at org.testing.internal.invokers.TestMethodWorker.java:193) at org.testing.internal.invokers.TestMethodWorker.java:193) at org.testing.internal.invokers.TestMethodWorker.java:193) at org.testing.internal.invokers.TestMethodWorker.java:128) at java.base/java.utll.Array.List.forEach(Array.List.java:1511) at org.testing.TestRunner.privateRun(TestRunner.java:208) at org.testing.TestRunner.run(TestRunner.java:303) at org.testing.SuiteRunner.runTestSuiteRunner.java:303) at org.testing.SuiteRunner.runTestSuiteRunner.java:303) at org.testing.SuiteRunner.runTestSuiteRunner.java:303) at org.testing.SuiteRunner.java:305) at org.testing.SuiteRunner.java:306) at org.testing.SuiteRunner.java:306) at org.testing.SuiteRunner.java:306) at org.testing.SuiteRunner.java:307) at org.testing.TestinG.grava:1092) at org.testing.TestinG.grava:1090 at org.apache.maven.surefire.testing.TestinG.grava:1090 at org.apache.maven.surefire.testing.TestinG.grava:1090 at org.apache.maven.surefire.testing.TestinG.grava:1090 at org.apache.maven.surefire.booter.ForkedBooter.run(TestinGExecutor.run(TestinGExecutor.java:324) at org.apache.maven.surefire.booter.ForkedBooter.pava:1090 at org.apache.maven.surefire.booter.ForkedBooter.pava:1090 at org.apache.maven.surefire.bo | Status | Duration |
| | at java.base/java.util.Iterator.forEachRemaining(Iterator.java:133) at java.base/java.util.Spliterators\$IteratorSpliterator.forEachRemaining(Spliterators.java:1845) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) at java.base/java.util.stream.ForEachOps\$ForEachOp.evaluateSequential(ForEachOps.java:150) at java.base/java.util.stream.ForEachOps\$ForEachOp\$OfRef.evaluateSequential(ForEachOps.java:173) at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| | at java.base/java.util.stream.ReferencePipeline.forEach(ReferencePipeline.java:596) at org.openqa.selenium.json.JsonOutput.lambda\$new\$23(JsonOutput.java:204) at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) at org.openqa.selenium.json.JsonOutput.lambda\$new\$24(JsonOutput.java:222) at com.google.common.collect.SingletonImmutableBiMap.forEach(SingletonImmutableBiMap.java:68) at org.openqa.selenium.json.JsonOutput.lambda\$new\$25(JsonOutput.java:217) | | |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) | | |
| | at org.openqa.selenium.json.JsonOutput.write(JsonOutput.java:400) | | |
| | at org.openqa.selenium.json.Json.toJson(Json.java:133) | | |
| | at org.openqa.selenium.json.Json.toJson(Json.java:119) | | |
| | at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:273) | | |
| | at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:127) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:179) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.perform(RemoteWebDriver.java:688) | | |
| | at org.openqa.selenium.interactions.Actions\$BuiltAction.perform(Actions.java:605) | | |
| | at driverFactory.AbstractComponents.actionClassMoveTo(AbstractComponents.java:39) | | |
| | at pageObjects.ExistingMorbidities.ValidateFamHisLarrowbtn(ExistingMorbidities.java:348) | | |
| | at stepDefinitions.ExistingMorbiditiesSD.patient_selects_an_option_holding_from_the_list_chosen(ExistingMorbiditiesSD.java:173) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) | | |
| | at io.cucumber.java.Invoker.invoke(Invoker.java:24) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:84) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |

| | | Duration |
|-------|---|----------|
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:135) | |
| - 1 | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:673) | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:220) | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:945) | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:193) | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:146) | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:808) | |
| | at org.testng.TestRunner.run(TestRunner.java:603) | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:429) | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:423) | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:383) | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:326) | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1249) | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1169) | |
| | at org.testng.TestNG.runSuites(TestNG.java:1092) | |
| | at org.testng.TestNG.run(TestNG.java:1060) | |
| | at org.apache.maven.surefire.testng.TestNGExecutor.run(TestNGExecutor.java:324) | |
| | at org.apache.maven.surefire.testng.TestNGXmlTestSuite.execute(TestNGXmlTestSuite.java:74) | |
| | at org.apache.maven.surefire.testng.TestNGProvider.invoke(TestNGProvider.java:123) | |
| | at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:456) | |
| | at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:169) | |
| | at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:595) | |
| | at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:581) | |
| 10 | Caused by: org.openga.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not | |
| | found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | |
| | aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: | |
| - [| 0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=(//div[@class='slds-dueling-listoptions']//li/ | |
| | span[@title='Diabetes'])[2]]] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: | |
| | chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, | |
| | goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, | |
| | proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, | |
| | imeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: | |
| | rue} Session ID: 0f4beb0afc998937c6907132ccdbe50e | |
| ' | at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | |

| Step / Hook Details | Status | Duration |
|---|--------|----------|
| at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) | | |
| at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) | | |
| at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) | | |
| at org.openqa.selenium.interactions.PointerInput\$Origin.asArg(PointerInput.java:259) | | |
| at org.openqa.selenium.interactions.PointerInput\$Move.encode(PointerInput.java:208) | | |
| at org.openqa.selenium.interactions.Sequence.encode(Sequence.java:72) | | |
| at org.openqa.selenium.interactions.Sequence.toJson(Sequence.java:81) | | |
| * Not displayable characters are replaced by '?'. | | |
| AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | AILED | 0.001 s |
| org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 2 | When Patient clicks on the left arrow of Family History | SKIPPED | 0.000 s |
| 3 | Then Patient should not be able to see the selected "Diabetes" in the chosen list box | SKIPPED | 0.000 s |

Validate Fitness Frequency DropDown

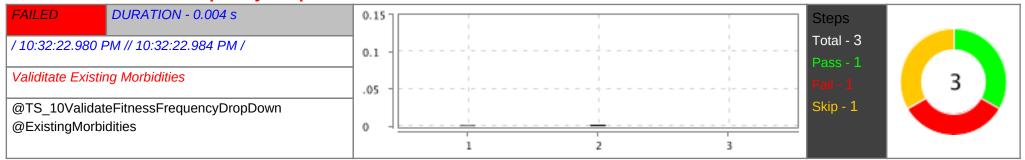


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Patient is on existing morbidities section | PASSED | 0.001 s |
| 2 | When Patient clicks on Fitness Frequency dropdown | FAILED | 0.002 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [Of4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=(//div[@class='slds-combobox slds-dropdown-trigger_click'])[14]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:redBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |

| | Step / Hook Details | Status | Duration |
|----|--|---------|----------|
| T | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openga.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| l | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| l | at org.openga.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| l | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| l | at org.openga.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| l | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) | | |
| l | at org.openga.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) | | |
| l | at org.openga.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| l | at org.openga.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| l | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| l | at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) | | |
| l | at org.openga.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) | | |
| l | at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) | | |
| l | at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) | | |
| l | at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| l | at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| l | at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) | | |
| l | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| l | at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) | | |
| l | at org.openga.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) | | |
| l | at pageObjects.ExistingMorbidities.ClickFitnessDropdown(ExistingMorbidities.java:373) | | |
| l | at stepDefinitions.ExistingMorbiditiesSD.patient clicks on fitness frequency dropdown(ExistingMorbiditiesSD.java:193) | | |
| l | at 3.Patient clicks on Fitness Frequency dropdown(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/ | | |
| ١, | 03existingMorbidities.feature:66) | | |
| | * Not displayable characters are replaced by '?'. | | |
| + | AFTER STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| Н | | I AILLD | 0.0013 |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found | | |
| | (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | | |
| | 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: | | |
| | 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, | | |
| | fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: | | |
| | normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, | | |
| | strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, | | |
| | webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, | | |
| | webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| П | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| П | | | |

DETAILED SECTION -- 55 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) | | |
| | at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | Then Patient should be able to select an option from the Fitness Frequency dropdown | SKIPPED | 0.000 s |

Validate the Surgeries Checkbox

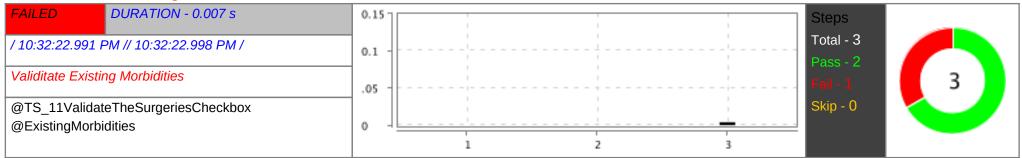

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Patient is on existing morbidities section | PASSED | 0.000 s |
| 2 | When Patient selects the surgeries check box | PASSED | 0.000 s |
| 3 | Then Patient should be able enter the text "Heart Surgery" in the text box | FAILED | 0.004 s |
| | org.openqa.selenium.json.JsonException: java.lang.reflect.InvocationTargetException Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, actions {actions=[org.openqa.selenium.interactions.Sequence@3d53e876, org.openqa.selenium.interactions.Sequence@48d44b46]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at org.openqa.selenium.json.JsonOutput.convertUsingMethod(JsonOutput.java:520) | | |

DETAILED SECTION -- 56 --

| at org.openqa.selenium.json.JsonOutput.lambda\$new\$16(JsonOutput.java:182) | | |
|---|--|---|
| | | |
| at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) | | |
| at org.openqa.selenium.json.JsonOutput.lambda\$new\$22(JsonOutput.java:204) | | |
| at java.base/java.util.stream.ForEachOps\$ForEachOp\$OfRef.accept(ForEachOps.java:183) | | |
| at java.base/java.util.stream.ReferencePipeline\$2\$1.accept(ReferencePipeline.java:179) | | |
| at java.base/java.util.Iterator.forEachRemaining(Iterator.java:133) | | |
| at java.base/java.util.Spliterators\$IteratorSpliterator.forEachRemaining(Spliterators.java:1845) | | |
| at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| at java.base/java.util.stream.ForEachOps\$ForEachOp.evaluateSequential(ForEachOps.java:150) | | |
| at java.base/java.util.stream.ForEachOps\$ForEachOp\$OfRef.evaluateSequential(ForEachOps.java:173) | | |
| at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| at java.base/java.util.stream.ReferencePipeline.forEach(ReferencePipeline.java:596) | | |
| at org.openqa.selenium.json.JsonOutput.lambda\$new\$23(JsonOutput.java:204) | | |
| at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) | | |
| at org.openqa.selenium.json.JsonOutput.lambda\$new\$24(JsonOutput.java:222) | | |
| at com.google.common.collect.SingletonImmutableBiMap.forEach(SingletonImmutableBiMap.java:68) | | |
| at org.openqa.selenium.json.JsonOutput.lambda\$new\$25(JsonOutput.java:217) | | |
| at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) | | |
| at org.openqa.selenium.json.JsonOutput.write(JsonOutput.java:400) | | |
| at org.openqa.selenium.json.Json.toJson(Json.java:133) | | |
| at org.openqa.selenium.json.Json.toJson(Json.java:119) | | |
| at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:273) | | |
| at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:127) | | |
| at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:179) | | |
| at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| · | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | at java.base/java.util.stream.ReferencePipeline\$2\$1.accept(ReferencePipeline.java:179) at java.base/java.util.Spliterator.forEachRemaining(Iterator.java:133) at java.base/java.util.SpliteratorsSpliterator.forEachRemaining(Spliterators.java:1845) at java.base/java.util.Spliteratorspliterator.forEachRemaining(Spliterators.java:1845) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) at java.base/java.util.stream.ForEachOps\$ForEachOp.evaluateSequential(ForEachOps.java:150) at java.base/java.util.stream.ForEachOps\$ForEachOp\$OfRef.evaluateSequential(ForEachOps.java:173) at java.base/java.util.stream.ReferencePipeline.evaluate(AbstractPipeline.java:234) at java.base/java.util.stream.ReferencePipeline.forEach(ReferencePipeline.java:296) at org.openqa.selenium.json.JsonOutput.lambda\$new\$23(JsonOutput.java:204) at org.openqa.selenium.json.JsonOutput.lambda\$new\$23(JsonOutput.java:222) at corg.openqa.selenium.json.JsonOutput.lambda\$new\$24(JsonOutput.java:222) at corg.openqa.selenium.json.JsonOutput.lambda\$new\$25(JsonOutput.java:217) at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:400) at org.openqa.selenium.json.JsonOutput.write(JsonOutput.java:400) at org.openqa.selenium.json.Json.toJson(Json.java:119) at org.openqa.selenium.json.Json.toJson(Json.java:119) at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:273) at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:179) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:179) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:179) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:171) | at java.base/java.util.stream.ReferencePipeline\$251.accept(ReferencePipeline.java:179) at java.base/java.util.stream.AbstractPipeline.copyinto(AbstractPipeline.java:599) at java.base/java.util.stream.AbstractPipeline.copyinto(AbstractPipeline.java:599) at java.base/java.util.stream.AbstractPipeline.copyinto(AbstractPipeline.java:599) at java.base/java.util.stream.ForEachOps\$ForEachOpsOptino(AbstractPipeline.java:599) at java.base/java.util.stream.ForEachOps\$ForEachOpsOptino(AbstractPipeline.java:499) at java.base/java.util.stream.ForEachOps\$ForEachOpsOrRef.evaluateSequential(ForEachOps.java:150) at java.base/java.util.stream.ForEachOps\$ForEachOpsOrRef.evaluateSequential(ForEachOps.java:173) at java.base/java.util.stream.ReferencePipeline.forEach(ReferencePipeline.java:234) at java.base/java.util.stream.ReferencePipeline.forEach(ReferencePipeline.java:2596) at org.openqa.selenium.json.JsonOutput.lambda\$new\$24(JsonOutput.java:204) at org.openqa.selenium.json.JsonOutput.lambda\$new\$24(JsonOutput.java:202) at org.openqa.selenium.json.JsonOutput.lambda\$new\$24(JsonOutput.java:222) at org.openqa.selenium.json.JsonOutput.mitableBilkap.org.acceptor.gova.gova.gova.gova.gova.gova.gova.gova |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| # | Step / HOOK Details execute/HttpCommandExecutor, java:179) at org.openga.selenium.remote.service. DriverCommandExecutor, java:196) at org.openga.selenium.remote.service. DriverCommandExecutor, java:196) at org.openga.selenium.remote.service.DriverCommandExecutor, java:602) at org.openga.selenium.remote.service.DriverCommandExecutor, java:603) at org.openga.selenium.remote.service.DriverCommandExecutor, java:603) at org.openga.selenium.remote.RemoteWebDriver.java:608) at org.openga.selenium.remote.Service.Driver.java:608) at org.openga.selenium.griver.Service.Service.Service.Driver.java:608) at org.openga.selenium.griver.Service.Service.Service.Driver.java:609) at org.openga.selenium.griver.Service.Se | Status | Duration |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at org.openqa.selenium.json.JsonOutput.convertUsingMethod(JsonOutput.java:516) | | |
| | at org.openqa.selenium.json.JsonOutput.lambda\$new\$16(JsonOutput.java:182) | | |
| | at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) | | |
| | at org.openqa.selenium.json.JsonOutput.lambda\$new\$22(JsonOutput.java:204) | | |
| | at java.base/java.util.stream.ForEachOps\$ForEachOp\$OfRef.accept(ForEachOps.java:183) | | |
| | at java.base/java.util.stream.ReferencePipeline\$2\$1.accept(ReferencePipeline.java:179) | | |
| | at java.base/java.util.Iterator.forEachRemaining(Iterator.java:133) | | |
| | at java.base/java.util.Spliterators\$IteratorSpliterator.forEachRemaining(Spliterators.java:1845) | | |
| | at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| | at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| | at java.base/java.util.stream.ForEachOps\$ForEachOp.evaluateSequential(ForEachOps.java:150) | | |
| | at java.base/java.util.stream.ForEachOps\$ForEachOp\$OfRef.evaluateSequential(ForEachOps.java:173) | | |
| | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| | at java.base/java.util.stream.ReferencePipeline.forEach(ReferencePipeline.java:596) | | |
| | at org.openqa.selenium.json.JsonOutput.lambda\$new\$23(JsonOutput.java:204) | | |
| | at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) | | |
| | at org.openqa.selenium.json.JsonOutput.lambda\$new\$24(JsonOutput.java:222) | | |
| | at com.google.common.collect.SingletonImmutableBiMap.forEach(SingletonImmutableBiMap.java:68) | | |
| | at org.openqa.selenium.json.JsonOutput.lambda\$new\$25(JsonOutput.java:217) | | |
| | at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) | | |
| | at org.openqa.selenium.json.JsonOutput.write(JsonOutput.java:400) | | |
| | at org.openqa.selenium.json.Json.toJson(Json.java:133) | | |
| | at org.openqa.selenium.json.Json.toJson(Json.java:119) | | |
| | at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:273) | | |
| | at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:127) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:179) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.perform(RemoteWebDriver.java:688) | | |
| | at org.openqa.selenium.interactions.Actions\$BuiltAction.perform(Actions.java:605) | | |
| | at driverFactory.AbstractComponents.actionClass(AbstractComponents.java:32) | | |
| | at pageObjects.ExistingMorbidities.sendTextBx(ExistingMorbidities.java:366) | | |
| | at stepDefinitions.ExistingMorbiditiesSD.patient_should_be_able_enter_the_text_in_the_text_box(ExistingMorbiditiesSD.java:91) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at io.cucumber.java.lnvoker.dolnvoke(Invoker.java:66) | | |
| | at io.cucumber.java.Invoker.invoke(Invoker.java:24) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:84) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | $at\ io. cucumber. core. runtime. Rethrowing Throwable Collector. execute And Throw (Rethrowing Throwable Collector. java: 23)$ | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at jdk.internal.reflect.GeneratedMethodAccessor157.invoke(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:135) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:673) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:220) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:945) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:193) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:146) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:808) | | |
| | at org.testng.TestRunner.run(TestRunner.java:603) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:429) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:423) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:383) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:326) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1249) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1169) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1092) | | |
| | at org.testng.TestNG.run(TestNG.java:1060) | | |
| | at org.apache.maven.surefire.testng.TestNGExecutor.run(TestNGExecutor.java:324) | | |
| | at org.apache.maven.surefire.testng.TestNGXmlTestSuite.execute(TestNGXmlTestSuite.java:74) | | |

DETAILED SECTION -- 60 --

| <u> </u> | Step / Hook Details | Status | Duration |
|----------|--|--------|----------|
| | at org.apache.maven.surefire.testng.TestNGProvider.invoke(TestNGProvider.java:123) | | |
| | at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:456) | | |
| | at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:169) | | |
| | at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:595) | | |
| | at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:581) | | |
| | | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| | at org.openqa.seleniam.support.pageractory.internal.cocatingElenientHandler.invoke(EocatingElenientHandler.java.so) at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) | | |
| | at org.openqa.selenium.interactions.PointerInput\$Origin.asArg(PointerInput.java:259) | | |
| | at org.openqa.selenium.interactions.PointerInput\$Move.encode(PointerInput.java:208) | | |
| | at org.openqa.selenium.interactions.Sequence.encode(Sequence.java:72) | | |
| | at org.openqa.selenium.interactions.Sequence.toJson(Sequence.java:81) | | |
| | * Not displayable characters are replaced by '?'. | | |
| _ | | FAILED | 0.001 s |
| | org.openga.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found | . / | 0.0013 |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | | |
| | 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: | | |
| | [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: | | |
| | 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, | | |
| | fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: | | |
| | normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, | | |
| | strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, | | |
| | webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, | | |
| | webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) | | |
| | at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |

Validate Immunization DropDown

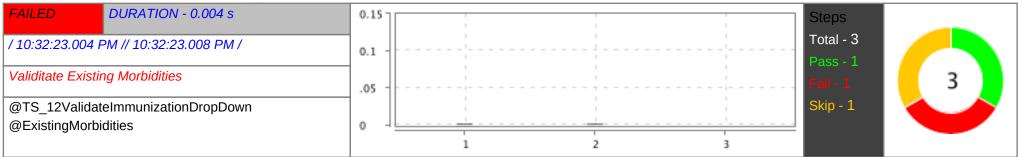


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Patient is on existing morbidities section | PASSED | 0.001 s |
| 2 | When Patient clicks on Immunization dropdown | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found | | |
| | (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | | |
| | 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: | | |
| | [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=(//div[@class='slds-combobox slds-dropdown-trigger slds-dropdown-trigger click'])[13]]] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: | | |
| | {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5 bhvqb55bq}, fedcm:accounts: true, | | |
| | goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, | | |
| | proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, | | |
| | timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, | | |
| | webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: | | |
| | true} Session ID: 0f4beb0afc998937c6907132ccdbe50e | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.artipCommandExecutor.execute(artipCommandExecutor.java.191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:190) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:103) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| | at org.openga.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| | at jdk.proxy2/jdk.proxy30.getWrappedElement(Unknown Source) | | |
| | at org.openga.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) | | |
| | at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) | | |
| | at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) | | |
| | at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| | at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| | at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) | | |
| | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| | at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) | | |
| | at pageObjects.ExistingMorbidities.ClickImmunizationDropdown(ExistingMorbidities.java:427) | | |
| | at stepDefinitions.ExistingMorbiditiesSD.patient_clicks_on_immunization_dropdown(ExistingMorbiditiesSD.java:213) | | |
| | at ?.Patient clicks on Immunization dropdown(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/ | | |
| | 03existingMorbidities.feature:78) | | |

DETAILED SECTION -- 63 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptlnsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessor1mpl.newInstance(DelegatingConstructorAccessor1mpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.evite.PtiverCommandExecutor.invokeExecutor.java:191) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | PAILED | 0.001 \$ |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) | | |
| | at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | Then Patient should be able to select an option from the Immunization dropdown | SKIPPED | 0.000 s |

Validate the International Travel Checkbox

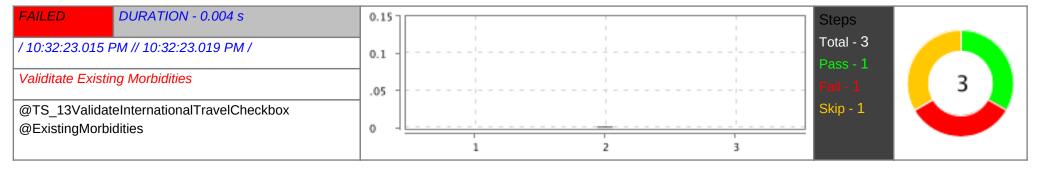

DETAILED SECTION -- 64 --

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Patient is on existing morbidities section | PASSED | 0.000 s |
| 2 | When Patient selects the International Travel check box | FAILED | 0.001 s |
| 2 | when Patient selects the International Travel check box org.openga.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session into: chrome=120.0.6099.109) Build into: version: '4.12.0', revision: '249/2a7d1b' System into: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver into: org.openga.selenium.chrome.ChromeDriver Command: [Olfabebade@98937c6907132cdeb5e5, findElement (using=xpath, value=/input(@anae=Internation12 travel in_last_3 months_c']]] Capabilities (acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: (chromedriverVersion: 120.0.6099.109, da19.140ab66, userDataDir: varfiolders/37.65 byndp55bq), federmacecounts: trave j. goog-chromeOptions: (debuggerAddress: localhost:50990), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy), secucly: ws:/localhost:50990/j.network.connectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy), secucly: ws:/localhost:50990/j.network.connectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy), secucly: ws:/localhost:50990/j.network.connectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy), secucly: ws:/localhost:50990/devloor_seculptor.googloop.109. setWindowRect true, stricti-Elemetractability: false, timeouts: (inplicit: 0, pageLoad: 300000, script: 30000), unhandledPromptBehavior_dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:argeBlob: true, webauthn:extension:argeBlob: true, webauthn:extension:argeBlob: true, webauthn:extension:argeBlob: true, webauthn:extension:argeBlob: true, webauthn:virualAuthenticators: true) Session ID: 014bebades98937c9907132ccdbe50e at java.base/java.lang.reflect.Genstructor.newInstance@Unknown Source) at java.base/java.lang.reflect.Constructor.newInstance@Constructor.gava.499) at java.base/java.lang.reflect.Constructor.newInstance@Constructor.gava.499 | FAILED | 0.001 s |

DETAILED SECTION -- 65 --


| 03existingMorbidities.feature:84) * Not displayable characters are replaced by '?'. AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, | Status | Step / Hook Details | Duration |
|---|---------|---|----------|
| org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: Var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:odp: ws:/localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: t webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor1B.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessor1mpl.newInstance(DelegatingConstructorAccessor1mpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:22) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.service.DriverComma | | at ?.Patient selects the International Travel check box(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/03existingMorbidities.feature:84) | |
| (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptlnsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/s/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990/j. networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: t webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor1B.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessor1B.newInstance(DelegatingConstructorAccessor1mpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.java:171) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.j | FAILED | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | 0.000 s |
| η το ακτικού το του το του τρει του τοι αποτοτορί τρει του | | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [Ofdbeboafc998937c6907132ccdbe50e, screenshot f] Capabilities (accepthsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: (chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq), fedcm:accounts: true, goog:chromeOptions: (debuggerAddress: localhost:50990), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdp/version: 120.0.6099.109, setWindowNetc: true, strictFileInteractability: false, timeouts: (implicit: 0, pageLoad: 300000, script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:credBlob: true, sebauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:minPinLength: true, webauthn:extension:printinplintension:printinplintension:printinplintension:printinplintension:printinplintension:printinplintension:printinplintension:printinplintension:printinplintension:printinplintension:printinplintension:printinplintension:printinplintension:printinplintension:printinplintension:printinplint | |
| 3 Then Patient should be able enter the "India" in the Enter Country Name text box | SKIPPED | | 0.000 s |

Validating Medication and Vitals Information

| FAILED | DURATION - 0.066 s | Scenarios Total - 9 | | Steps Total - 27 | |
|----------------------|--------------------|------------------------|---|---------------------|----|
| / 10:32:23.025 PM // | 10:32:23.091 PM / | Pass - 0 | 9 | Pass - 9 | 27 |
| | | Skip - 0 | | Skip - 9 | |

DETAILED SECTION -- 66 --

The Patient is logged in to Saleforce app(Sepsis)

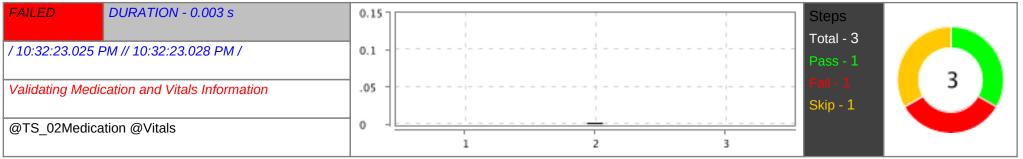


| # Step / Hook Details | Status | Duration |
|---|---------|----------|
| Given Patient is on Sepsis App Patients page | PASSED | 0.000 s |
| When Patient clicks on Current Medication textbox | FAILED | 0.002 s |
| org.openga.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openga.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//input[@name='Current_Medication_c*]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109} (3419140ab66, userDatabir: /var/folders/r3/5_ bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extensionlargeBlob: true, webauthn:extensionlargeBlob: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4be0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at org.openga.selenium.remote.codec.w3c.W3CHttpResponseCodec.ceateException(W3CHttpResponseCodec.java:133) at org.openga.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openga.selenium.remote.Service.DriverCommandExecutor.java:191) at org.openga.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:1 | I AILLU | 0.002 3 |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2.jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) at pageObjects.Vitals.MedicationClick(Vitals.java:149) at stepDefinitions.VitalsSD.patient_clicks_on_current_medication_textbox(VitalsSD.java:25) at ?.Patient clicks on Current Medication textbox(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/04Vitals.feature:7) * Not displayable characters are replaced by '?'. | | |
| | AFTER STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b'' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132cdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109, al19140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990/, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdp)Version: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: o, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceConstructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:33) at org.openqa.selenium.remote.service.DriverCommandExecutor.java:191) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(PriverCommandExecutor.java:171) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(PriverC | | |

DETAILED SECTION -- 68 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | Then Patient enter "Vitamin D" in textbox | SKIPPED | 0.000 s |

Validate Temperature

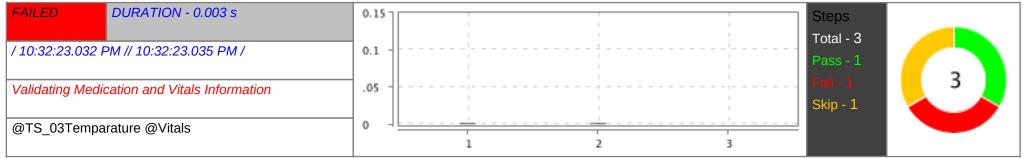

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on Sepsis App Patients page | PASSED | 0.001 s |
| 2 | When Patient clicks on Temperature textBox | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [Of4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//inputt_@name=Temperaturec']} Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109} (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessor1mpl.newInstance(DelegatingConstructorAccessor1mpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:22) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:171) at org.openqa.sele | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy30.click(Unknown Source) at pageObjects.Vitals.VitalsTempClick(Vitals.java:160) at stepDefinitions.VitalsSD.patient_clicks_on_temperature_text_box(VitalsSD.java:36) at ?.Patient clicks on Temperature textBox(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/04Vitals.feature:13) * Not displayable characters are replaced by '?'. | | |
| | AFTER STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6 Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [Of4beb0afc99893766907132ccdbe50e, screenshot {}] Capabilities (acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy; Proxy(), sectop: wsr/llocalhost:50990), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy; Proxy(), sectop: wsr/llocalhost:50990), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy; Proxy(), sectop: wsr/llocalhost:50990), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy; Proxy(), sectop: wsr/llocalhost:50990), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy; Proxy(), sectop: wsr/llocalhost:50990), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, platformName: platformName: mac, platformName: mac, platformName: mac, platformName: mac, platformName: mac, platformName: mac, platformName: platformName: mac, platformName: mac, platformName: mac, platformName: platformName: mac, platformName: mac, platformName: pl | | |
| 3 | Then Patient enter Temperature "98.8" in textBox | SKIPPED | 0.000 s |

DETAILED SECTION -- 70 --

Validate Heart Rate

| FAILED DURATION - 0.003 s | 0.15 Steps | |
|--|--------------|--|
| / 10:22:22 020 DM // 10:22:22 042 DM / | Total - 3 | |
| / 10:32:23.039 PM // 10:32:23.042 PM / | 0.1 Pass - 1 | |
| Validating Medication and Vitals Information | os | |
| | Skip - 1 | |
| @TS_04HeartRate @Vitals | 0 1 | |
| | 1 2 3 | |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on Sepsis App Patients page | PASSED | 0.000 s |
| 2 | When Patient clicks on Heartrate textBox | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [Of4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=/linput[@name=*Heart_Rate_C]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: (chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq), fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se.cdp: ws://localhost:50990/devtoo, se.cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdva.base/jdva.lang.reflect.GeneratedConstructorAccessor1B.newInstance(Unknown Source) at java.base/jdva.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:33) at org.openqa.selenium.remote.Acdec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:191) at org.openqa.selenium.remote.RemoteWebDriver.evecute(RemoteWebDriver.java:60) at org.openqa.selenium.remote.ElementLocation.FindElement(ElementLocation.j | | |

DETAILED SECTION -- 71 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at jdk.proxy2/jdk.proxy2.\$Proxy30.click(Unknown Source) at pageObjects.Vitals.HearrateClick(Vitals.java:200) at stepDefinitions.VitalsSD.patient_clicks_on_Heartrate_text_box(VitalsSD.java:47) at ?.Patient clicks on Heartrate textBox(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/04Vitals. feature:19) * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc99893766907132ccdbe50e, screenshot {}] Capabilities (acceptlinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:vitualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50 at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:171) at org.openqa.seleniu | | |
| 3 | Then Patient enter Heart Rate "90" in textBox | SKIPPED | 0.000 s |

Validate Respiratory Rate

DETAILED SECTION -- 72 --

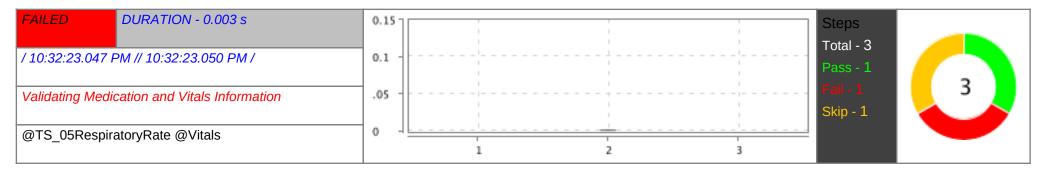


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Patient is on Sepsis App Patients page | PASSED | 0.000 s |
| 2 | When Patient clicks on Respiratory Rate textBox | FAILED | 0.001 s |
| 2 | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//input[@name='Respiratory_Ratec]]} Capabilities (acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109, altoy.hrome: {chromedriverVersion: 120.0.6099.109, altoy.hrome: {chromedriverVersion: 120.0.6099.109, altoy.hromedriverVersion: 120.0.6099.109, escup: ws://localhost:50990/devfoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, goog:chromeOptions: {debuggerAddress: localhost:50990/devfoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 300000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:prf: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true) Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessorInpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:33) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:19 | FAILED | 0.001 \$ |

DETAILED SECTION -- 73 --

| | at pageObjects.Vitals.respiratoryclick(Vitals.java:205) at stepDefinitions.VitalsSD.patient_clicks_on_respiratory_rate_text_box(VitalsSD.java:58) at ?.Patient clicks on Respiratory Rate textBox(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/04Vitals. feature:25) * Not displayable characters are replaced by '?'. | | |
|---|---|---------|---------|
| | | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.000 s |
| | org.openga.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b'' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openga.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/3/5_bhvqb55bq), fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp. ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000}, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:credBlob: true, webauthn:extension:ininPinLength: true, webauthn:extension:refBlob: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:490) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:490) at org.openga.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:200) at org.openga.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openga.selenium.remote.AttpCommandExecutor.invokeExecute(IntpCommandExecutor.java:191) at org.openga.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:171) a | | |
| 3 | Then Patient enter Reaspiratory Rate "15" in textBox | SKIPPED | 0.000 s |

Validate BP

DETAILED SECTION -- 74 --

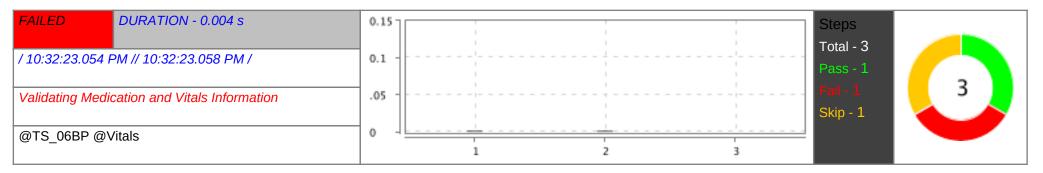


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on Sepsis App Patients page | PASSED | 0.001 s |
| 2 | When Patient clicks on BP textBox | FAILED | 0.001 s |
| 2 | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b" System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//input[@name="BPc"]]} Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq), fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhout50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 300000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:lnipPint.ength: true, webauthn:extension:minPint.ength: true, webauthn:intualAuthenticators: true} Session ID: 0fdbeb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.entive.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.entive.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.entive.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.ope | FAILED | 0.001 s |

DETAILED SECTION -- 75 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at stepDefinitions.VitalsSD.patient_clicks_on_bp_text_box(VitalsSD.java:68) at ?.Patient clicks on BP textBox(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/04Vitals.feature:31) * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.000 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir. /varffolders/r3/5 bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdp/version: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:minPinLength: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.HttpCommandExecutor.execute(PtiverCommandExecutor.java:191) at org.openqa.selenium.remote.exervice.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.service.DriverCommandExecutor.ex | | |
| | at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | Then Patient enter BP "110/80" in textBox | SKIPPED | 0.000 s |

Validate Glucose

DETAILED SECTION -- 76 --

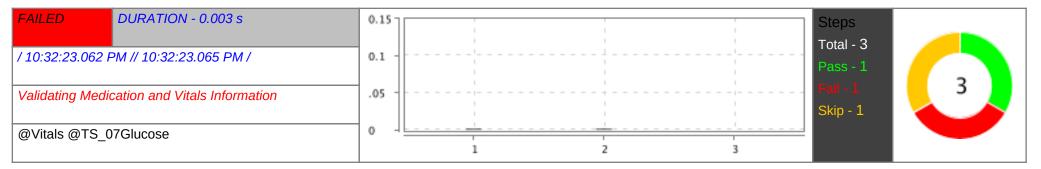


| When Patient clicks on Glucose dropdown | PASSED | 0.001 s |
|--|--------|---------|
| - market and a second approximation of the second approxim | | |
| | FAILED | 0.001 s |
| org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [Of4beb0afc998937c6907132ccdbe50e, findElement (using=xpath, value=(//div/@class='slds-combobox slds-dropdown-trigger_slds-dropdown-trigger_click)* 1519]. Capabilities (acceptinsecureCerts: false, browserName: chrome browserVersion: 120.0.6099.109, chrome: (chromedriverVersion: 120.0.6099.109, 1919 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq), fedcm:accounts: true, goog:chromeOptions: (debuggerAddress: localhost:50990), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), seciop: ws://localhosts:50990/devtoo, secopyversion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: (implicit: 0, pageLoad: 300000, script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:miPinLength: true, webauthn:extension:prf. true, webauthn:extension: | FAILED | 0.001 s |

DETAILED SECTION -- 77 -

| * | at pageObjects.Vitals.VitalsGlucoseDropdown(Vitals.java:182) at stepDefinitions.VitalsSD.admin_clicks_on_glucose_dropdown(VitalsSD.java:79) at ?.Patient clicks on Glucose dropdown(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/04Vitals.eature:37) Not displayable characters are replaced by '?'. | | |
|---|---|---------|---------|
| | | | |
| <i>P</i> | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| 0 (; 'a [[4 1 fe n s | org.openga.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openga.selenium.chrome.ChromeDriver Command: Of4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptlnsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}), edcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000}, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, vebauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jake.hasee/jdk.internal.reflect.CeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openga.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openga.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openga.selenium.remote.RemoteWebDriver.execute(HttpCommandExecutor.java:191) at org.openga.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openga.selenium.remote.RemoteWebDriver.exe | | |
| 3 T | Then Patient select Glucose from dropdown | SKIPPED | 0.000 s |

Validate Glucose Value

DETAILED SECTION -- 78 --

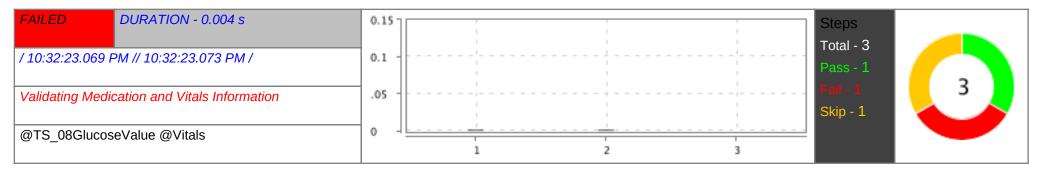


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on Sepsis App Patients page | PASSED | 0.001 s |
| 2 | When Patient clicks on Glucose Value textBox | FAILED | 0.001 s |
| 2 | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//input[@name='Glucose_Value_c']}] Capabilities {acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109} (3419140ab66, userDataDir: Narfolders/3/5_bhvqb55bq), fedcmaccounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy; Proxy(), se:cdp: ws://localhost:50990/j.networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy; Proxy(), se:cdp: ws://localhost:50990/j.networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy; Proxy(), se:cdp: ws://localhost:50990/j.networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy; Proxy(), se:cdp: ws://localhost:50990/j.devtoo, se:cdp/version: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: [implicit: 0, pageLoad: 300000, script: 30000], unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:prict true, webauthn:extension:prict true, webauthn:extension:largeBlob: true, webauthn:extension:la | FAILED | 0.001 \$ |

DETAILED SECTION -- 79 --

| | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at pageObjects.Vitals.VitalsGlucoseclick(Vitals.java:216) at stepDefinitions.VitalsSD.patient_clicks_on_glucose_value_text_box(VitalsSD.java:90) at ?.Patient clicks on Glucose Value textBox(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/04Vitals. feature:43) * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chromec.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities (acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: (chromedriverVersion: 120.0.6099.109), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:intualAuthenticators: true} Session ID: 0f4beb0afc98937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.java:191) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.r | | |
| 3 | Then Patient enter Glucose Value "100" in textBox | SKIPPED | 0.000 s |

Validate WBC

DETAILED SECTION -- 80 --

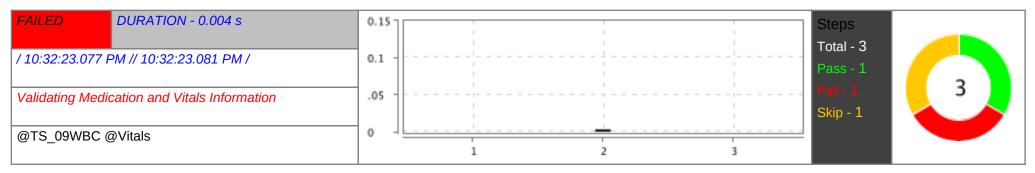

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Patient is on Sepsis App Patients page | PASSED | 0.000 s |
| 2 | When Patient clicks on WBC textBox | FAILED | 0.003 s |
| 2 | org.openqa.selenium.json.JsonException: java.lang.reflect.InvocationTargetException Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, actions {actions=[org.openqa.selenium.interactions. Sequence@63814bbe]]} Capabilities {acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: (chromedriverVersion: 120.0.6099.109, actions=[org.openqa.selenium.interactions.sequence@63814bbe]]} Capabilities {acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome-clorenderiors-forgology.ps. properties of the propertie | FAILED | 0.003 s |
| | at org.openqa.selenium.json.JsonOutput.lambda\$new\$24(JsonOutput.java:222) at com.google.common.collect.SingletonImmutableBiMap.forEach(SingletonImmutableBiMap.java:68) | | |
| | at org.openga.selenium.json.JsonOutput.lambda\$new\$25(JsonOutput.java:217) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) | | |
| | at org.openqa.selenium.json.JsonOutput.write(JsonOutput.java:400) | | |
| | at org.openqa.selenium.json.Json.toJson(Json.java:133) | | |
| | at org.openqa.selenium.json.Json.toJson(Json.java:119) | | |
| | at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:273) | | |
| | at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:127) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:179) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.perform(RemoteWebDriver.java:688) | | |
| | at org.openqa.selenium.interactions.Actions\$BuiltAction.perform(Actions.java:605) | | |
| | at driverFactory.AbstractComponents.actionClassMoveTo(AbstractComponents.java:39) | | |
| | at pageObjects.Vitals.wbcclick(Vitals.java:222) | | |
| | at stepDefinitions.VitalsSD.patient_clicks_on_wbc_text_box(VitalsSD.java:100) | | |
| | at ?.Patient clicks on WBC textBox(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/04Vitals.feature:49) | | |
| | Suppressed: org.openqa.selenium.json.JsonException: Attempting to close incomplete json stream Build info: version: '4.12.0', revision: | | |
| | '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: driver.version: | | |
| | RemoteWebDriver at org.openqa.selenium.json.JsonOutput.close(JsonOutput.java:431) at org.openqa.selenium.json.Json. | | |
| | toJson(Json.java:131) at org.openqa.selenium.json.Json.toJson(Json.java:119) at org.openqa.selenium.remote.codec. | | |
| | AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:273) at org.openqa.selenium.remote.codec. | | |
| | AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:127) at org.openqa.selenium.remote.HttpCommandExecutor. | | |
| | execute(HttpCommandExecutor.java:179) at org.openqa.selenium.remote.service.DriverCommandExecutor. invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor. | | |
| | execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.perform(RemoteWebDriver.java:688) at org.openqa.selenium.interactions. | | |
| | Actions\$BuiltAction.perform(Actions.java:605) at driverFactory.AbstractComponents.actionClassMoveTo(AbstractComponents.java:39) | | |
| | at pageObjects.Vitals.wbcclick(Vitals.java:222) at stepDefinitions.VitalsSD.patient clicks on wbc text box(VitalsSD.java:100) at | | |
| | java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect. | | |
| | NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl. | | |
| | invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java. | | |
| | Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition. | | |
| | invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io. | | |
| | cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io. | | |
| | runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io. | | |
| | cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java.54) at io.cucumber.core.runner.TestCase.run(TestCase.java.84) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner. | | |
| | lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext. | | |
| | lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector. | | |
| | executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext. | | |
| | runTestCase(CucumberExecutionContext.java:137) at io.cucumber.testng.TestNGCucumberRunner. | | |
| | runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests. | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| # | runScenario(AbstractTestNGCucumberTests,java:35) at jdk.internal.reflect.GeneratedMethodAccessor157.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.java:43) at java.base/java.lang. reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(Method.java:43) at java.base/java.lang. reflect.Method.invoke(Method.java:568) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:673) at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:673) at org.testng.internal.invokers.TestInvoker.invoke(TestInvoker.java:69) at org.testng.internal.invokers.TestInvoker.invoke(TestInvoker.java:295) at org.testng.internal.invokers.TestInvoker.invoke(TestInvoker.java:193) at org.testng.internal.invokers.TestMethodWorker.invoke(TestMethodWorker.invokeTestMethodS(TestInvoker.java:193) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethodS(TestInvoker.java:193) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethodS(TestInvoker.java:193) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethodS(TestInvoker.java:193) at org.testng.internal.invokers.TestMethodWorker.invokeTestMethodS(TestMethodWorker.java:193) at org.testng.Internal.invokers.TestMethodWorker.java:198) at org.testng.SuiteRunner.runTestSuiteRunner.runTest(SuiteRunner.java:198) at org.testng.SuiteRunner.runTestMethodWorker.java:393) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:326) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:326) at org.testng.SuiteRunner.runSequentially(TestNG.java:199) at org.testng.SuiteRunner.runSequentially(TestNG.java:199) at org.testng.TestNG.runSuitesSocquentially(TestNG.java:199) at org.testng.TestNG.runSuitesSocquentially(TestNG.java:199) at org.testng.TestNG.runSuitesSocquentially(TestNG.java:199) at org.testng.TestNG.runSuitesSocquentially(TestNG.java:199) at org.apache.maven.surefire.booter.ForkedBooter.java:199) at org.apache.maven.surefire.booter.ForkedBooter.jav | Status | Duration |
| | at java.base/java.util.stream.ForEachOps\$ForEachOp\$OfRef.accept(ForEachOps.java:183) at java.base/java.util.stream.ReferencePipeline\$2\$1.accept(ReferencePipeline.java:179) | | |
| | at java.base/java.util.lterator.forEachRemaining(Iterator.java:133) | | |
| | at java.base/java.util.Spliterators\$IteratorSpliterator.forEachRemaining(Spliterators.java:1845) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| | at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| | at java.base/java.util.stream.ForEachOps\$ForEachOp.evaluateSequential(ForEachOps.java:150) | | |
| | at java.base/java.util.stream.ForEachOps\$ForEachOp\$OfRef.evaluateSequential(ForEachOps.java:173) at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| | at java.base/java.util.stream.ReferencePipeline.forEach(ReferencePipeline.java.596) | | |
| | at org.openqa.selenium.json.JsonOutput.lambda\$new\$23(JsonOutput.java:204) | | |
| | at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) | | |
| | at org.openqa.selenium.json.JsonOutput.lambda\$new\$24(JsonOutput.java:222) | | |
| | at com.google.common.collect.SingletonImmutableBiMap.forEach(SingletonImmutableBiMap.java:68) | | |
| | at org.openga.selenium.json.JsonOutput.lambda\$new\$25(JsonOutput.java:217) | | |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) | | |
| | at org.openqa.selenium.json.JsonOutput.write(JsonOutput.java:400) | | |
| | at org.openqa.selenium.json.Json.toJson(Json.java:133) | | |
| | at org.openqa.selenium.json.Json.toJson(Json.java:119) | | |
| | at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:273) | | |
| | at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:127) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:179) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.perform(RemoteWebDriver.java:688) | | |
| | at org.openqa.selenium.interactions.Actions\$BuiltAction.perform(Actions.java:605) | | |
| | at driverFactory.AbstractComponents.actionClassMoveTo(AbstractComponents.java:39) | | |
| | at pageObjects.Vitals.wbcclick(Vitals.java:222) | | |
| | at stepDefinitions.VitalsSD.patient_clicks_on_wbc_text_box(VitalsSD.java:100) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) | | |
| | at io.cucumber.java.Invoker.invoke(Invoker.java:24) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:84) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at jdk.internal.reflect.GeneratedMethodAccessor157.invoke(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:135) | | |

| # | Step / Hook Details | Status | Duration |
|--------|--|--------|----------|
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:673) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:220) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:945) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:193) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:146) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:808) | | |
| | at org.testng.TestRunner.run(TestRunner.java:603) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:429) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:423) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:383) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:326) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1249) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1169) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1092) | | |
| | at org.testng.TestNG.run(TestNG.java:1060) | | |
| | at org.apache.maven.surefire.testng.TestNGExecutor.run(TestNGExecutor.java:324) | | |
| | at org.apache.maven.surefire.testng.TestNGXmlTestSuite.execute(TestNGXmlTestSuite.java:74) | | |
| | at org.apache.maven.surefire.testng.TestNGProvider.invoke(TestNGProvider.java:123) | | |
| | at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:456) | | |
| | at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:169) | | |
| | at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:595) | | |
| | at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:581) | | |
| | Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not | | |
| | found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | | |
| | 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: | | |
| | [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//input[@name='White_Blood_Cells_Leukocytec']}] Capabilities | | |
| | {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 | | |
| | (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: | | |
| | localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: | | |
| | ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, | | |
| | webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: | | |
| | true} Session ID: 0f4beb0afc998937c6907132ccdbe50e | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| \Box | at java.baserjava.iang.reneet.constructor.newmstance(constructor.java.400) | | |

| ! | Step / Hook Details | Status | Duration |
|----------|---|--------|----------|
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openga.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openga.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openga.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) | | |
| | at org.openga.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) | | |
| | at org.openga.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| | at org.openga.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| | at org.openga.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| | at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) | | |
| | at org.openga.selenium.interactions.PointerInput\$Origin.asArg(PointerInput.java:259) | | |
| | at org.openqa.selenium.interactions.PointerInput\$Move.encode(PointerInput.java:208) | | |
| | at org.openga.selenium.interactions.Sequence.encode(Sequence.java:72) | | |
| | at org.openqa.selenium.interactions.Sequence.toJson(Sequence.java:81) | | |
| | * Not displayable characters are replaced by '?'. | | |
| \dashv | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found | 171122 | 0.0013 |
| | (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | | |
| | 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openga.selenium.chrome.ChromeDriver Command: | | |
| | [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: | | |
| | 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, | | |
| | fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: | | |
| | normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, | | |
| | strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, | | |
| | webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, | | |
| | webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openga.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openga.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | | | |
| | at org.openga.selenjum.remote.codec.w3c,W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | 1 |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openga.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | Then Patient enter WBC "3000" in textBox | SKIPPED | 0.000 s |

Validate Save Button

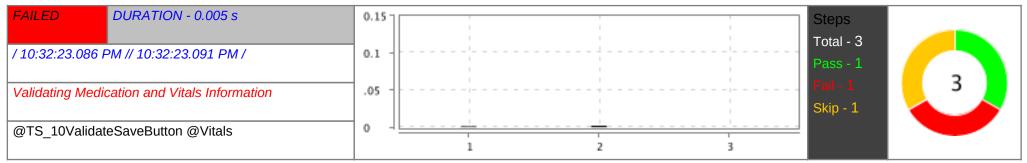

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on Sepsis App Patients page | PASSED | 0.001 s |
| 2 | When Patient clicks on save button | FAILED | 0.002 s |
| | org.openqa.selenium.json.JsonException: java.lang.reflect.InvocationTargetException Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, actions {actions=[org.openqa.selenium.interactions.Sequence@7b3feb26]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at org.openqa.selenium.json.JsonOutput.convertUsingMethod(JsonOutput.java:520) at org.openqa.selenium.json.JsonOutput.lambda\$new\$16(JsonOutput.java:182) at org.openqa.selenium.json.JsonOutput.lambda\$new\$22(JsonOutput.java:182) at org.openqa.selenium.json.JsonOutput.lambda\$new\$22(JsonOutput.java:190) at java.base/java.util.stream.ForEachOps\$ForEachOps\$ForEachOpsOfRef.accept(ForEachOps.java:183) at java.base/java.util.stream.ReferencePipeline\$2\$1.accept(ReferencePipeline.java:130) at java.base/java.util.Spliterators\$lterator\$pliterator.forEachRemaining(Spliterators.java:1345) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| | at java.base/java.util.stream.ForEachOps\$ForEachOp.evaluateSequential(ForEachOps.java:150) | | |
| | at java.base/java.util.stream.ForEachOps\$ForEachOp\$OfRef.evaluateSequential(ForEachOps.java:173) | | |
| | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| | at java.base/java.util.stream.ReferencePipeline.forEach(ReferencePipeline.java:596) | | |
| | at org.openqa.selenium.json.JsonOutput.lambda\$new\$23(JsonOutput.java:204) | | |
| | at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) | | |
| | at org.openqa.selenium.json.JsonOutput.lambda\$new\$24(JsonOutput.java:222) | | |
| | at com.google.common.collect.SingletonImmutableBiMap.forEach(SingletonImmutableBiMap.java:68) | | |
| | at org.openqa.selenium.json.JsonOutput.lambda\$new\$25(JsonOutput.java:217) | | |
| | at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) | | |
| | at org.openqa.selenium.json.JsonOutput.write(JsonOutput.java:400) | | |
| | at org.openqa.selenium.json.Json.toJson(Json.java:133) | | |
| | at org.openqa.selenium.json.Json.toJson(Json.java:119) | | |
| | at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:273) | | |
| | at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:127) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:179) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.perform(RemoteWebDriver.java:688) | | |
| | at org.openqa.selenium.interactions.Actions\$BuiltAction.perform(Actions.java:605) | | |
| | at driverFactory.AbstractComponents.actionClassMoveTo(AbstractComponents.java:39) | | |
| | at pageObjects.Vitals.saveBtnclick(Vitals.java:226) | | |
| | at stepDefinitions.VitalsSD.patient_clicks_on_save_button(VitalsSD.java:110) | | |
| | at ?.Patient clicks on save button(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/04Vitals.feature:55) | | |
| | Suppressed: org.openqa.selenium.json.JsonException: Attempting to close incomplete json stream Build info: version: '4.12.0', revision: | | |
| | '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: driver.version: | | |
| | RemoteWebDriver at org.openqa.selenium.json.JsonOutput.close(JsonOutput.java:431) at org.openqa.selenium.json.Json. | | |
| | toJson(Json.java:131) at org.openqa.selenium.json.Json.toJson(Json.java:119) at org.openqa.selenium.remote.codec. | | |
| | AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:273) at org.openqa.selenium.remote.codec. | | |
| | AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:127) at org.openqa.selenium.remote.HttpCommandExecutor. execute(HttpCommandExecutor.java:179) at org.openqa.selenium.remote.service.DriverCommandExecutor. | | |
| | invokeExecute(DriverCommandExecutor.java:179) at org.openqa.selenium.remote.service.DriverCommandExecutor. | | |
| | execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.perform(RemoteWebDriver.java:688) at org.openqa.selenium.interactions. | | |
| | Actions\$BuiltAction.perform(Actions.java:605) at driverFactory.AbstractComponents.actionClassMoveTo(AbstractComponents.java:39) | | |
| | at pageObjects.Vitals.saveBtnclick(Vitals.java:226) at stepDefinitions.VitalsSD.patient_clicks_on_save_button(VitalsSD.java:110) at | | |
| | java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect. | | |
| | NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl. | | |
| | invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java. | | |
| | Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition. | | |

| # Step / Hook Details | Status | Duration |
|--|--------|----------|
| invokeMethod(AbstractGlueDefinition java-47) at io.cucumber.java. JavaStepDefinition.execute(CavaStepDefinition java-29) at io.cucumber.core.numer.CoreStepDefinition.java-66) at o.cucumber.core.numer.PickleStepDefinitionMatch.tunStep(PickleStepDefinitionMatch.java-63) at io.cucumber.core.numer.ExecutionModeSt.execute(ExecutionMode.java-10) at io.cucumber.core.numer.ExecutionModeSt.execute(ExecutionMode.java-10) at io.cucumber.core.numer.ExecutionModeSt.execute(ExecutionMode.java-10) at io.cucumber.core.numer.PickleStep.num(PestStep.java-15) at io.cucumber.core.numer.PickleStep.numer.numStep.num.pickleStep.numer.numStep.numstep.num.pickleStep.numer.numStep.num.pickleStep.numer.numStep.numer.numStep.number.core.numer.pickleStep.numer.numstep.num.pickleStep.numer.numstep.num.pickleStep.numer.numstep.num.pickleStep.numer.numstep.number.numer.numstep.number.numer.numer.numstep.number.number.numer.numer.numstep.number.number.numer.number.number.numer.numstep.number.number.number.numer.numb | Status | Duration |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at java.base/java.util.stream.ForEachOps\$ForEachOp.evaluateSequential(ForEachOps.java:150) | | |
| | at java.base/java.util.stream.ForEachOps\$ForEachOp\$OfRef.evaluateSequential(ForEachOps.java:173) | | |
| | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| | at java.base/java.util.stream.ReferencePipeline.forEach(ReferencePipeline.java:596) | | |
| | at org.openqa.selenium.json.JsonOutput.lambda\$new\$23(JsonOutput.java:204) | | |
| | at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) | | |
| | at org.openqa.selenium.json.JsonOutput.lambda\$new\$24(JsonOutput.java:222) | | |
| | at com.google.common.collect.SingletonImmutableBiMap.forEach(SingletonImmutableBiMap.java:68) | | |
| | at org.openqa.selenium.json.JsonOutput.lambda\$new\$25(JsonOutput.java:217) | | |
| | at org.openqa.selenium.json.JsonOutput.write0(JsonOutput.java:409) | | |
| | at org.openqa.selenium.json.JsonOutput.write(JsonOutput.java:400) | | |
| | at org.openqa.selenium.json.Json.toJson(Json.java:133) | | |
| | at org.openqa.selenium.json.Json.toJson(Json.java:119) | | |
| | at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:273) | | |
| | at org.openqa.selenium.remote.codec.AbstractHttpCommandCodec.encode(AbstractHttpCommandCodec.java:127) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:179) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.perform(RemoteWebDriver.java:688) | | |
| | at org.openqa.selenium.interactions.Actions\$BuiltAction.perform(Actions.java:605) | | |
| | at driverFactory.AbstractComponents.actionClassMoveTo(AbstractComponents.java:39) | | |
| | at pageObjects.Vitals.saveBtnclick(Vitals.java:226) | | |
| | at stepDefinitions.VitalsSD.patient_clicks_on_save_button(VitalsSD.java:110) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) | | |
| | at io.cucumber.java.Invoker.invoke(Invoker.java:24) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:56) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:84) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) | | |
| | at jdk.internal.reflect.GeneratedMethodAccessor157.invoke(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:135) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:673) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:220) | | |
| | at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50) | | |
| | at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:945) | | |
| | at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:193) | | |
| | at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:146) | | |
| | at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:808) | | |
| | at org.testng.TestRunner.run(TestRunner.java:603) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:429) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:423) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:383) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:326) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1249) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1169) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1092) | | |
| | at org.testng.TestNG.run(TestNG.java:1060) | | |
| | at org.apache.maven.surefire.testng.TestNGExecutor.run(TestNGExecutor.java:324) | | |
| | at org.apache.maven.surefire.testng.TestNGXmlTestSuite.execute(TestNGXmlTestSuite.java:74) | | |
| | at org.apache.maven.surefire.testng.TestNGProvider.invoke(TestNGProvider.java:123) | | |
| | at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:456) | | |
| | at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:169) | | |
| | at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:595) | | |
| | at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:581) | | |
| | Caused by: org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not | | |
| | found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | | |
| | aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: | | |
| | Of4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//button[@name='SaveEdit']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: | | |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformMame: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdp/version: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timpolito: 1, pageLoad: 300000, script: 300000, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:argeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:pri: true, webauthn:extension:pri: true, webauthn:extension:argeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:pri: true, poor pri: true, webauthn:extension:pri: true, poor pri: tr | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) | | |
| | at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | Then the form should be saved succesfully by displaying a message | SKIPPED | 0.000 s |

Validating the New Patient form with Valid/Invalid/MissingData

| FAILED | DURATION - 0.103 s | Scenarios | | Steps | |
|------------------|-------------------------|-----------|---|------------|----|
| | | Total - 9 | | Total - 28 | |
| / 10:32:23.106 P | PM // 10:32:23.209 PM / | Pass - 0 | 9 | Pass - 8 | 28 |
| | | Fail - 9 | | Fail - 9 | 20 |
| | | Skip - 0 | | Skip - 11 | |
| | | | | | |

Validate the patient information form submission with missing data

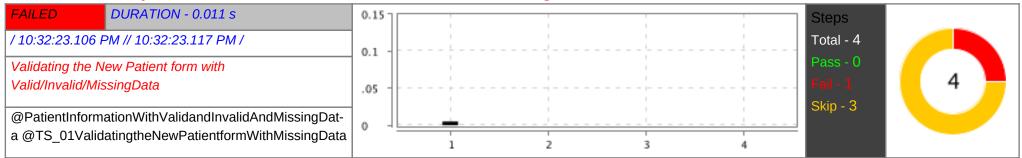

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on New patient form for entering patient details | FAILED | 0.005 s |


| ‡ | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| # | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b" System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [Of4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//a[@ittle=Patients]]} Capabilities (acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: (chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r2/5_bhvdp55bq), fedcma.cocunts: true, goog:chromeOptions: (debuggerAddress: localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 300000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension.crafelob: true webauthn:extension.largeBob: true, webauthn:extension.minpInl.ength: true, webauthn:extension.largeBob: true, webauthn:extension.pri: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessorImpl.newInstance(Unknown Source) at java.base/jdva.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:480) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:191) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:59) at org.openqa.selenium.rem | Status | Duration |
| | at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| | at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java.509) at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) | | |
| | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) | | |
| | at pageObjects.PatientObjectMandatory.patientObject_select(PatientObjectMandatory.java:227) at stepDefinitions.PatientObjectMandatorySD.patient_is_on_new_patient_form_for_entering_patient_details(PatientObjectMandatorySD. | | |
| | java:35) | | |
| | at ?.Patient is on New patient form for entering patient details(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/ | | |
| | features/05patientObjectMandatory.feature:6) | | |

DETAILED SECTION -- 94 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.003 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b" System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}} Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109, log.da19140ab66, userDataDir. /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdp)Version: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: o, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:minPinLength: true, webauthn:extension:rrf: true, webauthn:extension:reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.Constructor.newInstance(Unknown Source) at java.base/java.lang.reflect.Constructor.newInstance(Unknown Source) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:33) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(PriverCommandExecutor.java:171) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remot | | |
| | at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 2 | When Patient submits new patient form with missing data from "PatientDetails" and 0 | SKIPPED | 0.000 s |
| 3 | And Error message "We hit a snag." is displayed and review the following field | SKIPPED | 0.000 s |
| 4 | Then Error message "Complete this field." is displayed | SKIPPED | 0.000 s |

Validate the patient information form submission with invalid phonefield

DETAILED SECTION -- 95 --

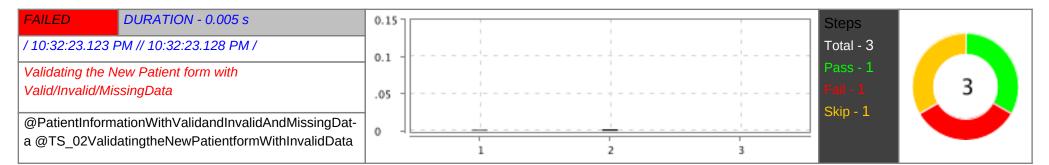


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on same patient form | PASSED | 0.001 s |
| 2 | When Patient submits new patient form with invalid data for phone field from "PatientDetails" and 1 | FAILED | 0.002 s |
| | | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| | at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) | | |
| | at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) at pageObjects.PatientObjectMandatory.cancelButton(PatientObjectMandatory.java:366) at stepDefinitions.PatientObjectMandatorySD. patient_submits_new_patient_form_with_invalid_data_for_phone_field_from_and(PatientObjectMandatorySD.java:72) at ?.Patient submits new patient form with invalid data for phone field from "PatientDetails" and 1(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/05patientObjectMandatory.feature:18) * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b* System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: (chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/i3/5_bhvqb55bq), fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, page.lo.adStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:virtualAuthenticators: true) Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jaki.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.edec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:191) at org.openqa.selenium.remote.eder.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:191) at org.openqa.selenium.remote.edebb7iver.getScreenshotAs(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.execute(Remot | | |
| 3 | Then Error message "US phone numbers should be in this format: (999) 999-9999." is displayed under phone field | SKIPPED | 0.000 s |

DETAILED SECTION -- 97 --

Validate the patient information form submission with invalid character

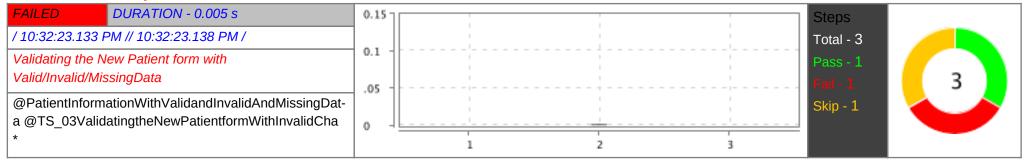

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on same patient form | PASSED | 0.000 s |
| 2 | When Patient submits new patient form with invalid data for textfields from "PatientDetails" and 2 | FAILED | 0.001 s |
| 2 | When Patient submits new patient form with invalid data for textfields from "PatientDetails" and 2 org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement (using=xpath, value=/lbutton[@name=CancelEdit])] Capabilities (acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: (chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq), fedcm:accounts: true, goog:chromeOptions: (debuggerAddress: localhost:50990/), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: (implicit: 0, pageLoad: 300000, script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:miniPinLength: true, webauthn:extension:prf: true, webauthn:vitualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.cecde(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:22) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:171) at org. | FAILED | 0.001 s |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) at pageObjects.PatientObjectMandatory.cancelButton(PatientObjectMandatory.java:366) at stepDefinitions.PatientObjectMandatorySD. patient_submits_new_patient_form_with_invalid_data_for_textfields_from_and(PatientObjectMandatorySD.java:95) at ?Patient submits new patient form with invalid data for textfields from "PatientDetails" and 2(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/05patientObjectMandatory.feature:29) * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Diver info: org.openqa.selenium.chrome.ChromeDriver Command: [Of4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedem:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), sccidy: wsr/localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), sccidy: wsr/localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), sccidy: wsr/localhost:50990/devtoo, secdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessorIBn.newInstance(DelgatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.service.DriverCommandExecutor.invok | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | Then Error message "Please enter only Alphabets" is displayed under textfields | SKIPPED | 0.000 s |

Validate the patient information form submission with invalid data for BP

| FAILED DURATION - 0.006 s | 0.15 Steps | |
|--|--------------|-----|
| / 10:32:23.145 PM // 10:32:23.151 PM / | Total - 3 | |
| Validating the New Patient form with | 0.1 Pass - 1 | A I |
| Valid/Invalid/MissingData | | |
| $@ {\tt PatientInformationWithValidandInvalidAndMissingDat-} \\$ | Skip - 1 | / |
| a | 0 | |
| @TS_04ValidatingtheNewPatientformWithInvalidBPdata | 1 2 3 | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on same patient form | PASSED | 0.000 s |
| 2 | When Patient submits new patient form with invalid data for BP field from "PatientDetails" and 3 | FAILED | 0.003 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b* System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//button[@name='CancelEdit']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq), fedem:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:prf: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:171) at org.openqa.selenium.rem | | |

DETAILED SECTION -- 100 --

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) at java.base/java.util.stream.ReferencePipeline\$\$\$1.accept(ReferencePipeline.java:197) at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) at java.base/java.util.stream.ReferencePipeline.evaluate(AbstractPipeline.java:234) at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) at pageObjects.PatientObjectMandatory.cancelButton(PatientObjectMandatory.java:366) at stepDefinitions.PatientObjectMandatory.orancelButton(PatientObjectMandatory.java:317) at ?.Patient submits new patient form with invalid data_for_BP_field_from_and(PatientObjectMandatorySD.java:117) at ?.Patient submits new patient form with invalid data for BP field from "PatientDetails" and 3(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/05patientObjectMandatory.feature:40) * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessorIB.newInstance(Unknown Source) at java.base/java.lang.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(WithCaller(Constructor.java:499) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.eservice.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | FAILED | 0.002 s |

DETAILED SECTION -- 101 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | Then Error message "BP should be in Systolic and Diastolic" is displayed under BP field | SKIPPED | 0.000 s |

Validate the patient information form submission with invalid data

| FAILED DURATION - 0.005 s | 0.15 Steps |
|--|-----------------------------|
| / 10:32:23.156 PM // 10:32:23.161 PM / | 0.1 - Total - 3 |
| Validating the New Patient form with | Pass - 1 |
| Valid/Invalid/MissingData | .05 - Fail 1 Skip - 1 |
| @PatientInformationWithValidandInvalidAndMissingDat- | 0 |
| a @TS_05ValidatingtheNewPatientformWithInvalidDOB | 1 2 3 |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on same patient form | PASSED | 0.001 s |
| 2 | When Patient submits new patient form with invalid data for DOB from "PatientDetails" and 4 | FAILED | 0.002 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//button[@name='CancelEdit']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: //var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |


DETAILED SECTION -- 102 --

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) at org.openqa.selenium.support.pagefactory.DefaultElement(RemoteWebDriver.java:353) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) at org.openqa.selenium.remote.internal.WebElementTOJsonConverter.apply(WebElementToJsonConverter.java:51) at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) at java.base/java.util.Spliterators&arraySpliterator.forEachRemaining(Spliterators.java:992) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:599) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:299) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:391) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:392) at java.base/java.util.stream.AbstractPipeline.collect(ReferencePipeline.java:393) at java.base/java.util.stream.AbstractPipeline.collect(ReferencePipeline.java:393) at java.base/java.util.stream.AbstractPipeline.collect(ReferencePipeline.java:394) at java.base/java.util.stream.AbstractPipeline.collect(ReferencePipeline.java:394) at java.base/java.util.stream.AbstractPipeline.ollect(ReferencePipeline.java:39 | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:490) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | FAILED | 0.001 s |

DETAILED SECTION -- 103 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) | | |
| | at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | Then Error message "DOB cannot be in future.pls change it to sometime past." is displayed under DOB field | SKIPPED | 0.000 s |

Validate the patient information form submission with invalid data

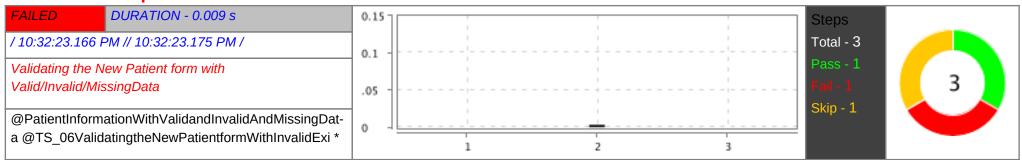

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Patient is on same patient form | PASSED | 0.000 s |
| 2 | When Patient submits new patient form entering other for morbidities from "PatientDetails" and 5 | FAILED | 0.003 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//button[@name='CancelEdit']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |

DETAILED SECTION -- 104 --

| | Step / Hook Details | Status | Duration |
|-------|--|--------|----------|
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) | | |
| | at org.openga.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| | at org.openga.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| | at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) | | |
| | at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) | | |
| | at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) | | |
| | at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) | | |
| | at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| | at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| | at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) | | |
| | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| | at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) | | |
| | at org.openga.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) | | |
| | at pageObjects.PatientObjectMandatory.cancelButton(PatientObjectMandatory.java:366) | | |
| | at stepDefinitions.PatientObjectMandatorySD. | | |
| | patient_submits_new_patient_form_entering_other_for_morbidities_from_and(PatientObjectMandatorySD.java:163) | | |
| | at ?.Patient submits new patient form entering other for morbidities from "PatientDetails" and 5(file:///Users/kalai/Documents/GitLab/Sepsis- | | |
| - , | Application/src/test/resources/features/05patientObjectMandatory.feature:62) | | |
| | * Not displayable characters are replaced by '?'. | | |
| ٦. | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.002 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found | | |
| - 1 | (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | | |
| - 1 | 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: | | |
| | [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: | | |
| | 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, | | |
| | fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, | | |
| | strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, | | |
| - 1 | webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, | | |

DETAILED SECTION -- 105 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) | | |
| | at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | Then Error message "Please explain only other existing morbidities!" is displayed under existing morbidity | SKIPPED | 0.000 s |

Validate patient information form submission with invalid data

| FAILED DURATION - 0.005 s | 0.15 | Steps |
|--|-------|--------------|
| / 10:32:23.184 PM // 10:32:23.189 PM / | | Total - 3 |
| Validating the New Patient form with | 0.1 | Pass - 1 |
| Valid/Invalid/MissingData | .05 - | Fail - 1 3 |
| @PatientInformationWithValidandInvalidAndMissingDat- | | Skip - 1 |
| a CTO 071/4/2/4/2016 All and Dational Company With the Verlid Free it. | 0 - | |
| @TS_07ValidatingtheNewPatientformWithInValidEmail | 1 2 3 | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on same patient form | PASSED | 0.000 s |
| 2 | When Patient submits new patient form with invalid email from "PatientDetails" and 6 | FAILED | 0.002 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//button[@name='CancelEdit']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, | | |


DETAILED SECTION -- 106 --

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss | | |
| | and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, | | |
| | webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| | at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) | | |
| | at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) | | |
| | at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) | | |
| | at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) | | |
| | at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| | at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| | at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) | | |
| | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| | at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) | | |
| | at org.openga.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) | | |
| | at pageObjects.PatientObjectMandatory.cancelButton(PatientObjectMandatory.java:366) | | |
| | at stepDefinitions.PatientObjectMandatorySD.patient submits new patient form with invalid email from and(PatientObjectMandatorySD. | | |
| | java:186) | | |
| | at ?.Patient submits new patient form with invalid email from "PatientDetails" and 6(file:///Users/kalai/Documents/GitLab/Sepsis-Application/ | | |
| | src/test/resources/features/05patientObjectMandatory.feature:73) | | |
| | * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found | | |
| | (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | | |
| | 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: | | |
| | [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: | | |

DETAILED SECTION -- 107 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, | | |
| | fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: | | |
| | normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, | | |
| | strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:brit: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, | | |
| | webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java.325) | | |
| | at org.openqa.seienium.remote.Kemotewebbnver.getscheensnotAs(Kemotewebbnver.java.323) at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |
| 3 | Then Error message "You have entered an invalid format." is displayed under email | SKIPPED | 0.000 s |

Validate patient information form submission with valid data for risk of Sepsis

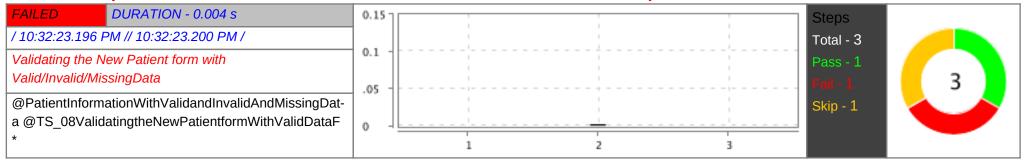

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Patient is on New patient form for entering patient info | PASSED | 0.000 s |
| 2 | When Patient submits new patient form with valid data from "PatientDetails" and 7 | FAILED | 0.002 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: | | |


DETAILED SECTION -- 108 --

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: | | |
| | [0f4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//a[@title='Patients']}] Capabilities {acceptInsecureCerts: false, | | |
| | browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: | | |
| | false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, | | |
| | setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss | | |
| | and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, | | |
| | webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| | at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| | at jdk.proxy2/jdk.proxy2.\$Proxy30.getWrappedElement(Unknown Source) | | |
| | at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) | | |
| | at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) | | |
| | at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) | | |
| | at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) | | |
| | at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) | | |
| | at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) | | |
| | at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) | | |
| | at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) | | |
| | at pageObjects.PatientObjectMandatory.patientObject_select(PatientObjectMandatory.java:227) | | |
| | at stepDefinitions.PatientObjectMandatorySD.patient_submits_new_patient_form_with_valid_data_from_and(PatientObjectMandatorySD. | | |
| | java:216) | | |
| | at ?.Patient submits new patient form with valid data from "PatientDetails" and 7(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/ | | |
| | test/resources/features/05patientObjectMandatory.feature:83) | | |
| | * Not displayable characters are replaced by '?'. | | |

DETAILED SECTION -- 109 --

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.002 s |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249[2a7d1b* System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0 6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDatablir: /var/folders/r3/5_bhvqb55bq), fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp. ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credfablob: true, webauthn:extension:minPinLength: true, webauthn:extension:minPinLength: true, webauthn:extension:minPinLength: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:extension:reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.cecde(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:22) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(PriverCommandExe | FAILED | 0.002 s |
| | at applicationHooks.AppHooks.afterstep(AppHooks.java:45) | | |

Validate attendance form submission with valid data for Critical risk

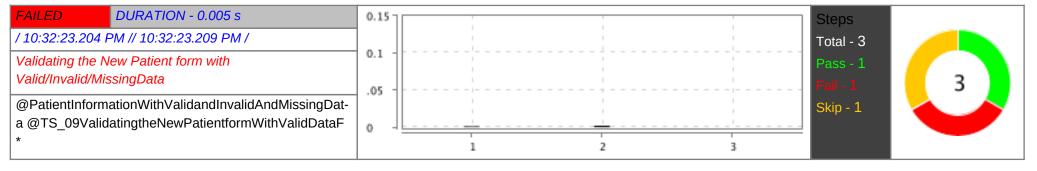


DETAILED SECTION -- 110 --

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on same patient form | PASSED | 0.001 s |
| 2 | When Patient submits new patient form with valid data for critical from "PatientDetails" and 13 | FAILED | 0.002 s |
| 2 | When Patient submits new patient form with valid data for critical from "PatientDetails" and 13 org.openga.selenium.NoSuchWindowException: no such window. target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '2.4972a7d1b" 'System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openga.selenium.chrome.ChromeDriver Command: (OfAbebOate9989376997132cdbe50e, findelEment (using-xpath, value-74@(ditle=Patients)]) Capabilities (acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: (chromedriverVersion: 120.0.699.109 (3419140ab66, userDataDir: /var/olders/3/25_bhyd5596), fedema.ccounts: true, googchromeOptions: (dehugugerAddress: localhostSoog), networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy), sector, ws:/localhostSo9990/devtoc, sectopyresion: 120.0.6099.109, setWindowRect true, striceFleieInteractability false, timeoust; (implicit. o, pageLoad: 300000), serpit: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:argeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:pri. tr | FAILED | 0.002 s |

DETAILED SECTION -- 111 --


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | patient_submits_new_patient_form_with_valid_data_for_critical_from_and(PatientObjectMandatorySD.java:256) at ?.Patient submits new patient form with valid data for critical from "PatientDetails" and 13(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/05patientObjectMandatory.feature:98) * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, screenshot {}] Capabilities {acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:ivitualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect. GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org. | | |
| 3 | Then Patient can see the risk of sepsis field to be "Critical" on the saved patient form | SKIPPED | 0.000 s |

Validitate Blood Profile upload files



DETAILED SECTION -- 112 --

Validitate Blood Profile upload files

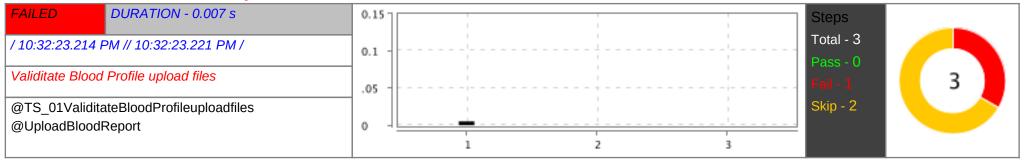

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Patient is on related tab in saved patient form | FAILED | 0.005 s |
| | Org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4', java.version: '17.06' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [Of4beb0afc998937c6907132ccdbe50e, findElement {using=xpath, value=//tbody/tr{1}/ht1 /span{1}/at]}] Capabilities {acceptinsecureCerts: talse, browserName: chrome, browserVersion: 120.0.6099.109, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: Narffolders/r3/5_bhvqb55bq), fedom.accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:in:PinLength: true, webauthn:extension:prf: true, webauthn:vitualAuthenticators: true} Session ID: 0f4beb0afc998937c6907132ccdbe50e at jdk.internal.reflect. GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/java.lang.reflect. Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect. Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect. Constructor.newInstanceGonstructor.java:499) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.ElementLocati | FAILED | 0.005 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:465) at pageObjects.UploadFileBloodReport.selectPatientId(UploadFileBloodReport.java:78) at stepDefinitions.UploadFileBloodReportSD.patient_is_on_related_tab_in_saved_patient_form(UploadFileBloodReportSD.java:22) at ?.Patient is on related tab in saved patient form(file:///Users/kalai/Documents/GitLab/Sepsis-Application/src/test/resources/features/ 06UploadFileBloodReport.feature:6) * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - applicationHooks.AppHooks.afterstep(io.cucumber.java.Scenario) | FAILED | 0.002 s |
| | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=120.0.6099.109) Build info: version: '4.12.0', revision: '249f2a7d1b* yystem info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13-4', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0f4beb0afc998937c6907132ccdbe50e, 'screenshot {}} Capabilities (acceptinsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.109, chrome: (chromedriverVersion: 120.0.6099.109) (3419140ab66, userDataDir: /var/folders/r3/5_bhvqb55bq), fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:50990}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:50990/devtoo, se:cdpVersion: 120.0.6099.109, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension.credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:reflect.Boleboatc998937c6907132ccdbe50e at jdk.internal.reflect.GeneratedConstructorAccessor1B.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(PriverCommandExecutor.java:171) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(PriverCommandExecutor.java:1 | | |
| 2 | When Patient clicks on the upload file option | SKIPPED | 0.000 s |

DETAILED SECTION -- 114 --

| | # | Step / Hook Details | Status | Duration |
|---|---|--|---------|----------|
| 3 | 3 | Then Patient should able to upload a file with a successful message "1 file was uploaded." | SKIPPED | 0.000 s |