

10. Create a request, and collections and variables using Postman.

To create a request, collection, and variables using Postman, follow these steps:

Create a collection

Click the Collections tab in the sidebar.

Click the + button to create a new collection.

Enter a name for your collection and click Create.


Create a variable

Click the Variables tab in the collection.

Click the Add button to create a new variable.

Enter a name and value for your variable.

Click Save.

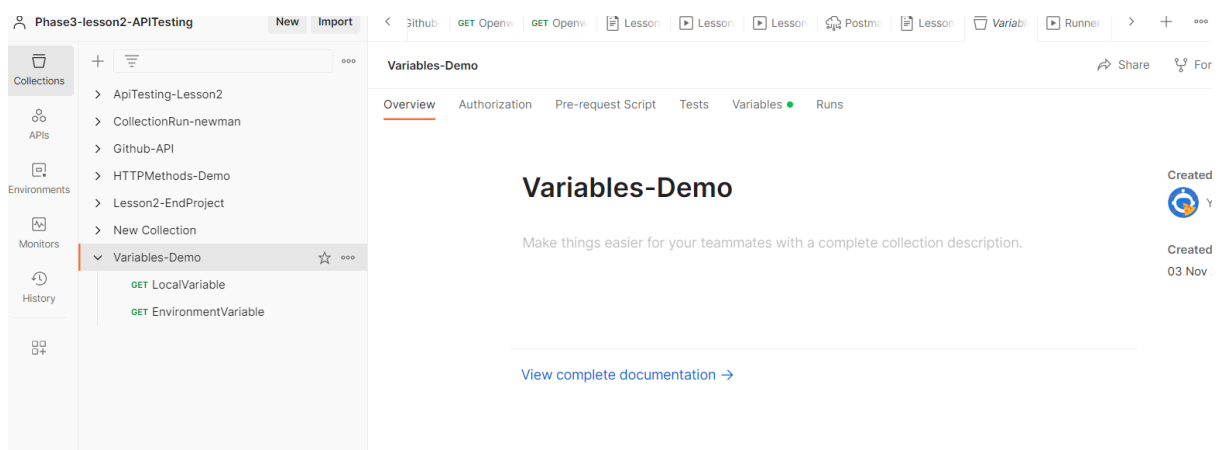

Phase3-lesson2-APITestingNewImport

githubGET OpenGET OpenLessonLessonLessonPostmanLessonGET LocalRuner+Project-variables

Collections+

- ApiTesting-Lesson2
 - CollectionRun-newman
 - Github-API
 - HTTPMethods-Demo
 - Lesson2-EndProject
 - New Collection
- Variables-Demo
 - GET LocalVariable
 - GET EnvironmentVariable

Variables-Demo / LocalVariableSave


GET{{Base_URL}}/data/2.5/weather?q={{City}}&appid={{apikey}}Send

ParamsAuthorizationHeaders (7)BodyPre-request ScriptTestsSettingsCookies

Query Params

	Key	Value	Description	Bulk Edit
<input checked="" type="checkbox"/>	q	{{City}}		
<input checked="" type="checkbox"/>	appid	{{apikey}}		
	Key	Value	Description	

Response



Phase3-lesson2-APITestingNewImport

githubGET OpenGET OpenLessonLessonLessonPostmanLessonVariableRuner+Project-variables

Collections+

- ApiTesting-Lesson2
 - CollectionRun-newman
 - Github-API
 - HTTPMethods-Demo
 - Lesson2-EndProject
 - New Collection
- Variables-Demo
 - GET LocalVariable
 - GET EnvironmentVariable

Variables-DemoShareFork0RunSave

OverviewAuthorizationPre-request ScriptTestsVariablesRuns

These variables are specific to this collection and its requests. Learn more about collection variables

Filter variables

	Variable	Initial value	Current value
<input checked="" type="checkbox"/>	apikey	PMAK-65447e80ec3d30002aba1fc2...	PMAK-65447e80ec3d30002aba1fc2-8563fe631b6c5954cb69a0ef0ce278b563
	Add new variable		

Use variables to reuse values and protect sensitive data