




### 3. Demonstrate how to use Postman with SOAP.

Here we can use the newman also

To use Newman, the command-line companion for Postman, you can follow these steps:

1. Install Newman globally by running ``npm install -g newman`` in your terminal or command prompt.
2. Export the Postman collection that you want to run as a JSON file.
3. Open your terminal or command prompt and navigate to the directory where the JSON file is located.
4. Run the command ``newman run <collection_file.json>`` to execute the collection.

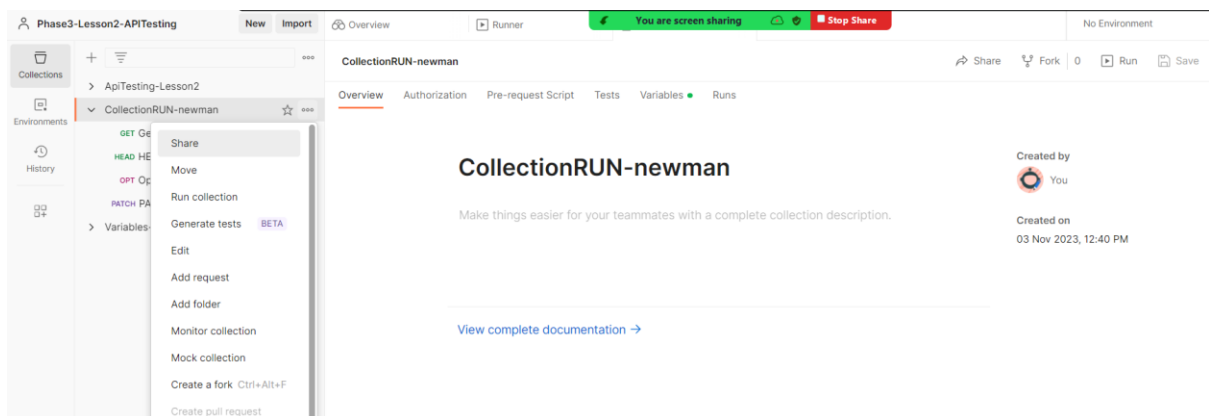

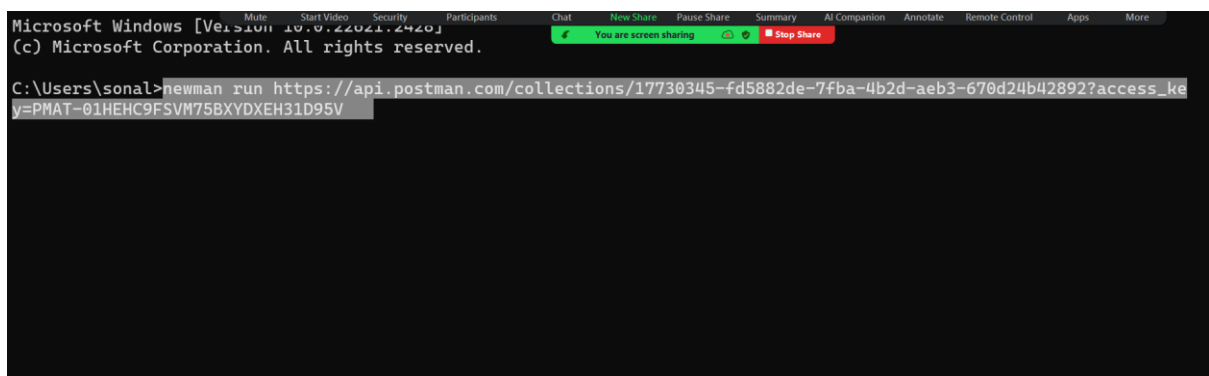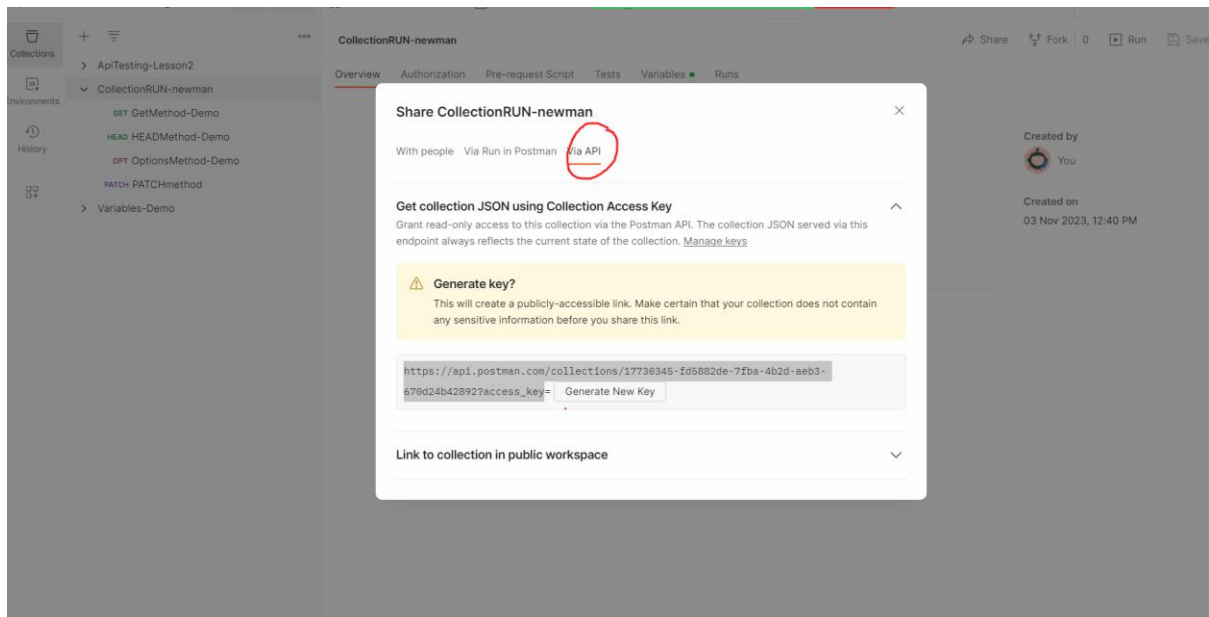

## CollectionRUN-newman

- GetMethod-Demo  
GET https://api.postman.com/workspaces [401 Unauthorized, 560B, 416ms]
- HEADMethod-Demo  
HEAD https://api.postman.com/workspaces [401 Unauthorized, 440B, 287ms]
- OptionsMethod-Demo  
OPTIONS https://api.postman.com/workspaces [200 OK, 285B, 281ms]
- PATCHmethod  
PATCH https://jsonplaceholder.typicode.com/posts/2 [200 OK, 1.4kB, 1025ms]

→ HEADMethod-Demo  
HEAD https://api.postman.com/workspaces [401 Unauthorized, 440B, 287ms]

→ OptionsMethod-Demo  
OPTIONS https://api.postman.com/workspaces [200 OK, 285B, 281ms]

→ PATCHmethod  
PATCH https://jsonplaceholder.typicode.com/posts/2 [200 OK, 1.4kB, 1025ms]

	executed	failed
iterations	1	0
requests	4	0
test-scripts	4	0
prerequest-scripts	4	0
assertions	0	0
total run duration: 3s		
total data received: 400B (approx)		
average response time: 502ms [min: 281ms, max: 1025ms, s.d.: 306ms]		