

9. Demonstrate how to work with variables in Postman.

To work with variables in Postman, you can create and use them in collections, environments, and requests.

Creating variables

To create a variable in Postman, follow these steps:

Click the Environments tab in the sidebar.

Click the + button to create a new environment.

Enter a name for your environment and click Create.

Click the Variables tab.

Click the Add button to create a new variable.

Enter a name and value for your variable.

Click Save.

You can also create variables in collections. To do this, follow these steps:

Click the Collections tab in the sidebar.



Open the collection where you want to create the variable.

Click the Variables tab.

Click the Add button to create a new variable.

Enter a name and value for your variable.

Click Save.

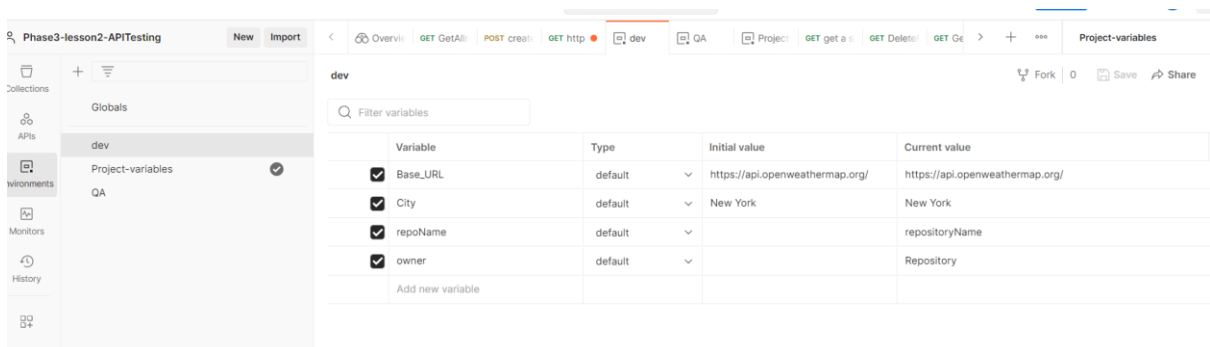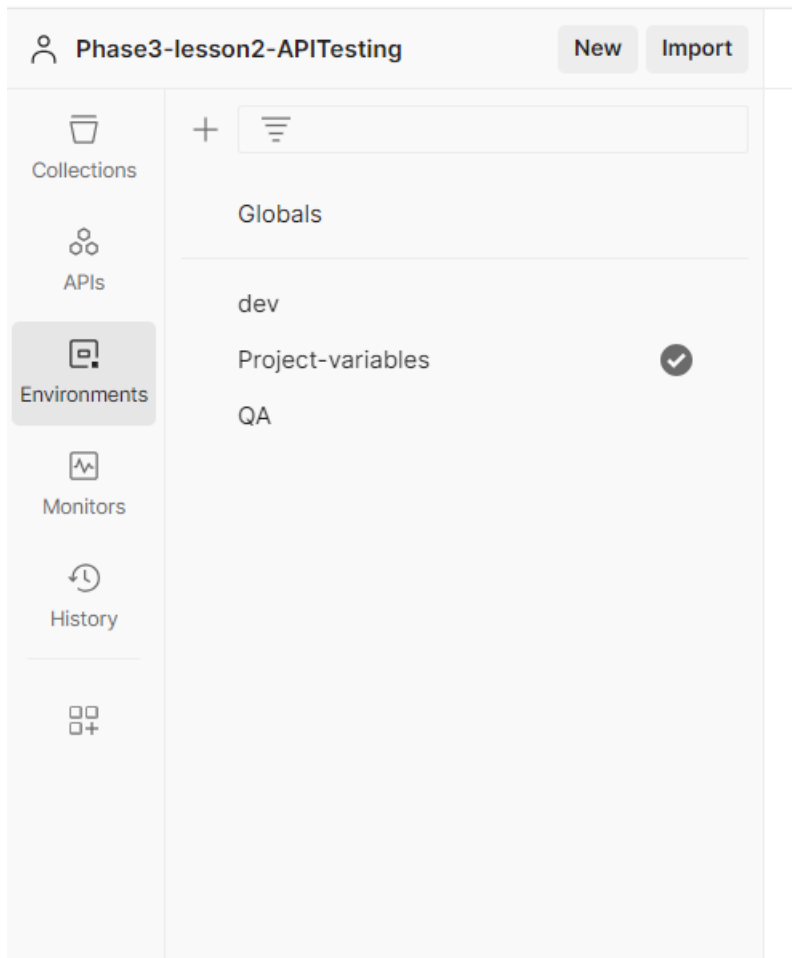

Phase3-lesson2-APITesting

NewImport

Collections

APIs

Environments

Monitors

History

+

ApiTesting-Lesson2

CollectionRun-newman

Github-API

HTTPMethods-Demo

Lesson2-EndProject

GET Openweatherreq

New Collection

This collection is empty

Add a request to start working.

Variables-Demo

GET LocalVariable

GET EnvironmentVariable

githubGET OpenweatherreqGET OpenweatherreqLessonLessonLessonPostmanLessonVariableRunner+Project-variables

Variables-Demo

ShareFork0RunSave

OverviewAuthorizationPre-request ScriptTestsVariablesRuns

These variables are specific to this collection and its requests. Learn more about [collection variables](#)

Filter variables

Variable	Initial value	Current value
<input checked="" type="checkbox"/> apikey	PMAK-65447e80ec3d30002aba1fc2...	PMAK-65447e80ec3d30002aba1fc2-8563fe631b6c5954cb69a0ef0ce278b563
Add new variable		