

SkillAssure Discoveri

Jenkins DevOps Hands-on Nugget

SkillAssure



A large orange decorative shape is located in the top left corner of the page, consisting of a right-angled triangle with a smaller right-angled triangle cut out of its hypotenuse.

Goal:

Unlock Jenkins User Account.

01

Activity

05

Steps

Activity-A : Unlock Jenkins User Account.

Step-A.1: Browse localhost:8080

localhost:9090/login?from=%2F



Welcome to Jenkins!

admin

.....

Sign in

Step-A.2: If not able to login.

Open Following file,

“ C:\Program Files (x86)\Jenkins\config.xml “

| This PC > Local Disk (C:) > Program Files (x86) > Jenkins | | | | |
|--|--------------------|------------------|------|--|
| Name | Date modified | Type | Size | |
| caches | 2/13/2020 6:48 PM | File folder | | |
| hudson.plugins.deploy.DeployPublisher.Migrator | 1/27/2020 11:25 AM | File folder | | |
| jobs | 4/3/2020 2:58 PM | File folder | | |
| jre | 1/27/2020 10:30 AM | File folder | | |
| logs | 1/27/2020 10:31 AM | File folder | | |
| nodes | 1/27/2020 10:31 AM | File folder | | |
| plugins | 2/12/2020 12:37 PM | File folder | | |
| secrets | 1/31/2020 8:49 PM | File folder | | |
| updates | 4/7/2020 3:31 PM | File folder | | |
| userContent | 1/27/2020 10:31 AM | File folder | | |
| users | 3/23/2020 6:30 PM | File folder | | |
| war | 1/27/2020 10:30 AM | File folder | | |
| workflow-lis | 1/27/2020 10:37 AM | File folder | | |
| workspace | 4/3/2020 3:04 PM | File folder | | |
| .lastStarted | 4/7/2020 3:31 PM | LASTSTARTED File | 0 KB | |
| .owner | 4/7/2020 4:46 PM | OWNER File | 1 KB | |
| com.cloudbees.hudson.plugins.folder.config.AbstractFolderConfiguration | 2/12/2020 2:50 PM | XML File | 1 KB | |
| config | 4/7/2020 3:31 PM | XML File | 3 KB | |
| credentials | 1/31/2020 6:39 PM | XML File | 2 KB | |
| nithub-plugin-configuration | 2/12/2020 2:50 PM | XML File | 1 KB | |

Step-A.3: Add following location in Path to Git Executable


Change Value of usesecurity from true to false. “ true→ false”

```

1 <?xml version='1.1' encoding='UTF-8'?>
2 <hudson>
3   <disabledAdministrativeMonitors>
4     <string>OldData</string>
5     <string>hudson.diagnosis.ReverseProxySetupMonitor</string>
6   </disabledAdministrativeMonitors>
7   <version>2.204.1</version>
8   <installStateName>RUNNING</installStateName>
9   <numExecutors>2</numExecutors>
10  <mode>NORMAL</mode>
11  <useSecurity>true</useSecurity>
12  <authorizationStrategy class="hudson.security.FullControlOnceLoggedInAuthorizationStrategy">
13    <denyAnonymousReadAccess>true</denyAnonymousReadAccess>
14  </authorizationStrategy>
15  <securityRealm class="hudson.security.HudsonPrivateSecurityRealm">
16    <disableSignup>true</disableSignup>
17    <enableCaptcha>false</enableCaptcha>
18  </securityRealm>
19  <disableRememberMe>false</disableRememberMe>
20  <projectNamingStrategy class="jenkins.model.ProjectNamingStrategy$DefaultProjectNamingStrategy"/>

```

Step-A.4: Open Task manager services and restart Jenkins Service.

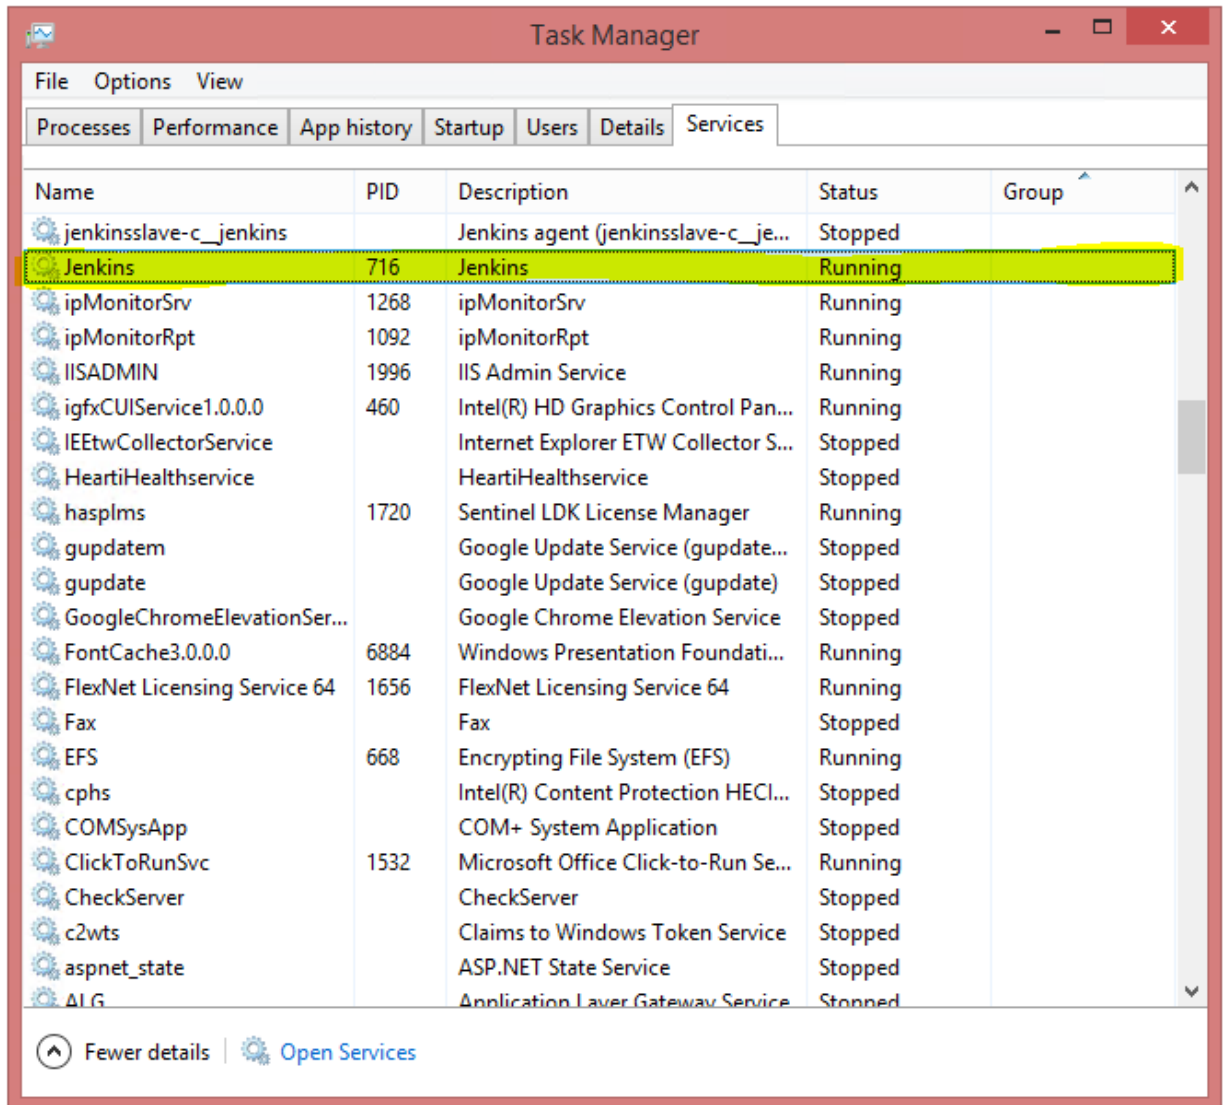

Step-A.5: Browse the Jenkins URL, now you are able to access without credential.

<http://localhost:8080/>

