

Download Xampp


Open <https://www.apachefriends.org/download.html> and download latest version for your operating system.

Install Downloaded software

Open Xampp Admin panel and start apache and mysql service

Close the Xampp Admin panel and open browser

In browser addressbar enter url : localhost/phpMyAdmin

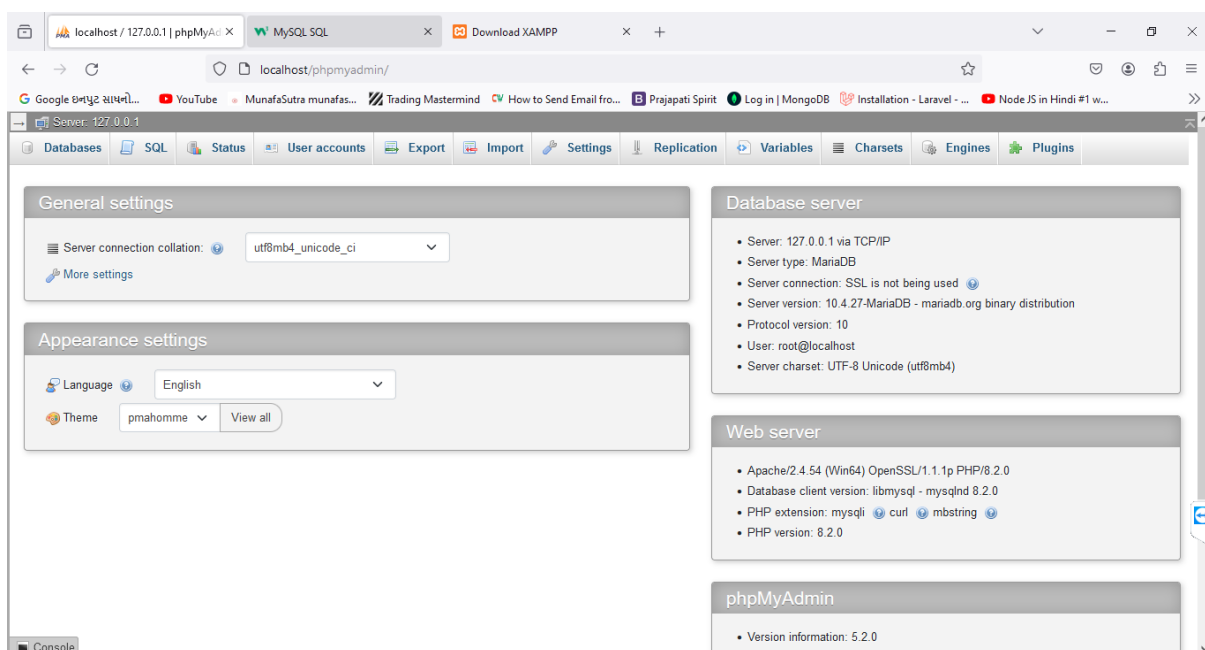

MySQL Tutorial

MySQL is a widely used relational database management system (RDBMS).

MySQL is free and open-source.

MySQL is ideal for both small and large applications.

Introduction to MySQL

MySQL is a very popular open-source relational database management system (RDBMS).

What is MySQL?

- MySQL is a relational database management system
 - MySQL is open-source
 - MySQL is free
 - MySQL is ideal for both small and large applications
 - MySQL is very fast, reliable, scalable, and easy to use
 - MySQL is cross-platform
 - MySQL is compliant with the ANSI SQL standard
 - MySQL was first released in 1995
 - MySQL is developed, distributed, and supported by Oracle Corporation
 - MySQL is named after co-founder Monty Widenius's daughter: My
-

Who Uses MySQL?

- Huge websites like Facebook, Twitter, Airbnb, Booking.com, Uber, GitHub, YouTube, etc.
 - Content Management Systems like WordPress, Drupal, Joomla!, Contao, etc.
 - A very large number of web developers around the world
-

Show Data On Your Web Site

To build a web site that shows data from a database, you will need:

- An RDBMS database program (like MySQL)
- A server-side scripting language, like PHP
- To use SQL to get the data you want
- To use HTML / CSS to style the page

MySQL RDBMS

What is RDBMS?

RDBMS stands for Relational Database Management System.

RDBMS is a program used to maintain a relational database.

RDBMS is the basis for all modern database systems such as MySQL, Microsoft SQL Server, Oracle, and Microsoft Access.

RDBMS uses [SQL queries](#) to access the data in the database.

What is a Database Table?

A table is a collection of related data entries, and it consists of columns and rows.

A column holds specific information about every record in the table.

A record (or row) is each individual entry that exists in a table.

Look at a selection from the Northwind "Customers" table:

CustomerID	CustomerName	ContactName	Address	City	PostalCode	Country
1	Alfreds Futterkiste	Maria Anders	Obere Str. 57	Berlin	12209	Germany
2	Ana Trujillo Emparedados y helados	Ana Trujillo	Avda. de la Constitución 2222	México D.F.	05021	Mexico
3	Antonio Moreno Taquería	Antonio Moreno	Mataderos 2312	México D.F.	05023	Mexico
4	Around the Horn	Thomas Hardy	120 Hanover Sq.	London	WA1 1DP	UK
5	Berglunds snabbköp	Christina Berglund	Berguvsvägen 8	Luleå	S-958 22	Sweden

The columns in the "Customers" table above are: CustomerID, CustomerName, ContactName, Address, City, PostalCode and Country. The table has 5 records (rows).

What is a Relational Database?

A relational database defines database relationships in the form of tables. The tables are related to each other - based on data common to each.

Look at the following three tables "Customers", "Orders", and "Shippers" from the Northwind database:

Customers Table

CustomerID	CustomerName	ContactName	Address	City	PostalCode	Country
1	Alfreds Futterkiste	Maria Anders	Obere Str. 57	Berlin	12209	Germany
2	Ana Trujillo Emparedados y helados	Ana Trujillo	Avda. de la Constitución 2222	México D.F.	05021	Mexico
3	Antonio Moreno Taquería	Antonio Moreno	Mataderos 2312	México D.F.	05023	Mexico
4	Around the Horn	Thomas Hardy	120 Hanover Sq.	London	WA1 1DP	UK
5	Berglunds snabbköp	Christina Berglund	Berguvsvägen 8	Luleå	S-958 22	Sweden

The relationship between the "Customers" table and the "Orders" table is the CustomerID column:

Orders Table

OrderID	CustomerID	EmployeeID	OrderDate	ShipperID
10278	5	8	1996-08-12	2
10280	5	2	1996-08-14	1
10308	2	7	1996-09-18	3
10355	4	6	1996-11-15	1
10365	3	3	1996-11-27	2
10383	4	8	1996-12-16	3
10384	5	3	1996-12-16	3

The relationship between the "Orders" table and the "Shippers" table is the ShipperID column:

Shippers Table

ShipperID	ShipperName	Phone
1	Speedy Express	(503) 555-9831
2	United Package	(503) 555-3199
3	Federal Shipping	(503) 555-9931


Before begin with MYsql Tutorial you need to create new Database and table with some of the data.

Open database section from localhost/phpMyAdmin -> then select create database section and enter your required database name then press create.

After successfully creation of new database, you will be redirected to newly created database page.

Create new table as following

Enter table name -> students -> create 8 columns

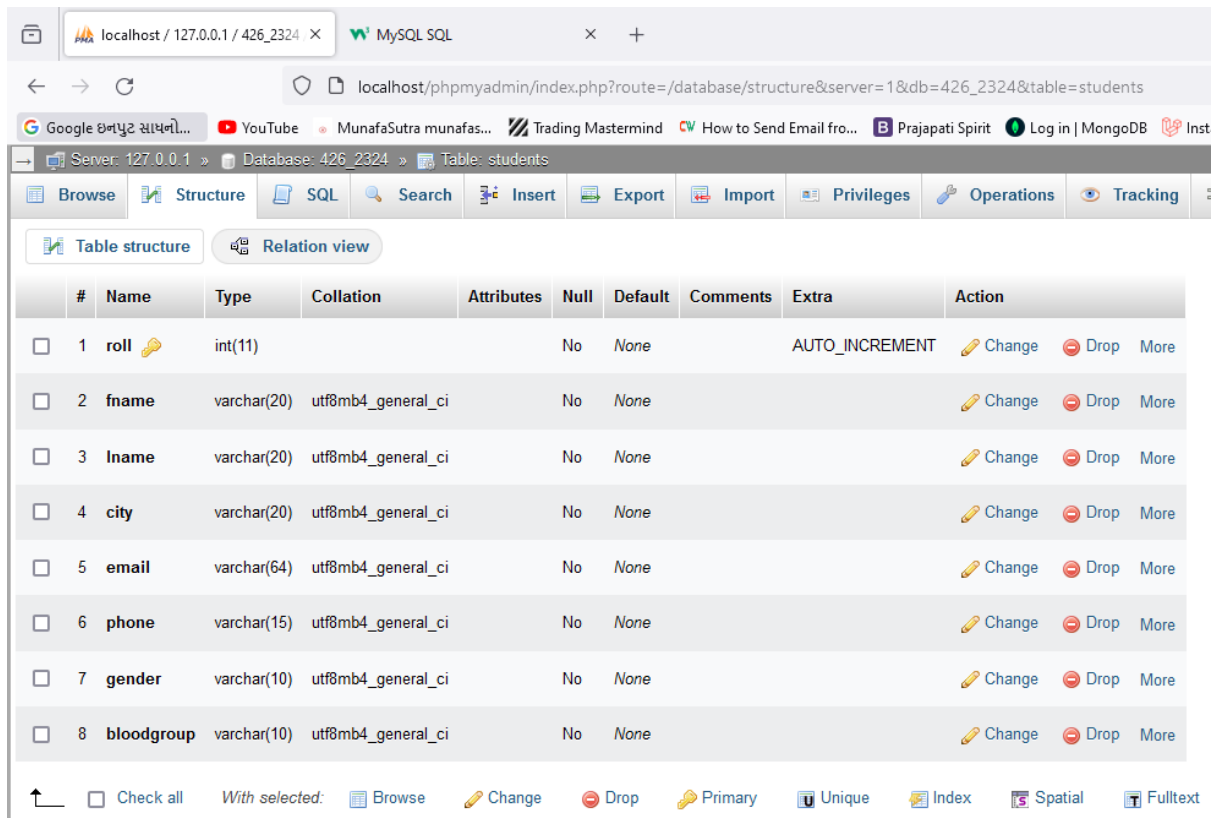

The screenshot shows the phpMyAdmin interface for a MySQL database. The 'Table structure' tab is selected, displaying the structure of the 'students' table. The table has 8 columns: roll (int(11), primary key, AUTO_INCREMENT), fname (varchar(20)), lname (varchar(20)), city (varchar(20)), email (varchar(64)), phone (varchar(15)), gender (varchar(10)), and bloodgroup (varchar(10)). All columns are using the utf8mb4_general_ci collation and have no default values or comments.

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
1	roll	int(11)			No	None		AUTO_INCREMENT	Change Drop More
2	fname	varchar(20)	utf8mb4_general_ci		No	None			Change Drop More
3	lname	varchar(20)	utf8mb4_general_ci		No	None			Change Drop More
4	city	varchar(20)	utf8mb4_general_ci		No	None			Change Drop More
5	email	varchar(64)	utf8mb4_general_ci		No	None			Change Drop More
6	phone	varchar(15)	utf8mb4_general_ci		No	None			Change Drop More
7	gender	varchar(10)	utf8mb4_general_ci		No	None			Change Drop More
8	bloodgroup	varchar(10)	utf8mb4_general_ci		No	None			Change Drop More

Create above table and add some of the data as below

MySQL SQL

What is SQL (Structured Query Language)?

SQL is the standard language for dealing with Relational Databases. SQL is used to insert, search, update, and delete database records.

How to Use SQL

The following SQL statement selects all the records in the "Customers" table:

Example

```
SELECT * FROM Customers;
```

```
SELECT * from students;
```

Keep in Mind That...

- SQL keywords are NOT case sensitive: `select` is the same as `SELECT`

In this tutorial we will write all SQL keywords in upper-case.

```
select * from students;
```

```
SELECT * from students;
```

Semicolon after SQL Statements?

Some database systems require a semicolon at the end of each SQL statement.

Semicolon is the standard way to separate each SQL statement in database systems that allow more than one SQL statement to be executed in the same call to the server. In this tutorial, we will use semicolon at the end of each SQL statement.

Some of The Most Important SQL Commands

- `SELECT` - extracts data from a database
- `UPDATE` - updates data in a database
- `DELETE` - deletes data from a database
- `INSERT INTO` - inserts new data into a database
- `CREATE DATABASE` - creates a new database
- `ALTER DATABASE` - modifies a database
- `CREATE TABLE` - creates a new table
- `ALTER TABLE` - modifies a table
- `DROP TABLE` - deletes a table
- `CREATE INDEX` - creates an index (search key)
- `DROP INDEX` - deletes an index

MySQL SELECT Statement

The MySQL SELECT Statement

The `SELECT` statement is used to select data from a database.

The data returned is stored in a **result table**, called the **result-set**.

SELECT Syntax

```
SELECT column1, column2, ...  
FROM table_name;
```

Here, column1, column2, ... are the field names of the table you want to select data from.

```
SELECT roll, fname, lname from students
```

```
SELECT roll, fname, lname, city from students;
```

If you want to select all the fields available in the table, use the following syntax:

```
SELECT * FROM table_name;
```

```
SELECT * FROM students;
```

SELECT * Example

The following SQL statement selects ALL the columns from the "Customers" table:

Example

```
SELECT * FROM Customers;
```

The MySQL SELECT DISTINCT Statement

The `SELECT DISTINCT` statement is used to return only distinct (different) values.

Inside a table, a column often contains many duplicate values; and sometimes you only want to list the different (distinct) values.

SELECT DISTINCT Syntax

```
SELECT DISTINCT column1, column2, ...  
FROM table_name;
```

```
SELECT DISTINCT city from students
```

SELECT Example Without DISTINCT

The following SQL statement selects all (including the duplicates) values from the "Country" column in the "Customers" table:

```
SELECT city from students;
```

```
SELECT COUNT(DISTINCT city) FROM students
```

MySQL WHERE Clause

The MySQL WHERE Clause

The `WHERE` clause is used to filter records.

It is used to extract only those records that fulfill a specified condition.

WHERE Syntax

`SELECT` *column1, column2, ...*

`FROM` *table_name*

`WHERE` *condition;*

```
SELECT * FROM students WHERE city = 'rajkot'
```

```
SELECT * FROM students WHERE roll > 5
```

```
SELECT * FROM students WHERE roll = 5;
```

```
SELECT * FROM students WHERE roll <> 5;
```

```
SELECT * FROM students WHERE not roll = 5;
```

Note: The `WHERE` clause is not only used in `SELECT` statements, it is also used in `UPDATE`, `DELETE`, etc.!

Text Fields vs. Numeric Fields

SQL requires single quotes around text values (most database systems will also allow double quotes).

However, numeric fields should not be enclosed in quotes:

```
SELECT * from students WHERE gender = 'male'
```

```
SELECT * from students WHERE gender = male
```

```
SELECT * from students WHERE roll = 8
```

```
SELECT * from students WHERE roll = '8';
```

MySQL AND, OR and NOT Operators

The MySQL AND, OR and NOT Operators

The `WHERE` clause can be combined with `AND`, `OR`, and `NOT` operators.

The `AND` and `OR` operators are used to filter records based on more than one condition:

- The `AND` operator displays a record if all the conditions separated by `AND` are `TRUE`.
- The `OR` operator displays a record if any of the conditions separated by `OR` is `TRUE`.
- The `NOT` operator displays a record if the condition(s) is `NOT TRUE`.

AND Syntax

```
SELECT column1, column2, ...  
FROM table_name  
WHERE condition1 AND condition2 AND condition3 ...;
```

OR Syntax

```
SELECT column1, column2, ...  
FROM table_name  
WHERE condition1 OR condition2 OR condition3 ...;
```

NOT Syntax

```
SELECT column1, column2, ...  
FROM table_name  
WHERE NOT condition;
```

```
SELECT roll, fname, lname, city from students WHERE roll = 1 and city = 'rajkot'
```

```
SELECT roll, fname, lname, city from students WHERE roll = 1 and city = 'surat';
```

```
SELECT roll, fname, lname, city from students WHERE city = 'rajkot' or city = 'surat';
```

```
SELECT roll, fname, lname, city from students WHERE not (city = 'rajkot' or city = 'surat');
```

```
SELECT roll, fname, lname, city from students WHERE not city = 'rajkot' ;
```

Combining AND, OR and NOT

You can also combine the `AND`, `OR` and `NOT` operators.

```
SELECT * from students WHERE roll = 1 and (city = 'rajkot' or city = 'surat')
```

MySQL ORDER BY Keyword

The MySQL ORDER BY Keyword

The `ORDER BY` keyword is used to sort the result-set in ascending or descending order.

The `ORDER BY` keyword sorts the records in ascending order by default. To sort the records in descending order, use the `DESC` keyword.

ORDER BY Syntax

```
SELECT column1, column2, ...  
FROM table_name  
ORDER BY column1, column2, ... ASC|DESC;
```

```
SELECT * from students
```

```
SELECT * from students ORDER by fname;
```

```
SELECT * from students ORDER by fname desc;
```

ORDER BY Several Columns Example

```
SELECT * from students ORDER by fname desc, lname desc;
```

MySQL INSERT INTO Statement

The MySQL INSERT INTO Statement

The `INSERT INTO` statement is used to insert new records in a table.

INSERT INTO Syntax

It is possible to write the `INSERT INTO` statement in two ways:

1. Specify both the column names and the values to be inserted:

```
INSERT INTO table_name (column1, column2, column3, ...)  
VALUES (value1, value2, value3, ...);
```

2. If you are adding values for all the columns of the table, you do not need to specify the column names in the SQL query. However, make sure the order of the values is in the same order as the columns in the table. Here, the `INSERT INTO` syntax would be as follows:

```
INSERT INTO table_name  
VALUES (value1, value2, value3, ...);
```

INSERT INTO Example

The following SQL statement inserts a new record in the "Students" table:

```
INSERT into students (fname, lname, city, email, phone, gender, bloodgroup) VALUES  
( 'patel', 'riya', 'ahamdabad', 'riya@gmail.com', '9988999900', 'female', 'o positive');
```

1 row inserted.

Inserted row id: **11** (Query took 0.0032 seconds.)

Did you notice that we did not insert any number into the Roll field?

The **roll** column is an [auto-increment](#) field and will be generated automatically when a new record is inserted into the table.

```
INSERT into students (fname, lname, city, email, phone, gender, bloodgroup) VALUES ('patel', 'siya',  
'ahamdabad', 'siya@gmail.com', '9988999900', 'female', 'o positive');
```

Insert Data Only in Specified Columns

It is also possible to only insert data in specific columns.

```
INSERT into students (fname, lname, city, gender, bloodgroup) VALUES ('patel', 'siya', 'ahamdabad',  
'female', 'o positive');
```

```
INSERT into students VALUES ('patel', 'jiya', 'jiya@gmail.com', '9988998899', 'ahamdabad', 'female', 'o positive');
```

```
#1136 - Column count doesn't match value count at row 1
```

```
INSERT into students VALUES (null, 'patel', 'jiya', 'jiya@gmail.com', '9988998899', 'ahamdabad', 'female', 'o positive');
```

MySQL NULL Values

What is a NULL Value?

A field with a NULL value is a field with no value.

If a field in a table is optional, it is possible to insert a new record or update a record without adding a value to this field. Then, the field will be saved with a NULL value.

Note: A NULL value is different from a zero value or a field that contains spaces. A field with a NULL value is one that has been left blank during record creation!

```
SELECT * from students WHERE email is null
```

```
SELECT * from students WHERE email = '';
```

How to Test for NULL Values?

It is not possible to test for NULL values with comparison operators, such as =, <, or <>.

We will have to use the `IS NULL` and `IS NOT NULL` operators instead.

IS NULL Syntax

```
SELECT column_names  
FROM table_name  
WHERE column_name IS NULL;
```

IS NOT NULL Syntax

```
SELECT column_names  
FROM table_name  
WHERE column_name IS NOT NULL;
```

```
INSERT into students (fname, lname, city, gender, bloodgroup) VALUES ('patel', 'siya', 'ahamdabad',  
'female', 'o positive');
```

```
INSERT into students (fname, lname, city, gender, bloodgroup) VALUES ('pandya', 'priya',  
'ahamdabad', 'female', 'o positive');
```

```
SELECT * from students WHERE email is null
```

```
SELECT * from students WHERE email is not null;
```

Tip: Always use `IS NULL` to look for NULL values.

The IS NOT NULL Operator

The `IS NOT NULL` operator is used to test for non-empty values (NOT NULL values).

MySQL UPDATE Statement

The MySQL UPDATE Statement

The `UPDATE` statement is used to modify the existing records in a table.

UPDATE Syntax

`UPDATE table_name`

`SET column1 = value1, column2 = value2, ...`

`WHERE condition;`

Note: Be careful when updating records in a table! Notice the `WHERE` clause in the `UPDATE` statement. The `WHERE` clause specifies which record(s) that should be updated. If you omit the `WHERE` clause, all records in the table will be updated!

```
UPDATE students set city = 'Gandhinagar' WHERE roll = 13
```

```
UPDATE students set city = 'Bhuj' WHERE roll > 13
```

UPDATE Multiple Records

It is the `WHERE` clause that determines how many records will be updated.

```
UPDATE students set email = 'demo@gmail.com', phone = '0000000000' where email is null
```

Update Warning!

Be careful when updating records. If you omit the `WHERE` clause, **ALL** records will be updated!

```
UPDATE students set bloodgroup = 'O Negative'
```

```
UPDATE students SET bloodgroup = 'B +ve' WHERE roll >= 12
```

MySQL LIMIT Clause

The MySQL LIMIT Clause

The `LIMIT` clause is used to specify the number of records to return.

The `LIMIT` clause is useful on large tables with thousands of records. Returning a large number of records can impact performance.

LIMIT Syntax

```
SELECT column_name(s)
FROM table_name
WHERE condition
LIMIT number;
```

```
SELECT * FROM students LIMIT 5
```

```
SELECT * FROM students WHERE city = 'rajkot' LIMIT 5;
```

What if we want to select records 4 - 6 (inclusive)?

MySQL provides a way to handle this: by using `OFFSET`.

The SQL query below says "return only 3 records, start on record 4 (`OFFSET 3`)":

```
SELECT * FROM students LIMIT 5 OFFSET 5;
```

```
SELECT * FROM students LIMIT 5 OFFSET 10;
```

```
SELECT * FROM students LIMIT 10, 5;
```

```
SELECT * FROM students LIMIT 0, 5;
```

```
SELECT * FROM students LIMIT 20, 5;
```

MySQL MIN() and MAX() Functions

MySQL MIN() and MAX() Functions

The `MIN()` function returns the smallest value of the selected column.

The `MAX()` function returns the largest value of the selected column.

MIN() Syntax

```
SELECT MIN(column_name)  
FROM table_name  
WHERE condition;
```

MAX() Syntax

```
SELECT MAX(column_name)  
FROM table_name  
WHERE condition;
```

```
SELECT max(roll) FROM students
```

```
SELECT min(roll) FROM students;
```

```
SELECT max(fees) FROM students
```

```
SELECT min(fees) FROM students;
```

MySQL COUNT(), AVG() and SUM() Functions

MySQL COUNT(), AVG() and SUM() Functions

The `COUNT()` function returns the number of rows that matches a specified criterion.

`COUNT()` Syntax

```
SELECT COUNT(column_name)  
FROM table_name  
WHERE condition;
```

The `AVG()` function returns the average value of a numeric column.

`AVG()` Syntax

```
SELECT AVG(column_name)  
FROM table_name  
WHERE condition;
```

The `SUM()` function returns the total sum of a numeric column.

`SUM()` Syntax

```
SELECT SUM(column_name)  
FROM table_name  
WHERE condition;
```

```
SELECT COUNT(roll) from students where fees > 10000;
```

```
SELECT COUNT(roll), sum(fees) from students where fees > 10000;
```

```
SELECT COUNT(roll), sum(fees) from students where city = 'rajkot';
```

```
SELECT COUNT(roll), sum(fees), avg(fees) from students where city = 'rajkot';
```

MySQL LIKE Operator

The MySQL LIKE Operator

The `LIKE` operator is used in a `WHERE` clause to search for a specified pattern in a column.

There are two wildcards often used in conjunction with the `LIKE` operator:

- The percent sign (%) represents **zero, one, or multiple** characters
- The underscore sign (_) represents **one, single** character

```
SELECT * from students WHERE fname like '%a%'
```

```
SELECT * from students WHERE fname like '%a';
```

```
SELECT * from students WHERE fname like '_a%';
```

```
SELECT * from students WHERE fname not like '_a%';
```

LIKE Syntax

```
SELECT column1, column2, ... FROM table_name WHERE columnN LIKE pattern;
```

Tip: You can also combine any number of conditions using `AND` or `OR` operators.

Here are some examples showing different `LIKE` operators with '%' and '_' wildcards:

LIKE Operator	Description
WHERE CustomerName LIKE 'a%'	Finds any values that start with "a"
WHERE CustomerName LIKE '%a'	Finds any values that end with "a"
WHERE CustomerName LIKE '%or%'	Finds any values that have "or" in any position
WHERE CustomerName LIKE '_r%'	Finds any values that have "r" in the second position
WHERE CustomerName LIKE 'a_%'	Finds any values that start with "a" and are at least 2 characters in length
WHERE CustomerName LIKE 'a__%'	Finds any values that start with "a" and are at least 3 characters in length
WHERE ContactName LIKE 'a%o'	Finds any values that start with "a" and ends with "o"

```
SELECT * from students WHERE fname like '_r%';
```

```
SELECT * from students WHERE fname like 'a%n';
```

MySQL Wildcards

MySQL Wildcard Characters

A wildcard character is used to substitute one or more characters in a string.

Wildcard characters are used with the [LIKE](#) operator. The `LIKE` operator is used in a `WHERE` clause to search for a specified pattern in a column.

Wildcard Characters in MySQL

Symbol	Description	Example
%	Represents zero or more characters	<code>bl%</code> finds bl, black, blue, and blob
_	Represents a single character	<code>h_t</code> finds hot, hat, and hit

The wildcards can also be used in combinations!

```
SELECT * from students WHERE city like 'raj%'
```

MySQL IN Operator

The MySQL IN Operator

The `IN` operator allows you to specify multiple values in a `WHERE` clause.

The `IN` operator is a shorthand for multiple `OR` conditions.

IN Syntax

```
SELECT column_name(s)
FROM table_name
WHERE column_name IN (value1, value2, ...);
```

or:

```
SELECT column_name(s)
FROM table_name
WHERE column_name IN (SELECT STATEMENT);
```

```
SELECT * from students WHERE city = 'Rajkot' or city = 'baroda' or city = 'jetpur'
```

IN Operator Examples

```
SELECT * from students WHERE city in ('Rajkot', 'baroda', 'jetpur');
```

```
SELECT * from students WHERE city not in ('Rajkot', 'baroda', 'jetpur');
```


MySQL BETWEEN Operator

The MySQL BETWEEN Operator

The `BETWEEN` operator selects values within a given range. The values can be numbers, text, or dates.

The `BETWEEN` operator is inclusive: begin and end values are included.

BETWEEN Syntax

```
SELECT column_name(s)
FROM table_name
WHERE column_name BETWEEN value1 AND value2;
```

```
SELECT * from students WHERE roll >= 5 and roll <= 10
```

```
SELECT * from students WHERE roll between 1 and 5
```

```
SELECT * from students WHERE roll between 5 and 10;
```

```
SELECT * from students WHERE fname between 'aryan' and 'nishit';
```

```
SELECT * from students WHERE fees between 10000 and 15000;
```

```
SELECT * from students WHERE fees not between 10000 and 15000;
```

BETWEEN with IN Example

```
SELECT * from students WHERE fees not between 10000 and 15000 and roll in (1,2,3,4,5);
```

```
SELECT * from students WHERE fees not between 10000 and 15000 and roll <= 5;
```

BETWEEN Text Values Example

```
SELECT * from students WHERE fname between 'aryan' and 'nishit';
```

BETWEEN Dates Example

```
SELECT * from students WHERE admissiondate BETWEEN '2020-01-01' and '2022-12-31'
```

```
SELECT * from students WHERE admissiondate not BETWEEN '2020-01-01' and '2022-12-31';
```

MySQL DELETE Statement

The MySQL DELETE Statement

The `DELETE` statement is used to delete existing records in a table.

DELETE Syntax

DELETE FROM *table_name* **WHERE** *condition*;

Note: Be careful when deleting records in a table! Notice the `WHERE` clause in the `DELETE` statement. The `WHERE` clause specifies which record(s) should be deleted. If you omit the `WHERE` clause, all records in the table will be deleted!

SQL DELETE Example

DELETE from students WHERE city = 'Bhuj'

DELETE from students WHERE bloodgroup = 'B +ve'

Delete All Records

It is possible to delete all rows in a table without deleting the table. This means that the table structure, attributes, and indexes will be intact:

DELETE from students

Truncate table students

Delete all the data from table and reset all the auto increment from table

TRUNCATE TABLE students