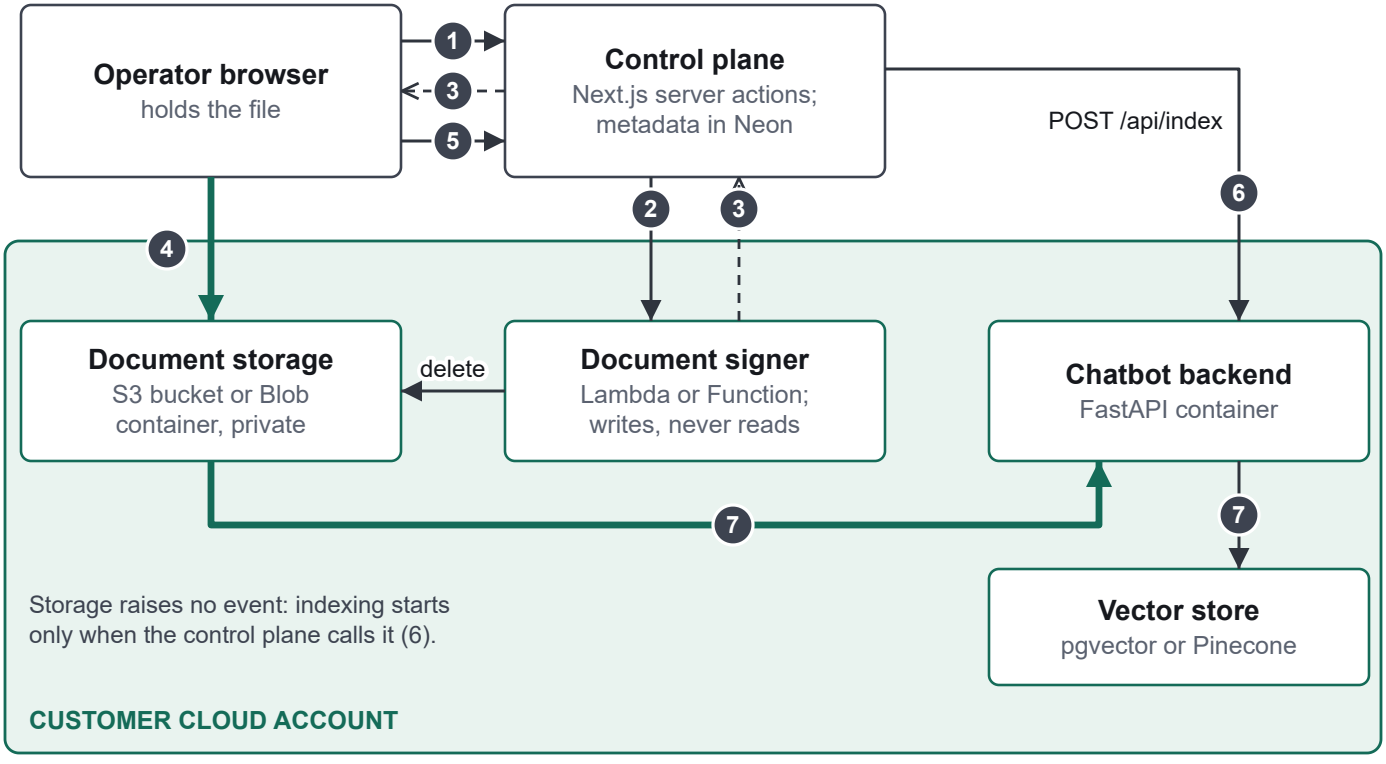


1. The operator asks to upload, or to delete, a document.
2. The control plane calls the tenant's document signer, authenticated by a shared secret.
3. The signer returns a 60-second authorization: an S3 presigned POST or an Azure user-delegation SAS. For a deletion, the signer deletes the object itself instead.
4. The browser uploads the file straight to the customer's storage.
5. The browser confirms; the control plane marks the document uploaded.
6. The control plane calls the backend's POST /api/index (public; no credential).
7. The backend re-reads every document under the prefix, re-embeds it and resyncs the vector store, removing vectors of deleted documents.

call response document content