

# ClickHouse文档

## 什么是ClickHouse ?

ClickHouse是一个用于联机分析(OLAP)的列式数据库管理系统(DBMS)。

在传统的行式数据库系统中，数据按如下顺序存储：

Row	WatchID	JavaEnable	Title	GoodEvent	EventTime
#0	89354350662	1	Investor Relations	1	2016-05-18 05:19:20
#1	90329509958	0	Contact us	1	2016-05-18 08:10:20
#2	89953706054	1	Mission	1	2016-05-18 07:38:00
#N	...	...	...	...	...

处于同一行中的数据总是被物理的存储在一起。

常见的行式数据库系统有： MySQL、 Postgres和MS SQL Server。

在列式数据库系统中，数据按如下的顺序存储：

Row:	#0	#1	#2	#N
WatchID:	89354350662	90329509958	89953706054	...
JavaEnable:	1	0	1	...
Title:	Investor Relations	Contact us	Mission	...
GoodEvent:	1	1	1	...
EventTime:	2016-05-18 05:19:20	2016-05-18 08:10:20	2016-05-18 07:38:00	...

该示例中只展示了数据在列式数据库中数据的排列顺序。对于存储而言，列式数据库总是将同一列的数据存储在一起，不同列的数据也总是分开存储。

常见的列式数据库有：Vertica、Paraccel (Actian Matrix , Amazon Redshift)、Sybase IQ、Exasol、Infobright、InfiniDB、MonetDB (VectorWise , Actian Vector)、LucidDB、SAP HANA、Google Dremel、Google PowerDrill、Druid、kdb+。

不同的存储方式适合不同的场景，这里的查询场景包括：进行了哪些查询，多久查询一次以及各类查询的比例；每种查询读取多少数据——行、列和字节；读取数据和写入数据之间的关系；使用的数据集大小以及如何使用本地的数据集；是否使用事务，以及它们是如何进行隔离的；数据的复制机制与数据的完整性要求；每种类型的查询要求的延迟与吞吐量等等。

系统负载越高，根据使用场景进行定制化就越重要，并且定制将会变的越精细。没有一个系统同样适用于明显不同的场景。如果系统适用于广泛的场景，在负载高的情况下，所有的场景可以会被公平但低效处理，或者高效处理一小部分场景。

## OLAP场景的关键特征

- 大多数是读请求
  - 数据总是以相当大的批(> 1000 rows)进行写入
  - 不修改已添加的数据
  - 每次查询都从数据库中读取大量的行，但是同时又仅需要少量的列
  - 宽表，即每个表包含着大量的列
  - 较少的查询(通常每台服务器每秒数百个查询或更少)
  - 对于简单查询，允许延迟大约50毫秒
  - 列中的数据相对较小：数字和短字符串(例如，每个URL 60个字节)
  - 处理单个查询时需要高吞吐量（每个服务器每秒高达数十亿行）
  - 事务不是必须的
  - 对数据一致性要求低
  - 每一个查询除了一个大表外都很小
  - 查询结果明显小于源数据，换句话说，数据被过滤或聚合后能够被盛放在单台服务器的内存中

很容易可以看出，OLAP场景与其他流行场景(例如,OLTP或K/V)有很大的不同，因此想要使用OLTP或Key-Value数据库去高效的处理分析查询是没有意义的，例如，使用OLAP数据库去处理分析请求通常要优于使用MongoDB或Redis去处理分析请求。

列式数据库更适合OLAP场景的原因

列式数据库更适合于OLAP场景(对于大多数查询而言，处理速度至少提高了100倍)，下面详细解释了原因(通过图片更有利  
于直观理解)：

行式



### 列式



看到差别了么？下面将详细介绍为什么会发生这种情况。

### Input/output

1. 针对分析类查询，通常只需要读取表的一小部分列。在列式数据库中你可以只读取你需要的数据。例如，如果只需要读取100列中的5列，这将帮助你最少减少20倍的I/O消耗。
2. 由于数据总是打包成批量读取的，所以压缩是非常容易的。同时数据按列分别存储这也更容易压缩。这进一步降低了I/O的体积。
3. 由于I/O的降低，这将帮助更多的数据被系统缓存。

例如，查询“统计每个广告平台的记录数量”需要读取“广告平台ID”这一列，它在未压缩的情况下需要1个字节进行存储。如果大部分流量不是来自广告平台，那么这一列至少可以以十倍的压缩率被压缩。当采用快速压缩算法，它的解压速度最少在十亿字节(未压缩数据)每秒。换句话说，这个查询可以在单个服务器上以每秒大约几十亿行的速度进行处理。这实际上是当前实现的速度。

## 示例

```
$ clickhouse-client
ClickHouse client version 0.0.52053.
Connecting to localhost:9000.
Connected to ClickHouse server version 0.0.52053.

:) SELECT CounterID, count() FROM hits GROUP BY CounterID ORDER BY count() DESC LIMIT 20

SELECT
    CounterID,
    count()
FROM hits
GROUP BY CounterID
ORDER BY count() DESC
LIMIT 20

+-----+-----+
| CounterID | count() |
+-----+-----+
| 114208 | 56057344 |
| 115080 | 51619590 |
| 3228 | 44658301 |
| 38230 | 42045932 |
| 145263 | 42042158 |
| 91244 | 38297270 |
| 154139 | 26647572 |
| 150748 | 24112755 |
| 242232 | 21302571 |
| 338158 | 13507087 |
| 62180 | 12229491 |
| 82264 | 12187441 |
| 232261 | 12148031 |
| 146272 | 11438516 |
| 168777 | 11403636 |
| 4120072 | 11227824 |
| 10938808 | 10519739 |
| 74088 | 9047015 |
| 115079 | 8837972 |
| 337234 | 8205961 |
+-----+-----+

20 rows in set. Elapsed: 0.153 sec. Processed 1.00 billion rows, 4.00 GB (6.53 billion rows/s., 26.10
GB/s.)

:)
```

## CPU

由于执行一个查询需要处理大量的行，因此在整个向量上执行所有操作将比在每一行上执行所有操作更加高效。同时这将有助于实现一个几乎没有调用成本的查询引擎。如果你不这样做，使用任何一个机械硬盘，查询引擎都不可避免的停止CPU进行等待。所以，在数据按列存储并且按列执行是很有意义的。

有两种方法可以做到这一点：

1. 向量引擎：所有的操作都是为向量而不是为单个值编写的。这意味着多个操作之间的不再需要频繁的调用，并且调用的成本基本可以忽略不计。操作代码包含一个优化的内部循环。
2. 代码生成：生成一段代码，包含查询中的所有操作。

这是不应该在一个通用数据库中实现的，因为这在运行简单查询时是没有意义的。但是也有例外，例如，MemSQL使用代码生成来减少处理SQL查询的延迟(只是为了比较，分析型数据库通常需要优化的是吞吐而不是延迟)。

请注意，为了提高CPU效率，查询语言必须是声明型的(SQL或MDX)，或者至少一个向量(J, K)。查询应该只包含隐式循环，允许进行优化。

# ClickHouse的独特功能

## 真正的列式数据库管理系统

在一个真正的列式数据库管理系统中，除了数据本身外不应该存在其他额外的数据。这意味着为了避免在值旁边存储它们的长度“number”，你必须支持固定长度数值类型。例如，10亿个UInt8类型的数据在未压缩的情况下大约消耗1GB左右的空间，如果不是这样的话，这将对CPU的使用产生强烈影响。即使是在未压缩的情况下，紧凑的存储数据也是非常重要的，因为解压缩的速度主要取决于未压缩数据的大小。

这是非常值得注意的，因为在一些其他系统中也可以将不同的列分别进行存储，但由于对其他场景进行的优化，使其无法有效的处理分析查询。例如：HBase，BigTable，Cassandra，HyperTable。在这些系统中，你可以得到每秒数十万的吞吐能力，但是无法得到每秒几亿行的吞吐能力。

需要说明的是，ClickHouse不单单是一个数据库，它是一个数据库管理系统。因为它允许在运行时创建表和数据库、加载数据和运行查询，而无需重新配置或重启服务。

## 数据压缩

在一些列式数据库管理系统中(例如：InfiniDB CE 和 MonetDB) 并没有使用数据压缩。但是，若想达到比较优异的性能，数据压缩确实起到了至关重要的作用。

## 数据的磁盘存储

许多的列式数据库(如 SAP HANA, Google PowerDrill)只能在内存中工作，这种方式会造成比实际更多的设备预算。ClickHouse被设计用于工作在传统磁盘上的系统，它提供每GB更低的存储成本，但如果有可以使用SSD和内存，它也会合理的利用这些资源。

## 多核心并行处理

ClickHouse会使用服务器上一切可用的资源，从而以最自然的方式并行处理大型查询。

## 多服务器分布式处理

上面提到的列式数据库管理系统中，几乎没有一个支持分布式的查询处理。在ClickHouse中，数据可以保存在不同的shard上，每一个shard都由一组用于容错的replica组成，查询可以并行地在所有shard上进行处理。这些对用户来说是透明的。

## 支持SQL

ClickHouse支持基于SQL的声明式查询语言，该语言大部分情况下是与SQL标准兼容的。支持的查询包括 GROUP BY，ORDER BY，IN，JOIN以及非相关子查询。不支持窗口函数和相关子查询。

## 向量引擎

为了高效的使用CPU，数据不仅仅按列存储，同时还按向量(列的一部分)进行处理，这样可以更加高效地使用CPU。

## 实时的数据更新

ClickHouse支持在表中定义主键。为了使查询能够快速在主键中进行范围查找，数据总是以增量的方式有序的存储在MergeTree中。因此，数据可以持续不断地高效的写入到表中，并且写入的过程中不会存在任何加锁的行为。

## 索引

按照主键对数据进行排序，这将帮助ClickHouse在几十毫秒以内完成对数据特定值或范围的查找。

## 适合在线查询

在线查询意味着在没有对数据做任何预处理的情况下以极低的延迟处理查询并将结果加载到用户的页面中。

## 支持近似计算

ClickHouse提供各种各样在允许牺牲数据精度的情况下对查询进行加速的方法：

1. 用于近似计算的各类聚合函数，如：distinct values, medians, quantiles
2. 基于数据的部分样本进行近似查询。这时，仅会从磁盘检索少部分比例的数据。
3. 不使用全部的聚合条件，通过随机选择有限个数据聚合条件进行聚合。这在数据聚合条件满足某些分布条件下，在提供相当准确的聚合结果的同时降低了计算资源的使用。

## 支持数据复制和数据完整性

ClickHouse使用异步的多主复制技术。当数据被写入任何一个可用副本后，系统会在后台将数据分发给其他副本，以保证系统在不同副本上保持相同的数据。在大多数情况下ClickHouse能在故障后自动恢复，在一些少数的复杂情况下需要手动恢复。

更多信息，参见 [数据复制](#)。

## ClickHouse可以认为是缺点的功能

1. 没有完整的事务支持。
2. 缺少高频率，低延迟的修改或删除已存在数据的能力。仅能用于批量删除或修改数据，但这符合 [GDPR](#)。
3. 稀疏索引使得ClickHouse不适合通过其键检索单行的点查询。

## Performance

根据Yandex的内部测试结果，ClickHouse表现出了比同类可比较产品更优的性能。你可以在 [这里](#) 查看具体的测试结果。

许多其他的测试也证实这一点。你可以使用互联网搜索到它们，或者你也可以从 [我们收集的部分相关连接](#) 中查看。

## 单个大查询的吞吐量

吞吐量可以使用每秒处理的行数或每秒处理的字节数来衡量。如果数据被放置在page cache中，则一个不太复杂的查询在单个服务器上大约能够以2-10GB / s（未压缩）的速度进行处理（对于简单的查询，速度可以达到30GB / s）。如果数据没有在page cache中的话，那么速度将取决于你的磁盘系统和数据的压缩率。例如，如果一个磁盘允许以400MB / s的速度读取数据，并且数据压缩率是3，则数据的处理速度为1.2GB/s。这意味着，如果你是在提取一个10字节的列，那么它的处理速度大约是1-2亿行每秒。

对于分布式处理，处理速度几乎是线性扩展的，但这受限于聚合或排序的结果不是那么大的情况下。

## 处理短查询的延迟时间

如果一个查询使用主键并且没有太多行(几十万)进行处理，并且没有查询太多的列，那么在数据被page cache缓存的情况下，它的延迟应该小于50毫秒(在最佳的情况下应该小于10毫秒)。否则，延迟取决于数据的查找次数。如果你当前使用的是HDD，在数据没有加载的情况下，查询所需要的延迟可以通过以下公式计算得知：查找时间 ( 10 ms ) \* 查询的列的数

量 \* 查询的数据块的数量。

## 处理大量短查询的吞吐量

在相同的情况下，ClickHouse可以在单个服务器上每秒处理数百个查询（在最佳的情况下最多可以处理数千个）。但是由于这不适用于分析型场景。因此我们建议每秒最多查询100次。

## 数据的写入性能

我们建议每次写入不少于1000行的批量写入，或每秒不超过一个写入请求。当使用tab-separated格式将一份数据写入到MergeTree表中时，写入速度大约为50到200MB/s。如果您写入的数据每行为1Mb，那么写入的速度为50,000到200,000行每秒。如果您的行更小，那么写入速度将更高。为了提高写入性能，您可以使用多个INSERT进行并行写入，这将带来线性的性能提升。

## ClickHouse历史

ClickHouse最初是为 [Yandex.Metrica 世界第二大Web分析平台](#) 而开发的。多年来一直作为该系统的核心组件被该系统持续使用着。目前为止，该系统在ClickHouse中有超过13万亿条记录，并且每天超过200多亿个事件被处理。它允许直接从原始数据中动态查询并生成报告。本文简要介绍了ClickHouse在其早期发展阶段的目标。

Yandex.Metrica基于用户定义的字段，对实时访问、连接会话，生成实时的统计报表。这种需求往往需要复杂聚合方式，比如对访问用户进行去重。构建报表的数据，是实时接收存储的新数据。

截至2014年4月，Yandex.Metrica每天跟踪大约120亿个事件（用户的点击和浏览）。为了可以创建自定义的报表，我们必须存储全部这些事件。同时，这些查询可能需要在几百毫秒内扫描数百万行的数据，或在几秒内扫描数亿行的数据。

## Yandex.Metrica以及其他Yandex服务的使用案例

在Yandex.Metrica中，ClickHouse被用于多个场景中。它的主要任务是使用原始数据在线的提供各种数据报告。它使用374台服务器的集群，存储了20.3万亿行的数据。在去除重复与副本数据的情况下，压缩后的数据达到了2PB。未压缩前（TSV格式）它大概有17PB。

ClickHouse还被使用在：

- 存储来自Yandex.Metrica回话重放数据。
- 处理中间数据
- 与Analytics一起构建全球报表。
- 为调试Yandex.Metrica引擎运行查询
- 分析来自API和用户界面的日志数据

ClickHouse在其他Yandex服务中至少有12个安装：search verticals, Market, Direct, business analytics, mobile development, AdFox, personal services等。

## 聚合与非聚合数据

有一种流行的观点认为，想要有效的计算统计数据，必须要聚合数据，因为聚合将降低数据量。

但是数据聚合是一个有诸多限制的解决方案，例如：

- 你必须提前知道用户定义的报表的字段列表
- 用户无法自定义报表

- 当聚合条件过多时，可能不会减少数据，聚合是无用的。
- 存在大量报表时，有太多的聚合变化（组合爆炸）
- 当聚合条件有非常大的基数时（如：url），数据量没有太大减少（少于两倍）
- 聚合的数据量可能会增长而不是收缩
- 用户不会查看我们为他生成的所有报告，大部分计算将是无用的
- 各种聚合可能违背了数据的逻辑完整性

如果我们直接使用非聚合数据而不进行任何聚合时，我们的计算量可能是减少的。

然而，相对于聚合中很大一部分工作被离线完成，在线计算需要尽快的完成计算，因为用户在等待结果。

Yandex.Metrica有一个专门用于聚合数据的系统，称为Metrage，它可以用作大部分报表。从2009年开始，Yandex.Metrica还为非聚合数据使用专门的OLAP数据库，称为OLAPServer，它以前用于报表构建系统。OLAPServer可以很好的工作在非聚合数据上，但是它有诸多限制，导致无法根据需要将其用于所有报表中。如，缺少对数据类型的支持（只支持数据），无法实时增量的更新数据（只能通过每天重写数据完成）。OLAPServer不是一个数据库管理系统，它只是一个数据库。

为了消除OLAPServer的这些局限性，解决所有报表使用非聚合数据的问题，我们开发了ClickHouse数据库管理系统。

## ClickHouse Adopters

### Disclaimer

The following list of companies using ClickHouse and their success stories is assembled from public sources, thus might differ from current reality. We'd really appreciate if you share the story of adopting ClickHouse in your company and [add it to the list](#), but please make sure you won't have any NDA issues by doing so. Providing updates with publications by other companies is also useful.

Company	Industry	Usecase	Cluster Size	(Un)Compressed Data Size*	Reference
2gis	Maps	Monitoring	—	—	<a href="#">Talk in Russian, July 2019</a>
Aloha Browser	Mobile App	Browser backend	—	—	<a href="#">Slides in Russian, May 2019</a>
Amadeus	Travel	Analytics	—	—	<a href="#">Press Release, April 2018</a>
Appsflyer	Mobile analytics	Main product	—	—	<a href="#">Talk in Russian, July 2019</a>
ArenaData	Data Platform	Main product	—	—	<a href="#">Slides in Russian, December 2019</a>
Badoo	Dating	Timeseries	—	—	<a href="#">Slides in Russian, December 2019</a>
Benocs	Network Telemetry and Analytics	Main Product	—	—	<a href="#">Slides in English, October 2017</a>
Bloomberg	Finance, Media	Monitoring	102 servers	—	<a href="#">Slides, May 2018</a>
Bloxy	Blockchain	Analytics	—	—	<a href="#">Slides in Russian, August 2018</a>

Company DataLiance/UltraPower	Industry Telecom	Usecase Analytics	Cluster Size	(Un)Compressed Data Size	Reference Slides in Chinese, January 2018
CARTO	Business Intelligence	Geo analytics	—	—	Geospatial processing with Clickhouse
CERN	Research	Experiment	—	—	Press release, April 2012
Cisco	Networking	Traffic analysis	—	—	Lightning talk, October 2019
Citadel Securities	Finance	—	—	—	Contribution, March 2019
Citymobil	Taxi	Analytics	—	—	Blog Post in Russian, March 2020
ContentSquare	Web analytics	Main product	—	—	Blog post in French, November 2018
Cloudflare	CDN	Traffic analysis	36 servers	—	Blog post, May 2017, Blog post, March 2018
Corunet	Analytics	Main product	—	—	Slides in English, April 2019
CraeditX 氚信	Finance AI	Analysis	—	—	Slides in English, November 2019
Criteo/Storetail	Retail	Main product	—	—	Slides in English, October 2018
Deutsche Bank	Finance	BI Analytics	—	—	Slides in English, October 2019
Diva-e	Digital consulting	Main Product	—	—	Slides in English, September 2019
Exness	Trading	Metrics, Logging	—	—	Talk in Russian, May 2019
Geniee	Ad network	Main product	—	—	Blog post in Japanese, July 2017
HUYA	Video Streaming	Analytics	—	—	Slides in Chinese, October 2018
Idealista	Real Estate	Analytics	—	—	Blog Post in English, April 2019
Infovista	Networks	Analytics	—	—	Slides in English, October 2019

Company	Industry	Metrics, Usecase, Logging	Cluster Size	(Un)Compressed Data Size	Slides in Russian, Reference
Integros	Platform for video services	Analytics	—	—	Slides in Russian, May 2019
Kodiak Data	Clouds	Main product	—	—	Slides in English, April 2018
Kontur	Software Development	Metrics	—	—	Talk in Russian, November 2018
LifeStreet	Ad network	Main product	75 servers (3 replicas)	5.27 PiB	Blog post in Russian, February 2017
Mail.ru Cloud Solutions	Cloud services	Main product	—	—	Running ClickHouse Instance, in Russian
MessageBird	Telecommunications	Statistics	—	—	Slides in English, November 2018
MGID	Ad network	Web-analytics	—	—	Our experience in implementing analytical DBMS ClickHouse, in Russian
OneAPM	Monitorings and Data Analysis	Main product	—	—	Slides in Chinese, October 2018
Pragma Innovation	Telemetry and Big Data Analysis	Main product	—	—	Slides in English, October 2018
QINGCLOUD	Cloud services	Main product	—	—	Slides in Chinese, October 2018
Qrator	DDoS protection	Main product	—	—	Blog Post, March 2019
Beijing PERCENT Information Technology Co., Ltd.	Analytics	Main Product	—	—	Slides in Chinese, June 2019
Rambler	Internet services	Analytics	—	—	Talk in Russian, April 2018
Tencent	Messaging	Logging	—	—	Talk in Chinese, November 2019
Traffic Stars	AD network	—	—	—	Slides in Russian, May 2018
S7 Airlines	Airlines	Metrics, Logging	—	—	Talk in Russian, March 2019
SEMrush	Marketing	Main product	—	—	Slides in Russian, August 2018

Company	Industry	Main product / Usecase	Cluster Size	(Un)Compressed Data Size	Talk in German, February 2020
Sentry	Software developer	Backend for product	—	—	Blog Post in English, May 2019
SGK	Government Social Security	Analytics	—	—	Slides in English, November 2019
seo.do	Analytics	Main product	—	—	Slides in English, November 2019
Sina	News	—	—	—	Slides in Chinese, October 2018
SMI2	News	Analytics	—	—	Blog Post in Russian, November 2017
Splunk	Business Analytics	Main product	—	—	Slides in English, January 2018
Spotify	Music	Experimentation	—	—	Slides, July 2018
Tencent	Big Data	Data processing	—	—	Slides in Chinese, October 2018
Uber	Taxi	Logging	—	—	Slides, February 2020
Vkontakte	Social Network	Statistics, Logging	—	—	Slides in Russian, August 2018
Wisebits	IT Solutions	Analytics	—	—	Slides in Russian, May 2019
Xiaoxin Tech.	Education	Common purpose	—	—	Slides in English, November 2019
Ximalaya	Audio sharing	OLAP	—	—	Slides in English, November 2019
Yandex Cloud	Public Cloud	Main product	—	—	Talk in Russian, December 2019
Yandex DataLens	Business Intelligence	Main product	—	—	Slides in Russian, December 2019
Yandex Market	e-Commerce	Metrics, Logging	—	—	Talk in Russian, January 2019
Yandex Metrica	Web analytics	Main product	360 servers in one cluster, 1862 servers in one department	66.41 PiB / 5.68 PiB	Slides, February 2020
ЦБТ	Software Development	Metrics, Logging	—	—	Blog Post, March 2019, in Russian
MKB	Bank	Web-system monitoring	—	—	Slides in Russian, September 2019

Company 盈为信	Industry BI Analytics	Usecase Main product	Cluster Size	(Un)Compressed Data Size ..	Reference Slides in Chinese, October 2019
----------------	--------------------------	-------------------------	--------------	--------------------------------	---

## 入门

如果您是ClickHouse的新手，并希望亲身体验它的性能，首先您需要通过 [安装过程](#)。

之后，您可以选择以下选项之一：

- [通过详细的教程](#)
- [试验示例数据集](#)

## 系统要求

ClickHouse可以在任何具有x86\_64，AArch64或PowerPC64LE CPU架构的Linux，FreeBSD或Mac OS X上运行。

虽然预构建的二进制文件通常是为x86\\_64编译并利用SSE 4.2指令集，但除非另有说明，否则使用支持它的CPU将成为额外的系统要求。这是检查当前CPU是否支持SSE 4.2的命令：

```
$ grep -q sse4_2 /proc/cpuinfo && echo "SSE 4.2 supported" || echo "SSE 4.2 not supported"
```

要在不支持SSE 4.2或具有AArch64或PowerPC64LE体系结构的处理器上运行ClickHouse，您应该[通过源构建ClickHouse](#)进行适当的配置调整。

## 可用的安装选项

### 为Debian/Ubuntu安装

在 /etc/apt/sources.list (或创建 /etc/apt/sources.list.d/clickhouse.list 文件)中添加仓库：

```
deb http://repo.yandex.ru/clickhouse/deb/stable/ main/
```

如果你想使用最新的测试版本，请使用'testing'替换'stable'。

然后运行：

```
sudo apt-get install dirmngr      # optional
sudo apt-key adv --keyserver hkp://keyserver.ubuntu.com:80 --recv E0C56BD4      # optional
sudo apt-get update
sudo apt-get install clickhouse-client clickhouse-server
```

你也可以从这里手动下载安装包：<https://repo.yandex.ru/clickhouse/deb/stable/main/>。

ClickHouse包含访问控制配置，它们位于 users.xml 文件中(与'config.xml'同目录)。默认情况下，允许从任何地方使用默认的'default'用户无密码的访问ClickHouse。参考'user/default/networks'。有关更多信息，请参考"Configuration files"部分。

### 来自RPM包

Yandex ClickHouse团队建议使用官方预编译的 rpm 软件包，用于CentOS，RedHat和所有其他基于rpm的Linux发行版。

首先，您需要添加官方存储库：

```
sudo yum install yum-utils
sudo rpm --import https://repo.yandex.ru/clickhouse/CCLICKHOUSE-KEY.GPG
sudo yum-config-manager --add-repo https://repo.yandex.ru/clickhouse/rpm/stable/x86_64
```

如果您想使用最新版本，请将 stable 替换为 testing（建议您在测试环境中使用）。

然后运行这些命令以实际安装包：

```
sudo yum install clickhouse-server clickhouse-client
```

您也可以从此处手动下载和安装软件包：[https://repo.yandex.ru/clickhouse/rpm/stable/x86\\_64](https://repo.yandex.ru/clickhouse/rpm/stable/x86_64)。

## 来自Docker

要在Docker中运行ClickHouse，请遵循[Docker Hub](#)上的指南。那些图像使用官方的 deb 包。

## 使用源码安装

具体编译方式可以参考build.md。

你可以编译并安装它们。你也可以直接使用而不进行安装。

```
Client: dbms/programs/clickhouse-client  
Server: dbms/programs/clickhouse-server
```

在服务器中为数据创建如下目录：

```
/opt/clickhouse/data/default/  
/opt/clickhouse/metadata/default/
```

(它们可以在server config中配置。) 为需要的用户运行'chown'

日志的路径可以在server config (src/dbms/programs/server/config.xml)中配置。

## 启动

可以运行如下命令在后台启动服务：

```
sudo service clickhouse-server start
```

可以在 /var/log/clickhouse-server/ 目录中查看日志。

如果服务没有启动，请检查配置文件 /etc/clickhouse-server/config.xml。

你也可以在控制台中直接启动服务：

```
clickhouse-server --config-file=/etc/clickhouse-server/config.xml
```

在这种情况下，日志将被打印到控制台中，这在开发过程中很方便。如果配置文件在当前目录中，你可以不指定'--config-file'参数。它默认使用'./config.xml'。

你可以使用命令行客户端连接到服务：

```
clickhouse-client
```

默认情况下它使用'default'用户无密码的与localhost:9000服务建立连接。客户端也可以用于连接远程服务，例如：

```
clickhouse-client --host=example.com
```

有关更多信息，请参考"Command-line client"部分。

检查系统是否工作：

```
miloovidov@hostname:~/work/metrica/src/dbms/src/Client$ ./clickhouse-client
ClickHouse client version 0.0.18749.
Connecting to localhost:9000.
Connected to ClickHouse server version 0.0.18749.

:) SELECT 1

SELECT 1

1
1

1 rows in set. Elapsed: 0.003 sec.

:)
```

恭喜，系统已经工作了！

为了继续进行实验，你可以尝试下载测试数据集。

## ClickHouse Tutorial

### What to Expect from This Tutorial?

By going through this tutorial you'll learn how to set up basic ClickHouse cluster, it'll be small, but fault tolerant and scalable. We will use one of example datasets to fill it with data and execute some demo queries.

### Single Node Setup

To postpone complexities of distributed environment, we'll start with deploying ClickHouse on a single server or virtual machine. ClickHouse is usually installed from `deb` or `rpm` packages, but there are `alternatives` for the operating systems that do no support them.

For example, you have chosen `deb` packages and executed:

```
sudo apt-get install dirmngr
sudo apt-key adv --keyserver hkp://keyserver.ubuntu.com:80 --recv E0C56BD4

echo "deb http://repo.yandex.ru/clickhouse/deb/stable/ main/" | sudo tee
/etc/apt/sources.list.d/clickhouse.list
sudo apt-get update

sudo apt-get install -y clickhouse-server clickhouse-client
```

What do we have in the packages that got installed:

- `clickhouse-client` package contains `clickhouse-client` application, interactive ClickHouse console client.
- `clickhouse-common` package contains a ClickHouse executable file.
- `clickhouse-server` package contains configuration files to run ClickHouse as a server.

Server config files are located in `/etc/clickhouse-server/`. Before going further please notice the `<path>` element in `config.xml`. Path determines the location for data storage, so it should be located on volume with large disk capacity, the default value is `/var/lib/clickhouse/`. If you want to adjust the configuration it's not really handy to directly edit `config.xml` file, considering it might get rewritten on future package updates. Recommended way to override the config elements is to create `files in config.d directory` which serve as "patches" to `config.xml`.

As you might have noticed, `clickhouse-server` is not launched automatically after package installation. It won't be automatically restarted after updates either. The way you start the server depends on your init system, usually it's:

```
sudo service clickhouse-server start
```

or

```
sudo /etc/init.d/clickhouse-server start
```

The default location for server logs is `/var/log/clickhouse-server/`. Server will be ready to handle client connections once `Ready for connections` message was logged.

Once the `clickhouse-server` is up and running, we can use `clickhouse-client` to connect to the server and run some test queries like `SELECT "Hello, world!"`.

 **Quick tips for clickhouse-client**

Interactive mode:

```
clickhouse-client  
clickhouse-client --host=... --port=... --user=... --password=...
```

Enable multiline queries:

```
clickhouse-client -m  
clickhouse-client --multiline
```

Run queries in batch-mode:

```
clickhouse-client --query='SELECT 1'  
echo 'SELECT 1' | clickhouse-client  
clickhouse-client <<< 'SELECT 1'
```

Insert data from a file in specified format:

```
clickhouse-client --query='INSERT INTO table VALUES' < data.txt  
clickhouse-client --query='INSERT INTO table FORMAT TabSeparated' < data.tsv
```

## Import Sample Dataset

Now it's time to fill our ClickHouse server with some sample data. In this tutorial we'll use anonymized data of Yandex.Metrica, the first service that run ClickHouse in production way before it became open-source (more on that in [history section](#)). There are [multiple ways to import Yandex.Metrica dataset](#) and for the sake of the tutorial we'll go with the most realistic one.

### Download and Extract Table Data

```
curl https://clickhouse-datasets.s3.yandex.net/hits/tsv/hits_v1.tsv.xz | unxz --threads=`nproc` >  
hits_v1.tsv  
curl https://clickhouse-datasets.s3.yandex.net/visits/tsv/visits_v1.tsv.xz | unxz --threads=`nproc` >  
visits_v1.tsv
```

The extracted files are about 10GB in size.

### Create Tables

Tables are logically grouped into "databases". There's a `default` database, but we'll create a new one named `tutorial`:

```
clickhouse-client --query "CREATE DATABASE IF NOT EXISTS tutorial"
```

Syntax for creating tables is way more complicated compared to databases (see [reference](#)). In general `CREATE TABLE` statement has to specify three key things:

1. Name of table to create.
2. Table schema, i.e. list of columns and their **data types**.
3. **Table engine** and it's settings, which determines all the details on how queries to this table will be physically executed.

Yandex.Metrica is a web analytics service and sample dataset doesn't cover it's full functionality, so there are only two tables to create:

- `hits` is a table with each action done by all users on all websites covered by the service.
- `visits` is a table that contains pre-built sessions instead of individual actions.

Let's see and execute the real create table queries for these tables:

```
CREATE TABLE tutorial.hits_v1
(
    `WatchID` UInt64,
    `JavaEnable` UInt8,
    `Title` String,
    `GoodEvent` Int16,
    `EventTime` DateTime,
    `EventDate` Date,
    `CounterID` UInt32,
    `ClientIP` UInt32,
    `ClientIP6` FixedString(16),
    `RegionID` UInt32,
    `UserID` UInt64,
    `CounterClass` Int8,
    `OS` UInt8,
    `UserAgent` UInt8,
    `URL` String,
    `Referer` String,
    `URLDomain` String,
    `RefererDomain` String,
    `Refresh` UInt8,
    `IsRobot` UInt8,
    `RefererCategories` Array(UInt16),
    `URLCategories` Array(UInt16),
    `URLRegions` Array(UInt32),
    `RefererRegions` Array(UInt32),
    `ResolutionWidth` UInt16,
    `ResolutionHeight` UInt16,
    `ResolutionDepth` UInt8,
    `FlashMajor` UInt8,
    `FlashMinor` UInt8,
    `FlashMinor2` String,
    `NetMajor` UInt8,
    `NetMinor` UInt8,
    `UserAgentMajor` UInt16,
    `UserAgentMinor` FixedString(2),
    `CookieEnable` UInt8,
    `JavascriptEnable` UInt8,
    `IsMobile` UInt8,
    `MobilePhone` UInt8,
    `MobilePhoneModel` String,
    `Params` String,
    `IPNetworkID` UInt32,
    `TraficSourceID` Int8,
    `SearchEngineID` UInt16,
    `SearchPhrase` String,
    `AdvEngineID` UInt8,
    `IsArtifical` UInt8,
    `WindowClientWidth` UInt16,
    `WindowClientHeight` UInt16,
    `ClientTimeZone` Int16,
    `ClientEventTime` DateTime,
    `SilverlightVersion1` UInt8,
    `SilverlightVersion2` UInt8,
    `SilverlightVersion3` UInt32,
```

```
`SilverlightVersion4` UInt16,
`PageCharset` String,
`CodeVersion` UInt32,
`IsLink` UInt8,
`IsDownload` UInt8,
` IsNotBounce` UInt8,
`FUniqID` UInt64,
`HID` UInt32,
`IsOldCounter` UInt8,
`IsEvent` UInt8,
`IsParameter` UInt8,
`DontCountHits` UInt8,
`WithHash` UInt8,
`HitColor` FixedString(1),
`UTCEventTime` DateTime,
`Age` UInt8,
`Sex` UInt8,
`Income` UInt8,
`Interests` UInt16,
`Robotness` UInt8,
`GeneralInterests` Array(UInt16),
`RemoteIP` UInt32,
`RemoteIP6` FixedString(16),
`WindowName` Int32,
`OpenerName` Int32,
`HistoryLength` Int16,
`BrowserLanguage` FixedString(2),
`BrowserCountry` FixedString(2),
`SocialNetwork` String,
`SocialAction` String,
`HTTPSError` UInt16,
`SendTiming` Int32,
`DNSTiming` Int32,
`ConnectTiming` Int32,
`ResponseStartTiming` Int32,
`ResponseEndTiming` Int32,
`FetchTiming` Int32,
`RedirectTiming` Int32,
`DOMInteractiveTiming` Int32,
`DOMContentLoadedTiming` Int32,
`DOMCompleteTiming` Int32,
`LoadEventStartTiming` Int32,
`LoadEventEndTiming` Int32,
`NSToDOMContentLoadedTiming` Int32,
`FirstPaintTiming` Int32,
`RedirectCount` Int8,
`SocialSourceNetworkID` UInt8,
`SocialSourcePage` String,
`ParamPrice` Int64,
`ParamOrderID` String,
`ParamCurrency` FixedString(3),
`ParamCurrencyID` UInt16,
`GoalsReached` Array(UInt32),
`OpenstatServiceName` String,
`OpenstatCampaignID` String,
`OpenstatAdID` String,
`OpenstatSourceID` String,
`UTMSource` String,
`UTMMedium` String,
`UTMCampaign` String,
`UTMContent` String,
`UTMTerm` String,
`FromTag` String,
`HasGCLID` UInt8,
`RefererHash` UInt64,
`URLHash` UInt64,
`CLID` UInt32,
`YCLID` UInt64,
`ShareService` String,
`ShareURL` String,
`ShareTitle` String,
`ParsedParams` Nested(
    Key1 String,
```

```

    Key2 String,
    Key3 String,
    Key4 String,
    Key5 String,
    ValueDouble Float64),
`IslandID` FixedString(16),
`RequestNum` UInt32,
`RequestTry` UInt8
)
ENGINE = MergeTree()
PARTITION BY toYYYYMM(EventDate)
ORDER BY (CounterID, EventDate, intHash32(UserID))
SAMPLE BY intHash32(UserID)
SETTINGS index_granularity = 8192

```

```

CREATE TABLE tutorial.visits_v1
(
    `CounterID` UInt32,
    `StartDate` Date,
    `Sign` Int8,
    `IsNew` UInt8,
    `VisitID` UInt64,
    `UserID` UInt64,
    `StartTime` DateTime,
    `Duration` UInt32,
    `UTCStartTime` DateTime,
    `PageViews` Int32,
    `Hits` Int32,
    `IsBounce` UInt8,
    `Referer` String,
    `StartURL` String,
    `RefererDomain` String,
    `StartURLDomain` String,
    `EndURL` String,
    `LinkURL` String,
    `IsDownload` UInt8,
    `TraficSourceID` Int8,
    `SearchEngineID` UInt16,
    `SearchPhrase` String,
    `AdvEngineID` UInt8,
    `PlaceID` Int32,
    `RefererCategories` Array(UInt16),
    `URLCategories` Array(UInt16),
    `URLRegions` Array(UInt32),
    `RefererRegions` Array(UInt32),
    `IsYandex` UInt8,
    `GoalReachesDepth` Int32,
    `GoalReachesURL` Int32,
    `GoalReachesAny` Int32,
    `SocialSourceNetworkID` UInt8,
    `SocialSourcePage` String,
    `MobilePhoneModel` String,
    `ClientEventTime` DateTime,
    `RegionID` UInt32,
    `ClientIP` UInt32,
    `ClientIP6` FixedString(16),
    `RemoteIP` UInt32,
    `RemoteIP6` FixedString(16),
    `IPNetworkID` UInt32,
    `SilverlightVersion3` UInt32,
    `CodeVersion` UInt32,
    `ResolutionWidth` UInt16,
    `ResolutionHeight` UInt16,
    `UserAgentMajor` UInt16,
    `UserAgentMinor` UInt16,
    `WindowClientWidth` UInt16,
    `WindowClientHeight` UInt16,
    `SilverlightVersion2` UInt8,
    `SilverlightVersion4` UInt16,
    `FlashVersion3` UInt16,
    `FlashVersion4` UInt16,
    `ClientTimezone` Tnt16
)

```

```
clientTimezone` Int8,
`OS` UInt8,
`UserAgent` UInt8,
`ResolutionDepth` UInt8,
`FlashMajor` UInt8,
`FlashMinor` UInt8,
`NetMajor` UInt8,
`NetMinor` UInt8,
`MobilePhone` UInt8,
`SilverlightVersion1` UInt8,
`Age` UInt8,
`Sex` UInt8,
`Income` UInt8,
`JavaEnable` UInt8,
`CookieEnable` UInt8,
`JavascriptEnable` UInt8,
`IsMobile` UInt8,
`BrowserLanguage` UInt16,
`BrowserCountry` UInt16,
`Interests` UInt16,
`Robotness` UInt8,
`GeneralInterests` Array(UInt16),
`Params` Array(String),
`Goals` Nested(
    ID UInt32,
    Serial UInt32,
    EventTime DateTime,
    Price Int64,
    OrderID String,
    CurrencyID UInt32),
`WatchIDs` Array(UInt64),
`ParamSumPrice` Int64,
`ParamCurrency` FixedString(3),
`ParamCurrencyID` UInt16,
`ClickLogID` UInt64,
`ClickEventID` Int32,
`ClickGoodEvent` Int32,
`ClickEventTime` DateTime,
`ClickPriorityID` Int32,
`ClickPhraseID` Int32,
`ClickPageID` Int32,
`ClickPlaceID` Int32,
`ClickTypeID` Int32,
`ClickResourceID` Int32,
`ClickCost` UInt32,
`ClickClientIP` UInt32,
`ClickDomainID` UInt32,
`ClickURL` String,
`ClickAttempt` UInt8,
`ClickOrderID` UInt32,
`ClickBannerID` UInt32,
`ClickMarketCategoryID` UInt32,
`ClickMarketPP` UInt32,
`ClickMarketCategoryName` String,
`ClickMarketPPName` String,
`ClickAWAPSCampaignName` String,
`ClickPageName` String,
`ClickTargetType` UInt16,
`ClickTargetPhraseID` UInt64,
`ClickContextType` UInt8,
`ClickSelectType` Int8,
`ClickOptions` String,
`ClickGroupBannerID` Int32,
`OpenstatServiceName` String,
`OpenstatCampaignID` String,
`OpenstatAdID` String,
`OpenstatSourceID` String,
`UTMSource` String,
`UTMMedium` String,
`UTMCampaign` String,
`UTMContent` String,
`UTMTerm` String,
`FromTag` String,
```

```

`HasGCLID` UInt8,
`FirstVisit` DateTime,
`PredLastVisit` Date,
`LastVisit` Date,
`TotalVisits` UInt32,
`TraficSource` Nested(
    ID Int8,
    SearchEngineID UInt16,
    AdvEngineID UInt8,
    PlaceID UInt16,
    SocialSourceNetworkID UInt8,
    Domain String,
    SearchPhrase String,
    SocialSourcePage String),
`Attendance` FixedString(16),
`CLID` UInt32,
`YCLID` UInt64,
`NormalizedRefererHash` UInt64,
`SearchPhraseHash` UInt64,
`RefererDomainHash` UInt64,
`NormalizedStartURLHash` UInt64,
`StartURLDomainHash` UInt64,
`NormalizedEndURLHash` UInt64,
`TopLevelDomain` UInt64,
`URLScheme` UInt64,
`OpenstatServiceNameHash` UInt64,
`OpenstatCampaignIDHash` UInt64,
`OpenstatAdIDHash` UInt64,
`OpenstatSourceIDHash` UInt64,
`UTMSourceHash` UInt64,
`UTMMediumHash` UInt64,
`UTMCampaignHash` UInt64,
`UTMContentHash` UInt64,
`UTMTermHash` UInt64,
`FromHash` UInt64,
`WebVisorEnabled` UInt8,
`WebVisorActivity` UInt32,
`ParsedParams` Nested(
    Key1 String,
    Key2 String,
    Key3 String,
    Key4 String,
    Key5 String,
    ValueDouble Float64),
`Market` Nested(
    Type UInt8,
    GoalID UInt32,
    OrderID String,
    OrderPrice Int64,
    PP UInt32,
    DirectPlaceID UInt32,
    DirectOrderID UInt32,
    DirectBannerID UInt32,
    GoodID String,
    GoodName String,
    GoodQuantity Int32,
    GoodPrice Int64),
`IslandID` FixedString(16)
)
ENGINE = CollapsingMergeTree(Sign)
PARTITION BY toYYYYMM(StartDate)
ORDER BY (CounterID, StartDate, intHash32(UserID), VisitID)
SAMPLE BY intHash32(UserID)
SETTINGS index_granularity = 8192

```

You can execute those queries using interactive mode of `clickhouse-client` (just launch it in terminal without specifying a query in advance) or try some [alternative interface](#) if you want.

As we can see, `hits_v1` uses the [basic MergeTree engine](#), while the `visits_v1` uses the [Collapsing](#) variant.

## Import Data

Data import to ClickHouse is done via `INSERT INTO` query like in many other SQL databases. However data is usually provided in one of the [supported formats](#) instead of `VALUES` clause (which is also supported).

The files we downloaded earlier are in tab-separated format, so here's how to import them via console client:

```
clickhouse-client --query "INSERT INTO tutorial.hits_v1 FORMAT TSV" --max_insert_block_size=100000 < hits_v1.tsv
clickhouse-client --query "INSERT INTO tutorial.visits_v1 FORMAT TSV" --max_insert_block_size=100000 < visits_v1.tsv
```

ClickHouse has a lot of [settings to tune](#) and one way to specify them in console client is via arguments, as we can see with `--max_insert_block_size`. The easiest way to figure out what settings are available, what do they mean and what the defaults are is to query the `system.settings` table:

```
SELECT name, value, changed, description
FROM system.settings
WHERE name LIKE '%max_insert_b%'
FORMAT TSV

max_insert_block_size    1048576    0    "The maximum block size for insertion, if we control the creation
of blocks for insertion."
```

Optionally you can [OPTIMIZE](#) the tables after import. Tables that are configured with MergeTree-family engine always do merges of data parts in background to optimize data storage (or at least check if it makes sense). These queries will just force table engine to do storage optimization right now instead of some time later:

```
clickhouse-client --query "OPTIMIZE TABLE tutorial.hits_v1 FINAL"
clickhouse-client --query "OPTIMIZE TABLE tutorial.visits_v1 FINAL"
```

This is I/O and CPU intensive operation so if the table constantly receives new data it's better to leave it alone and let merges run in background.

Now we can check that the tables are successfully imported:

```
clickhouse-client --query "SELECT COUNT(*) FROM tutorial.hits_v1"
clickhouse-client --query "SELECT COUNT(*) FROM tutorial.visits_v1"
```

## Example Queries

```
SELECT
  StartURL AS URL,
  AVG(Duration) AS AvgDuration
FROM tutorial.visits_v1
WHERE StartDate BETWEEN '2014-03-23' AND '2014-03-30'
GROUP BY URL
ORDER BY AvgDuration DESC
LIMIT 10
```

```
SELECT
  sum(Sign) AS visits,
  sumIf(Sign, has(Goals.ID, 1105530)) AS goal_visits,
  (100. * goal_visits) / visits AS goal_percent
FROM tutorial.visits_v1
WHERE (CounterID = 912887) AND (toYYYYMM(StartDate) = 201403) AND (domain(StartURL) = 'yandex.ru')
```

## Cluster Deployment

ClickHouse cluster is a homogenous cluster. Steps to set up:

1. Install ClickHouse server on all machines of the cluster
2. Set up cluster configs in configuration files
3. Create local tables on each instance
4. Create a **Distributed table**

**Distributed table** is actually a kind of "view" to local tables of ClickHouse cluster. SELECT query from a distributed table will be executed using resources of all cluster's shards. You may specify configs for multiple clusters and create multiple distributed tables providing views to different clusters.

Example config for cluster with three shards, one replica each:

```
<remote_servers>
  <perftest_3shards_1replicas>
    <shard>
      <replica>
        <host>example-perftest01j.yandex.ru</host>
        <port>9000</port>
      </replica>
    </shard>
    <shard>
      <replica>
        <host>example-perftest02j.yandex.ru</host>
        <port>9000</port>
      </replica>
    </shard>
    <shard>
      <replica>
        <host>example-perftest03j.yandex.ru</host>
        <port>9000</port>
      </replica>
    </shard>
  </perftest_3shards_1replicas>
</remote_servers>
```

For further demonstration let's create new local table with exactly the same `CREATE TABLE` query that we used for `hits_v1`, but different table name:

```
CREATE TABLE tutorial.hits_local (...) ENGINE = MergeTree() ...
```

Creating a distributed table providing a view into local tables of the cluster:

```
CREATE TABLE tutorial.hits_all AS tutorial.hits_local
ENGINE = Distributed(perftest_3shards_1replicas, tutorial, hits_local, rand());
```

Common practice is to create similar Distributed tables on all machines of the cluster. This would allow to run distributed queries on any machine of the cluster. Also there's an alternative option to create temporary distributed table for a given SELECT query using **remote** table function.

Let's run **INSERT SELECT** into Distributed table to spread the table to multiple servers.

```
INSERT INTO tutorial.hits_all SELECT * FROM tutorial.hits_v1;
```

#### **Notice**

This approach is not suitable for sharding of large tables. There's a separate tool [clickhouse-copier](#) that can re-shard arbitrary large tables.

As you could expect computationally heavy queries are executed N times faster being launched on 3 servers instead of one.

In this case we have used a cluster with 3 shards each contains a single replica.

To provide resilience in production environment we recommend that each shard should contain 2-3 replicas distributed between multiple data-centers. Note that ClickHouse supports unlimited number of replicas.

Example config for cluster of one shard containing three replicas:

```
<remote_servers>
  ...
  <perftest_1shards_3replicas>
    <shard>
      <replica>
        <host>example-perf01j.yandex.ru</host>
        <port>9000</port>
      </replica>
      <replica>
        <host>example-perf02j.yandex.ru</host>
        <port>9000</port>
      </replica>
      <replica>
        <host>example-perf03j.yandex.ru</host>
        <port>9000</port>
      </replica>
    </shard>
  </perftest_1shards_3replicas>
</remote_servers>
```

To enable native replication **ZooKeeper** is required. ClickHouse will take care of data consistency on all replicas and run restore procedure after failure automatically. It's recommended to deploy ZooKeeper cluster to separate servers.

ZooKeeper is not a strict requirement: in some simple cases you can duplicate the data by writing it into all the replicas from your application code. This approach is not recommended, in this case ClickHouse won't be able to guarantee data consistency on all replicas. This remains the responsibility of your application.

ZooKeeper locations need to be specified in configuration file:

```
<zookeeper>
  <node>
    <host>zoo01.yandex.ru</host>
    <port>2181</port>
  </node>
  <node>
    <host>zoo02.yandex.ru</host>
    <port>2181</port>
  </node>
  <node>
    <host>zoo03.yandex.ru</host>
    <port>2181</port>
  </node>
</zookeeper>
```

Also we need to set macros for identifying each shard and replica, it will be used on table creation:

```
<macros>
  <shard>01</shard>
  <replica>01</replica>
</macros>
```

If there are no replicas at the moment on replicated table creation, a new first replica will be instantiated. If there are already live replicas, new replica will clone the data from existing ones. You have an option to create all replicated tables first and that insert data to it. Another option is to create some replicas and add the others after or during data insertion.

```
CREATE TABLE tutorial.hits_replica (...)  
ENGINE = ReplicatedMergeTree(  
    '/clickhouse_perftest/tables/{shard}/hits',  
    '{replica}'  
)  
...
```

Here we use **ReplicatedMergeTree** table engine. In parameters we specify ZooKeeper path containing shard and replica identifiers.

```
INSERT INTO tutorial.hits_replica SELECT * FROM tutorial.hits_local;
```

Replication operates in multi-master mode. Data can be loaded into any replica and it will be synced with other instances automatically. Replication is asynchronous so at a given moment of time not all replicas may contain recently inserted data. To allow data insertion at least one replica should be up. Others will sync up data and repair consistency once they will become active again. Please notice that such approach allows for the low possibility of loss of just appended data.

## 航班飞行数据

航班飞行数据有以下两个方式获取：

- 从原始数据导入
- 下载预处理好的分区数据

### 从原始数据导入

下载数据：

```
for s in `seq 1987 2018`  
do  
for m in `seq 1 12`  
do  
wget  
https://transtats.bts.gov/PREZIP/On_Time_Reportng_Carrier_On_Time_Performance_1987_present_${s}_${m}.zip  
done  
done
```

(引用 <https://github.com/Percona-Lab/ontime-airline-performance/blob/master/download.sh> )

创建表结构：

```
CREATE TABLE `ontime` (  
    `Year` UInt16,  
    `Quarter` UInt8,  
    `Month` UInt8,  
    `DayofMonth` UInt8,  
    `DayOfWeek` UInt8,  
    `FlightDate` Date,  
    `UniqueCarrier` FixedString(7),  
    `AirlineID` Int32,  
    `Carrier` FixedString(2),  
    `TailNum` String,  
    `FlightNum` String,  
    `OriginAirportID` Int32,  
    `OriginAirportSeqID` Int32,  
    `OriginCityMarketID` Int32,  
    `Origin` FixedString(5),  
    `OriginCityName` String,  
    `OriginState` FixedString(2),  
    `OriginStateFips` String,  
    `OriginStateName` String,  
    ...)
```

```
`OriginWac` Int32,
`DestAirportID` Int32,
`DestAirportSeqID` Int32,
`DestCityMarketID` Int32,
`Dest` FixedString(5),
`DestCityName` String,
`DestState` FixedString(2),
`DestStateFips` String,
`DestStateName` String,
`DestWac` Int32,
`CRSDepTime` Int32,
`DepTime` Int32,
`DepDelay` Int32,
`DepDelayMinutes` Int32,
`DepDel15` Int32,
`DepartureDelayGroups` String,
`DepTimeBlk` String,
`TaxiOut` Int32,
`WheelsOff` Int32,
`WheelsOn` Int32,
`TaxiIn` Int32,
`CRSArrTime` Int32,
`ArrTime` Int32,
`ArrDelay` Int32,
`ArrDelayMinutes` Int32,
`ArrDel15` Int32,
`ArrivalDelayGroups` Int32,
`ArrTimeBlk` String,
`Cancelled` UInt8,
`CancellationCode` FixedString(1),
`Diverted` UInt8,
`CRSElapsedTime` Int32,
`ActualElapsedTime` Int32,
`AirTime` Int32,
`Flights` Int32,
`Distance` Int32,
`DistanceGroup` UInt8,
`CarrierDelay` Int32,
`WeatherDelay` Int32,
`NASDelay` Int32,
`SecurityDelay` Int32,
`LateAircraftDelay` Int32,
`FirstDepTime` String,
`TotalAddGTime` String,
`LongestAddGTime` String,
`DivAirportLandings` String,
`DivReachedDest` String,
`DivActualElapsedTime` String,
`DivArrDelay` String,
`DivDistance` String,
`Div1Airport` String,
`Div1AirportID` Int32,
`Div1AirportSeqID` Int32,
`Div1WheelsOn` String,
`Div1TotalGTime` String,
`Div1LongestGTime` String,
`Div1WheelsOff` String,
`Div1TailNum` String,
`Div2Airport` String,
`Div2AirportID` Int32,
`Div2AirportSeqID` Int32,
`Div2WheelsOn` String,
`Div2TotalGTime` String,
`Div2LongestGTime` String,
`Div2WheelsOff` String,
`Div2TailNum` String,
`Div3Airport` String,
`Div3AirportID` Int32,
`Div3AirportSeqID` Int32,
`Div3WheelsOn` String,
`Div3TotalGTime` String,
`Div3LongestGTime` String,
`Div3WheelsOff` String,
```

```

`Div3TailNum` String,
`Div4Airport` String,
`Div4AirportID` Int32,
`Div4AirportSeqID` Int32,
`Div4WheelsOn` String,
`Div4TotalGTime` String,
`Div4LongestGTime` String,
`Div4WheelsOff` String,
`Div4TailNum` String,
`Div5Airport` String,
`Div5AirportID` Int32,
`Div5AirportSeqID` Int32,
`Div5WheelsOn` String,
`Div5TotalGTime` String,
`Div5LongestGTime` String,
`Div5WheelsOff` String,
`Div5TailNum` String
) ENGINE = MergeTree(FlightDate, (Year, FlightDate), 8192)

```

加载数据：

```
$ for i in *.zip; do echo $i; unzip -cq $i '*.csv' | sed 's/\.\.00//g' | clickhouse-client --host=example-perf-test01j --query="INSERT INTO ontime FORMAT CSVWithNames"; done
```

## 下载预处理好的分区数据

```

$ curl -O https://clickhouse-datasets.s3.yandex.net/ontime/partitions/ontime.tar
$ tar xvf ontime.tar -C /var/lib/clickhouse # path to ClickHouse data directory
$ # check permissions of unpacked data, fix if required
$ sudo service clickhouse-server restart
$ clickhouse-client --query "select count(*) from datasets.ontime"

```

### Info

如果要运行下面的SQL查询，必须使用完整的表名， datasets.ontime。

查询：

Q0.

```

SELECT avg(c1)
FROM
(
  SELECT Year, Month, count(*) AS c1
  FROM ontime
  GROUP BY Year, Month
);

```

Q1. 查询从2000年到2008年每天的航班数

```

SELECT DayOfWeek, count(*) AS c
FROM ontime
WHERE Year>=2000 AND Year<=2008
GROUP BY DayOfWeek
ORDER BY c DESC;

```

Q2. 查询从2000年到2008年每周延误超过10分钟的航班数。

```
SELECT DayOfWeek, count(*) AS c
FROM ontime
WHERE DepDelay>10 AND Year>=2000 AND Year<=2008
GROUP BY DayOfWeek
ORDER BY c DESC;
```

Q3. 查询2000年到2008年每个机场延误超过10分钟以上的次数

```
SELECT Origin, count(*) AS c
FROM ontime
WHERE DepDelay>10 AND Year>=2000 AND Year<=2008
GROUP BY Origin
ORDER BY c DESC
LIMIT 10;
```

Q4. 查询2007年各航空公司延误超过10分钟以上的次数

```
SELECT Carrier, count(*)
FROM ontime
WHERE DepDelay>10 AND Year=2007
GROUP BY Carrier
ORDER BY count(*) DESC;
```

Q5. 查询2007年各航空公司延误超过10分钟以上的百分比

```
SELECT Carrier, c, c2, c*100/c2 as c3
FROM
(
  SELECT
    Carrier,
    count(*) AS c
  FROM ontime
  WHERE DepDelay>10
    AND Year=2007
  GROUP BY Carrier
)
ANY INNER JOIN
(
  SELECT
    Carrier,
    count(*) AS c2
  FROM ontime
  WHERE Year=2007
  GROUP BY Carrier
) USING Carrier
ORDER BY c3 DESC;
```

更好的查询版本：

```
SELECT Carrier, avg(DepDelay>10)*100 AS c3
FROM ontime
WHERE Year=2007
GROUP BY Carrier
ORDER BY Carrier
```

Q6. 同上一个查询一致,只是查询范围扩大到2000年到2008年

```

SELECT Carrier, c, c2, c*100/c2 AS c3
FROM
(
  SELECT
    Carrier,
    count(*) AS c
  FROM ontime
  WHERE DepDelay>10
    AND Year>=2000 AND Year<=2008
  GROUP BY Carrier
)
ANY INNER JOIN
(
  SELECT
    Carrier,
    count(*) AS c2
  FROM ontime
  WHERE Year>=2000 AND Year<=2008
  GROUP BY Carrier
) USING Carrier
ORDER BY c3 DESC;

```

更好的查询版本：

```

SELECT Carrier, avg(DepDelay>10)*100 AS c3
FROM ontime
WHERE Year>=2000 AND Year<=2008
GROUP BY Carrier
ORDER BY Carrier;

```

Q7. 每年航班延误超过10分钟的百分比

```

SELECT Year, c1/c2
FROM
(
  select
    Year,
    count(*)*100 AS c1
  from ontime
  WHERE DepDelay>10
  GROUP BY Year
)
ANY INNER JOIN
(
  select
    Year,
    count(*) AS c2
  from ontime
  GROUP BY Year
) USING (Year)
ORDER BY Year;

```

更好的查询版本：

```

SELECT Year, avg(DepDelay>10)
FROM ontime
GROUP BY Year
ORDER BY Year;

```

Q8. 每年更受人们喜爱的目的地

```

SELECT DestCityName, uniqExact(OriginCityName) AS u
FROM ontime
WHERE Year >= 2000 and Year <= 2010
GROUP BY DestCityName
ORDER BY u DESC LIMIT 10;

```

Q9.

```
SELECT Year, count(*) AS c1
FROM ontime
GROUP BY Year;
```

Q10.

```
SELECT
    min(Year), max(Year), Carrier, count(*) AS cnt,
    sum(ArrDelayMinutes>30) AS flights_delayed,
    round(sum(ArrDelayMinutes>30)/count(*),2) AS rate
FROM ontime
WHERE
    DayOfWeek NOT IN (6,7) AND OriginState NOT IN ('AK', 'HI', 'PR', 'VI')
    AND DestState NOT IN ('AK', 'HI', 'PR', 'VI')
    AND FlightDate < '2010-01-01'
GROUP by Carrier
HAVING cnt>100000 and max(Year)>1990
ORDER by rate DESC
LIMIT 1000;
```

Bonus:

```
SELECT avg(cnt)
FROM
(
    SELECT Year,Month,count(*) AS cnt
    FROM ontime
    WHERE DepDel15=1
    GROUP BY Year,Month
);

SELECT avg(c1) FROM
(
    SELECT Year,Month,count(*) AS c1
    FROM ontime
    GROUP BY Year,Month
);

SELECT DestCityName, uniqExact(OriginCityName) AS u
FROM ontime
GROUP BY DestCityName
ORDER BY u DESC
LIMIT 10;

SELECT OriginCityName, DestCityName, count() AS c
FROM ontime
GROUP BY OriginCityName, DestCityName
ORDER BY c DESC
LIMIT 10;

SELECT OriginCityName, count() AS c
FROM ontime
GROUP BY OriginCityName
ORDER BY c DESC
LIMIT 10;
```

这个性能测试由Vadim Tkachenko提供。参考：

- <https://www.percona.com/blog/2009/10/02/analyzing-air-traffic-performance-with-infobright-and-monetdb/>
- <https://www.percona.com/blog/2009/10/26/air-traffic-queries-in-luciddb/>
- <https://www.percona.com/blog/2009/11/02/air-traffic-queries-in-infinidb-early-alpha/>
- <https://www.percona.com/blog/2014/04/21/using-apache-hadoop-and-impala-together-with-mysql-for-data-analysis/>

- <https://www.percona.com/blog/2016/01/07/apache-spark-with-air-ontime-performance-data/>
- <http://nickmakos.blogspot.ru/2012/08/analyzing-air-traffic-performance-with.html>

## 纽约市出租车数据

纽约市出租车数据有以下两个方式获取：

从原始数据导入 下载预处理好的分区数据

### 怎样导入原始数据

可以参考<https://github.com/toddwschneider/nyc-taxi-data>和<http://tech.marksblogg.com/billion-nyc-taxi-rides-redshift.html>中的关于数据集结构描述与数据下载指令说明。

数据集包含227GB的CSV文件。这大约需要一个小时的下载时间(1Gbit带宽下，并行下载大概是一半时间)。 下载时注意损坏的文件。可以检查文件大小并重新下载损坏的文件。

有些文件中包含一些无效的行，您可以使用如下语句修复他们：

```
sed -E '/(. , ){18, }/d' data/yellow_tripdata_2010-02.csv > data/yellow_tripdata_2010-02.csv_
sed -E '/(. , ){18, }/d' data/yellow_tripdata_2010-03.csv > data/yellow_tripdata_2010-03.csv_
mv data/yellow_tripdata_2010-02.csv_ data/yellow_tripdata_2010-02.csv
mv data/yellow_tripdata_2010-03.csv_ data/yellow_tripdata_2010-03.csv
```

然后您必须在PostgreSQL中预处理这些数据。这将创建多边形中的点（以匹配在地图中纽约市中范围），然后通过使用JOIN查询将数据关联组合到一个规范的表中。为了完成这部分操作，您需要安装PostgreSQL的同时安装PostGIS插件。

运行 initialize\_database.sh 时要小心，并手动重新检查是否正确创建了所有表。

在PostgreSQL中处理每个月的数据大约需要20-30分钟，总共大约需要48小时。

您可以按如下方式检查下载的行数：

```
$ time psql nyc-taxi-data -c "SELECT count(*) FROM trips;"_
### Count_
1298979494_
(1 row)

real    7m9.164s
```

(根据Mark Litwintschik的系列博客报道数据略多余11亿行)

PostgreSQL处理这些数据大概需要370GB的磁盘空间。

从PostgreSQL中导出数据：

```

COPY
(
    SELECT trips.id,
        trips.vendor_id,
        trips.pickup_datetime,
        trips.dropoff_datetime,
        trips.store_and_fwd_flag,
        trips.rate_code_id,
        trips.pickup_longitude,
        trips.pickup_latitude,
        trips.dropoff_longitude,
        trips.dropoff_latitude,
        trips.passenger_count,
        trips.trip_distance,
        trips.fare_amount,
        trips.extra,
        trips.mta_tax,
        trips.tip_amount,
        trips.tolls_amount,
        trips.ehail_fee,
        trips.improvement_surcharge,
        trips.total_amount,
        trips.payment_type,
        trips.trip_type,
        trips.pickup,
        trips.dropoff,
        cab_types.type cab_type,
        weather.precipitation_tenths_of_mm rain,
        weather.snow_depth_mm,
        weather.snowfall_mm,
        weather.max_temperature_tenths_degrees_celsius max_temp,
        weather.min_temperature_tenths_degrees_celsius min_temp,
        weather.average_wind_speed_tenths_of_meters_per_second wind,
        pick_up.gid pickup_nyct2010_gid,
        pick_up.ctlabel pickup_ctlabel,
        pick_up.borocode pickup_borocode,
        pick_up.boroname pickup_boroname,
        pick_up.ct2010 pickup_ct2010,
        pick_up.boroct2010 pickup_boroct2010,
        pick_up.cdeligibil pickup_cdeligibil,
        pick_up.ntacode pickup_ntacode,
        pick_up.ntaname pickup_ntaname,
        pick_up.puma pickup_puma,
        drop_off.gid dropoff_nyct2010_gid,
        drop_off.ctlabel dropoff_ctlabel,
        drop_off.borocode dropoff_borocode,
        drop_off.boroname dropoff_boroname,
        drop_off.ct2010 dropoff_ct2010,
        drop_off.boroct2010 dropoff_boroct2010,
        drop_off.cdeligibil dropoff_cdeligibil,
        drop_off.ntacode dropoff_ntacode,
        drop_off.ntaname dropoff_ntaname,
        drop_off.puma dropoff_puma
    FROM trips
    LEFT JOIN cab_types
        ON trips.cab_type_id = cab_types.id
    LEFT JOIN central_park_weather_observations_raw weather
        ON weather.date = trips.pickup_datetime::date
    LEFT JOIN nyct2010 pick_up
        ON pick_up.gid = trips.pickup_nyct2010_gid
    LEFT JOIN nyct2010 drop_off
        ON drop_off.gid = trips.dropoff_nyct2010_gid
) TO '/opt/milovidov/nyc-taxi-data/trips.tsv';

```

数据快照的创建速度约为每秒50 MB。在创建快照时，PostgreSQL以每秒约28 MB的速度从磁盘读取数据。这大约需要5个小时。最终生成的TSV文件为590612904969 bytes。

在ClickHouse中创建临时表：

```
CREATE TABLE trips
(
    trip_id                UInt32,
    vendor_id               String,
    pickup_datetime         DateTime,
    dropoff_datetime        Nullable(DateTime),
    store_and_fwd_flag     Nullable(FixedString(1)),
    rate_code_id            Nullable(UInt8),
    pickup_longitude        Nullable(Float64),
    pickup_latitude          Nullable(Float64),
    dropoff_longitude       Nullable(Float64),
    dropoff_latitude         Nullable(Float64),
    passenger_count         Nullable(UInt8),
    trip_distance            Nullable(Float64),
    fare_amount              Nullable(Float32),
    extra                    Nullable(Float32),
    mta_tax                  Nullable(Float32),
    tip_amount                Nullable(Float32),
    tolls_amount              Nullable(Float32),
    ehail_fee                 Nullable(Float32),
    improvement_surcharge   Nullable(Float32),
    total_amount              Nullable(Float32),
    payment_type              Nullable(String),
    trip_type                 Nullable(UInt8),
    pickup                    Nullable(String),
    dropoff                   Nullable(String),
    cab_type                  Nullable(String),
    precipitation             Nullable(UInt8),
    snow_depth                 Nullable(UInt8),
    snowfall                   Nullable(UInt8),
    max_temperature           Nullable(UInt8),
    min_temperature           Nullable(UInt8),
    average_wind_speed        Nullable(UInt8),
    pickup_nyct2010_gid      Nullable(UInt8),
    pickup_ctlabel            Nullable(String),
    pickup_borocode           Nullable(UInt8),
    pickup_boroname            Nullable(String),
    pickup_ct2010              Nullable(String),
    pickup_boroct2010          Nullable(String),
    pickup_cdeligibil        Nullable(FixedString(1)),
    pickup_ntacode             Nullable(String),
    pickup_ntaname              Nullable(String),
    pickup_puma                 Nullable(String),
    dropoff_nyct2010_gid      Nullable(UInt8),
    dropoff_ctlabel            Nullable(String),
    dropoff_borocode           Nullable(UInt8),
    dropoff_boroname            Nullable(String),
    dropoff_ct2010              Nullable(String),
    dropoff_boroct2010          Nullable(String),
    dropoff_cdeligibil        Nullable(String),
    dropoff_ntacode             Nullable(String),
    dropoff_ntaname              Nullable(String),
    dropoff_puma                 Nullable(String)
) ENGINE = Log;
```

接下来,需要将字段转换为更正确的数据类型 , 并且在可能的情况下 , 消除NULL。

```
$ time clickhouse-client --query="INSERT INTO trips FORMAT TabSeparated" < trips.tsv
real    75m56.214s
```

数据的读取速度为112-140 Mb/秒。 通过这种方式将数据加载到Log表中需要76分钟。 这个表中的数据需要使用142 GB的磁盘空间.

( 也可以直接使用 COPY ... TO PROGRAM 从Postgres中导入数据 )

由于数据中与天气相关的所有数据 ( precipitation.....average\_wind\_speed ) 都填充了NULL。所以，我们将从最终数据集中删除它们

首先，我们使用单台服务器创建表，后面我们将在多台节点上创建这些表。

创建表结构并写入数据：

```
CREATE TABLE trips_mergetree
ENGINE = MergeTree(pickup_date, pickup_datetime, 8192)
AS SELECT

trip_id,
CAST(vendor_id AS Enum8('1' = 1, '2' = 2, 'CMT' = 3, 'VTS' = 4, 'DDS' = 5, 'B02512' = 10, 'B02598' = 11,
'B02617' = 12, 'B02682' = 13, 'B02764' = 14)) AS vendor_id,
toDate(pickup_datetime) AS pickup_date,
ifNull(pickup_datetime, toDateTime(0)) AS pickup_datetime,
toDate(dropoff_datetime) AS dropoff_date,
ifNull(dropoff_datetime, toDateTime(0)) AS dropoff_datetime,
assumeNotNull(store_and_fwd_flag) IN ('Y', '1', '2') AS store_and_fwd_flag,
assumeNotNull(rate_code_id) AS rate_code_id,
assumeNotNull(pickup_longitude) AS pickup_longitude,
assumeNotNull(pickup_latitude) AS pickup_latitude,
assumeNotNull(dropoff_longitude) AS dropoff_longitude,
assumeNotNull(dropoff_latitude) AS dropoff_latitude,
assumeNotNull(passenger_count) AS passenger_count,
assumeNotNull(trip_distance) AS trip_distance,
assumeNotNull(fare_amount) AS fare_amount,
assumeNotNull(extra) AS extra,
assumeNotNull(mta_tax) AS mta_tax,
assumeNotNull(tip_amount) AS tip_amount,
assumeNotNull(tolls_amount) AS tolls_amount,
assumeNotNull(ehail_fee) AS ehail_fee,
assumeNotNull(improvement_surcharge) AS improvement_surcharge,
assumeNotNull(total_amount) AS total_amount,
CAST((assumeNotNull(payment_type) AS pt) IN ('CSH', 'CASH', 'Cash', 'CAS', 'Cas', '1') ? 'CSH' : (pt IN
('CRD', 'Credit', 'Cre', 'CRE', 'CREDIT', '2') ? 'CRE' : (pt IN ('NOC', 'No Charge', 'No', '3') ? 'NOC' :
(pt IN ('DIS', 'Dispute', 'Dis', '4') ? 'DIS' : 'UNK'))) AS Enum8('CSH' = 1, 'CRE' = 2, 'UNK' = 0, 'NOC' =
3, 'DIS' = 4)) AS payment_type,
assumeNotNull(trip_type) AS trip_type,
ifNull(toFixedString(unhex(pickup), 25), toFixedString('', 25)) AS pickup,
ifNull(toFixedString(unhex(dropoff), 25), toFixedString('', 25)) AS dropoff,
CAST(assumeNotNull(cab_type) AS Enum8('yellow' = 1, 'green' = 2, 'uber' = 3)) AS cab_type,

assumeNotNull(pickup_nyct2010_gid) AS pickup_nyct2010_gid,
toFloat32(ifNull(pickup_ctlabel, '0')) AS pickup_ctlabel,
assumeNotNull(pickup_borocode) AS pickup_borocode,
CAST(assumeNotNull(pickup_boroname) AS Enum8('Manhattan' = 1, 'Queens' = 4, 'Brooklyn' = 3, '' = 0,
'Bronx' = 2, 'Staten Island' = 5)) AS pickup_boroname,
toFixedString(ifNull(pickup_ct2010, '000000'), 6) AS pickup_ct2010,
toFixedString(ifNull(pickup_boroct2010, '0000000'), 7) AS pickup_boroct2010,
CAST(assumeNotNull(ifNull(pickup_cdeligibil, ' ')) AS Enum8(' ' = 0, 'E' = 1, 'I' = 2)) AS
pickup_cdeligibil,
toFixedString(ifNull(pickup_ntacode, '0000'), 4) AS pickup_ntacode,

CAST(assumeNotNull(pickup_ntaname) AS Enum16(' ' = 0, 'Airport' = 1, 'Allerton-Pelham Gardens' = 2,
'Annadale-Huguenot-Prince\''s Bay-Eltingville' = 3, 'Arden Heights' = 4, 'Astoria' = 5, 'Auburndale' = 6,
'Baisley Park' = 7, 'Bath Beach' = 8, 'Battery Park City-Lower Manhattan' = 9, 'Bay Ridge' = 10,
'Bayside-Bayside Hills' = 11, 'Bedford' = 12, 'Bedford Park-Fordham North' = 13, 'Bellerose' = 14,
'Belmont' = 15, 'Bensonhurst East' = 16, 'Bensonhurst West' = 17, 'Borough Park' = 18, 'Breezy Point-Belle
Harbor-Rockaway Park-Broad Channel' = 19, 'Briarwood-Jamaica Hills' = 20, 'Brighton Beach' = 21,
'Bronxdale' = 22, 'Brooklyn Heights-Cobble Hill' = 23, 'Brownsville' = 24, 'Bushwick North' = 25, 'Bushwick
South' = 26, 'Cambria Heights' = 27, 'Canarsie' = 28, 'Carroll Gardens-Columbia Street-Red Hook' = 29,
'Central Harlem North-Polo Grounds' = 30, 'Central Harlem South' = 31, 'Charleston-Richmond
Valley-Tottenville' = 32, 'Chinatown' = 33, 'Clarendon-Bathgate' = 34, 'Clinton' = 35, 'Clinton Hill' = 36,
'Co-op City' = 37, 'College Point' = 38, 'Corona' = 39, 'Crotona Park East' = 40, 'Crown Heights North' =
41, 'Crown Heights South' = 42, 'Cypress Hills-City Line' = 43, 'DUMBO-Vinegar Hill-Downtown
Brooklyn-Boerum Hill' = 44, 'Douglas Manor-Douglaston-Little Neck' = 45, 'Dyker Heights' = 46, 'East
Concourse-Concourse Village' = 47, 'East Elmhurst' = 48, 'East Flatbush-Farragut' = 49, 'East Flushing' =
50, 'East Harlem North' = 51, 'East Harlem South' = 52, 'East New York' = 53, 'East New York (Pennsylvania
Ave)' = 54, 'East Tremont' = 55, 'East Village' = 56, 'East Williamsburg' = 57,
'Eastchester-Edenwald-Baychester' = 58, 'Elmhurst' = 59, 'Elmhurst-Maspeth' = 60, 'Erasmus' = 61, 'Far
```

'Rockaway-Bayswater' = 62, 'Flatbush' = 63, 'Flatlands' = 64, 'Flushing' = 65, 'Fordham South' = 66, 'Forest Hills' = 67, 'Fort Greene' = 68, 'Fresh Meadows-Utopia' = 69, 'Ft. Totten-Bay Terrace-Clearview' = 70, 'Georgetown-Marine Park-Bergen Beach-Mill Basin' = 71, 'Glen Oaks-Floral Park-New Hyde Park' = 72, 'Glendale' = 73, 'Gramercy' = 74, 'Grasmere-Arrochar-Ft. Wadsworth' = 75, 'Gravesend' = 76, 'Great Kills' = 77, 'Greenpoint' = 78, 'Grymes Hill-Clifton-Fox Hills' = 79, 'Hamilton Heights' = 80, 'Hammels-Arverne-Edgemere' = 81, 'Highbridge' = 82, 'Hollis' = 83, 'Homecrest' = 84, 'Hudson Yards-Chelsea-Flatiron-Union Square' = 85, 'Hunters Point-Sunnyside-West Maspeth' = 86, 'Hunts Point' = 87, 'Jackson Heights' = 88, 'Jamaica' = 89, 'Jamaica Estates-Holliswood' = 90, 'Kensington-Ocean Parkway' = 91, 'Kew Gardens' = 92, 'Kew Gardens Hills' = 93, 'Kingsbridge Heights' = 94, 'Laurelton' = 95, 'Lenox Hill-Roosevelt Island' = 96, 'Lincoln Square' = 97, 'Lindenwood-Howard Beach' = 98, 'Longwood' = 99, 'Lower East Side' = 100, 'Madison' = 101, 'Manhattanville' = 102, 'Marble Hill-Inwood' = 103, 'Mariner's Harbor-Arlington-Port Ivory-Graniteville' = 104, 'Maspeth' = 105, 'Melrose South-Mott Haven North' = 106, 'Middle Village' = 107, 'Midtown-Midtown South' = 108, 'Midwood' = 109, 'Morningside Heights' = 110, 'Morrisania-Melrose' = 111, 'Mott Haven-Port Morris' = 112, 'Mount Hope' = 113, 'Murray Hill' = 114, 'Murray Hill-Kips Bay' = 115, 'New Brighton-Silver Lake' = 116, 'New Dorp-Midland Beach' = 117, 'New Springville-Bloomfield-Travis' = 118, 'North Corona' = 119, 'North Riverdale-Fieldston-Riverdale' = 120, 'North Side-South Side' = 121, 'Norwood' = 122, 'Oakland Gardens' = 123, 'Oakwood-Oakwood Beach' = 124, 'Ocean Hill' = 125, 'Ocean Parkway South' = 126, 'Old Astoria' = 127, 'Old Town-Dongan Hills-South Beach' = 128, 'Ozone Park' = 129, 'Park Slope-Gowanus' = 130, 'Parkchester' = 131, 'Pelham Bay-Country Club-City Island' = 132, 'Pelham Parkway' = 133, 'Pomonok-Flushing Heights-Hillcrest' = 134, 'Port Richmond' = 135, 'Prospect Heights' = 136, 'Prospect Lefferts Gardens-Wingate' = 137, 'Queens Village' = 138, 'Queensboro Hill' = 139, 'Queensbridge-Ravenswood-Long Island City' = 140, 'Rego Park' = 141, 'Richmond Hill' = 142, 'Ridgewood' = 143, 'Rikers Island' = 144, 'Rosedale' = 145, 'Rossville-Woodrow' = 146, 'Rugby-Remsen Village' = 147, 'Schuylerville-Throgs Neck-Edgewater Park' = 148, 'Seagate-Coney Island' = 149, 'Sheepshead Bay-Gerritsen Beach-Manhattan Beach' = 150, 'SoHo-TriBeCa-Civic Center-Little Italy' = 151, 'Soundview-Bruckner' = 152, 'Soundview-Castle Hill-Clason Point-Harding Park' = 153, 'South Jamaica' = 154, 'South Ozone Park' = 155, 'Springfield Gardens North' = 156, 'Springfield Gardens South-Brooklyn' = 157, 'Spuyten Duyvil-Kingsbridge' = 158, 'St. Albans' = 159, 'Stapleton-Rosebank' = 160, 'Starrett City' = 161, 'Steinway' = 162, 'Stuyvesant Heights' = 163, 'Stuyvesant Town-Cooper Village' = 164, 'Sunset Park East' = 165, 'Sunset Park West' = 166, 'Todt Hill-Emerson Hill-Heartland Village-Lighthouse Hill' = 167, 'Turtle Bay-East Midtown' = 168, 'University Heights-Morris Heights' = 169, 'Upper East Side-Carnegie Hill' = 170, 'Upper West Side' = 171, 'Van Cortlandt Village' = 172, 'Van Nest-Morris Park-Westchester Square' = 173, 'Washington Heights North' = 174, 'Washington Heights South' = 175, 'West Brighton' = 176, 'West Concourse' = 177, 'West Farms-Bronx River' = 178, 'West New Brighton-New Brighton-St. George' = 179, 'West Village' = 180, 'Westchester-Unionport' = 181, 'Westerleigh' = 182, 'Whitestone' = 183, 'Williamsbridge-Olinville' = 184, 'Williamsburg' = 185, 'Windsor Terrace' = 186, 'Woodhaven' = 187, 'Woodlawn-Wakefield' = 188, 'Woodside' = 189, 'Yorkville' = 190, 'park-cemetery-etc-Bronx' = 191, 'park-cemetery-etc-Brooklyn' = 192, 'park-cemetery-etc-Manhattan' = 193, 'park-cemetery-etc-Queens' = 194, 'park-cemetery-etc-Staten Island' = 195) AS pickup\_ntaname,

toInt16(ifNull(pickup\_puma, '0')) AS pickup\_puma,

assumeNotNull(dropoff\_nyct2010\_gid) AS dropoff\_nyct2010\_gid,  
toFloat32(ifNull(dropoff\_ctlabel, '0')) AS dropoff\_ctlabel,  
assumeNotNull(dropoff\_borocode) AS dropoff\_borocode,  
CAST(assumeNotNull(dropoff\_boroname) AS Enum8('Manhattan' = 1, 'Queens' = 4, 'Brooklyn' = 3, '' = 0, 'Bronx' = 2, 'Staten Island' = 5)) AS dropoff\_boroname,  
toFixedString(ifNull(dropoff\_ct2010, '000000'), 6) AS dropoff\_ct2010,  
toFixedString(ifNull(dropoff\_boroct2010, '0000000'), 7) AS dropoff\_boroct2010,  
CAST(assumeNotNull(ifNull(dropoff\_cdeligibil, ' ')) AS Enum8(' ' = 0, 'E' = 1, 'I' = 2)) AS dropoff\_cdeligibil,  
toFixedString(ifNull(dropoff\_ntacode, '0000'), 4) AS dropoff\_ntacode,

CAST(assumeNotNull(dropoff\_ntaname) AS Enum16(' ' = 0, 'Airport' = 1, 'Allerton-Pelham Gardens' = 2, 'Annadale-Huguenot-Prince's Bay-Eltingville' = 3, 'Arden Heights' = 4, 'Astoria' = 5, 'Auburndale' = 6, 'Baisley Park' = 7, 'Bath Beach' = 8, 'Battery Park City-Lower Manhattan' = 9, 'Bay Ridge' = 10, 'Bayside-Bayside Hills' = 11, 'Bedford' = 12, 'Bedford Park-Fordham North' = 13, 'Bellerose' = 14, 'Belmont' = 15, 'Bensonhurst East' = 16, 'Bensonhurst West' = 17, 'Borough Park' = 18, 'Breezy Point-Belle Harbor-Rockaway Park-Broad Channel' = 19, 'Briarwood-Jamaica Hills' = 20, 'Brighton Beach' = 21, 'Bronxdale' = 22, 'Brooklyn Heights-Cobble Hill' = 23, 'Brownsville' = 24, 'Bushwick North' = 25, 'Bushwick South' = 26, 'Cambria Heights' = 27, 'Canarsie' = 28, 'Carroll Gardens-Columbia Street-Red Hook' = 29, 'Central Harlem North-Polo Grounds' = 30, 'Central Harlem South' = 31, 'Charleston-Richmond Valley-Tottenville' = 32, 'Chinatown' = 33, 'Clarendon-Bathgate' = 34, 'Clinton' = 35, 'Clinton Hill' = 36, 'Co-op City' = 37, 'College Point' = 38, 'Corona' = 39, 'Crotona Park East' = 40, 'Crown Heights North' = 41, 'Crown Heights South' = 42, 'Cypress Hills-City Line' = 43, 'DUMBO-Vinegar Hill-Downtown Brooklyn-Boerum Hill' = 44, 'Douglas Manor-Douglaslaston-Little Neck' = 45, 'Dyker Heights' = 46, 'East Concourse-Concourse Village' = 47, 'East Elmhurst' = 48, 'East Flatbush-Farragut' = 49, 'East Flushing' = 50, 'East Harlem North' = 51, 'East Harlem South' = 52, 'East New York' = 53, 'East New York (Pennsylvania Ave)' = 54, 'East Tremont' = 55, 'East Village' = 56, 'East Williamsburg' = 57, 'Eastchester-Edenwald-Baychester' = 58, 'Elmhurst' = 59, 'Elmhurst-Maspeth' = 60, 'Erasmus' = 61, 'Far Rockaway-Bayswater' = 62, 'Flatbush' = 63, 'Flatlands' = 64, 'Flushing' = 65, 'Fordham South' = 66, 'Forest Hills' = 67, 'Fort Greene' = 68, 'Fresh Meadows-Utopia' = 69, 'Ft. Totten-Bay Terrace-Clearview' = 70, 'Georgetown-Marine Park-Bergen Beach-Mill Basin' = 71, 'Glen Oaks-Floral Park-New Hyde Park' = 72).

```

    'Glendale' = 73, 'Gramercy' = 74, 'Grasmere-Arrochar-Ft. Wadsworth' = 75, 'Gravesend' = 76, 'Great Kills' = 77, 'Greenpoint' = 78, 'Grymes Hill-Clifton-Fox Hills' = 79, 'Hamilton Heights' = 80, 'Hammels-Arverne-Edgemere' = 81, 'Highbridge' = 82, 'Hollis' = 83, 'Homecrest' = 84, 'Hudson Yards-Chelsea-Flatiron-Union Square' = 85, 'Hunters Point-Sunnyside-West Maspeth' = 86, 'Hunts Point' = 87, 'Jackson Heights' = 88, 'Jamaica' = 89, 'Jamaica Estates-Holliswood' = 90, 'Kensington-Ocean Parkway' = 91, 'Kew Gardens' = 92, 'Kew Gardens Hills' = 93, 'Kingsbridge Heights' = 94, 'Laurelton' = 95, 'Lenox Hill-Roosevelt Island' = 96, 'Lincoln Square' = 97, 'Lindenwood-Howard Beach' = 98, 'Longwood' = 99, 'Lower East Side' = 100, 'Madison' = 101, 'Manhattanville' = 102, 'Marble Hill-Inwood' = 103, 'Mariner\'s Harbor-Arlington-Port Ivory-Graniteville' = 104, 'Maspeth' = 105, 'Melrose South-Mott Haven North' = 106, 'Middle Village' = 107, 'Midtown-Midtown South' = 108, 'Midwood' = 109, 'Morningside Heights' = 110, 'Morrisania-Melrose' = 111, 'Mott Haven-Port Morris' = 112, 'Mount Hope' = 113, 'Murray Hill' = 114, 'Murray Hill-Kips Bay' = 115, 'New Brighton-Silver Lake' = 116, 'New Dorp-Midland Beach' = 117, 'New Springville-Bloomfield-Travis' = 118, 'North Corona' = 119, 'North Riverdale-Fieldston-Riverdale' = 120, 'North Side-South Side' = 121, 'Norwood' = 122, 'Oakland Gardens' = 123, 'Oakwood-Oakwood Beach' = 124, 'Ocean Hill' = 125, 'Ocean Parkway South' = 126, 'Old Astoria' = 127, 'Old Town-Dongan Hills-South Beach' = 128, 'Ozone Park' = 129, 'Park Slope-Gowanus' = 130, 'Parkchester' = 131, 'Pelham Bay-Country Club-City Island' = 132, 'Pelham Parkway' = 133, 'Pomonok-Flushing Heights-Hillcrest' = 134, 'Port Richmond' = 135, 'Prospect Heights' = 136, 'Prospect Lefferts Gardens-Wingate' = 137, 'Queens Village' = 138, 'Queensboro Hill' = 139, 'Queensbridge-Ravenswood-Long Island City' = 140, 'Rego Park' = 141, 'Richmond Hill' = 142, 'Ridgewood' = 143, 'Rikers Island' = 144, 'Rosedale' = 145, 'Rossville-Woodrow' = 146, 'Rugby-Remsen Village' = 147, 'Schuylerville-Throgs Neck-Edgewater Park' = 148, 'Seagate-Coney Island' = 149, 'Sheepshead Bay-Gerritsen Beach-Manhattan Beach' = 150, 'SoHo-TriBeCa-Civic Center-Little Italy' = 151, 'Soundview-Bruckner' = 152, 'Soundview-Castle Hill-Clason Point-Harding Park' = 153, 'South Jamaica' = 154, 'South Ozone Park' = 155, 'Springfield Gardens North' = 156, 'Springfield Gardens South-Brookville' = 157, 'Spuyten Duyvil-Kingsbridge' = 158, 'St. Albans' = 159, 'Stapleton-Rosebank' = 160, 'Starrett City' = 161, 'Steinway' = 162, 'Stuyvesant Heights' = 163, 'Stuyvesant Town-Cooper Village' = 164, 'Sunset Park East' = 165, 'Sunset Park West' = 166, 'Todt Hill-Emerson Hill-Heartland Village-Lighthouse Hill' = 167, 'Turtle Bay-East Midtown' = 168, 'University Heights-Morris Heights' = 169, 'Upper East Side-Carnegie Hill' = 170, 'Upper West Side' = 171, 'Van Cortlandt Village' = 172, 'Van Nest-Morris Park-Westchester Square' = 173, 'Washington Heights North' = 174, 'Washington Heights South' = 175, 'West Brighton' = 176, 'West Concourse' = 177, 'West Farms-Bronx River' = 178, 'West New Brighton-New Brighton-St. George' = 179, 'West Village' = 180, 'Westchester-Unionport' = 181, 'Westerleigh' = 182, 'Whitestone' = 183, 'Williamsbridge-Olinville' = 184, 'Williamsburg' = 185, 'Windsor Terrace' = 186, 'Woodhaven' = 187, 'Woodlawn-Wakefield' = 188, 'Woodside' = 189, 'Yorkville' = 190, 'park-cemetery-etc-Bronx' = 191, 'park-cemetery-etc-Brooklyn' = 192, 'park-cemetery-etc-Manhattan' = 193, 'park-cemetery-etc-Queens' = 194, 'park-cemetery-etc-Staten Island' = 195) AS dropoff_ntaname,
toUInt16(ifNull(dropoff_puma, '0')) AS dropoff_puma
FROM trips

```

这需要3030秒，速度约为每秒428,000行。要加快速度，可以使用 Log 引擎替换`MergeTree`引擎来创建表。在这种情况下，下载速度超过200秒。

这个表需要使用126GB的磁盘空间。

```
SELECT formatReadableSize(sum(bytes)) FROM system.parts WHERE table = 'trips_mergetree' AND active
```

```

└─formatReadableSize(sum(bytes))
| 126.18 GiB
└───────────────────

```

除此之外，你还可以在MergeTree上运行OPTIMIZE查询来进行优化。但这不是必须的，因为即使在没有进行优化的情况下它的表现依然是很好的。

## 下载预处理好的分区数据

```

$ curl -O https://clickhouse-datasets.s3.yandex.net/trips_mergetree/partitions/trips_mergetree.tar
$ tar xvf trips_mergetree.tar -C /var/lib/clickhouse # path to ClickHouse data directory
$ # check permissions of unpacked data, fix if required
$ sudo service clickhouse-server restart
$ clickhouse-client --query "select count(*) from datasets.trips_mergetree"

```

如果要运行下面的SQL查询，必须使用完整的表名， datasets.trips\_mergetree。

## 单台服务器运行结果

Q1:

```
SELECT cab_type, count(*) FROM trips_mergetree GROUP BY cab_type
```

0.490 seconds.

Q2:

```
SELECT passenger_count, avg(total_amount) FROM trips_mergetree GROUP BY passenger_count
```

1.224 seconds.

Q3:

```
SELECT passenger_count, toYear(pickup_date) AS year, count(*) FROM trips_mergetree GROUP BY passenger_count, year
```

2.104 seconds.

Q4:

```
SELECT passenger_count, toYear(pickup_date) AS year, round(trip_distance) AS distance, count(*)  
FROM trips_mergetree  
GROUP BY passenger_count, year, distance  
ORDER BY year, count(*) DESC
```

3.593 seconds.

我们使用的是如下配置的服务器：

Two Intel(R) Xeon(R) CPU E5-2650 v2 @ 2.60GHz, 16 physical kernels total, 128 GiB RAM, 8x6 TB HD on hardware RAID-5

执行时间是取三次运行中最好的值，但是从第二次查询开始，查询就讲从文件系统的缓存中读取数据。同时在每次读取和处理后不在进行缓存。

在三台服务器中创建表结构：

在每台服务器中运行：

```
CREATE TABLE default.trips_mergetree_third ( trip_id UInt32, vendor_id Enum8('1' = 1, '2' = 2, 'CMT' = 3,  
'VTS' = 4, 'DDS' = 5, 'B02512' = 10, 'B02598' = 11, 'B02617' = 12, 'B02682' = 13, 'B02764' = 14),  
pickup_date Date, pickup_datetime DateTime, dropoff_date Date, dropoff_datetime DateTime,  
store_and_fwd_flag UInt8, rate_code_id UInt8, pickup_longitude Float64, pickup_latitude Float64,  
dropoff_longitude Float64, dropoff_latitude Float64, passenger_count UInt8, trip_distance Float64,  
fare_amount Float32, extra Float32, mta_tax Float32, tip_amount Float32, tolls_amount Float32, ehail_fee  
Float32, improvement_surcharge Float32, total_amount Float32, payment_type_ Enum8('UNK' = 0, 'CSH' = 1,  
'CRE' = 2, 'NOC' = 3, 'DIS' = 4), trip_type UInt8, pickup FixedString(25), dropoff FixedString(25),  
cab_type Enum8('yellow' = 1, 'green' = 2, 'uber' = 3), pickup_nyct2010_gid UInt8, pickup_ctlabel Float32,  
pickup_borocode UInt8, pickup_boroname Enum8('' = 0, 'Manhattan' = 1, 'Bronx' = 2, 'Brooklyn' = 3,  
'Queens' = 4, 'Staten Island' = 5), pickup_ct2010 FixedString(6), pickup_boroct2010 FixedString(7),  
pickup_cdeligibil Enum8('' = 0, 'E' = 1, 'I' = 2), pickup_ntacode FixedString(4), pickup_ntaname  
Enum16('' = 0, 'Airport' = 1, 'Allerton-Pelham Gardens' = 2, 'Annadale-Huguenot-Prince\\'s Bay-Eltingville'  
= 3, 'Arden Heights' = 4, 'Astoria' = 5, 'Auburndale' = 6, 'Baisley Park' = 7, 'Bath Beach' = 8, 'Battery  
Park City-Lower Manhattan' = 9, 'Bay Ridge' = 10, 'Bayside-Bayside Hills' = 11, 'Bedford' = 12, 'Bedford  
Park-Fordham North' = 13, 'Bellerose' = 14, 'Belmont' = 15, 'Bensonhurst East' = 16, 'Bensonhurst West' =  
17, 'Borough Park' = 18, 'Breezy Point-Belle Harbor-Rockaway Park-Broad Channel' = 19, 'Briarwood-Jamaica  
Hills' = 20, 'Brighton Beach' = 21, 'Bronxdale' = 22, 'Brooklyn Heights-Cobble Hill' = 23, 'Brownsville' =
```

24, 'Bushwick North' = 25, 'Bushwick South' = 26, 'Cambria Heights' = 27, 'Canarsie' = 28, 'Carroll Gardens-Columbia Street-Red Hook' = 29, 'Central Harlem North-Polo Grounds' = 30, 'Central Harlem South' = 31, 'Charleston-Richmond Valley-Tottenville' = 32, 'Chinatown' = 33, 'Claremont-Bathgate' = 34, 'Clinton' = 35, 'Clinton Hill' = 36, 'Co-op City' = 37, 'College Point' = 38, 'Corona' = 39, 'Crotone Park East' = 40, 'Crown Heights North' = 41, 'Crown Heights South' = 42, 'Cypress Hills-City Line' = 43, 'DUMBO-Vinegar Hill-Downtown Brooklyn-Boerum Hill' = 44, 'Douglas Manor-Douglaslaston-Little Neck' = 45, 'Dyker Heights' = 46, 'East Concourse-Concourse Village' = 47, 'East Elmhurst' = 48, 'East Flatbush-Farragut' = 49, 'East Flushing' = 50, 'East Harlem North' = 51, 'East Harlem South' = 52, 'East New York' = 53, 'East New York (Pennsylvania Ave)' = 54, 'East Tremont' = 55, 'East Village' = 56, 'East Williamsburg' = 57, 'Eastchester-Edenwald-Baychester' = 58, 'Elmhurst' = 59, 'Elmhurst-Maspeth' = 60, 'Erasmus' = 61, 'Far Rockaway-Bayswater' = 62, 'Flatbush' = 63, 'Flatlands' = 64, 'Flushing' = 65, 'Fordham South' = 66, 'Forest Hills' = 67, 'Fort Greene' = 68, 'Fresh Meadows-Utopia' = 69, 'Ft. Totten-Bay Terrace-Clearview' = 70, 'Georgetown-Marine Park-Bergen Beach-Mill Basin' = 71, 'Glen Oaks-Floral Park-New Hyde Park' = 72, 'Glendale' = 73, 'Gramercy' = 74, 'Grasmere-Arrochar-Ft. Wadsworth' = 75, 'Gravesend' = 76, 'Great Kills' = 77, 'Greenpoint' = 78, 'Grymes Hill-Clifton-Fox Hills' = 79, 'Hamilton Heights' = 80, 'Hammels-Arverne-Edgemere' = 81, 'Highbridge' = 82, 'Hollis' = 83, 'Homecrest' = 84, 'Hudson Yards-Chelsea-Flatiron-Union Square' = 85, 'Hunters Point-Sunnyside-West Maspeth' = 86, 'Hunts Point' = 87, 'Jackson Heights' = 88, 'Jamaica' = 89, 'Jamaica Estates-Holliswood' = 90, 'Kensington-Ocean Parkway' = 91, 'Kew Gardens' = 92, 'Kew Gardens Hills' = 93, 'Kingsbridge Heights' = 94, 'Laurelton' = 95, 'Lenox Hill-Roosevelt Island' = 96, 'Lincoln Square' = 97, 'Lindenwood-Howard Beach' = 98, 'Longwood' = 99, 'Lower East Side' = 100, 'Madison' = 101, 'Manhattanville' = 102, 'Marble Hill-Inwood' = 103, 'Mariner\'s Harbor-Arlington-Port Ivory-Graniteville' = 104, 'Maspeth' = 105, 'Melrose South-Mott Haven North' = 106, 'Middle Village' = 107, 'Midtown-Midtown South' = 108, 'Midwood' = 109, 'Morningside Heights' = 110, 'Morrisania-Melrose' = 111, 'Mott Haven-Port Morris' = 112, 'Mount Hope' = 113, 'Murray Hill' = 114, 'Murray Hill-Kips Bay' = 115, 'New Brighton-Silver Lake' = 116, 'New Dorp-Midland Beach' = 117, 'New Springville-Bloomfield-Travis' = 118, 'North Corona' = 119, 'North Riverdale-Fieldston-Riverdale' = 120, 'North Side-South Side' = 121, 'Norwood' = 122, 'Oakland Gardens' = 123, 'Oakwood-Oakwood Beach' = 124, 'Ocean Hill' = 125, 'Ocean Parkway South' = 126, 'Old Astoria' = 127, 'Old Town-Dongan Hills-South Beach' = 128, 'Ozone Park' = 129, 'Park Slope-Gowanus' = 130, 'Parkchester' = 131, 'Pelham Bay-Country Club-City Island' = 132, 'Pelham Parkway' = 133, 'Pomonok-Flushing Heights-Hillcrest' = 134, 'Port Richmond' = 135, 'Prospect Heights' = 136, 'Prospect Lefferts Gardens-Wingate' = 137, 'Queens Village' = 138, 'Queensboro Hill' = 139, 'Queensbridge-Ravenswood-Long Island City' = 140, 'Rego Park' = 141, 'Richmond Hill' = 142, 'Ridgewood' = 143, 'Rikers Island' = 144, 'Rosedale' = 145, 'Rossville-Woodrow' = 146, 'Rugby-Remsen Village' = 147, 'Schuylerville-Throgs Neck-Edgewater Park' = 148, 'Seagate-Coney Island' = 149, 'Sheepshead Bay-Gerritsen Beach-Manhattan Beach' = 150, 'SoHo-TriBeCa-Civic Center-Little Italy' = 151, 'Soundview-Bruckner' = 152, 'Soundview-Castle Hill-Clason Point-Harding Park' = 153, 'South Jamaica' = 154, 'South Ozone Park' = 155, 'Springfield Gardens North' = 156, 'Springfield Gardens South-Brooklyn' = 157, 'Spuyten Duyvil-Kingsbridge' = 158, 'St. Albans' = 159, 'Stapleton-Rosebank' = 160, 'Starrett City' = 161, 'Steinway' = 162, 'Stuyvesant Heights' = 163, 'Stuyvesant Town-Cooper Village' = 164, 'Sunset Park East' = 165, 'Sunset Park West' = 166, 'Todt Hill-Emerson Hill-Heartland Village-Lighthouse Hill' = 167, 'Turtle Bay-East Midtown' = 168, 'University Heights-Morris Heights' = 169, 'Upper East Side-Carnegie Hill' = 170, 'Upper West Side' = 171, 'Van Cortlandt Village' = 172, 'Van Nest-Morris Park-Westchester Square' = 173, 'Washington Heights North' = 174, 'Washington Heights South' = 175, 'West Brighton' = 176, 'West Concourse' = 177, 'West Farms-Bronx River' = 178, 'West New Brighton-New Brighton-St. George' = 179, 'West Village' = 180, 'Westchester-Unionport' = 181, 'Westerleigh' = 182, 'Whitestone' = 183, 'Williamsbridge-Olinville' = 184, 'Williamsburg' = 185, 'Windsor Terrace' = 186, 'Woodhaven' = 187, 'Woodlawn-Wakefield' = 188, 'Woodside' = 189, 'Yorkville' = 190, 'park-cemetery-etc-Bronx' = 191, 'park-cemetery-etc-Brooklyn' = 192, 'park-cemetery-etc-Manhattan' = 193, 'park-cemetery-etc-Queens' = 194, 'park-cemetery-etc-Staten Island' = 195), pickup\_puma UInt16, dropoff\_nyct2010\_gid UInt8, dropoff\_ctlabefl Float32, dropoff\_borocode UInt8, dropoff\_boroname Enum8('' = 0, 'Manhattan' = 1, 'Bronx' = 2, 'Brooklyn' = 3, 'Queens' = 4, 'Staten Island' = 5), dropoff\_ct2010 FixedString(6), dropoff\_boroct2010 FixedString(7), dropoff\_cdeligibil Enum8('' = 0, 'E' = 1, 'I' = 2), dropoff\_ntacode FixedString(4), dropoff\_ntaname Enum16('' = 0, 'Airport' = 1, 'Allerton-Pelham Gardens' = 2, 'Annadale-Huguenot-Prince\'s Bay-Eltingville' = 3, 'Arden Heights' = 4, 'Astoria' = 5, 'Auburndale' = 6, 'Baisley Park' = 7, 'Bath Beach' = 8, 'Battery Park City-Lower Manhattan' = 9, 'Bay Ridge' = 10, 'Bayside-Bayside Hills' = 11, 'Bedford' = 12, 'Bedford Park-Fordham North' = 13, 'Bellerose' = 14, 'Belmont' = 15, 'Bensonhurst East' = 16, 'Bensonhurst West' = 17, 'Borough Park' = 18, 'Breezy Point-Belle Harbor-Rockaway Park-Broad Channel' = 19, 'Briarwood-Jamaica Hills' = 20, 'Brighton Beach' = 21, 'Bronxdale' = 22, 'Brooklyn Heights-Cobble Hill' = 23, 'Brownsville' = 24, 'Bushwick North' = 25, 'Bushwick South' = 26, 'Cambria Heights' = 27, 'Canarsie' = 28, 'Carroll Gardens-Columbia Street-Red Hook' = 29, 'Central Harlem North-Polo Grounds' = 30, 'Central Harlem South' = 31, 'Charleston-Richmond Valley-Tottenville' = 32, 'Chinatown' = 33, 'Claremont-Bathgate' = 34, 'Clinton' = 35, 'Clinton Hill' = 36, 'Co-op City' = 37, 'College Point' = 38, 'Corona' = 39, 'Crotone Park East' = 40, 'Crown Heights North' = 41, 'Crown Heights South' = 42, 'Cypress Hills-City Line' = 43, 'DUMBO-Vinegar Hill-Downtown Brooklyn-Boerum Hill' = 44, 'Douglas Manor-Douglaslaston-Little Neck' = 45, 'Dyker Heights' = 46, 'East Concourse-Concourse Village' = 47, 'East Elmhurst' = 48, 'East Flatbush-Farragut' = 49, 'East Flushing' = 50, 'East Harlem North' = 51, 'East Harlem South' = 52, 'East New York' = 53, 'East New York (Pennsylvania Ave)' = 54, 'East Tremont' = 55, 'East Village' = 56, 'East Williamsburg' = 57, 'Eastchester-Edenwald-Baychester' = 58, 'Elmhurst' = 59, 'Elmhurst-Maspeth' = 60, 'Erasmus' = 61, 'Far Rockaway-Bayswater' = 62, 'Flatbush' = 63, 'Flatlands' = 64, 'Flushing' = 65, 'Fordham South' = 66, 'Forest Hills' = 67, 'Fort Greene' = 68, 'Fresh Meadows-Utopia' = 69, 'Ft. Totten-Bay Terrace-Clearview' = 70, 'Georgetown-Marine Park-Bergen Beach-Mill Basin' = 71, 'Glen Oaks-Floral Park-New Hyde Park' = 72, 'Glendale' = 73, 'Gramercy' = 74, 'Grasmere-Arrochar-Ft. Wadsworth' = 75, 'Gravesend' = 76, 'Great Kills' = 77, 'Greenpoint' = 78, 'Grymes Hill-Clifton-Fox Hills' = 79, 'Hamilton Heights' = 80,

```

'Hammels-Arverne-Edgemere' = 81, 'Highbridge' = 82, 'Hollis' = 83, 'Homecrest' = 84, 'Hudson
Yards-Chelsea-Flatiron-Union Square' = 85, 'Hunters Point-Sunnyside-West Maspeth' = 86, 'Hunts Point' = 87,
'Jackson Heights' = 88, 'Jamaica' = 89, 'Jamaica Estates-Holliswood' = 90, 'Kensington-Ocean Parkway' =
91, 'Kew Gardens' = 92, 'Kew Gardens Hills' = 93, 'Kingsbridge Heights' = 94, 'Laurelton' = 95, 'Lenox
Hill-Roosevelt Island' = 96, 'Lincoln Square' = 97, 'Lindenwood-Howard Beach' = 98, 'Longwood' = 99, 'Lower
East Side' = 100, 'Madison' = 101, 'Manhattanville' = 102, 'Marble Hill-Inwood' = 103, 'Mariner\'s Harbor-
Arlington-Port Ivory-Graniteville' = 104, 'Maspeth' = 105, 'Melrose South-Mott Haven North' = 106, 'Middle
Village' = 107, 'Midtown-Midtown South' = 108, 'Midwood' = 109, 'Morningside Heights' = 110, 'Morrisania-
Melrose' = 111, 'Mott Haven-Port Morris' = 112, 'Mount Hope' = 113, 'Murray Hill' = 114, 'Murray Hill-Kips
Bay' = 115, 'New Brighton-Silver Lake' = 116, 'New Dorp-Midland Beach' = 117, 'New Springville-Bloomfield-
Travis' = 118, 'North Corona' = 119, 'North Riverdale-Fieldston-Riverdale' = 120, 'North Side-South Side' =
121, 'Norwood' = 122, 'Oakland Gardens' = 123, 'Oakwood-Oakwood Beach' = 124, 'Ocean Hill' = 125, 'Ocean
Parkway South' = 126, 'Old Astoria' = 127, 'Old Town-Dongan Hills-South Beach' = 128, 'Ozone Park' = 129,
'Park Slope-Gowanus' = 130, 'Parkchester' = 131, 'Pelham Bay-Country Club-City Island' = 132, 'Pelham
Parkway' = 133, 'Pomonok-Flushing Heights-Hillcrest' = 134, 'Port Richmond' = 135, 'Prospect Heights' =
136, 'Prospect Lefferts Gardens-Wingate' = 137, 'Queens Village' = 138, 'Queensboro Hill' = 139,
'Queensbridge-Ravenswood-Long Island City' = 140, 'Rego Park' = 141, 'Richmond Hill' = 142, 'Ridgewood' =
143, 'Rikers Island' = 144, 'Rosedale' = 145, 'Rossville-Woodrow' = 146, 'Rugby-Remsen Village' = 147,
'Schuylerville-Throgs Neck-Edgewater Park' = 148, 'Seagate-Coney Island' = 149, 'Sheepshead Bay-Gerritsen
Beach-Manhattan Beach' = 150, 'SoHo-TriBeCa-Civic Center-Little Italy' = 151, 'Soundview-Bruckner' = 152,
'Soundview-Castle Hill-Clason Point-Harding Park' = 153, 'South Jamaica' = 154, 'South Ozone Park' = 155,
'Springfield Gardens North' = 156, 'Springfield Gardens South-Brooklyn' = 157, 'Spuyten Duyvil-
Kingsbridge' = 158, 'St. Albans' = 159, 'Stapleton-Rosebank' = 160, 'Starrett City' = 161, 'Steinway' =
162, 'Stuyvesant Heights' = 163, 'Stuyvesant Town-Cooper Village' = 164, 'Sunset Park East' = 165, 'Sunset
Park West' = 166, 'Todt Hill-Emerson Hill-Heartland Village-Lighthouse Hill' = 167, 'Turtle Bay-East
Midtown' = 168, 'University Heights-Morris Heights' = 169, 'Upper East Side-Carnegie Hill' = 170, 'Upper
West Side' = 171, 'Van Cortlandt Village' = 172, 'Van Nest-Morris Park-Westchester Square' = 173,
'Washington Heights North' = 174, 'Washington Heights South' = 175, 'West Brighton' = 176, 'West Concourse' =
177, 'West Farms-Bronx River' = 178, 'West New Brighton-New Brighton-St. George' = 179, 'West Village' =
180, 'Westchester-Unionport' = 181, 'Westerleigh' = 182, 'Whitestone' = 183, 'Williamsbridge-Olinville' =
184, 'Williamsburg' = 185, 'Windsor Terrace' = 186, 'Woodhaven' = 187, 'Woodlawn-Wakefield' = 188,
'Woodside' = 189, 'Yorkville' = 190, 'park-cemetery-etc-Bronx' = 191, 'park-cemetery-etc-Brooklyn' = 192,
'park-cemetery-etc-Manhattan' = 193, 'park-cemetery-etc-Queens' = 194, 'park-cemetery-etc-Staten Island' =
195), dropoff_puma UInt16) ENGINE = MergeTree(pickup_date, pickup_datetime, 8192)

```

在之前的服务器中运行：

```

CREATE TABLE trips_mergetree_x3 AS trips_mergetree_third ENGINE = Distributed(perftest, default,
trips_mergetree_third, rand())

```

运行如下查询重新分布数据：

```

INSERT INTO trips_mergetree_x3 SELECT * FROM trips_mergetree

```

这个查询需要运行2454秒。

在三台服务器集群中运行的结果：

Q1: 0.212 seconds. Q2: 0.438 seconds. Q3: 0.733 seconds. Q4: 1.241 seconds.

不出意料，查询是线性扩展的。

我们同时在140台服务器的集群中运行的结果：

Q1: 0.028 sec. Q2: 0.043 sec. Q3: 0.051 sec. Q4: 0.072 sec.

在这种情况下，查询处理时间首先由网络延迟确定。 我们使用位于芬兰的Yandex数据中心中的客户端去位于俄罗斯的集群上运行查询，这增加了大约20毫秒的延迟。

## 总结

servers	Q1	Q2	Q3	Q4
1	0.490	1.224	2.104	3.593
3	0.212	0.438	0.733	1.241
140	0.028	0.043	0.051	0.072

## AMPLab 大数据基准测试

参考 <https://amplab.cs.berkeley.edu/benchmark/>

需要您在<https://aws.amazon.com>注册一个免费的账号。注册时需要您提供信用卡、邮箱、电话等信息。之后可以在[https://console.aws.amazon.com/iam/home?nc2=h\\_m\\_sc#security\\_credential](https://console.aws.amazon.com/iam/home?nc2=h_m_sc#security_credential)获取新的访问密钥

在控制台运行以下命令：

```
$ sudo apt-get install s3cmd
$ mkdir tiny; cd tiny;
$ s3cmd sync s3://big-data-benchmark/pavlo/text-deflate/tiny/ .
$ cd ..
$ mkdir 1node; cd 1node;
$ s3cmd sync s3://big-data-benchmark/pavlo/text-deflate/1node/ .
$ cd ..
$ mkdir 5nodes; cd 5nodes;
$ s3cmd sync s3://big-data-benchmark/pavlo/text-deflate/5nodes/ .
$ cd ..
```

在ClickHouse运行如下查询：

```
CREATE TABLE rankings_tiny
(
    pageURL String,
    pageRank UInt32,
    avgDuration UInt32
) ENGINE = Log;

CREATE TABLE uservisits_tiny
(
    sourceIP String,
    destinationURL String,
    visitDate Date,
    adRevenue Float32,
    UserAgent String,
    cCode FixedString(3),
    lCode FixedString(6),
    searchWord String,
    duration UInt32
) ENGINE = MergeTree(visitDate, visitDate, 8192);

CREATE TABLE rankings_1node
(
    pageURL String,
    pageRank UInt32,
    avgDuration UInt32
) ENGINE = Log;

CREATE TABLE uservisits_1node
(
    sourceIP String,
    destinationURL String,
    visitDate Date,
    adRevenue Float32,
    UserAgent String,
    cCode FixedString(3),
    lCode FixedString(6),
    searchWord String,
    duration UInt32
) ENGINE = MergeTree(visitDate, visitDate, 8192);

CREATE TABLE rankings_5nodes_on_single
(
    pageURL String,
    pageRank UInt32,
    avgDuration UInt32
) ENGINE = Log;

CREATE TABLE uservisits_5nodes_on_single
(
    sourceIP String,
    destinationURL String,
    visitDate Date,
    adRevenue Float32,
    UserAgent String,
    cCode FixedString(3),
    lCode FixedString(6),
    searchWord String,
    duration UInt32
) ENGINE = MergeTree(visitDate, visitDate, 8192);
```

回到控制台运行如下命令：

```

$ for i in tiny/rankings/*.deflate; do echo $i; zlib-flate -uncompress < $i | clickhouse-client --host=example-perftest01j --query="INSERT INTO rankings_tiny FORMAT CSV"; done
$ for i in tiny/uservisits/*.deflate; do echo $i; zlib-flate -uncompress < $i | clickhouse-client --host=example-perftest01j --query="INSERT INTO uservisits_tiny FORMAT CSV"; done
$ for i in 1node/rankings/*.deflate; do echo $i; zlib-flate -uncompress < $i | clickhouse-client --host=example-perftest01j --query="INSERT INTO rankings_1node FORMAT CSV"; done
$ for i in 1node/uservisits/*.deflate; do echo $i; zlib-flate -uncompress < $i | clickhouse-client --host=example-perftest01j --query="INSERT INTO uservisits_1node FORMAT CSV"; done
$ for i in 5nodes/rankings/*.deflate; do echo $i; zlib-flate -uncompress < $i | clickhouse-client --host=example-perftest01j --query="INSERT INTO rankings_5nodes_on_single FORMAT CSV"; done
$ for i in 5nodes/uservisits/*.deflate; do echo $i; zlib-flate -uncompress < $i | clickhouse-client --host=example-perftest01j --query="INSERT INTO uservisits_5nodes_on_single FORMAT CSV"; done

```

简单的查询示例：

```

SELECT pageURL, pageRank FROM rankings_1node WHERE pageRank > 1000

SELECT substring(sourceIP, 1, 8), sum(adRevenue) FROM uservisits_1node GROUP BY substring(sourceIP, 1, 8)

SELECT
    sourceIP,
    sum(adRevenue) AS totalRevenue,
    avg(pageRank) AS pageRank
FROM rankings_1node ALL INNER JOIN
(
    SELECT
        sourceIP,
        destinationURL AS pageURL,
        adRevenue
    FROM uservisits_1node
    WHERE (visitDate > '1980-01-01') AND (visitDate < '1980-04-01')
) USING pageURL
GROUP BY sourceIP
ORDER BY totalRevenue DESC
LIMIT 1

```

## 维基访问数据

参考: <http://dumps.wikimedia.org/other/pagecounts-raw/>

创建表结构：

```

CREATE TABLE wikistat
(
    date Date,
    time DateTime,
    project String,
    subproject String,
    path String,
    hits UInt64,
    size UInt64
) ENGINE = MergeTree(date, (path, time), 8192);

```

加载数据：

```

$ for i in {2007..2016}; do for j in {01..12}; do echo $i-$j >&2; curl -SSL "http://dumps.wikimedia.org/other/pagecounts-raw/$i/$i-$j/" | grep -oE 'pagecounts-[0-9]+-[0-9]+\.\gz'; done; done | sort | uniq | tee links.txt
$ cat links.txt | while read link; do wget http://dumps.wikimedia.org/other/pagecounts-raw/$(echo $link | sed -r 's/pagecounts-([0-9]{4})([0-9]{2})[0-9]{2}-[0-9]+\.\gz/\1/')/$(echo $link | sed -r 's/pagecounts-([0-9]{4})([0-9]{2})[0-9]{2}-[0-9]+\.\gz/\1-\2/')/$link; done
$ ls -1 /opt/wikistat/ | grep gz | while read i; do echo $i; gzip -cd /opt/wikistat/$i | ./wikistat-loader --time="$(echo -n $i | sed -r 's/pagecounts-([0-9]{4})([0-9]{2})[0-9]{2}-([0-9]{2})([0-9]{2})([0-9]{2})\.\gz/\1-\2-\3 \4-00-00/')" | clickhouse-client --query="INSERT INTO wikistat FORMAT TabSeparated"; done

```

# Criteo TB级别点击日志

可以从<http://labs.criteo.com/downloads/download-terabyte-click-logs/>上下载数据

创建原始数据对应的表结构：

```
CREATE TABLE criteo_log (date Date, clicked UInt8, int1 Int32, int2 Int32, int3 Int32, int4 Int32, int5 Int32, int6 Int32, int7 Int32, int8 Int32, int9 Int32, int10 Int32, int11 Int32, int12 Int32, int13 Int32, cat1 String, cat2 String, cat3 String, cat4 String, cat5 String, cat6 String, cat7 String, cat8 String, cat9 String, cat10 String, cat11 String, cat12 String, cat13 String, cat14 String, cat15 String, cat16 String, cat17 String, cat18 String, cat19 String, cat20 String, cat21 String, cat22 String, cat23 String, cat24 String, cat25 String, cat26 String) ENGINE = Log
```

下载数据：

```
$ for i in {00..23}; do echo $i; zcat datasets/criteo/day_${i#0}.gz | sed -r 's/^/2000-01-'${i/00/24}'\t/' | clickhouse-client --host=example-perftest01j --query="INSERT INTO criteo_log FORMAT TabSeparated"; done
```

创建转换后的数据对应的表结构：

```
CREATE TABLE criteo
(
    date Date,
    clicked UInt8,
    int1 Int32,
    int2 Int32,
    int3 Int32,
    int4 Int32,
    int5 Int32,
    int6 Int32,
    int7 Int32,
    int8 Int32,
    int9 Int32,
    int10 Int32,
    int11 Int32,
    int12 Int32,
    int13 Int32,
    icat1 UInt32,
    icat2 UInt32,
    icat3 UInt32,
    icat4 UInt32,
    icat5 UInt32,
    icat6 UInt32,
    icat7 UInt32,
    icat8 UInt32,
    icat9 UInt32,
    icat10 UInt32,
    icat11 UInt32,
    icat12 UInt32,
    icat13 UInt32,
    icat14 UInt32,
    icat15 UInt32,
    icat16 UInt32,
    icat17 UInt32,
    icat18 UInt32,
    icat19 UInt32,
    icat20 UInt32,
    icat21 UInt32,
    icat22 UInt32,
    icat23 UInt32,
    icat24 UInt32,
    icat25 UInt32,
    icat26 UInt32
) ENGINE = MergeTree(date, intHash32(icat1), (date, intHash32(icat1)), 8192)
```

将第一张表中的原始数据转化写入到第二张表中去：

```
INSERT INTO criteo SELECT date, clicked, int1, int2, int3, int4, int5, int6, int7, int8, int9, int10,
int11, int12, int13, reinterpretAsUInt32(unhex(cat1)) AS icat1, reinterpretAsUInt32(unhex(cat2)) AS icat2,
reinterpretAsUInt32(unhex(cat3)) AS icat3, reinterpretAsUInt32(unhex(cat4)) AS icat4,
reinterpretAsUInt32(unhex(cat5)) AS icat5, reinterpretAsUInt32(unhex(cat6)) AS icat6,
reinterpretAsUInt32(unhex(cat7)) AS icat7, reinterpretAsUInt32(unhex(cat8)) AS icat8,
reinterpretAsUInt32(unhex(cat9)) AS icat9, reinterpretAsUInt32(unhex(cat10)) AS icat10,
reinterpretAsUInt32(unhex(cat11)) AS icat11, reinterpretAsUInt32(unhex(cat12)) AS icat12,
reinterpretAsUInt32(unhex(cat13)) AS icat13, reinterpretAsUInt32(unhex(cat14)) AS icat14,
reinterpretAsUInt32(unhex(cat15)) AS icat15, reinterpretAsUInt32(unhex(cat16)) AS icat16,
reinterpretAsUInt32(unhex(cat17)) AS icat17, reinterpretAsUInt32(unhex(cat18)) AS icat18,
reinterpretAsUInt32(unhex(cat19)) AS icat19, reinterpretAsUInt32(unhex(cat20)) AS icat20,
reinterpretAsUInt32(unhex(cat21)) AS icat21, reinterpretAsUInt32(unhex(cat22)) AS icat22,
reinterpretAsUInt32(unhex(cat23)) AS icat23, reinterpretAsUInt32(unhex(cat24)) AS icat24,
reinterpretAsUInt32(unhex(cat25)) AS icat25, reinterpretAsUInt32(unhex(cat26)) AS icat26 FROM criteo_log;

DROP TABLE criteo_log;
```

## Star Schema Benchmark

编译 dbgen:

```
$ git clone git@github.com:vadimtk/ssb-dbgen.git
$ cd ssb-dbgen
$ make
```

开始生成数据：

```
$ ./dbgen -s 1000 -T c
$ ./dbgen -s 1000 -T l
$ ./dbgen -s 1000 -T p
$ ./dbgen -s 1000 -T s
$ ./dbgen -s 1000 -T d
```

在ClickHouse中创建表结构：

```

CREATE TABLE customer
(
    C_CUSTKEY      UInt32,
    C_NAME         String,
    C_ADDRESS      String,
    C_CITY          LowCardinality(String),
    C_NATION        LowCardinality(String),
    C_REGION        LowCardinality(String),
    C_PHONE         String,
    C_MKTSEGMENT   LowCardinality(String)
)
ENGINE = MergeTree ORDER BY (C_CUSTKEY);

CREATE TABLE lineorder
(
    LO_ORDERKEY      UInt32,
    LO_LINENUMBER    UInt8,
    LO_CUSTKEY       UInt32,
    LO_PARTKEY       UInt32,
    LO_SUPPKEY       UInt32,
    LO_ORDERDATE     Date,
    LO_ORDERPRIORITY LowCardinality(String),
    LO_SHIPPRIORITY  UInt8,
    LO_QUANTITY      UInt8,
    LO_EXTENDEDPRICE UInt32,
    LO_ORDTOTALPRICE UInt32,
    LO_DISCOUNT      UInt8,
    LO_REVENUE       UInt32,
    LO_SUPPLYCOST    UInt32,
    LO_TAX           UInt8,
    LO_COMMITDATE    Date,
    LO_SHIPMODE      LowCardinality(String)
)
ENGINE = MergeTree PARTITION BY toYear(LO_ORDERDATE) ORDER BY (LO_ORDERDATE, LO_ORDERKEY);

CREATE TABLE part
(
    P_PARTKEY      UInt32,
    P_NAME         String,
    P_MFGR          LowCardinality(String),
    P_CATEGORY      LowCardinality(String),
    P_BRAND         LowCardinality(String),
    P_COLOR         LowCardinality(String),
    P_TYPE          LowCardinality(String),
    P_SIZE          UInt8,
    P_CONTAINER     LowCardinality(String)
)
ENGINE = MergeTree ORDER BY P_PARTKEY;

CREATE TABLE supplier
(
    S_SUPPKEY      UInt32,
    S_NAME         String,
    S_ADDRESS      String,
    S_CITY          LowCardinality(String),
    S_NATION        LowCardinality(String),
    S_REGION        LowCardinality(String),
    S_PHONE         String
)
ENGINE = MergeTree ORDER BY S_SUPPKEY;

```

写入数据：

```

$ clickhouse-client --query "INSERT INTO customer FORMAT CSV" < customer.tbl
$ clickhouse-client --query "INSERT INTO part FORMAT CSV" < part.tbl
$ clickhouse-client --query "INSERT INTO supplier FORMAT CSV" < supplier.tbl
$ clickhouse-client --query "INSERT INTO lineorder FORMAT CSV" < lineorder.tbl

```

将“星型模型”转换为非规范化的“平面模型”：

```

SET max_memory_usage = 20000000000, allow_experimental_multiple_joins_emulation = 1;

CREATE TABLE lineorder_flat
ENGINE = MergeTree
PARTITION BY toYear(LO_ORDERDATE)
ORDER BY (LO_ORDERDATE, LO_ORDERKEY) AS
SELECT l.*, c.*, s.*, p.*
FROM lineorder l
ANY INNER JOIN customer c ON (c.C_CUSTKEY = l.LO_CUSTKEY)
ANY INNER JOIN supplier s ON (s.S_SUPPKEY = l.LO_SUPPKEY)
ANY INNER JOIN part p ON (p.P_PARTKEY = l.LO_PARTKEY);

ALTER TABLE lineorder_flat DROP COLUMN C_CUSTKEY, DROP COLUMN S_SUPPKEY, DROP COLUMN P_PARTKEY;

```

Running the queries:

Q1.1

```

SELECT sum(LO_EXTENDEDPRICE * LO_DISCOUNT) AS revenue FROM lineorder_flat WHERE toYear(LO_ORDERDATE) = 1993
AND LO_DISCOUNT BETWEEN 1 AND 3 AND LO_QUANTITY < 25;

```

Q1.2

```

SELECT sum(LO_EXTENDEDPRICE * LO_DISCOUNT) AS revenue FROM lineorder_flat WHERE toYYYYMM(LO_ORDERDATE) = 199401
AND LO_DISCOUNT BETWEEN 4 AND 6 AND LO_QUANTITY BETWEEN 26 AND 35;

```

Q1.3

```

SELECT sum(LO_EXTENDEDPRICE * LO_DISCOUNT) AS revenue FROM lineorder_flat WHERE toISOWeek(LO_ORDERDATE) = 6
AND toYear(LO_ORDERDATE) = 1994 AND LO_DISCOUNT BETWEEN 5 AND 7 AND LO_QUANTITY BETWEEN 26 AND 35;

```

Q2.1

```

SELECT sum(LO_REVENUE), toYear(LO_ORDERDATE) AS year, P_BRAND FROM lineorder_flat WHERE P_CATEGORY =
'MFGR#12' AND S_REGION = 'AMERICA' GROUP BY year, P_BRAND ORDER BY year, P_BRAND;

```

Q2.2

```

SELECT sum(LO_REVENUE), toYear(LO_ORDERDATE) AS year, P_BRAND FROM lineorder_flat WHERE P_BRAND BETWEEN
'MFGR#2221' AND 'MFGR#2228' AND S_REGION = 'ASIA' GROUP BY year, P_BRAND ORDER BY year, P_BRAND;

```

Q2.3

```

SELECT sum(LO_REVENUE), toYear(LO_ORDERDATE) AS year, P_BRAND FROM lineorder_flat WHERE P_BRAND =
'MFGR#2239' AND S_REGION = 'EUROPE' GROUP BY year, P_BRAND ORDER BY year, P_BRAND;

```

Q3.1

```

SELECT C_NATION, S_NATION, toYear(LO_ORDERDATE) AS year, sum(LO_REVENUE) AS revenue FROM lineorder_flat
WHERE C_REGION = 'ASIA' AND S_REGION = 'ASIA' AND year >= 1992 AND year <= 1997 GROUP BY C_NATION,
S_NATION, year ORDER BY year asc, revenue desc;

```

Q3.2

```

SELECT C_CITY, S_CITY, toYear(LO_ORDERDATE) AS year, sum(LO_REVENUE) AS revenue FROM lineorder_flat WHERE
C_NATION = 'UNITED STATES' AND S_NATION = 'UNITED STATES' AND year >= 1992 AND year <= 1997 GROUP BY
C_CITY, S_CITY, year ORDER BY year asc, revenue desc;

```

Q3.3

```
SELECT C_CITY, S_CITY, toYear(LO_ORDERDATE) AS year, sum(LO_REVENUE) AS revenue FROM lineorder_flat WHERE (C_CITY = 'UNITED KI1' OR C_CITY = 'UNITED KI5') AND (S_CITY = 'UNITED KI1' OR S_CITY = 'UNITED KI5') AND year >= 1992 AND year <= 1997 GROUP BY C_CITY, S_CITY, year ORDER BY year asc, revenue desc;
```

Q3.4

```
SELECT C_CITY, S_CITY, toYear(LO_ORDERDATE) AS year, sum(LO_REVENUE) AS revenue FROM lineorder_flat WHERE (C_CITY = 'UNITED KI1' OR C_CITY = 'UNITED KI5') AND (S_CITY = 'UNITED KI1' OR S_CITY = 'UNITED KI5') AND toYYYYMM(LO_ORDERDATE) = '199712' GROUP BY C_CITY, S_CITY, year ORDER BY year asc, revenue desc;
```

Q4.1

```
SELECT toYear(LO_ORDERDATE) AS year, C_NATION, sum(LO_REVENUE - LO_SUPPLYCOST) AS profit FROM lineorder_flat WHERE C_REGION = 'AMERICA' AND S_REGION = 'AMERICA' AND (P_MFGR = 'MFGR#1' OR P_MFGR = 'MFGR#2') GROUP BY year, C_NATION ORDER BY year, C_NATION;
```

Q4.2

```
SELECT toYear(LO_ORDERDATE) AS year, S_NATION, P_CATEGORY, sum(LO_REVENUE - LO_SUPPLYCOST) AS profit FROM lineorder_flat WHERE C_REGION = 'AMERICA' AND S_REGION = 'AMERICA' AND (year = 1997 OR year = 1998) AND (P_MFGR = 'MFGR#1' OR P_MFGR = 'MFGR#2') GROUP BY year, S_NATION, P_CATEGORY ORDER BY year, S_NATION, P_CATEGORY;
```

Q4.3

```
SELECT toYear(LO_ORDERDATE) AS year, S_CITY, P_BRAND, sum(LO_REVENUE - LO_SUPPLYCOST) AS profit FROM lineorder_flat WHERE S_NATION = 'UNITED STATES' AND (year = 1997 OR year = 1998) AND P_CATEGORY = 'MFGR#14' GROUP BY year, S_CITY, P_BRAND ORDER BY year, S_CITY, P_BRAND;
```

## Anonymized Yandex.Metrica Data

Dataset consists of two tables containing anonymized data about hits (`hits_v1`) and visits (`visits_v1`) of Yandex.Metrica. You can read more about Yandex.Metrica in [ClickHouse history](#) section.

The dataset consists of two tables, either of them can be downloaded as a compressed `tsv.xz` file or as prepared partitions. In addition to that, an extended version of the `hits` table containing 100 million rows is available as TSV at [https://clickhouse-datasets.s3.yandex.net/hits/tsv/hits\\_100m\\_obfuscated\\_v1.tsv.xz](https://clickhouse-datasets.s3.yandex.net/hits/tsv/hits_100m_obfuscated_v1.tsv.xz) and as prepared partitions at [https://clickhouse-datasets.s3.yandex.net/hits/partitions/hits\\_100m\\_obfuscated\\_v1.tar.xz](https://clickhouse-datasets.s3.yandex.net/hits/partitions/hits_100m_obfuscated_v1.tar.xz).

### Obtaining Tables from Prepared Partitions

Download and import `hits` table:

```
curl -O https://clickhouse-datasets.s3.yandex.net/hits/partitions/hits_v1.tar
tar xvf hits_v1.tar -C /var/lib/clickhouse # path to ClickHouse data directory
## check permissions on unpacked data, fix if required
sudo service clickhouse-server restart
clickhouse-client --query "SELECT COUNT(*) FROM datasets.hits_v1"
```

Download and import `visits`:

```
curl -O https://clickhouse-datasets.s3.yandex.net/visits/partitions/visits_v1.tar
tar xvf visits_v1.tar -C /var/lib/clickhouse # path to ClickHouse data directory
## check permissions on unpacked data, fix if required
sudo service clickhouse-server restart
clickhouse-client --query "SELECT COUNT(*) FROM datasets.visits_v1"
```

## Obtaining Tables from Compressed TSV File

Download and import hits from compressed TSV file:

```
curl https://clickhouse-datasets.s3.yandex.net/hits/tsv/hits_v1.tsv.xz | unxz --threads=`nproc` > hits_v1.tsv
## now create table
clickhouse-client --query "CREATE DATABASE IF NOT EXISTS datasets"
clickhouse-client --query "CREATE TABLE datasets.hits_v1 ( WatchID UInt64, JavaEnable UInt8, Title String, GoodEvent Int16, EventTime DateTime, EventDate Date, CounterID UInt32, ClientIP UInt32, ClientIP6 FixedString(16), RegionID UInt32, UserID UInt64, CounterClass Int8, OS UInt8, UserAgent UInt8, URL String, Referer String, URLDomain String, RefererDomain String, Refresh UInt8, IsRobot UInt8, RefererCategories Array(UInt16), URLCategories Array(UInt16), URLRegions Array(UInt32), RefererRegions Array(UInt32), ResolutionWidth UInt16, ResolutionHeight UInt16, ResolutionDepth UInt8, FlashMajor UInt8, FlashMinor UInt8, FlashMinor2 String, NetMajor UInt8, NetMinor UInt8, UserAgentMajor UInt16, UserAgentMinor FixedString(2), CookieEnable UInt8, JavascriptEnable UInt8, IsMobile UInt8, MobilePhone UInt8, MobilePhoneModel String, Params String, IPNetworkID UInt32, TraficSourceID Int8, SearchEngineID UInt16, SearchPhrase String, AdvEngineID UInt8, IsArtifical UInt8, WindowClientWidth UInt16, WindowClientHeight UInt16, ClientTimeZone Int16, ClientEventTime DateTime, SilverlightVersion1 UInt8, SilverlightVersion2 UInt8, SilverlightVersion3 UInt32, SilverlightVersion4 UInt16, PageCharset String, CodeVersion UInt32, IsLink UInt8, IsDownload UInt8, IsNotBounce UInt8, FUniqID UInt64, HID UInt32, IsOldCounter UInt8, IsEvent UInt8, IsParameter UInt8, DontCountHits UInt8, WithHash UInt8, HitColor FixedString(1), UTCEventTime DateTime, Age UInt8, Sex UInt8, Income UInt8, Interests UInt16, Robotness UInt8, GeneralInterests Array(UInt16), RemoteIP UInt32, RemoteIP6 FixedString(16), WindowName Int32, OpenerName Int32, HistoryLength Int16, BrowserLanguage FixedString(2), BrowserCountry FixedString(2), SocialNetwork String, SocialAction String, HTTPSError UInt16, SendTiming Int32, DNSTiming Int32, ConnectTiming Int32, ResponseStartTiming Int32, ResponseEndTiming Int32, FetchTiming Int32, RedirectTiming Int32, DOMInteractiveTiming Int32, DOMContentLoadedTiming Int32, DOMCompleteTiming Int32, LoadEventStartTiming Int32, LoadEventEndTiming Int32, NSToDOMContentLoadedTiming Int32, FirstPaintTiming Int32, RedirectCount Int8, SocialSourceNetworkID UInt8, SocialSourcePage String, ParamPrice Int64, ParamOrderID String, ParamCurrency FixedString(3), ParamCurrencyID UInt16, GoalsReached Array(UInt32), OpenstatServiceName String, OpenstatCampaignID String, OpenstatAdID String, OpenstatSourceID String, UTMSource String, UTMMedium String, UTMCampaign String, UTMContent String, UTMTerm String, FromTag String, HasGCLID UInt8, RefererHash UInt64, URLHash UInt64, CLID UInt32, YCLID UInt64, ShareService String, ShareURL String, ShareTitle String, ParsedParams Nested(Key1 String, Key2 String, Key3 String, Key4 String, Key5 String, ValueDouble Float64), IslandID FixedString(16), RequestNum UInt32, RequestTry UInt8) ENGINE = MergeTree() PARTITION BY toYYYYMM(EventDate) ORDER BY (CounterID, EventDate, intHash32(UserID)) SAMPLE BY intHash32(UserID) SETTINGS index_granularity = 8192"
## import data
cat hits_v1.tsv | clickhouse-client --query "INSERT INTO datasets.hits_v1 FORMAT TSV" --
max_insert_block_size=100000
## optionally you can optimize table
clickhouse-client --query "OPTIMIZE TABLE datasets.hits_v1 FINAL"
clickhouse-client --query "SELECT COUNT(*) FROM datasets.hits_v1"
```

Download and import visits from compressed tsv-file:

```

curl https://clickhouse-datasets.s3.yandex.net/visits/tsv/visits_v1.tsv.xz | unxz --threads=`nproc` >
visits_v1.tsv
## now create table
clickhouse-client --query "CREATE DATABASE IF NOT EXISTS datasets"
clickhouse-client --query "CREATE TABLE datasets.visits_v1 ( CounterID UInt32, StartDate Date, Sign Int8,
IsNew UInt8, VisitID UInt64, UserID UInt64, StartTime DateTime, Duration UInt32, UTCStartTime
DateTime, PageViews Int32, Hits Int32, IsBounce UInt8, Referer String, StartURL String, RefererDomain
String, StartURLDomain String, EndURL String, LinkURL String, IsDownload UInt8, TraficSourceID Int8,
SearchEngineID UInt16, SearchPhrase String, AdvEngineID UInt8, PlaceID Int32, RefererCategories
Array(UInt16), URLCategories Array(UInt16), URLRegions Array(UInt32), RefererRegions Array(UInt32),
IsYandex UInt8, GoalReachesDepth Int32, GoalReachesURL Int32, GoalReachesAny Int32,
SocialSourceNetworkID UInt8, SocialSourcePage String, MobilePhoneModel String, ClientEventTime DateTime,
RegionID UInt32, ClientIP UInt32, ClientIP6 FixedString(16), RemoteIP UInt32, RemoteIP6
FixedString(16), IPNetworkID UInt32, SilverlightVersion3 UInt32, CodeVersion UInt32, ResolutionWidth
UInt16, ResolutionHeight UInt16, UserAgentMajor UInt16, UserAgentMinor UInt16, WindowClientWidth
UInt16, WindowClientHeight UInt16, SilverlightVersion2 UInt8, SilverlightVersion4 UInt16, FlashVersion3
UInt16, FlashVersion4 UInt16, ClientTimeZone Int16, OS UInt8, UserAgent UInt8, ResolutionDepth UInt8,
FlashMajor UInt8, FlashMinor UInt8, NetMajor UInt8, NetMinor UInt8, MobilePhone UInt8,
SilverlightVersion1 UInt8, Age UInt8, Sex UInt8, Income UInt8, JavaEnable UInt8, CookieEnable UInt8,
JavascriptEnable UInt8, IsMobile UInt8, BrowserLanguage UInt16, BrowserCountry UInt16, Interests
UInt16, Robotness UInt8, GeneralInterests Array(UInt16), Params Array(String), Goals Nested(ID UInt32),
Serial UInt32, EventTime DateTime, Price Int64, OrderID String, CurrencyID UInt32), WatchIDs
Array(UInt64), ParamSumPrice Int64, ParamCurrency FixedString(3), ParamCurrencyID UInt16, ClickLogID
UInt64, ClickEventID Int32, ClickGoodEvent Int32, ClickEventTime DateTime, ClickPriorityID Int32,
ClickPhraseID Int32, ClickPageID Int32, ClickPlaceID Int32, ClickTypeID Int32, ClickResourceID Int32,
ClickCost UInt32, ClickClientIP UInt32, ClickDomainID UInt32, ClickURL String, ClickAttempt UInt8,
ClickOrderID UInt32, ClickBannerID UInt32, ClickMarketCategoryID UInt32, ClickMarketPP UInt32,
ClickMarketCategoryName String, ClickMarketPPName String, ClickAWAPSCampaignName String, ClickPageName
String, ClickTargetType UInt16, ClickTargetPhraseID UInt64, ClickContextType UInt8, ClickSelectType
Int8, ClickOptions String, ClickGroupBannerID Int32, OpenstatServiceName String, OpenstatCampaignID
String, OpenstatAdID String, OpenstatSourceID String, UTMSource String, UTMMedium String, UTMCampaign
String, UTMContent String, UTMTerm String, FromTag String, HasGCLID UInt8, FirstVisit DateTime,
PredLastVisit Date, LastVisit Date, TotalVisits UInt32, TraficSource Nested(ID Int8, SearchEngineID
UInt16, AdvEngineID UInt8, PlaceID UInt16, SocialSourceNetworkID UInt8, Domain String, SearchPhrase String,
SocialSourcePage String), Attendance FixedString(16), CLID UInt32, YCLID UInt64, NormalizedRefererHash
UInt64, SearchPhraseHash UInt64, RefererDomainHash UInt64, NormalizedStartURLHash UInt64,
StartURLDomainHash UInt64, NormalizedEndURLHash UInt64, TopLevelDomain UInt64, URLscheme UInt64,
OpenstatServiceNameHash UInt64, OpenstatCampaignIDHash UInt64, OpenstatAdIDHash UInt64,
OpenstatSourceIDHash UInt64, UTMSourceHash UInt64, UTMMediumHash UInt64, UTMCampaignHash UInt64,
UTMContentHash UInt64, UTMTermHash UInt64, FromHash UInt64, WebVisorEnabled UInt8, WebVisorActivity
UInt32, ParsedParams Nested(Key1 String, Key2 String, Key3 String, Key4 String, Key5 String,
ValueDouble Float64), Market Nested(Type UInt8, GoalID UInt32, OrderID String, OrderPrice Int64, PP
UInt32, DirectPlaceID UInt32, DirectOrderID UInt32, DirectBannerID UInt32, GoodID String, GoodName
String, GoodQuantity Int32, GoodPrice Int64), IslandID FixedString(16)) ENGINE =
CollapsingMergeTree(StartDate, intHash32(UserID), (CounterID, StartDate, intHash32(UserID), VisitID), 8192,
Sign)"
## import data
cat visits_v1.tsv | clickhouse-client --query "INSERT INTO datasets.visits_v1 FORMAT TSV" --
max_insert_block_size=100000
## optionally you can optimize table
clickhouse-client --query "OPTIMIZE TABLE datasets.visits_v1 FINAL"
clickhouse-client --query "SELECT COUNT(*) FROM datasets.visits_v1"

```

## Example Queries

[ClickHouse tutorial](#) is based on Yandex.Metrica dataset and the recommended way to get started with this dataset is to just go through tutorial.

Additional examples of queries to these tables can be found among [stateful tests](#) of ClickHouse (they are named `test.hits` and `test.visits` there).

## 客户端

ClickHouse提供了两个网络接口（两者都可以选择包装在TLS中以提高安全性）：

- [HTTP](#)，记录在案，易于使用。

- 本地TCP，这有较少的开销。

在大多数情况下，建议使用适当的工具或库，而不是直接与这些工具或库进行交互。 Yandex的官方支持如下：[命令行客户端](#)  
[JDBC驱动程序](#) [ODBC驱动程序](#) [C++客户端库](#)

还有许多第三方库可供使用ClickHouse：[客户端库集成](#) \* [可视界面](#)

## 命令行客户端

通过命令行来访问 ClickHouse，您可以使用 `clickhouse-client`

```
$ clickhouse-client
ClickHouse client version 0.0.26176.
Connecting to localhost:9000.
Connected to ClickHouse server version 0.0.26176.:)
```

该客户端支持命令行参数以及配置文件。查看更多，请看 "[配置](#)"

### 使用方式

这个客户端可以选择使用交互式与非交互式（批量）两种模式。使用批量模式，要指定 `query` 参数，或者发送数据到 `stdin`（它会检查 `stdin` 是否是 Terminal），或者两种同时使用。它与 HTTP 接口很相似，当使用 `query` 参数发送数据到 `stdin` 时，客户端请求就是一行一行的 `stdin` 输入作为 `query` 的参数。这种方式在大规模的插入请求中非常方便。

使用这个客户端插入数据的示例：

```
echo -ne "1, 'some text', '2016-08-14 00:00:00'\n2, 'some more text', '2016-08-14 00:00:01'" | clickhouse-client --database=test --query="INSERT INTO test FORMAT CSV";

cat <<_EOF | clickhouse-client --database=test --query="INSERT INTO test FORMAT CSV";
3, 'some text', '2016-08-14 00:00:00'
4, 'some more text', '2016-08-14 00:00:01'
_EOF

cat file.csv | clickhouse-client --database=test --query="INSERT INTO test FORMAT CSV";
```

在批量模式中，默认的数据格式是 `TabSeparated` 分隔的。您可以根据查询来灵活设置 `FORMAT` 格式。

默认情况下，在批量模式中只能执行单个查询。为了从一个 Script 中执行多个查询，可以使用 `--multิquery` 参数。除了 `INSERT` 请求外，这种方式在任何地方都有用。查询的结果会连续且不含分隔符地输出。同样的，为了执行大规模的查询，您可以为每个查询执行一次 `clickhouse-client`。但注意到每次启动 `clickhouse-client` 程序都需要消耗几十毫秒时间。

在交互模式下，每条查询过后，你可以直接输入下一条查询命令。

如果 `multiline` 没有指定（默认没指定）：为了执行查询，按下 `Enter` 即可。查询语句不是必须使用分号结尾。如果需要写一个多个查询语句，可以在换行之前输入一个反斜杠 \，然后在您按下 `Enter` 键后，您就可以输入当前语句的下一行查询了。

如果 `multiline` 指定了：为了执行查询，需要以分号结尾并且按下 `Enter` 键。如果行末没有分号，将认为当前语句并没有输入完而要求继续输入下一行。

若只运行单个查询，分号后面的所有内容都会被忽略。

您可以指定 `\G` 来替代分号或者在分号后面，这表示 `Vertical` 的格式。在这种格式下，每一个值都会打印在不同的行中，这种方式对于宽表来说很方便。这个不常见的特性是为了兼容 MySQL 命令而加的。

命令行客户端是基于 `replxx`。换句话说，它可以使用我们熟悉的快捷键方式来操作以及保留历史命令。历史命令会写入在 `~/.clickhouse-client-history` 中。

默认情况下，输出的格式是 PrettyCompact。您可以通过 FORMAT 设置根据不同查询来修改格式，或者通过在查询末尾指定 \G 字符，或通过在命令行中使用 --format or --vertical 参数，或使用客户端的配置文件。

若要退出客户端，使用 Ctrl+D（或 Ctrl+C），或者输入以下其中一个命令：exit, quit, logout, учше, йгше, дщпшге, exit;, quit;, logout;, учшеж, йгшеж, дщпшгеж, q, й, q, Q, :q, Й, ЖЙ

当执行一个查询的时候，客户端会显示：

1. 进度，进度会每秒更新十次（默认情况下）。对于很快的查询，进度可能没有时间显示。
2. 为了调试会显示解析且格式化后的查询语句。
3. 指定格式的输出结果。
4. 输出结果的行数的行数，经过的时间，以及查询处理的速度。

您可以通过 Ctrl+C 来取消一个长时间的查询。然而，您依然需要等待服务端来中止请求。在某个阶段去取消查询是不可能的。如果您不等待并再次按下 Ctrl + C，客户端将会退出。

命令行客户端允许通过外部数据（外部临时表）来查询。更多相关信息，请参考 "[外部数据查询处理](#)".

## 配置

您可以通过以下方式传入参数到 clickhouse-client 中（所有的参数都有默认值）：

- 通过命令行

命令行参数会覆盖默认值和配置文件的配置。

- 配置文件

配置文件的配置会覆盖默认值

## 命令行参数

- --host, -h — 服务端的 host 名称，默认是 'localhost'。您可以选择使用 host 名称或者 IPv4 或 IPv6 地址。
- --port – 连接的端口，默认值：9000。注意 HTTP 接口以及 TCP 原生接口是使用不同端口的。
- --user, -u – 用户名。默认值：default。
- --password – 密码。默认值：空字符串。
- --query, -q – 非交互模式下的查询语句。
- --database, -d – 默认当前操作的数据库。默认值：服务端默认的配置（默认是 default）。
- --multiline, -m – 如果指定，允许多行语句查询（Enter 仅代表换行，不代表查询语句完结）。
- --multiquery, -n – 如果指定，允许处理用逗号分隔的多个查询，只在非交互模式下生效。
- --format, -f – 使用指定的默认格式输出结果。
- --vertical, -E – 如果指定，默认情况下使用垂直格式输出结果。这与 '--format=Vertical' 相同。在这种格式中，每个值都在单独的行上打印，这种方式对显示宽表很有帮助。
- --time, -t – 如果指定，非交互模式下会打印查询执行的时间到 'stderr' 中。
- --stacktrace – 如果指定，如果出现异常，会打印堆栈跟踪信息。
- --config-file – 配置文件的名称。

## 配置文件

clickhouse-client 使用一下第一个存在的文件：

- 通过 --config-file 参数指定的文件。
- ./clickhouse-client.xml

- `\~/.clickhouse-client/config.xml`
- `/etc/clickhouse-client/config.xml`

配置文件示例:

```
<config>
  <user>username</user>
  <password>password</password>
</config>
```

## 原生客户端接口 (TCP)

本机协议用于[命令行客户端](#)，用于分布式查询处理期间的服务器间通信，以及其他C++程序。不幸的是，本机ClickHouse协议还没有正式的规范，但它可以从ClickHouse源代码进行逆向工程[从这里开始](#)）和/或拦截和分析TCP流量。

## HTTP 客户端

HTTP 接口可以让你通过任何平台和编程语言来使用 ClickHouse。我们用 Java 和 Perl 以及 shell 脚本来访问它。在其他的部门中，HTTP 接口会用在 Perl，Python 以及 Go 中。HTTP 接口比 TCP 原生接口更为局限，但是却有更好的兼容性。

默认情况下，clickhouse-server 会在端口 8123 上监控 HTTP 请求（这可以在配置中修改）。如果你发送了一个不带参数的 GET 请求，它会返回一个字符串 "Ok."（结尾有换行）。可以将它用在健康检查脚本中。

```
$ curl 'http://localhost:8123/'  
Ok.
```

通过 URL 中的 `query` 参数来发送请求，或者发送 POST 请求，或者将查询的开头部分放在 URL 的 `query` 参数中，其他部分放在 POST 中（我们会在后面解释为什么这样做是有必要的）。URL 的大小会限制在 16 KB，所以发送大型查询时要时刻记住这点。

如果请求成功，将会收到 200 的响应状态码和响应主体中的结果。如果发生了某个异常，将会收到 500 的响应状态码和响应主体中的异常描述信息。

当使用 GET 方法请求时，`readonly` 会被设置。换句话说，若要作修改数据的查询，只能发送 POST 方法的请求。可以将查询通过 POST 主体发送，也可以通过 URL 参数发送。

Examples:

```
$ curl 'http://localhost:8123/?query=SELECT%201'  
1  
  
$ wget -O- -q 'http://localhost:8123/?query=SELECT 1'  
1  
  
$ GET 'http://localhost:8123/?query=SELECT 1'  
1  
  
$ echo -ne 'GET /?query=SELECT%201 HTTP/1.0\r\n\r\n' | nc localhost 8123  
HTTP/1.0 200 OK  
Connection: Close  
Date: Fri, 16 Nov 2012 19:21:50 GMT  
  
1
```

可以看到，curl 命令由于空格需要 URL 转义，所以不是很方便。尽管 wget 命令对 url 做了 URL 转义，但我们并不推荐使用他，因为在 HTTP 1.1 协议下使用 `keep-alive` 和 `Transfer-Encoding: chunked` 头部设置它并不能很好的工作。

```
$ echo 'SELECT 1' | curl 'http://localhost:8123/' --data-binary @-
1

$ echo 'SELECT 1' | curl 'http://localhost:8123/?query=' --data-binary @-
1

$ echo '1' | curl 'http://localhost:8123/?query=SELECT' --data-binary @-
1
```

如果一部分请求是通过参数发送的，另外一部分通过 POST 主体发送，两部分查询之间会一行空行插入。 错误示例：

```
$ echo 'ECT 1' | curl 'http://localhost:8123/?query=SEL' --data-binary @-
Code: 59, e.displayText() = DB::Exception: Syntax error: failed at position 0: SEL
ECT 1
, expected One of: SHOW TABLES, SHOW DATABASES, SELECT, INSERT, CREATE, ATTACH, RENAME, DROP, DETACH, USE,
SET, OPTIMIZE., e.what() = DB::Exception
```

默认情况下，返回的数据是 TabSeparated 格式的，更多信息，见 "[数据格式]" 部分。 可以使用 FORMAT 设置查询来请求不同格式。

```
$ echo 'SELECT 1 FORMAT Pretty' | curl 'http://localhost:8123/?' --data-binary @-
```

1
1

INSERT 必须通过 POST 方法来插入数据。这种情况下，你可以将查询的开头部分放在 URL 参数中，然后用 POST 主体传入插入的数据。插入的数据可以是，举个例子，从 MySQL 导出的以 tab 分割的数据。在这种方式中，INSERT 查询取代了 LOAD DATA LOCAL INFILE from MySQL。

示例：创建一个表：

```
echo 'CREATE TABLE t (a UInt8) ENGINE = Memory' | POST 'http://localhost:8123/'
```

使用类似 INSERT 的查询来插入数据：

```
echo 'INSERT INTO t VALUES (1),(2),(3)' | POST 'http://localhost:8123/'
```

数据可以从查询中单独发送：

```
echo '(4),(5),(6)' | POST 'http://localhost:8123/?query=INSERT INTO t VALUES'
```

可以指定任何数据格式。值的格式和写入表 t 的值的格式相同：

```
echo '(7),(8),(9)' | POST 'http://localhost:8123/?query=INSERT INTO t FORMAT Values'
```

若要插入 tab 分割的数据，需要指定对应的格式：

```
echo -ne '10\n11\n12\n' | POST 'http://localhost:8123/?query=INSERT INTO t FORMAT TabSeparated'
```

从表中读取内容。由于查询处理是并行的，数据以随机顺序输出。

```
$ GET 'http://localhost:8123/?query=SELECT a FROM t'  
7  
8  
9  
10  
11  
12  
1  
2  
3  
4  
5  
6
```

删除表。

```
POST 'http://localhost:8123/?query=DROP TABLE t'
```

成功请求后并不会返回数据，返回一个空的响应体。

可以通过压缩来传输数据。压缩的数据没有一个标准的格式，但你需要指定一个压缩程序来使用它(sudo apt-get install compressor-metrika-yandex)。

如果在 URL 中指定了 compress=1，服务会返回压缩的数据。如果在 URL 中指定了 decompress=1，服务会解压通过 POST 方法发送的数据。

可以通过为每份数据进行立即压缩来减少大规模数据传输中的网络压力。

可以指定 'database' 参数来指定默认的数据库。

```
$ echo 'SELECT number FROM numbers LIMIT 10' | curl 'http://localhost:8123/?database=system' --data-binary  
@-  
0  
1  
2  
3  
4  
5  
6  
7  
8  
9
```

默认情况下，默认数据库会在服务的配置中注册，默认是 default。或者，也可以在表名之前使用一个点来指定数据库。

用户名密码可以通过以下两种方式指定：

1. 通过 HTTP Basic Authentication。示例：

```
echo 'SELECT 1' | curl 'http://user:password@localhost:8123/' -d @-
```

1. 通过 URL 参数中的 'user' 和 'password'。示例：

```
echo 'SELECT 1' | curl 'http://localhost:8123/?user=user&password=password' -d @-
```

如果用户名没有指定，默认的用户是 default。如果密码没有指定，默认会使用空密码。可以使用 URL 参数指定配置或者设置整个配置文件来处理单个查询。示例：[http://localhost:8123/?profile=web&max\\_rows\\_to\\_read=1000000000&query=SELECT+1](http://localhost:8123/?profile=web&max_rows_to_read=1000000000&query=SELECT+1)

更多信息，参见 "设置" 部分。

```
$ echo 'SELECT number FROM system.numbers LIMIT 10' | curl 'http://localhost:8123/?' --data-binary @-
0
1
2
3
4
5
6
7
8
9
```

更多关于其他参数的信息，参见 "[设置](#)" 部分。

相比起 TCP 原生接口，HTTP 接口不支持会话和会话设置的概念，不允许中止查询（准确地说，只在少数情况下允许），不显示查询处理的进展。执行解析和数据格式化都是在服务端处理，网络上会比 TCP 原生接口更低效。

可选的 `query_id` 参数可能当做 query ID 传入（或者任何字符串）。更多信息，参见 "[设置 replace\\_running\\_query](#)" 部分。

可选的 `quota_key` 参数可能当做 quota key 传入（或者任何字符串）。更多信息，参见 "[配额](#)" 部分。

HTTP 接口允许传入额外的数据（外部临时表）来查询。更多信息，参见 "[外部数据查询处理](#)" 部分。

## 响应缓冲

可以在服务器端启用响应缓冲。提供了 `buffer_size` 和 `wait_end_of_query` 两个URL 参数来达此目的。

`buffer_size` 决定了查询结果要在服务内存中缓冲多少个字节数据。如果响应体比这个阈值大，缓冲区会写入到 HTTP 管道，剩下的数据也直接发到 HTTP 管道中。

为了确保整个响应体被缓冲，可以设置 `wait_end_of_query=1`。这种情况下，存入内存的数据会被缓冲到服务端的一个临时文件中。

示例：

```
curl -sS 'http://localhost:8123/?max_result_bytes=4000000&buffer_size=3000000&wait_end_of_query=1' -d
'SELECT toUInt8(number) FROM system.numbers LIMIT 9000000 FORMAT RowBinary'
```

查询请求响应状态码和 HTTP 头被发送到客户端后，若发生查询处理出错，使用缓冲区可以避免这种情况的发生。在这种情况下，响应主体的结尾会写入一条错误消息，而在客户端，只能在解析阶段检测到该错误。

## MySQL interface

ClickHouse 支持 MySQL wire protocol. It can be enabled by `mysql_port` setting in configuration file:

```
<mysql_port>9004</mysql_port>
```

Example of connecting using command-line tool mysql:

```
$ mysql --protocol tcp -u default -P 9004
```

Output if connection succeeded:

```
Welcome to the MySQL monitor. Commands end with ; or \g.
Your MySQL connection id is 4
Server version: 20.2.1.1-ClickHouse

Copyright (c) 2000, 2019, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql>
```

For compatibility with all MySQL clients, it is recommended to specify user password with **double SHA1** in configuration file. If user password is specified using **SHA256**, some clients won't be able to authenticate (mysqljs and old versions of command-line tool mysql).

Restrictions:

- prepared queries are not supported
- some data types are sent as strings

## 输入输出格式

ClickHouse 可以接受多种数据格式，可以在 (INSERT) 以及 (SELECT) 请求中使用。

下列表格列出了支持的数据格式以及在 (INSERT) 以及 (SELECT) 请求中使用它们的方式。

格式	INSERT	SELECT
TabSeparated	✓	✓
TabSeparatedRaw	✗	✓
TabSeparatedWithNames	✓	✓
TabSeparatedWithNamesAndTypes	✓	✓
Template	✓	✓
TemplateIgnoreSpaces	✓	✗
CSV	✓	✓
CSVWithNames	✓	✓
CustomSeparated	✓	✓
Values	✓	✓
Vertical	✗	✓
VerticalRaw	✗	✓
JSON	✗	✓
JSONCompact	✗	✓

格式	NEachRow	INSERT	SELECT
TSKV		✓	✓
Pretty		✗	✓
PrettyCompact		✗	✓
PrettyCompactMonoBlock		✗	✓
PrettyNoEscapes		✗	✓
PrettySpace		✗	✓
Protobuf		✓	✓
Avro		✓	✓
AvroConfluent		✓	✗
Parquet		✓	✓
ORC		✓	✗
RowBinary		✓	✓
RowBinaryWithNamesAndTypes		✓	✓
Native		✓	✓
Null		✗	✓
XML		✗	✓
CapnProto		✓	✓

## TabSeparated

在 TabSeparated 格式中，数据按行写入。每行包含由制表符分隔的值。除了行中的最后一个值（后面紧跟换行符）之外，每个值都跟随一个制表符。在任何地方都可以使用严格的 Unix 命令行。最后一行还必须在最后包含换行符。值以文本格式编写，不包含引号，并且要转义特殊字符。

这种格式也可以用 TSV 来表示。

TabSeparated 格式非常方便用于自定义程序或脚本处理数据。HTTP 客户端接口默认会用这种格式，命令行客户端批量模式下也会用这种格式。这种格式允许在不同数据库之间传输数据。例如，从 MySQL 中导出数据然后导入到 ClickHouse 中，反之亦然。

TabSeparated 格式支持输出数据总值（当使用 WITH TOTALS）以及极值（当 'extremes' 设置是1）。这种情况下，总值和极值输出在主数据的后面。主要的数据，总值，极值会以一个空行隔开，例如：

```
SELECT EventDate, count() AS c FROM test.hits GROUP BY EventDate WITH TOTALS ORDER BY EventDate FORMAT
TabSeparated``
```

2014-03-17	1406958
2014-03-18	1383658
2014-03-19	1405797
2014-03-20	1353623
2014-03-21	1245779
2014-03-22	1031592
2014-03-23	1046491
0000-00-00	8873898
2014-03-17	1031592
2014-03-23	1406958

## 数据解析方式

整数以十进制形式写入。数字在开头可以包含额外的 + 字符（解析时忽略，格式化时不记录）。非负数不能包含负号。读取时，允许将空字符串解析为零，或者（对于带符号的类型）将仅包含负号的字符串解析为零。不符合相应数据类型的数字可能会被解析为不同的数字，而不会显示错误消息。

浮点数以十进制形式写入。点号用作小数点分隔符。支持指数等符号，如'inf'，'+ inf'，'-inf'和'nan'。浮点数的输入可以以小数点开始或结束。格式化的时候，浮点数的精确度可能会丢失。解析的时候，没有严格需要去读取与机器可以表示的最接近的数值。

日期会以 YYYY-MM-DD 格式写入和解析，但会以任何字符作为分隔符。带时间的日期会以 YYYY-MM-DD hh:mm:ss 格式写入和解析，但会以任何字符作为分隔符。这一切都发生在客户端或服务器启动时的系统时区（取决于哪一种格式的数据）。对于具有时间的日期，夏时制时间未指定。因此，如果转储在夏令时中有时间，则转储不会明确地匹配数据，解析将选择两者之一。在读取操作期间，不正确的日期和具有时间的日期可以使用自然溢出或空日期和时间进行分析，而不会出现错误消息。

有个例外情况，Unix 时间戳格式（10个十进制数字）也支持使用时间解析日期。结果不是时区相关的。格式 YYYY-MM-DD hh:mm:ss 和 NNNNNNNNNN 会自动区分。

字符串以反斜线转义的特殊字符输出。以下转义序列用于输出：`\b`，`\f`，`\r`，`\n`，`\t`，`\0`，`\``，`\\"`。解析还支持`\a`，`\v`和`\xHH`（十六进制转义字符）和任何`\c`字符，其中`c`是任何字符（这些序列被转换为`c`）。因此，读取数据支持可以将换行符写为`\n`或`\`的格式，或者换行。例如，字符串`Hello world` 在单词之间换行而不是空格可以解析为以下任何形式：

```
Hello\nworld
Hello\
world
```

第二种形式是支持的，因为 MySQL 读取 tab-separated 格式数据集的时候也会使用它。

在 TabSeparated 格式中传递数据时需要转义的最小字符集为：Tab，换行符（LF）和反斜杠。

只有一小组符号会被转义。你可以轻易地找到一个字符串值，但这不会正常在你的终端显示。

数组写在方括号内的逗号分隔值列表中。通常情况下，数组中的数字项目会被拼凑，但日期，带时间的日期以及字符串将使用与上面相同的转义规则用单引号引起。

`NULL` 将输出为`\N`。

## TabSeparatedRaw

与 TabSeparated 格式不一样的是，行数据是不会被转义的。该格式仅适用于输出查询结果，但不适用于解析输入（将数据插入到表中）。

这种格式也可以使用名称`TSVRaw` 来表示。

## TabSeparatedWithNames

与 TabSeparated 格式不一样的是，第一行会显示列的名称。在解析过程中，第一行完全被忽略。您不能使用列名来确定其位置或检查其正确性。（未来可能会加入解析头行的功能）

这种格式也可以使用名称 TSVWithNames 来表示。

## TabSeparatedWithNamesAndTypes

与 TabSeparated 格式不一样的是，第一行会显示列的名称，第二行会显示列的类型。在解析过程中，第一行和第二行完全被忽略。

这种格式也可以使用名称 TSVWithNamesAndTypes 来表示。

## Template

This format allows to specify a custom format string with placeholders for values with specified escaping rule.

It uses settings `format_schema` , `format_schema_rows` , `format_schema_rows_between_delimiter` and some settings of other formats (e.g. `output_format_json_quote_64bit_integers` when using JSON escaping, see further)

Format string `format_schema_rows` specifies rows format with the following syntax:

```
delimiter_1${column_1:serializeAs_1}delimiter_2${column_2:serializeAs_2} ... delimiter_N ,
```

where `delimiter_i` is a delimiter between values (\$ symbol can be escaped as \$\$), `column_i` is a name of a column whose values are to be selected or inserted (if empty, then column will be skipped), `serializeAs_i` is an escaping rule for the column values. The following escaping rules are supported:

- CSV , JSON , XML (similarly to the formats of the same names)
- Escaped (similarly to TSV )
- Quoted (similarly to Values )
- Raw (without escaping, similarly to TSVRaw )
- None (no escaping rule, see further)

If escaping rule is omitted, then None will be used. XML and Raw are suitable only for output.

So, for the following format string:

```
`Search phrase: ${SearchPhrase:Quoted}, count: ${c:Escaped}, ad price: $$$[price:JSON];`
```

the values of SearchPhrase , c and price columns, which are escaped as Quoted , Escaped and JSON will be printed (for select) or will be expected (for insert) between Search phrase: , , count: , , ad price: \$ and ; delimiters respectively. For example:

```
Search phrase: 'bathroom interior design', count: 2166, ad price: $3;
```

The `format_schema_rows_between_delimiter` setting specifies delimiter between rows, which is printed (or expected) after every row except the last one (\n by default)

Format string `format_schema` has the same syntax as `format_schema_rows` and allows to specify a prefix, a suffix and a way to print some additional information. It contains the following placeholders instead of column names:

- `data` is the rows with data in `format_schema_rows` format, separated by `format_schema_rows_between_delimiter` . This placeholder must be the first placeholder in the format string.

- `totals` is the row with total values in `format_schema_rows` format (when using `WITH TOTALS`)
- `min` is the row with minimum values in `format_schema_rows` format (when extremes is set to 1)
- `max` is the row with maximum values in `format_schema_rows` format (when extremes is set to 1)
- `rows` is the total number of output rows
- `rows_before_limit` is the minimal number of rows there would have been without `LIMIT`. Output only if the query contains `LIMIT`. If the query contains `GROUP BY`, `rows_before_limit_at_least` is the exact number of rows there would have been without a `LIMIT`.
- `time` is the request execution time in seconds
- `rows_read` is the number of rows have been read
- `bytes_read` is the number of bytes (uncompressed) have been read

The placeholders `data`, `totals`, `min` and `max` must not have escaping rule specified (or `None` must be specified explicitly). The remaining placeholders may have any escaping rule specified. If the `format_schema` setting is an empty string,  `${data}` is used as default value. For insert queries format allows to skip some columns or some fields if prefix or suffix (see example).

Select example:

```
SELECT SearchPhrase, count() AS c FROM test.hits GROUP BY SearchPhrase ORDER BY c DESC LIMIT 5
FORMAT Template
SETTINGS format_schema = '<!DOCTYPE HTML>
<html> <head> <title>Search phrases</title> </head>
<body>
<table border="1"> <caption>Search phrases</caption>
  <tr> <th>Search phrase</th> <th>Count</th> </tr>
  ${data}
</table>
<table border="1"> <caption>Max</caption>
  ${max}
</table>
<b>Processed ${rows_read:XML} rows in ${time:XML} sec</b>
</body>
</html>',
format_schema_rows = '<tr> <td>${SearchPhrase:XML}</td> <td>${c:XML}</td> </tr>',
format_schema_rows_between_delimiter = '\n'
```

```
<!DOCTYPE HTML>
<html> <head> <title>Search phrases</title> </head>
<body>
<table border="1"> <caption>Search phrases</caption>
  <tr> <th>Search phrase</th> <th>Count</th> </tr>
  <tr> <td></td> <td>8267016</td> </tr>
  <tr> <td>bathroom interior design</td> <td>2166</td> </tr>
  <tr> <td>yandex</td> <td>1655</td> </tr>
  <tr> <td>spring 2014 fashion</td> <td>1549</td> </tr>
  <tr> <td>freeform photos</td> <td>1480</td> </tr>
</table>
<table border="1"> <caption>Max</caption>
  <tr> <td></td> <td>8873898</td> </tr>
</table>
<b>Processed 3095973 rows in 0.1569913 sec</b>
</body>
</html>
```

Insert example:

```
Some header
Page views: 5, User id: 4324182021466249494, Useless field: hello, Duration: 146, Sign: -1
Page views: 6, User id: 4324182021466249494, Useless field: world, Duration: 185, Sign: 1
Total rows: 2
```

```
INSERT INTO UserActivity FORMAT Template SETTINGS
format_schema = 'Some header\n${data}\nTotal rows: ${:CSV}\n',
format_schema_rows = 'Page views: ${PageViews:CSV}, User id: ${UserID:CSV}, Useless field: ${:CSV},
Duration: ${Duration:CSV}, Sign: ${Sign:CSV}'
```

PageViews , UserID , Duration and Sign inside placeholders are names of columns in the table. Values after Useless field in rows and after \nTotal rows: in suffix will be ignored. All delimiters in the input data must be strictly equal to delimiters in specified format strings.

## TemplateIgnoreSpaces

This format is suitable only for input. Similar to Template , but skips whitespace characters between delimiters and values in the input stream. However, if format strings contain whitespace characters, these characters will be expected in the input stream. Also allows to specify empty placeholders ( \${} or \${:None} ) to split some delimiter into separate parts to ignore spaces between them. Such placeholders are used only for skipping whitespace characters. It's possible to read JSON using this format, if values of columns have the same order in all rows. For example, the following request can be used for inserting data from output example of format **JSON**:

```
INSERT INTO table_name FORMAT TemplateIgnoreSpaces SETTINGS
format_schema = '${{"meta":${}:${:JSON}},${"data":${}:${}}
[${data}]${},${"totals":${}:${:JSON}},${"extremes":${}:${:JSON}},${"rows":${}:${:JSON}},${"rows_before_limit_at":${}}}'
format_schema_rows = '${"SearchPhrase":${}:${}${phrase:JSON}${},${}"c":${}:${}${cnt:JSON}${}}',
format_schema_rows_between_delimiter = ','
```

## TSKV

与 TabSeparated 格式类似，但它输出的是 name=value 的格式。名称会和 TabSeparated 格式一样被转义，= 字符也会被转义。

```
SearchPhrase= count()=8267016
SearchPhrase=bathroom interior design count()=2166
SearchPhrase=yandex count()=1655
SearchPhrase=2014 spring fashion count()=1549
SearchPhrase=freeform photos count()=1480
SearchPhrase=angelina jolie count()=1245
SearchPhrase=omsk count()=1112
SearchPhrase=photos of dog breeds count()=1091
SearchPhrase=curtain designs count()=1064
SearchPhrase=baku count()=1000
```

**NULL** 输出为 \N 。

```
SELECT * FROM t_null FORMAT TSKV
```

```
x=1 y=\N
```

当有大量的小列时，这种格式是低效的，通常没有理由使用它。它被用于 Yandex 公司的一些部门。

数据的输出和解析都支持这种格式。对于解析，任何顺序都支持不同列的值。可以省略某些值，用 - 表示，它们被视为等于它们的默认值。在这种情况下，零和空行被用作默认值。作为默认值，不支持表中指定的复杂值。

对于不带等号或值，可以用附加字段 `tskv` 来表示，这种在解析上是被允许的。这样的话该字段被忽略。

## CSV

按逗号分隔的数据格式(**RFC**)。

格式化的时候，行是用双引号括起来的。字符串中的双引号会以两个双引号输出，除此之外没有其他规则来做字符转义了。日期和时间也会以双引号包括。数字的输出不带引号。值由一个单独的字符隔开，这个字符默认是`,`。行使用 Unix 换行符（LF）分隔。数组序列化成 CSV 规则如下：首先将数组序列化为 TabSeparated 格式的字符串，然后将结果字符串用双引号括输出到 CSV。CSV 格式的元组被序列化为单独的列（即它们在元组中的嵌套关系会丢失）。

```
clickhouse-client --format_csv_delimiter="|" --query="INSERT INTO test.csv FORMAT CSV" < data.csv
```

\*默认情况下间隔符是`,`，在 `format_csv_delimiter` 中可以了解更多间隔符配置。

解析的时候，可以使用或不使用引号来解析所有值。支持双引号和单引号。行也可以不用引号排列。在这种情况下，它们被解析为逗号或换行符（CR 或 LF）。在解析不带引号的行时，若违反 RFC 规则，会忽略前导和尾随的空格和制表符。对于换行，全部支持 Unix (LF)，Windows (CR LF) 和 Mac OS Classic (CR LF)。

`NULL` 将输出为`\N`。

CSV 格式是和 TabSeparated 一样的方式输出总数和极值。

## CSVWithNames

会输出带头部行，和 TabSeparatedWithNames 一样。

## CustomSeparated

Similar to [Template](#), but it prints or reads all columns and uses escaping rule from setting `format_custom_escaping_rule` and delimiters from settings `format_custom_field_delimiter`, `format_custom_row_before_delimiter`, `format_custom_row_after_delimiter`, `format_custom_row_between_delimiter`, `format_custom_result_before_delimiter` and `format_custom_result_after_delimiter`, not from format strings. There is also `CustomSeparatedIgnoreSpaces` format, which is similar to `TemplateIgnoreSpaces`.

## JSON

以 JSON 格式输出数据。除了数据表之外，它还输出列名称和类型以及一些附加信息：输出行的总数以及在没有 LIMIT 时可以输出的行数。例：

```
SELECT SearchPhrase, count() AS c FROM test.hits GROUP BY SearchPhrase WITH TOTALS ORDER BY c DESC LIMIT 5
FORMAT JSON
```

```

{
  "meta": [
    {
      "name": "SearchPhrase",
      "type": "String"
    },
    {
      "name": "c",
      "type": "UInt64"
    }
  ],
  "data": [
    {
      "SearchPhrase": "",
      "c": "8267016"
    },
    {
      "SearchPhrase": "bathroom interior design",
      "c": "2166"
    },
    {
      "SearchPhrase": "yandex",
      "c": "1655"
    },
    {
      "SearchPhrase": "spring 2014 fashion",
      "c": "1549"
    },
    {
      "SearchPhrase": "freeform photos",
      "c": "1480"
    }
  ],
  "totals": [
    {
      "SearchPhrase": "",
      "c": "8873898"
    }
  ],
  "extremes": [
    {
      "min": {
        "SearchPhrase": "",
        "c": "1480"
      },
      "max": {
        "SearchPhrase": "",
        "c": "8267016"
      }
    }
  ],
  "rows": 5,
  "rows_before_limit_at_least": 141137
}

```

JSON 与 JavaScript 兼容。为了确保这一点，一些字符被另外转义：斜线 / 被转义为 \ / ; 替代的换行符 U+2028 和 U+2029 会打断一些浏览器解析，它们会被转义为 \uXXXX 。 ASCII 控制字符被转义：退格，换页，换行，回车和水平制表符被替换为 \b , \f , \n , \r , \t 作为使用 \uXXXX 序列的00-1F范围内的剩余字节。无效的 UTF-8 序列更改为替换字符 ，因此输出文本将包含有效的 UTF-8 序列。为了与 JavaScript 兼容，默认情况下，Int64 和 UInt64 整数用双引号引起。要除去引号，可以将配置参数 output\_format\_json\_quote\_64bit\_integers 设置为0。

rows – 结果输出的行数。

`rows_before_limit_at_least` 去掉 LIMIT 过滤后的最小行总数。只会在查询包含 LIMIT 条件时输出。若查询包含 GROUP BY , `rows_before_limit_at_least` 就是去掉 LIMIT 后过滤后的准确行数。

`totals` – 总值（当使用 TOTALS 条件时）。

`extremes` – 极值（当 extremes 设置为 1 时）。

该格式仅适用于输出查询结果，但不适用于解析输入（将数据插入到表中）。

ClickHouse 支持 `NULL`, 在 JSON 格式中以 `null` 输出来表示.

参考 JSONEachRow 格式。

## JSONCompact

与 JSON 格式不同的是它以数组的方式输出结果，而不是以结构体。

示例：

```
{
    "meta": [
        {
            "name": "SearchPhrase",
            "type": "String"
        },
        {
            "name": "c",
            "type": "UInt64"
        }
    ],
    "data": [
        [
            "", "8267016"],
            ["bathroom interior design", "2166"],
            ["yandex", "1655"],
            ["fashion trends spring 2014", "1549"],
            ["freeform photo", "1480"]
        ],
        "totals": [
            "", "8873898"],
        "extremes": [
            {
                "min": [
                    "", "1480"],
                "max": [
                    "", "8267016"]
            },
            "rows": 5,
            "rows_before_limit_at_least": 141137
        ]
    }
}
```

这种格式仅仅适用于输出结果集，而不适用于解析（将数据插入到表中）。参考 JSONEachRow 格式。

## JSONEachRow

将数据结果每一行以 JSON 结构体输出（换行分割 JSON 结构体）。

```

{"SearchPhrase": "", "count()": "8267016"}
{"SearchPhrase": "bathroom interior design", "count()": "2166"}
{"SearchPhrase": "yandex", "count()": "1655"}
{"SearchPhrase": "2014 spring fashion", "count()": "1549"}
{"SearchPhrase": "freeform photo", "count()": "1480"}
{"SearchPhrase": "angelina jolie", "count()": "1245"}
{"SearchPhrase": "omsk", "count()": "1112"}
{"SearchPhrase": "photos of dog breeds", "count()": "1091"}
{"SearchPhrase": "curtain designs", "count()": "1064"}
{"SearchPhrase": "baku", "count()": "1000"}

```

与 JSON 格式不同的是，没有替换无效的UTF-8序列。任何一组字节都可以在行中输出。这是必要的，因为这样数据可以被格式化而不会丢失任何信息。值的转义方式与JSON相同。

对于解析，任何顺序都支持不同列的值。可以省略某些值 - 它们被视为等于它们的默认值。在这种情况下，零和空行被用作默认值。作为默认值，不支持表中指定的复杂值。元素之间的空白字符被忽略。如果在对象之后放置逗号，它将被忽略。对象不一定必须用新行分隔。

## Usage of Nested Structures

If you have a table with the **Nested** data type columns, you can insert JSON data having the same structure. Enable this functionality with the `input_format_import_nested_json` setting.

For example, consider the following table:

```
CREATE TABLE json_each_row_nested (n Nested (s String, i Int32) ) ENGINE = Memory
```

As you can find in the `Nested` data type description, ClickHouse treats each component of the nested structure as a separate column, `n.s` and `n.i` for our table. So you can insert the data the following way:

```
INSERT INTO json_each_row_nested FORMAT JSONEachRow {"n.s": ["abc", "def"], "n.i": [1, 23]}
```

To insert data as hierarchical JSON object set `input_format_import_nested_json=1`.

```
{
  "n": {
    "s": ["abc", "def"],
    "i": [1, 23]
  }
}
```

Without this setting ClickHouse throws the exception.

```
SELECT name, value FROM system.settings WHERE name = 'input_format_import_nested_json'
```

name	value
input_format_import_nested_json	0

```
INSERT INTO json_each_row_nested FORMAT JSONEachRow {"n": {"s": ["abc", "def"], "i": [1, 23]}}
```

```
Code: 117. DB::Exception: Unknown field found while parsing JSONEachRow format: n: (at row 1)
```

```
SET input_format_import_nested_json=1
INSERT INTO json_each_row_nested FORMAT JSONEachRow {"n": {"s": ["abc", "def"], "i": [1, 23]}}
SELECT * FROM json_each_row_nested
```

n.s	n.i
['abc', 'def']	[1, 23]

## Native

最高性能的格式。据通过二进制格式的块进行写入和读取。对于每个块，该块中的行数，列数，列名称和类型以及列的部分将被相继记录。换句话说，这种格式是“列式”的 - 它不会将列转换为行。这是用于在服务器之间进行交互的本地界面中使用的格式，用于使用命令行客户端和 C++ 客户端。

您可以使用此格式快速生成只能由 ClickHouse DBMS 读取的格式。但自己处理这种格式是没有意义的。

## Null

没有输出。但是，查询已处理完毕，并且在使用命令行客户端时，数据将传输到客户端。这仅用于测试，包括生产力测试。显然，这种格式只适用于输出，不适用于解析。

## Pretty

将数据以表格形式输出，也可以使用 ANSI 转义字符在终端中设置颜色。它会绘制一个完整的表格，每行数据在终端中占用两行。每一个结果块都会以单独的表格输出。这是很有必要的，以便结果块不用缓冲结果输出（缓冲在可以预见结果集宽度的时候是很有必要的）。

`NULL` 输出为 `NULL`。

```
SELECT * FROM t_null
```

x	y
1	NULL

为避免将太多数据传输到终端，只打印前10,000行。如果行数大于或等于10,000，则会显示消息“Showed first 10 000”。该格式仅适用于输出查询结果，但不适用于解析输入（将数据插入到表中）。

Pretty格式支持输出总值（当使用 `WITH TOTALS` 时）和极值（当 `extremes` 设置为1时）。在这些情况下，总数值和极值在主数据之后以单独的表格形式输出。示例（以 PrettyCompact 格式显示）：

```
SELECT EventDate, count() AS c FROM test.hits GROUP BY EventDate WITH TOTALS ORDER BY EventDate FORMAT PrettyCompact
```

EventDate	C
2014-03-17	1406958
2014-03-18	1383658
2014-03-19	1405797
2014-03-20	1353623
2014-03-21	1245779
2014-03-22	1031592
2014-03-23	1046491

Totals:

EventDate	C
0000-00-00	8873898

Extremes:

EventDate	C
2014-03-17	1031592
2014-03-23	1406958

## PrettyCompact

与 Pretty 格式不一样的是，PrettyCompact 去掉了行之间的表格分割线，这样使得结果更加紧凑。这种格式会在交互命令行客户端下默认使用。

### PrettyCompactMonoBlock

与 PrettyCompact 格式不一样的是，它支持 10,000 行数据缓冲，然后输出在一个表格中，不会按照块来区分

### PrettyNoEscapes

与 Pretty 格式不一样的是，它不使用 ANSI 字符转义，这在浏览器显示数据以及在使用 watch 命令行工具是有必要的。

示例：

```
watch -n1 "clickhouse-client --query='SELECT event, value FROM system.events FORMAT PrettyCompactNoEscapes'"
```

您可以使用 HTTP 接口来获取数据，显示在浏览器中。

### PrettyCompactNoEscapes

用法类似上述。

### PrettySpaceNoEscapes

用法类似上述。

## PrettySpace

与 PrettyCompact (#prettycompact) 格式不一样的是，它使用空格来代替网格来显示数据。

## RowBinary

以二进制格式逐行格式化和解析数据。行和值连续列出，没有分隔符。这种格式比 Native 格式效率低，因为它是基于行的。

整数使用固定长度的小端表示法。例如，UInt64 使用8个字节。DateTime 被表示为 UInt32 类型的Unix 时间戳值。Date

被表示为 UInt16 对象，它的值为 1970-01-01以来的天数。字符串表示为 varint 长度（无符号 LEB128），后跟字符串的字节数。FixedString 被简单地表示为一个字节序列。

数组表示为 varint 长度（无符号 LEB128），后跟有序的数组元素。

对于 NULL 的支持，一个为 1 或 0 的字节会加在每个 Nullable 值前面。如果为 1，那么该值就是 NULL。如果为 0，则不为 NULL。

## RowBinaryWithNamesAndTypes

Similar to RowBinary, but with added header:

- LEB128-encoded number of columns (N)
- N String s specifying column names
- N String s specifying column types

## Values

在括号中打印每一行。行由逗号分隔。最后一行之后没有逗号。括号内的值也用逗号分隔。数字以十进制格式输出，不含引号。数组以方括号输出。带有时的字符串，日期和时间用引号包围输出。转义字符的解析规则与 TabSeparated 格式类似。在格式化过程中，不插入额外的空格，但在解析过程中，空格是被允许并跳过的（除了数组值之外的空格，这是不允许的）。NULL 为 NULL。

以 Values 格式传递数据时需要转义的最小字符集是：单引号和反斜线。

这是 INSERT INTO t VALUES ... 中可以使用的格式，但您也可以将其用于查询结果。

## Vertical

使用指定的列名在单独的行上打印每个值。如果每行都包含大量列，则此格式便于打印一行或几行。

NULL 输出为 NULL。

示例：

```
SELECT * FROM t_null FORMAT Vertical
```

Row 1:

x: 1  
y: NULL

该格式仅适用于输出查询结果，但不适用于解析输入（将数据插入到表中）。

## VerticalRaw

和 Vertical 格式不同点在于，行是不会被转义的。这种格式仅仅适用于输出，但不适用于解析输入（将数据插入到表中）。

示例：

```
:) SHOW CREATE TABLE geonames FORMAT VerticalRaw;
Row 1:
_____
statement: CREATE TABLE default.geonames ( geonameid UInt32, date Date DEFAULT CAST('2017-12-08' AS Date))
ENGINE = MergeTree(date, geonameid, 8192)

:) SELECT 'string with \'quotes\' and \t with some special \n characters' AS test FORMAT VerticalRaw;
Row 1:
_____
test: string with 'quotes' and   with some special
      characters
```

和 Vertical 格式相比：

```
:) SELECT 'string with \'quotes\' and \t with some special \n characters' AS test FORMAT Vertical;
Row 1:
_____
test: string with \'quotes\' and \t with some special \n characters
```

## XML

该格式仅适用于输出查询结果，但不适用于解析输入，示例：

```

<?xml version='1.0' encoding='UTF-8' ?>
<result>
    <meta>
        <columns>
            <column>
                <name>SearchPhrase</name>
                <type>String</type>
            </column>
            <column>
                <name>count()</name>
                <type>UInt64</type>
            </column>
        </columns>
    </meta>
    <data>
        <row>
            <SearchPhrase></SearchPhrase>
            <field>8267016</field>
        </row>
        <row>
            <SearchPhrase>bathroom interior design</SearchPhrase>
            <field>2166</field>
        </row>
        <row>
            <SearchPhrase>yandex</SearchPhrase>
            <field>1655</field>
        </row>
        <row>
            <SearchPhrase>2014 spring fashion</SearchPhrase>
            <field>1549</field>
        </row>
        <row>
            <SearchPhrase>freeform photos</SearchPhrase>
            <field>1480</field>
        </row>
        <row>
            <SearchPhrase>angelina jolie</SearchPhrase>
            <field>1245</field>
        </row>
        <row>
            <SearchPhrase>omsk</SearchPhrase>
            <field>1112</field>
        </row>
        <row>
            <SearchPhrase>photos of dog breeds</SearchPhrase>
            <field>1091</field>
        </row>
        <row>
            <SearchPhrase>curtain designs</SearchPhrase>
            <field>1064</field>
        </row>
        <row>
            <SearchPhrase>baku</SearchPhrase>
            <field>1000</field>
        </row>
    </data>
    <rows>10</rows>
    <rows_before_limit_at_least>141137</rows_before_limit_at_least>
</result>

```

如果列名称没有可接受的格式，则仅使用 `field` 作为元素名称。通常，XML 结构遵循 JSON 结构。就像JSON一样，将无效的 UTF-8 字符都作替换，以便输出文本将包含有效的 UTF-8 字符序列。

在字符串值中，字符 `<` 和 `&` 被转义为 `<` 和 `&`。

数组输出为 `<array> <elem> Hello </ elem> <elem> World </ elem> ... </ array>`，元组输出为 `<tuple> <elem> Hello </ elem> <elem> World </ ELEM> ... </tuple>`。

## CapnProto

Cap'n Proto 是一种二进制消息格式，类似 Protocol Buffers 和 Thriftis，但与 JSON 或 MessagePack 格式不一样。

Cap'n Proto 消息格式是严格类型的，而不是自我描述，这意味着它们不需要外部的描述。这种格式可以实时地应用，并针对每个查询进行缓存。

```
SELECT SearchPhrase, count() AS c FROM test.hits
    GROUP BY SearchPhrase FORMAT CapnProto SETTINGS schema = 'schema:Message'
```

其中 schema.capnp 描述如下：

```
struct Message {
    SearchPhrase @0 :Text;
    c @1 :Uint64;
}
```

格式文件存储的目录可以在服务配置中的 `format_schema_path` 指定。

Cap'n Proto 反序列化是很高效的，通常不会增加系统的负载。

## Protobuf

Protobuf - is a [Protocol Buffers](#) format.

This format requires an external format schema. The schema is cached between queries. ClickHouse supports both `proto2` and `proto3` syntaxes. Repeated/optional/required fields are supported.

Usage examples:

```
SELECT * FROM test.table FORMAT Protobuf SETTINGS format_schema = 'schemafile:MessageType'
```

```
cat protobuf_messages.bin | clickhouse-client --query "INSERT INTO test.table FORMAT Protobuf SETTINGS
format_schema='schemafile:MessageType'"
```

where the file `schemafile.proto` looks like this:

```
syntax = "proto3";

message MessageType {
    string name = 1;
    string surname = 2;
    uint32 birthDate = 3;
    repeated string phoneNumbers = 4;
};
```

To find the correspondence between table columns and fields of Protocol Buffers' message type ClickHouse compares their names. This comparison is case-insensitive and the characters `_` (underscore) and `.` (dot) are considered as equal. If types of a column and a field of Protocol Buffers' message are different the necessary conversion is applied.

Nested messages are supported. For example, for the field `z` in the following message type

```
message MessageType {
    message XType {
        message YType {
            int32 z;
        };
        repeated YType y;
    };
    XType x;
};
```

ClickHouse tries to find a column named `x.y.z` (or `x_y_z` or `X.y_Z` and so on). Nested messages are suitable to input or output a [nested data structures](#).

Default values defined in a protobuf schema like this

```
syntax = "proto2";

message MessageType {
    optional int32 result_per_page = 3 [default = 10];
}
```

are not applied; the [table defaults](#) are used instead of them.

ClickHouse inputs and outputs protobuf messages in the `length-delimited` format. It means before every message should be written its length as a `varint`. See also [how to read/write length-delimited protobuf messages in popular languages](#)

## Avro

[Apache Avro](#) is a row-oriented data serialization framework developed within Apache's Hadoop project.

ClickHouse Avro format supports reading and writing [Avro data files](#).

### Data Types Matching

The table below shows supported data types and how they match ClickHouse[data types](#) in `INSERT` and `SELECT` queries.

Avro data type <code>INSERT</code>	ClickHouse data type	Avro data type <code>SELECT</code>
boolean , int , long , float , double	<code>Int(8 16 32)</code> , <code>UInt(8 16 32)</code>	int
boolean , int , long , float , double	<code>Int64</code> , <code>UInt64</code>	long
boolean , int , long , float , double	<code>Float32</code>	float
boolean , int , long , float , double	<code>Float64</code>	double
bytes , string , fixed , enum	<code>String</code>	bytes
bytes , string , fixed	<code>FixedString(N)</code>	fixed(N)
enum	<code>Enum(8 16)</code>	enum
array(T)	<code>Array(T)</code>	array(T)
union(null, T) , union(T, null)	<code>Nullable(T)</code>	union(null, T)
null	<code>Nullable(Nothing)</code>	null
int (date) *	<code>Date</code>	int (date) *
long (timestamp-millis) *	<code>DateTime64(3)</code>	long (timestamp-millis) *
long (timestamp-micros) *	<code>DateTime64(6)</code>	long (timestamp-micros) *

\* Avro logical types

Unsupported Avro data types: record (non-root), map

Unsupported Avro logical data types: uuid , time-millis , time-micros , duration

## Inserting Data

To insert data from an Avro file into ClickHouse table:

```
$ cat file.avro | clickhouse-client --query="INSERT INTO {some_table} FORMAT Avro"
```

The root schema of input Avro file must be of record type.

To find the correspondence between table columns and fields of Avro schema ClickHouse compares their names. This comparison is case-sensitive. Unused fields are skipped.

Data types of a ClickHouse table columns can differ from the corresponding fields of the Avro data inserted. When inserting data, ClickHouse interprets data types according to the table above and then **casts** the data to corresponding column type.

## Selecting Data

To select data from ClickHouse table into an Avro file:

```
$ clickhouse-client --query="SELECT * FROM {some_table} FORMAT Avro" > file.avro
```

Column names must:

- start with [A-Za-z\_]
- subsequently contain only [A-Za-z0-9\_]

Output Avro file compression and sync interval can be configured with `output_format_avro_codec` and `output_format_avro_sync_interval` respectively.

## AvroConfluent

AvroConfluent supports decoding single-object Avro messages commonly used with [Kafka](#) and [Confluent Schema Registry](#).

Each Avro message embeds a schema id that can be resolved to the actual schema with help of the Schema Registry.

Schemas are cached once resolved.

Schema Registry URL is configured with `format_avro_schema_registry_url`

### Data Types Matching

Same as [Avro](#)

### Usage

To quickly verify schema resolution you can use [kafkacat](#) with [clickhouse-local](#):

```
$ kafkacat -b kafka-broker -C -t topic1 -o beginning -f '%s' -c 3 | clickhouse-local --input-format AvroConfluent --format_avro_schema_registry_url 'http://schema-registry' -S "field1 Int64, field2 String" -q 'select * from table'
1 a
2 b
3 c
```

To use AvroConfluent with [Kafka](#):

```
CREATE TABLE topic1_stream
(
    field1 String,
    field2 String
)
ENGINE = Kafka()
SETTINGS
kafka_broker_list = 'kafka-broker',
kafka_topic_list = 'topic1',
kafka_group_name = 'group1',
kafka_format = 'AvroConfluent';

SET format_avro_schema_registry_url = 'http://schema-registry';

SELECT * FROM topic1_stream;
```

#### Warning

Setting `format_avro_schema_registry_url` needs to be configured in `users.xml` to maintain its value after a restart.

## Parquet

[Apache Parquet](#) is a columnar storage format widespread in the Hadoop ecosystem. ClickHouse supports read and write operations for this format.

### Data Types Matching

The table below shows supported data types and how they match ClickHouse[data types](#) in `INSERT` and `SELECT` queries.

Parquet data type ( <code>INSERT</code> )	ClickHouse data type	Parquet data type ( <code>SELECT</code> )
UINT8 , BOOL	UInt8	UINT8
INT8	Int8	INT8
UINT16	UInt16	UINT16
INT16	Int16	INT16
UINT32	UInt32	UINT32
INT32	Int32	INT32
UINT64	UInt64	UINT64
INT64	Int64	INT64
FLOAT , HALF_FLOAT	Float32	FLOAT
DOUBLE	Float64	DOUBLE
DATE32	Date	UINT16
DATE64 , TIMESTAMP	DateTime	UINT32
STRING , BINARY	String	STRING
—	FixedString	STRING
DECIMAL	Decimal	DECIMAL

ClickHouse supports configurable precision of `Decimal` type. The `INSERT` query treats the Parquet `DECIMAL` type as the ClickHouse `Decimal128` type.

Unsupported Parquet data types: `DATE32` , `TIME32` , `FIXED_SIZE_BINARY` , `JSON` , `UUID` , `ENUM` .

Data types of a ClickHouse table columns can differ from the corresponding fields of the Parquet data inserted. When inserting data, ClickHouse interprets data types according to the table above and then [cast](#) the data to that data type which is set for the ClickHouse table column.

## Inserting and Selecting Data

You can insert Parquet data from a file into ClickHouse table by the following command:

```
$ cat {filename} | clickhouse-client --query="INSERT INTO {some_table} FORMAT Parquet"
```

You can select data from a ClickHouse table and save them into some file in the Parquet format by the following command:

```
$ clickhouse-client --query="SELECT * FROM {some_table} FORMAT Parquet" > {some_file.pq}
```

To exchange data with Hadoop, you can use[HDFS table engine](#).

## ORC

Apache ORC is a columnar storage format widespread in the Hadoop ecosystem. You can only insert data in this format to ClickHouse.

### Data Types Matching

The table below shows supported data types and how they match ClickHouse[data types](#) in `INSERT` queries.

ORC data type ( <code>INSERT</code> )	ClickHouse data type
UINT8 , BOOL	<code>UInt8</code>
INT8	<code>Int8</code>
UINT16	<code>UInt16</code>
INT16	<code>Int16</code>
UINT32	<code>UInt32</code>
INT32	<code>Int32</code>
UINT64	<code>UInt64</code>
INT64	<code>Int64</code>
FLOAT , HALF_FLOAT	<code>Float32</code>
DOUBLE	<code>Float64</code>
DATE32	<code>Date</code>
DATE64 , TIMESTAMP	<code>DateTime</code>
STRING , BINARY	<code>String</code>
DECIMAL	<code>Decimal</code>

ClickHouse supports configurable precision of the `Decimal` type. The `INSERT` query treats the ORC `DECIMAL` type as the ClickHouse `Decimal128` type.

Unsupported ORC data types: `DATE32` , `TIME32` , `FIXED_SIZE_BINARY` , `JSON` , `UUID` , `ENUM` .

The data types of ClickHouse table columns don't have to match the corresponding ORC data fields. When inserting data, ClickHouse interprets data types according to the table above and then [casts](#) the data to the data type set for the ClickHouse table column.

### Inserting Data

You can insert ORC data from a file into ClickHouse table by the following command:

```
$ cat filename.orc | clickhouse-client --query="INSERT INTO some_table FORMAT ORC"
```

To exchange data with Hadoop, you can use[HDFS table engine](#).

## Format Schema

The file name containing the format schema is set by the setting `format_schema`. It's required to set this setting when it is used one of the formats `Cap'n Proto` and `Protobuf`. The format schema is a combination of a file name and the name of a message type in this file, delimited by colon, e.g. `schemafile.proto:MessageType`. If the file has the standard extension for the format (for example, `.proto` for `Protobuf`), it can be omitted and in this case the format schema looks like `schemafile:MessageType`.

If you input or output data via the `client` in the interactive mode, the file name specified in the format schema can contain an absolute path or a path relative to the current directory on the client. If you use the client in the batch mode, the path to the schema must be relative due to security reasons.

If you input or output data via the `HTTP interface` the file name specified in the format schema should be located in the directory specified in `format_schema_path` in the server configuration.

## Skip Errors

Some formats such as `CSV`, `TabSeparated`, `TSKV`, `JSONEachRow`, `Template`, `CustomSeparated` and `Protobuf` can skip broken row if parsing error occurred and continue parsing from the beginning of next row. See `input_format_allow_errors_num` and `input_format_allow_errors_ratio` settings. Limitations: - In case of parsing error `JSONEachRow` skips all data until the new line (or EOF), so rows must be delimited by `\n` to count errors correctly. - `Template` and `CustomSeparated` use delimiter after the last column and delimiter between rows to find the beginning of next row, so skipping errors works only if at least one of them is not empty.

## JDBC 驱动

- 官方JDBC 的驱动
- 三方提供的 JDBC 驱动:
  - ClickHouse-Native-JDBC
  - clickhouse4j

## ODBC 驱动

- ClickHouse官方有 ODBC 的驱动。见 [这里](#)。

## C ++客户端库

请参阅以下网站的自述文件[clickhouse-cpp](#)资料库。

## 第三方开发的库

### ⚠ 放弃

Yandex不维护下面列出的库，也没有进行任何广泛的测试以确保其质量。

- Python
  - [infi.clickhouse\\_orm](#)
  - [clickhouse-driver](#)

- [clickhouse-client](#)
- PHP
  - [SeasClick](#)
  - [phpClickHouse](#)
  - [clickhouse-php-client](#)
  - [clickhouse-client](#)
  - [PhpClickHouseClient](#)
- Go
  - [clickhouse](#)
  - [go-clickhouse](#)
  - [mailrugo-clickhouse](#)
  - [golang-clickhouse](#)
- NodeJs
  - [clickhouse \(NodeJs\)](#)
  - [node-clickhouse](#)
- Perl
  - [perl-DBD-ClickHouse](#)
  - [HTTP-ClickHouse](#)
  - [AnyEvent-ClickHouse](#)
- Ruby
  - [ClickHouse \(Ruby\)](#)
- R
  - [clickhouse-r](#)
  - [RClickhouse](#)
- Java
  - [clickhouse-client-java](#)
- Scala
  - [clickhouse-scala-client](#)
- Kotlin
  - [AORM](#)
- C#
  - [ClickHouse.Ado](#)
  - [ClickHouse.Net](#)
  - [ClickHouse.Client](#)
- Elixir
  - [clickhouseex](#)
- Nim
  - [nim-clickhouse](#)

# 第三方集成库

## ⚠ 声明

Yandex不维护下面列出的库，也没有进行任何广泛的测试以确保其质量。

## 基建产品

- 关系数据库管理系统
  - MySQL
    - ProxySQL
    - clickhouse-mysql-data-reader
    - horgh-replicator
  - PostgreSQL
    - clickhousedb\_fdw
    - infi.clickhouse\_fdw (使用 infi.clickhouse\_orm)
    - pg2ch
  - MSSQL
    - ClickHouseMigrator
- 消息队列
  - Kafka
    - clickhouse\_sinker (使用 Go client)
- 对象存储
  - S3
    - clickhouse-backup
- 容器编排
  - Kubernetes
    - clickhouse-operator
- 配置管理
  - puppet
    - innogames/clickhouse
    - mfedorov/clickhouse
- 监控
  - Graphite
    - graphouse
    - carbon-clickhouse +
    - graphite-clickhouse
    - graphite-ch-optimizer - optimizes stale partitions in \*GraphiteMergeTree if rules from rollup configuration could be applied
  - Grafana
    - clickhouse-grafana

- Prometheus
  - clickhouse\_exporter
  - PromHouse
- Nagios
  - check\_clickhouse
- Zabbix
  - clickhouse-zabbix-template
- Sematext
  - clickhouse积分
- 记录
  - rsyslog
    - omclickhouse
  - fluentd
    - loghouse (对于 Kubernetes)
  - logagent
    - logagent output-plugin-clickhouse
- 地理
  - MaxMind
    - clickhouse-maxmind-geoip

## 编程语言生态系统

- Python
  - SQLAlchemy
    - sqlalchemy-clickhouse (使用 infi.clickhouse\_orm)
  - pandas
    - pandahouse
- R
  - dplyr
    - RClickhouse (使用 clickhouse-cpp)
- Java
  - Hadoop
    - clickhouse-hdfs-loader (使用 JDBC)
- Scala
  - Akka
    - clickhouse-scala-client
- C#
  - ADO.NET
    - ClickHouse.Ado
    - ClickHouse.Net

- [ClickHouse.Net.Migrations](#)
- Elixir
  - [Ecto](#)
    - [clickhouse\\_ecto](#)

## 第三方开发的可视化界面

开源

### Tabix

ClickHouse Web 界面 [Tabix](#).

主要功能：

- 浏览器直接连接 ClickHouse，不需要安装其他软件。
- 高亮语法的编辑器。
- 自动命令补全。
- 查询命令执行的图形分析工具。
- 配色方案选项。

[Tabix 文档](#).

### HouseOps

[HouseOps](#) 是一个交互式 UI/IDE 工具，可以运行在 OSX, Linux and Windows 平台上。

主要功能：

- 查询高亮语法提示，可以以表格或 JSON 格式查看数据。
- 支持导出 CSV 或 JSON 格式数据。
- 支持查看查询执行的详情，支持 KILL 查询。
- 图形化显示，支持显示数据库中所有的表和列的详细信息。
- 快速查看列占用的空间。
- 服务配置。

以下功能正在计划开发： - 数据库管理 - 用户管理 - 实时数据分析 - 集群监控 - 集群管理 - 监控副本情况以及 Kafka 引擎表

### LightHouse

[LightHouse](#) 是 ClickHouse 的轻量级 Web 界面。

特征：

- 包含过滤和元数据的表列表。
- 带有过滤和排序的表格预览。
- 只读查询执行。

### DBeaver

[DBeaver](#) 具有 ClickHouse 支持的通用桌面数据库客户端。

特征：

- 使用语法高亮显示查询开发。
- 表格预览。
- 自动完成。

### **clickhouse-cli**

[clickhouse-cli](#) 是ClickHouse的替代命令行客户端，用Python 3编写。

特征：

- 自动完成。
- 查询和数据输出的语法高亮显示。
- 寻呼机支持数据输出。
- 自定义PostgreSQL类命令。

### **clickhouse-flamegraph**

[clickhouse-flamegraph](#) 是一个可视化的专业工具 `system.trace_log` 如[flamegraph](#).

## 商业

### **Holistics Software**

[Holistics](#) 在2019年被Gartner FrontRunners列为可用性最高排名第二的商业智能工具之一。 Holistics是一个基于SQL的全栈数据平台和商业智能工具，用于设置您的分析流程。

特征：

-自动化的电子邮件，Slack和Google表格报告时间表。 -强大的SQL编辑器，具有版本控制，自动完成，可重用的查询组件和动态过滤器。 -通过iframe在自己的网站或页面中嵌入仪表板。 -数据准备和ETL功能。 -SQL数据建模支持数据的关系映射。

### **DataGrip**

[DataGrip](#) 是JetBrains的数据库IDE，专门支持ClickHouse。 它还嵌入到其他基于IntelliJ的工具中：PyCharm，IntelliJ IDEA，GoLand，PhpStorm等。

特征：

- 非常快速的代码完成。
- ClickHouse语法高亮显示。
- 支持ClickHouse特有的功能，例如嵌套列，表引擎。
- 数据编辑器。
- 重构。
- 搜索和导航。

## 来自第三方开发人员的代理服务器

[chproxy](#) 是ClickHouse数据库的http代理和负载均衡器。

特征

每用户路由和响应缓存。 灵活的限制。 \*自动SSL证书续订。

在Go中实现。

## KittenHouse

**KittenHouse** 设计为ClickHouse和应用程序服务器之间的本地代理，以防在应用程序端缓冲INSERT数据是不可能或不方便的。

特征：

内存和磁盘数据缓冲。每表路由。\*负载平衡和健康检查。

在Go中实现。

## ClickHouse-Bulk

**ClickHouse-Bulk** 是一个简单的ClickHouse插入收集器。

特征：

分组请求并按阈值或间隔发送。多个远程服务器。\*基本身份验证。

在Go中实现。

## 数据类型

ClickHouse 可以在数据表中存储多种数据类型。

本节描述 ClickHouse 支持的数据类型，以及使用或者实现它们时（如果有的话）的注意事项。

## UInt8, UInt16, UInt32, UInt64, Int8, Int16, Int32, Int64

固定长度的整型，包括有符号整型或无符号整型。

### 整型范围

- Int8 - [-128 : 127]
- Int16 - [-32768 : 32767]
- Int32 - [-2147483648 : 2147483647]
- Int64 - [-9223372036854775808 : 9223372036854775807]

### 无符号整型范围

- UInt8 - [0 : 255]
- UInt16 - [0 : 65535]
- UInt32 - [0 : 4294967295]
- UInt64 - [0 : 18446744073709551615]

## Float32, Float64

浮点数。

类型与以下 C 语言中类型是相同的：

- `Float32` - `float`
- `Float64` - `double`

我们建议您尽可能以整数形式存储数据。例如，将固定精度的数字转换为整数值，例如货币数量或页面加载时间用毫秒为单位表示

## 使用浮点数

- 对浮点数进行计算可能引起四舍五入的误差。

```
SELECT 1 - 0.9
```

```
minus(1, 0.9)  
0.0999999999999998
```

- 计算的结果取决于计算方法（计算机系统的处理器类型和体系结构）
- 浮点计算结果可能是诸如无穷大（`INF`）和“非数字”（`NAN`）。对浮点数计算的时候应该考虑到这点。
- 当一行行阅读浮点数的时候，浮点数的结果可能不是机器最近显示的数值。

## `NAN` 和 `Inf`

与标准SQL相比，ClickHouse 支持以下类别的浮点数：

- `Inf` – 正无穷

```
SELECT 0.5 / 0
```

```
divide(0.5, 0)  
inf
```

- `-Inf` – 负无穷

```
SELECT -0.5 / 0
```

```
divide(-0.5, 0)  
-inf
```

- `NAN` – 非数字

```
SELECT 0 / 0
```

```
divide(0, 0)  
nan
```

可以在 [ORDER BY 子句](#) 查看更多关于 `NAN` 排序的规则。

`Decimal(P, S)`, `Decimal32(S)`, `Decimal64(S)`, `Decimal128(S)`

有符号的定点数，可在加、减和乘法运算过程中保持精度。对于除法，最低有效数字会被丢弃（不舍入）。

## 参数

- P - 精度。有效范围：[1:38]，决定可以有多少个十进制数字（包括分数）。
- S - 规模。有效范围：[0 : P]，决定数字的小数部分中包含的小数位数。

对于不同的 P 参数值 Decimal 表示，以下例子都是同义的：- P from [ 1 : 9 ] - for Decimal32(S) - P from [ 10 : 18 ] - for Decimal64(S) - P from [ 19 : 38 ] - for Decimal128(S)

## 十进制值范围

- Decimal32(S) - (  $-1 * 10^{(9 - S)}$ ,  $1 * 10^{(9 - S)}$  )
- Decimal64(S) - (  $-1 * 10^{(18 - S)}$ ,  $1 * 10^{(18 - S)}$  )
- Decimal128(S) - (  $-1 * 10^{(38 - S)}$ ,  $1 * 10^{(38 - S)}$  )

例如，Decimal32(4) 可以表示 -99999.9999 至 99999.9999 的数值，步长为 0.0001。

## 内部表示方式

数据采用与自身位宽相同的有符号整数存储。这个数在内存中实际范围会高于上述范围，从 String 转换到十进制数的时候会做对应的检查。

由于现代CPU不支持128位数字，因此 Decimal128 上的操作由软件模拟。所以 Decimal128 的运算速度明显慢于 Decimal32/Decimal64。

## 运算和结果类型

对 Decimal 的二进制运算导致更宽的结果类型（无论参数的顺序如何）。

- Decimal64(S1) Decimal32(S2) -> Decimal64(S)
- Decimal128(S1) Decimal32(S2) -> Decimal128(S)
- Decimal128(S1) Decimal64(S2) -> Decimal128(S)

精度变化的规则：

- 加法，减法： $S = \max(S1, S2)$ 。
- 乘法： $S = S1 + S2$ 。
- 除法： $S = S1$ 。

对于 Decimal 和整数之间的类似操作，结果是与参数大小相同的十进制。

未定义 Decimal 和 Float32/Float64 之间的函数。要执行此类操作，您可以使用：toDecimal32、toDecimal64、toDecimal128 或 toFloat32、toFloat64，需要显式地转换其中一个参数。注意，结果将失去精度，类型转换是昂贵的操作。

Decimal 上的一些函数返回结果为 Float64（例如，var 或 stddev）。对于其中一些，中间计算发生在 Decimal 中。对于此类函数，尽管结果类型相同，但 Float64 和 Decimal 中相同数据的结果可能不同。

## 溢出检查

在对 Decimal 类型执行操作时，数值可能会发生溢出。分数中的过多数字被丢弃（不是舍入的）。整数中的过多数字将导致异常。

```
SELECT toDecimal32(2, 4) AS x, x / 3
```

x	divide(toDecimal32(2, 4), 3)
2.0000	0.6666

```
SELECT toDecimal32(4.2, 8) AS x, x * x
```

DB::Exception: Scale is out of bounds.

```
SELECT toDecimal32(4.2, 8) AS x, 6 * x
```

DB::Exception: Decimal math overflow.

检查溢出会导致计算变慢。如果已知溢出不可能，则可以通过设置 `decimal_check_overflow` 来禁用溢出检查，在这种情况下，溢出将导致结果不正确：

```
SET decimal_check_overflow = 0;
SELECT toDecimal32(4.2, 8) AS x, 6 * x
```

x	multiply(6, toDecimal32(4.2, 8))
4.20000000	-17.74967296

溢出检查不仅发生在算术运算上，还发生在比较运算上：

```
SELECT toDecimal32(1, 8) < 100
```

DB::Exception: Can't compare.

## Boolean Values

没有单独的类型来存储布尔值。可以使用 UInt8 类型，取值限制为 0 或 1。

## String

字符串可以任意长度的。它可以包含任意的字节集，包含空字节。因此，字符串类型可以代替其他 DBMSs 中的 VARCHAR、BLOB、CLOB 等类型。

### 编码

ClickHouse 没有编码的概念。字符串可以是任意的字节集，按它们原本的方式进行存储和输出。若需存储文本，我们建议使用 UTF-8 编码。至少，如果你的终端使用UTF-8（推荐），这样读写就不需要进行任何的转换了。同样，对不同的编码文本 ClickHouse 会有不同处理字符串的函数。比如，`length` 函数可以计算字符串包含的字节数组的长度，然而 `lengthUTF8` 函数是假设字符串以 UTF-8 编码，计算的是字符串包含的 Unicode 字符的长度。

## FixedString

固定长度 N 的字符串（N 必须是严格的正自然数）。

您可以使用下面的语法对列声明为 FixedString 类型：

```
<column_name> FixedString(N)
```

其中 N 表示自然数。

当数据的长度恰好为 N 个字节时， FixedString 类型是高效的。在其他情况下，这可能会降低效率。

可以有效存储在 FixedString 类型的列中的值的示例：

- 二进制表示的IP地址 ( IPv6 使用 FixedString(16) )
- 语言代码 ( ru\_RU, en\_US ... )
- 货币代码 ( USD, RUB ... )
- 二进制表示的哈希值 ( MD5 使用 FixedString(16) , SHA256 使用 FixedString(32) )


请使用 **UUID** 数据类型来存储 UUID 值。

当向 ClickHouse 中插入数据时，

- 如果字符串包含的字节数少于 'N' , 将对字符串末尾进行空字节填充。
- 如果字符串包含的字节数大于 N , 将抛出 Too large value for FixedString(N) 异常。

当做数据查询时，ClickHouse 不会删除字符串末尾的空字节。如果使用 WHERE 子句，则须要手动添加空字节以匹配 FixedString 的值。以下示例阐明了如何将 WHERE 子句与 FixedString 一起使用。

考虑带有 FixedString(2) 列的表：



查询语句 `SELECT * FROM FixedStringTable WHERE a = 'b'` 不会返回任何结果。请使用空字节来填充筛选条件。

```
SELECT * FROM FixedStringTable  
WHERE a = 'b\0'
```



这种方式与 MySQL 的 CHAR 类型的方式不同 ( MySQL 中使用空格填充字符串，并在输出时删除空格)。

请注意，FixedString(N) 的长度是个常量。仅由空字符组成的字符串，函数 **length** 返回值为 N , 而函数 **empty** 的返回值为 1 。

## UUID

A universally unique identifier (UUID) is a 16-byte number used to identify records. For detailed information about the UUID, see [Wikipedia](#).

The example of UUID type value is represented below:

```
61f0c404-5cb3-11e7-907b-a6006ad3dba0
```

If you do not specify the UUID column value when inserting a new record, the UUID value is filled with zero:

```
00000000-0000-0000-0000-000000000000
```

## How to generate

To generate the UUID value, ClickHouse provides the [generateUUIDv4](#) function.

## Usage example

### Example 1

This example demonstrates creating a table with the UUID type column and inserting a value into the table.

```
CREATE TABLE t_uuid (x UUID, y String) ENGINE=TinyLog
```

```
INSERT INTO t_uuid SELECT generateUUIDv4(), 'Example 1'
```

```
SELECT * FROM t_uuid
```

x	y
417ddc5d-e556-4d27-95dd-a34d84e46a50	Example 1

### Example 2

In this example, the UUID column value is not specified when inserting a new record.

```
INSERT INTO t_uuid (y) VALUES ('Example 2')
```

```
SELECT * FROM t_uuid
```

x	y
417ddc5d-e556-4d27-95dd-a34d84e46a50	Example 1
00000000-0000-0000-0000-000000000000	Example 2

## Restrictions

The UUID data type only supports functions which [String](#) data type also supports (for example, [min](#), [max](#), and [count](#)).

The UUID data type is not supported by arithmetic operations (for example, [abs](#)) or aggregate functions, such as [sum](#) and [avg](#).

## Date

日期类型，用两个字节存储，表示从 1970-01-01 (无符号) 到当前的日期值。允许存储从 Unix 纪元开始到编译阶段定义的上限阈值常量（目前上限是2106年，但最终完全支持的年份为2105）。最小值输出为0000-00-00。

日期中没有存储时区信息。

## DateTime64

Allows to store an instant in time, that can be expressed as a calendar date and a time of a day, with defined sub-second

precision

Tick size (precision):  $10^{-\text{precision}}$  seconds

Syntax:

```
DateTime64(precision, [timezone])
```

Internally, stores data as number of 'ticks' since epoch start (1970-01-01 00:00:00 UTC) as Int64. The tick resolution is determined by the precision parameter. Additionally, the `DateTime64` type can store time zone that is the same for the entire column, that affects how the values of the `DateTime64` type values are displayed in text format and how the values specified as strings are parsed ('2020-01-01 05:00:01.000'). The time zone is not stored in the rows of the table (or in resultset), but is stored in the column metadata. See details in [DateTime](#).

## Examples

1. Creating a table with `DateTime64`-type column and inserting data into it:

```
CREATE TABLE dt
(
    `timestamp` DateTime64(3, 'Europe/Moscow'),
    `event_id` UInt8
)
ENGINE = TinyLog
```

```
INSERT INTO dt Values (1546300800000, 1), ('2019-01-01 00:00:00', 2)
```

```
SELECT * FROM dt
```

timestamp	event_id
2019-01-01 03:00:00.000	1
2019-01-01 00:00:00.000	2

- When inserting datetime as an integer, it is treated as an appropriately scaled Unix Timestamp (UTC). `1546300800000` (with precision 3) represents '2019-01-01 00:00:00' UTC. However, as `timestamp` column has `Europe/Moscow` (UTC+3) timezone specified, when outputting as string the value will be shown as '2019-01-01 03:00:00'.
- When inserting string value as datetime, it is treated as being in column timezone. '`2019-01-01 00:00:00`' will be treated as being in `Europe/Moscow` timezone and stored as `1546290000000`.

2. Filtering on `DateTime64` values

```
SELECT * FROM dt WHERE timestamp = toDateTime64('2019-01-01 00:00:00', 3, 'Europe/Moscow')
```

timestamp	event_id
2019-01-01 00:00:00.000	2

Unlike `DateTime`, `DateTime64` values are not converted from String automatically

3. Getting a time zone for a `DateTime64`-type value:

```
SELECT toDateTime64(now(), 3, 'Europe/Moscow') AS column, toTypeName(column) AS x
```

column	x
2019-10-16 04:12:04.000	DateTime64(3, 'Europe/Moscow')

#### 4. Timezone conversion

```
SELECT
toDateTime64(timestamp, 3, 'Europe/London') as lon_time,
toDateTime64(timestamp, 3, 'Europe/Moscow') as mos_time
FROM dt
```

lon_time	mos_time
2019-01-01 00:00:00.000	2019-01-01 03:00:00.000
2018-12-31 21:00:00.000	2019-01-01 00:00:00.000

### See Also

- [Type conversion functions](#)
- [Functions for working with dates and times](#)
- [Functions for working with arrays](#)
- [The date\\_time\\_input\\_format setting](#)
- [The timezone server configuration parameter](#)
- [Operators for working with dates and times](#)
- [Date data type](#)
- [DateTime data type](#)

## DateTime

时间戳类型。用四个字节（无符号的）存储 Unix 时间戳）。允许存储与日期类型相同的范围内的值。最小值为 0000-00-00 00:00:00。时间戳类型值精确到秒（没有闰秒）。

### 时区

使用启动客户端或服务器时的系统时区，时间戳是从文本（分解为组件）转换为二进制并返回。在文本格式中，有关夏令时的信息会丢失。

默认情况下，客户端连接到服务的时候会使用服务端时区。您可以通过启用客户端命令行选项 `--use_client_time_zone` 来设置使用客户端时间。

因此，在处理文本日期时（例如，在保存文本转储时），请记住在夏令时更改期间可能存在歧义，如果时区发生更改，则可能存在匹配数据的问题。

## Enum8, Enum16

包括 `Enum8` 和 `Enum16` 类型。`Enum` 保存 `'string' = integer` 的对应关系。在 ClickHouse 中，尽管用户使用的是字符串常量，但所有含有 `Enum` 数据类型的操作都是按照包含整数的值来执行。这在性能方面比使用 `String` 数据类型更有效。

- `Enum8` 用 `'String' = Int8` 对描述。
- `Enum16` 用 `'String' = Int16` 对描述。

## 用法示例

创建一个带有一个枚举 `Enum8('hello' = 1, 'world' = 2)` 类型的列：

```
CREATE TABLE t_enum
(
    x Enum8('hello' = 1, 'world' = 2)
)
ENGINE = TinyLog
```

这个 `x` 列只能存储类型定义中列出的值：`'hello'` 或 `'world'`。如果您尝试保存任何其他值，ClickHouse 抛出异常。

```
:) INSERT INTO t_enum VALUES ('hello'), ('world'), ('hello')

INSERT INTO t_enum VALUES

Ok.

3 rows in set. Elapsed: 0.002 sec.

:) insert into t_enum values('a')

INSERT INTO t_enum VALUES

Exception on client:
Code: 49. DB::Exception: Unknown element 'a' for type Enum8('hello' = 1, 'world' = 2)
```

当您从表中查询数据时，ClickHouse 从 `Enum` 中输出字符串值。

```
SELECT * FROM t_enum

x
-----
hello
world
hello
```

如果需要看到对应行的数值，则必须将 `Enum` 值转换为整数类型。

```
SELECT CAST(x, 'Int8') FROM t_enum

CAST(x, 'Int8')
-----
1
2
1
```

在查询中创建枚举值，您还需要使用 `CAST`。

```
SELECT toTypeName(CAST('a', 'Enum8(\\'a\' = 1, \\'b\' = 2)'))

toTypeName(CAST('a', 'Enum8(\\'a\' = 1, \\'b\' = 2)'))
-----
```

## 规则及用法

`Enum8` 类型的每个值范围是 `-128 ... 127`，`Enum16` 类型的每个值范围是 `-32768 ... 32767`。所有的字符串或者数字都必须是不一样的。允许存在空字符串。如果某个 `Enum` 类型被指定了（在表定义的时候），数字可以是任意顺序。然而，顺序并不重要。

Enum 中的字符串和数值都不能是 **NULL**。

Enum 包含在 **Nullable** 类型中。因此，如果您使用此查询创建一个表

```
CREATE TABLE t_enum_nullable
(
    x Nullable( Enum8('hello' = 1, 'world' = 2) )
)
ENGINE = TinyLog
```

不仅可以存储 'hello' 和 'world'，还可以存储 **NULL**。

```
INSERT INTO t_enum_nullable Values('hello'), ('world'), (NULL)
```

在内存中，Enum 列的存储方式与相应数值的 **Int8** 或 **Int16** 相同。

当以文本方式读取的时候，ClickHouse 将值解析成字符串然后去枚举值的集合中搜索对应字符串。如果没有找到，会抛出异常。当读取文本格式的时候，会根据读取到的字符串去找对应的数值。如果没有找到，会抛出异常。

当以文本形式写入时，ClickHouse 将值解析成字符串写入。如果列数据包含垃圾数据（不是来自有效集合的数字），则抛出异常。Enum 类型以二进制读取和写入的方式与 **Int8** 和 **Int16** 类型一样的。

隐式默认值是数值最小的值。

在 **ORDER BY**，**GROUP BY**，**IN**，**DISTINCT** 等等中，Enum 的行为与相应的数字相同。例如，按数字排序。对于等式运算符和比较运算符，Enum 的工作机制与它们在底层数值上的工作机制相同。

枚举值不能与数字进行比较。枚举可以与常量字符串进行比较。如果与之比较的字符串不是有效Enum值，则将引发异常。可以使用 **IN** 运算符来判断一个 Enum 是否存在于某个 Enum 集合中，其中集合中的 Enum 需要用字符串表示。

大多数具有数字和字符串的运算并不适用于Enums；例如，Enum 类型不能和一个数值相加。但是，Enum有一个原生的 **toString** 函数，它返回它的字符串值。

Enum 值使用 **toT** 函数可以转换成数值类型，其中 T 是一个数值类型。若 T 恰好对应 Enum 的底层数值类型，这个转换是零消耗的。

Enum 类型可以被 **ALTER** 无成本地修改对应集合的值。可以通过 **ALTER** 操作来增加或删除 Enum 的成员（只要表没有用到该值，删除都是安全的）。作为安全保障，改变之前使用过的 Enum 成员将抛出异常。

通过 **ALTER** 操作，可以将 **Enum8** 转成 **Enum16**，反之亦然，就像 **Int8** 转 **Int16** 一样。

## Array(T)

由 T 类型元素组成的数组。

T 可以是任意类型，包含数组类型。但不推荐使用多维数组，ClickHouse 对多维数组的支持有限。例如，不能存储在 **MergeTree** 表中存储多维数组。

### 创建数组

您可以使用**array**函数来创建数组：

```
array(T)
```

您也可以使用方括号：

```
[]
```

创建数组示例：

```
:) SELECT array(1, 2) AS x, toTypeName(x)
```

```
SELECT
```

```
[1, 2] AS x,  
toTypeName(x)
```

```
x-----toTypeName(array(1, 2))  
|[1, 2] | Array(UInt8)|
```

```
1 rows in set. Elapsed: 0.002 sec.
```

```
:) SELECT [1, 2] AS x, toTypeName(x)
```

```
SELECT
```

```
[1, 2] AS x,  
toTypeName(x)
```

```
x-----toTypeName([1, 2])  
|[1, 2] | Array(UInt8)|
```

```
1 rows in set. Elapsed: 0.002 sec.
```

## 使用数据类型

ClickHouse会自动检测数组元素,并根据元素计算出存储这些元素最小的数据类型。如果在元素中存在 **NULL** 或存在 **Nullable** 类型元素 ,那么数组的元素类型将会变成 **Nullable**。

如果 ClickHouse 无法确定数据类型 ,它将产生异常。当尝试同时创建一个包含字符串和数字的数组时会发生这种情况 ( `SELECT array(1, 'a')` )。

自动数据类型检测示例 :

```
:) SELECT array(1, 2, NULL) AS x, toTypeName(x)
```

```
SELECT
```

```
[1, 2, NULL] AS x,  
toTypeName(x)
```

```
x-----toTypeName(array(1, 2, NULL))  
|[1, 2, NULL] | Array(Nullable(UInt8))|
```

```
1 rows in set. Elapsed: 0.002 sec.
```

如果您尝试创建不兼容的数据类型数组 ,ClickHouse 将引发异常 :

```
:) SELECT array(1, 'a')
```

```
SELECT [1, 'a']
```

```
Received exception from server (version 1.1.54388):  
Code: 386. DB::Exception: Received from localhost:9000, 127.0.0.1. DB::Exception: There is no supertype for  
types UInt8, String because some of them are String/FixedString and some of them are not.
```

```
0 rows in set. Elapsed: 0.246 sec.
```

## AggregateFunction(name, types\_of\_arguments...)

聚合函数的中间状态 ,可以通过聚合函数名称加 -State 后缀的形式得到它。与此同时 ,当您需要访问该类型的最终状态数据

时，您需要以相同的聚合函数名加 -Merge 后缀的形式来得到最终状态数据。

AggregateFunction — 参数化的数据类型。

## 参数

- 聚合函数名

如果函数具备多个参数列表，请在此处指定其他参数列表中的值。

- 聚合函数参数的类型

## 示例

```
CREATE TABLE t
(
    column1 AggregateFunction(uniq, UInt64),
    column2 AggregateFunction(anyIf, String, UInt8),
    column3 AggregateFunction(quantiles(0.5, 0.9), UInt64)
) ENGINE = ...
```

上述中的 `uniq` , `anyIf` (`any+If`) 以及 `quantiles` 都为 ClickHouse 中支持的聚合函数。

## 使用指南

### 数据写入

当需要写入数据时，您需要将数据包含在 `INSERT SELECT` 语句中，同时对于 `AggregateFunction` 类型的数据，您需要使用对应的以 `-State` 为后缀的函数进行处理。

### 函数使用示例

```
uniqState(UserID)
quantilesState(0.5, 0.9)(SendTiming)
```

不同于 `uniq` 和 `quantiles` 函数返回聚合结果的最终值，以 `-State` 后缀的函数总是返回 `AggregateFunction` 类型的数据的中间状态。

对于 `SELECT` 而言，`AggregateFunction` 类型总是以特定的二进制形式展现在所有的输出格式中。例如，您可以使用 `SELECT` 语句将函数的状态数据转储为 `TabSeparated` 格式的同时使用 `INSERT` 语句将数据转储回去。

### 数据查询

当从 `AggregatingMergeTree` 表中查询数据时，对于 `AggregateFunction` 类型的字段，您需要使用以 `-Merge` 为后缀的相同聚合函数来聚合数据。对于非 `AggregateFunction` 类型的字段，请将它们包含在 `GROUP BY` 子句中。

以 `-Merge` 为后缀的聚合函数，可以将多个 `AggregateFunction` 类型的中间状态组合计算为最终的聚合结果。

例如，如下的两个查询返回的结果总是一致：

```
SELECT uniq(UserID) FROM table

SELECT uniqMerge(state) FROM (SELECT uniqState(UserID) AS state FROM table GROUP BY RegionID)
```

## 使用示例

请参阅 [AggregatingMergeTree 的说明](#)

## Tuple(T1, T2, ...)

元组，其中每个元素都有单独的 [类型](#)。

不能在表中存储元组（除了内存表）。它们可以用于临时列分组。在查询中，IN 表达式和带特定参数的 lambda 函数可以来对临时列进行分组。更多信息，请参阅 [IN 操作符](#) 和 [Higher order functions](#)。

元组可以是查询的结果。在这种情况下，对于JSON以外的文本格式，括号中的值是逗号分隔的。在JSON格式中，元组作为数组输出（在方括号中）。

## 创建元组

可以使用函数来创建元组：

```
tuple(T1, T2, ...)
```

创建元组的示例：

```
:) SELECT tuple(1, 'a') AS x, toTypeName(x)

SELECT
  (1, 'a') AS x,
  toTypeName(x)

x-----toTypeName(tuple(1, 'a'))
(1, 'a') | Tuple(UInt8, String)

1 rows in set. Elapsed: 0.021 sec.
```

## 元组中的数据类型

在动态创建元组时，ClickHouse 会自动为元组的每一个参数赋予最小可表达的类型。如果参数为 [NULL](#)，那这个元组对应元素是 [Nullable](#)。

自动数据类型检测示例：

```
SELECT tuple(1, NULL) AS x, toTypeName(x)

SELECT
  (1, NULL) AS x,
  toTypeName(x)

x-----toTypeName(tuple(1, NULL))
(1, NULL) | Tuple(UInt8, Nullable(Nothing))

1 rows in set. Elapsed: 0.002 sec.
```

## Nullable(TypeName)

允许用特殊标记 ([NULL](#)) 表示"缺失值"，可以与 `TypeName` 的正常值存放一起。例如，`Nullable(Int8)` 类型的列可以存储 `Int8` 类型值，而没有值的行将存储 `NULL`。

对于 `TypeName`，不能使用复合数据类型 [Array](#) 和 [Tuple](#)。复合数据类型可以包含 `Nullable` 类型值，例如 `Array(Nullable(Int8))`。

`Nullable` 类型字段不能包含在表索引中。

除非在 ClickHouse 服务器配置中另有说明，否则 `NULL` 是任何 `Nullable` 类型的默认值。

## 存储特性

要在表的列中存储 Nullable 类型值，ClickHouse 除了使用带有值的普通文件外，还使用带有 NULL 掩码的单独文件。掩码文件中的条目允许 ClickHouse 区分每个表行的 NULL 和相应数据类型的默认值。由于附加了新文件，“Nullable”列与类似的普通文件相比消耗额外的存储空间。

!!! 注意点 使用 Nullable 几乎总是对性能产生负面影响，在设计数据库时请记住这一点


掩码文件中的条目允许 ClickHouse 区分每个表行的对应数据类型的“NULL”和默认值由于有额外的文件，“Nullable”列比普通列消耗更多的存储空间

## 用法示例

```
CREATE TABLE t_null(x Int8, y Nullable(Int8)) ENGINE TinyLog
```

```
INSERT INTO t_null VALUES (1, NULL), (2, 3)
```

```
SELECT x + y FROM t_null
```



## 嵌套数据结构

### Nested(Name1 Type1, Name2 Type2, ...)

嵌套数据结构类似于嵌套表。嵌套数据结构的参数（列名和类型）与 CREATE 查询类似。每个表可以包含任意多行嵌套数据结构。

示例：

```
CREATE TABLE test.visits
(
    CounterID UInt32,
    StartDate Date,
    Sign Int8,
    IsNew UInt8,
    VisitID UInt64,
    UserID UInt64,
    ...
    Goals Nested
    (
        ID UInt32,
        Serial UInt32,
        EventTime DateTime,
        Price Int64,
        OrderID String,
        CurrencyID UInt32
    ),
    ...
) ENGINE = CollapsingMergeTree(StartDate, intHash32(UserID), (CounterID, StartDate, intHash32(UserID),
VisitID), 8192, Sign)
```

上述示例声明了 Goals 这种嵌套数据结构，它包含访客转化相关的数据（访客达到的目标）。在 'visits' 表中每一行都可以对应零个或者任意个转化数据。

只支持一级嵌套。嵌套结构的列中，若列的类型是数组类型，那么该列其实和多维数组是相同的，所以目前嵌套层级的支持很局限（MergeTree 引擎中不支持存储这样的列）

大多数情况下，处理嵌套数据结构时，会指定一个单独的列。为了这样实现，列的名称会与点号连接起来。这些列构成了一组匹配类型。在同一条嵌套数据中，所有的列都具有相同的长度。

示例：

```
SELECT
    Goals.ID,
    Goals.EventTime
FROM test.visits
WHERE CounterID = 101500 AND length(Goals.ID) < 5
LIMIT 10
```

Goals.ID	Goals.EventTime
[1073752, 591325, 591325]	['2014-03-17 16:38:10', '2014-03-17 16:38:48', '2014-03-17 16:42:27']
[1073752]	['2014-03-17 00:28:25']
[1073752]	['2014-03-17 10:46:20']
[1073752, 591325, 591325, 591325]	['2014-03-17 13:59:20', '2014-03-17 22:17:55', '2014-03-17 22:18:07', '2014-03-17 22:18:51']
[]	[]
[1073752, 591325, 591325]	['2014-03-17 11:37:06', '2014-03-17 14:07:47', '2014-03-17 14:36:21']
[]	[]
[]	[]
[591325, 1073752]	['2014-03-17 00:46:05', '2014-03-17 00:46:05']
[1073752, 591325, 591325, 591325]	['2014-03-17 13:28:33', '2014-03-17 13:30:26', '2014-03-17 18:51:21', '2014-03-17 18:51:45']

所以可以简单地把嵌套数据结构当做是所有列都是相同长度的多列数组。

SELECT 查询只有在使用 ARRAY JOIN 的时候才可以指定整个嵌套数据结构的名称。更多信息，参考 "ARRAY JOIN 子句"。示例：

```
SELECT
    Goal.ID,
    Goal.EventTime
FROM test.visits
ARRAY JOIN Goals AS Goal
WHERE CounterID = 101500 AND length(Goals.ID) < 5
LIMIT 10
```

Goal.ID	Goal.EventTime
1073752	2014-03-17 16:38:10
591325	2014-03-17 16:38:48
591325	2014-03-17 16:42:27
1073752	2014-03-17 00:28:25
1073752	2014-03-17 10:46:20
1073752	2014-03-17 13:59:20
591325	2014-03-17 22:17:55
591325	2014-03-17 22:18:07
591325	2014-03-17 22:18:51
1073752	2014-03-17 11:37:06

不能对整个嵌套数据结构执行 SELECT。只能明确列出属于它一部分列。

对于 INSERT 查询，可以单独地传入所有嵌套数据结构中的列数组（假如它们是单独的列数组）。在插入过程中，系统会检查它们是否有相同的长度。

对于 DESCRIBE 查询，嵌套数据结构中的列会以相同的方式分别列出来。

ALTER 查询对嵌套数据结构的操作非常有限。

## Special Data Types

特殊数据类型的值既不能存在表中也不能在结果中输出，但可用于查询的中间结果。

## Expression

用于表示高阶函数中的Lambda表达式。

## Set

可以用在 IN 表达式的右半部分。

## Nothing

此数据类型的唯一目的是表示不是期望值的情况。所以不能创建一个 Nothing 类型的值。

例如，文本 **NULL** 的类型为 `Nullable(Nothing)`。详情请见 [Nullable](#)。

`Nothing` 类型也可以用来表示空数组：

```
:) SELECT toTypeName(array())
SELECT toTypeName([])
└─toTypeName(array())─
  ┌─Array(Nothing)─┐
  └────────────────┘
1 rows in set. Elapsed: 0.062 sec.
```

## Interval

The family of data types representing time and date intervals. The resulting types of the **INTERVAL** operator.

### ⚠ Warning

You can't use `Interval` data types for storing values in tables.

Structure:

- Time interval as an unsigned integer value.
- Type of an interval.

Supported interval types:

- SECOND
- MINUTE
- HOUR
- DAY
- WEEK
- MONTH
- QUARTER
- YEAR

For each interval type, there is a separate data type. For example, the DAY interval is expressed as the IntervalDay data type:

```
SELECT toTypeName(INTERVAL 4 DAY)
```

toTypeName(toIntervalDay(4))
IntervalDay

## Usage Remarks

You can use Interval -type values in arithmetical operations with Date and DateTime-type values. For example, you can add 4 days to the current time:

```
SELECT now() as current_date_time, current_date_time + INTERVAL 4 DAY
```

current_date_time	plus(now(), toIntervalDay(4))
2019-10-23 10:58:45	2019-10-27 10:58:45

Intervals with different types can't be combined. You can't use intervals like 4 DAY 1 HOUR . Express intervals in units that are smaller or equal to the smallest unit of the interval, for example, the interval 1 day and an hour interval can be expressed as 25 HOUR or 90000 SECOND .

You can't perform arithmetical operations with Interval -type values, but you can add intervals of different types consequently to values in Date or DateTime data types. For example:

```
SELECT now() AS current_date_time, current_date_time + INTERVAL 4 DAY + INTERVAL 3 HOUR
```

current_date_time	plus(plus(now(), toIntervalDay(4)), toIntervalHour(3))
2019-10-23 11:16:28	2019-10-27 14:16:28

The following query causes an exception:

```
select now() AS current_date_time, current_date_time + (INTERVAL 4 DAY + INTERVAL 3 HOUR)
```

Received exception from server (version 19.14.1):  
 Code: 43. DB::Exception: Received from localhost:9000. DB::Exception: Wrong argument types for function plus: if one argument is Interval, then another must be Date or DateTime..

## See Also

- `INTERVAL` operator
- `toInterval` type conversion functions

## Domains

Domain类型是特定实现的类型，它总是与某个现存的基础类型保持二进制兼容的同时添加一些额外的特性，以能够在维持磁盘数据不变的情况下使用这些额外的特性。目前ClickHouse暂不支持自定义domain类型。

如果你可以在一个地方使用与Domain类型二进制兼容的基础类型，那么在相同的地方您也可以使用Domain类型，例如：

- 使用Domain类型作为表中列的类型
- 对Domain类型的列进行读/写数据
- 如果与Domain二进制兼容的基础类型可以作为索引，那么Domain类型也可以作为索引
- 将Domain类型作为参数传递给函数使用
- 其他

### Domains的额外特性

- 在执行SHOW CREATE TABLE 或 DESCRIBE TABLE时，其对应的列总是展示为Domain类型的名称
- 在INSERT INTO domain\_table(domain\_column) VALUES(...)中输入数据总是以更人性化的格式进行输入
- 在SELECT domain\_column FROM domain\_table中数据总是以更人性化的格式输出
- 在INSERT INTO domain\_table FORMAT CSV ...中，实现外部源数据以更人性化的格式载入

### Domains类型的限制

- 无法通过 ALTER TABLE 将基础类型的索引转换为Domain类型的索引。
- 当从其他列或表插入数据时，无法将string类型的值隐式地转换为Domain类型的值。
- 无法对存储为Domain类型的值添加约束。

## IPv4

IPv4 是与 UInt32 类型保持二进制兼容的Domain类型，其用于存储IPv4地址的值。它提供了更为紧凑的二进制存储的同时支持识别可读性更加友好的输入输出格式。

### 基本使用

```
CREATE TABLE hits (url String, from IPv4) ENGINE = MergeTree() ORDER BY url;
DESCRIBE TABLE hits;
```

name	type	default_type	default_expression	comment	codec_expression
url	String				
from	IPv4				

同时您也可以使用 IPv4 类型的列作为主键：

```
CREATE TABLE hits (url String, from IPv4) ENGINE = MergeTree() ORDER BY from;
```

在写入与查询时，IPv4 类型能够识别可读性更加友好的输入输出格式：

```
INSERT INTO hits (url, from) VALUES ('https://wikipedia.org', '116.253.40.133')('https://clickhouse.tech', '183.247.232.58')('https://clickhouse.yandex/docs/en/', '116.106.34.242');
```

```
SELECT * FROM hits;
```

url	from
https://clickhouse.tech/docs/en/	116.106.34.242
https://wikipedia.org	116.253.40.133
https://clickhouse.tech	183.247.232.58

同时它提供更为紧凑的二进制存储格式：

```
SELECT toTypeName(from), hex(from) FROM hits LIMIT 1;
```

toTypeName(from)	hex(from)
IPv4	B7F7E83A

不可隐式转换为除 UInt32 以外的其他类型。如果要将 IPv4 类型的值转换成字符串，你可以使用 IPv4NumToString() 显示的进行转换：

```
SELECT toTypeName(s), IPv4NumToString(from) as s FROM hits LIMIT 1;
```

toTypeName(IPv4NumToString(from))	s
String	183.247.232.58

或可以使用 CAST 将它转换为 UInt32 类型：

```
SELECT toTypeName(i), CAST(from as UInt32) as i FROM hits LIMIT 1;
```

toTypeName(CAST(from, 'UInt32'))	i
UInt32	3086477370

## IPv6

IPv6 是与 FixedString(16) 类型保持二进制兼容的Domain类型，其用于存储IPv6地址的值。它提供了更为紧凑的二进制存储的同时支持识别可读性更加友好的输入输出格式。

### 基本用法

```
CREATE TABLE hits (url String, from IPv6) ENGINE = MergeTree() ORDER BY url;
```

```
DESCRIBE TABLE hits;
```

name	type	default_type	default_expression	comment	codec_expression
url	String				
from	IPv6				

同时您也可以使用 IPv6 类型的列作为主键：

```
CREATE TABLE hits (url String, from IPv6) ENGINE = MergeTree() ORDER BY from;
```

在写入与查询时，IPv6 类型能够识别可读性更加友好的输入输出格式：

```
INSERT INTO hits (url, from) VALUES ('https://wikipedia.org', '2a02:aa08:e000:3100::2')  
('https://clickhouse.tech', '2001:44c8:129:2632:33:0:252:2')('https://clickhouse.yandex/docs/en/',  
'2a02:e980:1e::1');
```

```
SELECT * FROM hits;
```

url	from
https://clickhouse.tech	2001:44c8:129:2632:33:0:252:2
https://clickhouse.tech/docs/en/	2a02:e980:1e::1
https://wikipedia.org	2a02:aa08:e000:3100::2

同时它提供更为紧凑的二进制存储格式：

```
SELECT toTypeName(from), hex(from) FROM hits LIMIT 1;
```

toTypeName(from)	hex(from)
IPv6	200144C801292632003300002520002

不可隐式转换为除 FixedString(16) 以外的其他类型类型。如果要将 IPv6 类型的值转换成字符串，你可以使用 IPv6NumToString() 显示的进行转换：

```
SELECT toTypeName(s), IPv6NumToString(from) as s FROM hits LIMIT 1;
```

toTypeName(IPv6NumToString(from))	s
String	2001:44c8:129:2632:33:0:252:2

或使用 CAST 将其转换为 FixedString(16)：

```
SELECT toTypeName(i), CAST(from as FixedString(16)) as i FROM hits LIMIT 1;
```

toTypeName(CAST(from, 'FixedString(16)'))	i
FixedString(16)	2001:44c8:129:2632:33:0:252:2

## 数据库引擎

您使用的所有表都是由数据库引擎所提供的

默认情况下，ClickHouse使用自己的数据库引擎，该引擎提供可配置的表引擎和所有支持的SQL语法。

除此之外，您还可以选择使用以下的数据库引擎：

- MySQL

## MySQL

MySQL引擎用于将远程的MySQL服务器中的表映射到ClickHouse中，并允许您对表进行 INSERT 和 SELECT 查询，以方便您在ClickHouse与MySQL之间进行数据交换。

MySQL 数据库引擎会将对其的查询转换为MySQL语法并发送到MySQL服务器中，因此您可以执行诸如 SHOW TABLES 或 SHOW CREATE TABLE 之类的操作。

但您无法对其执行以下操作：

- ATTACH / DETACH
- DROP
- RENAME
- CREATE TABLE
- ALTER

## CREATE DATABASE

```
CREATE DATABASE [IF NOT EXISTS] db_name [ON CLUSTER cluster]
ENGINE = MySQL('host:port', 'database', 'user', 'password')
```

### MySQL数据库引擎参数

- host:port — 链接的MySQL地址。
- database — 链接的MySQL数据库。
- user — 链接的MySQL用户。
- password — 链接的MySQL用户密码。

## 支持的类型对应

MySQL	ClickHouse
UNSIGNED TINYINT	UInt8
TINYINT	Int8
UNSIGNED SMALLINT	UInt16
SMALLINT	Int16
UNSIGNED INT, UNSIGNED MEDIUMINT	UInt32
INT, MEDIUMINT	Int32
UNSIGNED BIGINT	UInt64
BIGINT	Int64
FLOAT	Float32
DOUBLE	Float64
DATE	Date
DATETIME, TIMESTAMP	DateTime
BINARY	FixedString

其他的MySQL数据类型将全部都转换为String。

同时以上的所有类型都支持Nullable。

## 使用示例

在MySQL中创建表：

```
mysql> USE test;
Database changed

mysql> CREATE TABLE `mysql_table` (
    -> `int_id` INT NOT NULL AUTO_INCREMENT,
    -> `float` FLOAT NOT NULL,
    -> PRIMARY KEY (`int_id`));
Query OK, 0 rows affected (0,09 sec)

mysql> insert into mysql_table (`int_id`, `float`) VALUES (1,2);
Query OK, 1 row affected (0,00 sec)

mysql> select * from mysql_table;
+-----+-----+
| int_id | value |
+-----+-----+
|      1 |      2 |
+-----+-----+
1 row in set (0,00 sec)
```

在ClickHouse中创建MySQL类型的数据库，同时与MySQL服务器交换数据：

```
CREATE DATABASE mysql_db ENGINE = MySQL('localhost:3306', 'test', 'my_user', 'user_password')
```

```
SHOW DATABASES
```

name
default
mysql_db
system

```
SHOW TABLES FROM mysql_db
```

name
mysql_table

```
SELECT * FROM mysql_db.mysql_table
```

int_id	value
1	2

```
INSERT INTO mysql_db.mysql_table VALUES (3,4)
```

```
SELECT * FROM mysql_db.mysql_table
```

int_id	value
1	2
3	4

Lazy

Keeps tables in RAM only `expiration_time_in_seconds` seconds after last access. Can be used only with \*Log tables.

It's optimized for storing many small \*Log tables, for which there is a long time interval between accesses.

## Creating a Database

```
CREATE DATABASE testlazy ENGINE = Lazy(expiration_time_in_seconds);
```

## 表引擎

表引擎（即表的类型）决定了：

- 数据的存储方式和位置，写到哪里以及从哪里读取数据。
- 支持哪些查询以及如何支持。
- 并发数据访问。
- 索引的使用（如果存在）。
- 是否可以执行多线程请求。
- 数据复制参数。

## 引擎类型

### MergeTree

适用于高负载任务的最通用和功能最强大的表引擎。这些引擎的共同特点是可以快速插入数据并进行后续的后台数据处理。MergeTree系列引擎支持数据复制（使用Replicated\* 的引擎版本），分区和一些其他引擎不支持的其他功能。

该类型的引擎：*MergeTree* *ReplacingMergeTree* *SummingMergeTree* *AggregatingMergeTree* *CollapsingMergeTree* *VersionedCollapsingMergeTree* \* *GraphiteMergeTree*

### Log

具有最小功能的轻量级引擎。当您需要快速写入许多小表（最多约100万行）并在以后整体读取它们时，该类型的引擎是最有效的。

该类型的引擎：

- [TinyLog](tinylog/)
- [StripeLog](stripelog/)
- [Log](log/)

### Intergation engines

用于与其他的数据存储与处理系统集成的引擎。该类型的引擎：

- Kafka
- MySQL
- ODBC
- JDBC
- HDFS

## 用于其他特定功能的引擎

该类型的引擎：

- [Distributed](#)
- [MaterializedView](#)
- [Dictionary](#)
- [Merge](#)
- [File](#)
- [Null](#)
- [Set](#)
- [Join](#)
- [URL](#)
- [View](#)
- [Memory](#)
- [Buffer](#)

## 虚拟列

虚拟列是表引擎组成的一部分，它在对应的表引擎的源代码中定义。

您不能在 `CREATE TABLE` 中指定虚拟列，并且虚拟列不会包含在 `SHOW CREATE TABLE` 和 `DESCRIBE TABLE` 的查询结果中。虚拟列是只读的，所以您不能向虚拟列中写入数据。

如果想要查询虚拟列中的数据，您必须在 `SELECT` 查询中包含虚拟列的名字。`SELECT *` 不会返回虚拟列的内容。

若您创建的表中有一列与虚拟列的名字相同，那么虚拟列将不能再被访问。我们不建议您这样做。为了避免这种列名的冲突，虚拟列的名字一般都以下划线开头。

## MergeTree

Clickhouse 中最强大的表引擎当属 `MergeTree`（合并树）引擎及该系列（`*MergeTree`）中的其他引擎。

`MergeTree` 引擎系列的基本理念如下。当你有巨量数据要插入到表中，你要高效地一批批写入数据片段，并希望这些数据片段在后台按照一定规则合并。相比在插入时不断修改（重写）数据进存储，这种策略会高效很多。

主要特点：

- 存储的数据按主键排序。

这让你可以创建一个用于快速检索数据的小稀疏索引。

- 允许使用分区，如果指定了 [分区键](#) 的话。

在相同数据集和相同结果集的情况下 ClickHouse 中某些带分区的操作会比普通操作更快。查询中指定了分区键时 ClickHouse 会自动截取分区数据。这也有效增加了查询性能。

- 支持数据副本。

`ReplicatedMergeTree` 系列的表便是用于此。更多信息，请参阅 [数据副本](#) 一节。

- 支持数据采样。

需要的话，你可以给表设置一个采样方法。

!!! 注意 **Merge** 引擎并不属于 **\*MergeTree** 系列。

## 建表

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    name1 [type1] [DEFAULT|MATERIALIZED|ALIAS expr1],
    name2 [type2] [DEFAULT|MATERIALIZED|ALIAS expr2],
    ...
    INDEX index_name1 expr1 TYPE type1(...) GRANULARITY value1,
    INDEX index_name2 expr2 TYPE type2(...) GRANULARITY value2
) ENGINE = MergeTree()
[PARTITION BY expr]
[ORDER BY expr]
[PRIMARY KEY expr]
[SAMPLE BY expr]
[SETTINGS name=value, ...]
```

请求参数的描述，参考 [请求描述](#)。

### 子句

- **ENGINE** - 引擎名和参数。 `ENGINE = MergeTree()`。`MergeTree` 引擎没有参数。
- **PARTITION BY** — [分区键](#)。

要按月分区，可以使用表达式 `toYYYYMM(date_column)`，这里的 `date_column` 是一个 `Date` 类型的列。这里该分区名格式会是 `"YYYYMM"` 这样。

- **ORDER BY** — 表的排序键。

可以是一组列的元组或任意的表达式。例如: `ORDER BY (CounterID, EventDate)`。

- **PRIMARY KEY** - 主键，如果要设成 [跟排序键不相同](#)。

默认情况下主键跟排序键（由 `ORDER BY` 子句指定）相同。因此，大部分情况下不需要再专门指定一个 `PRIMARY KEY` 子句。

- **SAMPLE BY** — 用于抽样的表达式。

如果要用抽样表达式，主键中必须包含这个表达式。例如：`SAMPLE BY intHash32(UserID) ORDER BY (CounterID, EventDate, intHash32(UserID))`。

- **SETTINGS** — 影响 `MergeTree` 性能的额外参数：

- `index_granularity` — 索引粒度。即索引中相邻『标记』间的数据行数。默认值，8192。该列表中所有可用的参数可以从[这里查看 `MergeTreeSettings.h`](#)。
- `index_granularity_bytes` — 索引粒度，以字节为单位，默认值: 10Mb。如果仅按数据行数限制索引粒度，请设置为0(不建议)。
- `enable_mixed_granularity_parts` — 启用或禁用通过 `index_granularity_bytes` 控制索引粒度的大小。在19.11版本之前，只有 `index_granularity` 配置能够用于限制索引粒度的大小。当从大表(数十或数百兆)中查询数据时候，`index_granularity_bytes` 配置能够提升ClickHouse的性能。如果你的表内数据量很大，可以开启这项配置用以提升 `SELECT` 查询的性能。
- `use_minimalistic_part_header_in_zookeeper` — 数据片段头在 ZooKeeper 中的存储方式。如果设置了 `use_minimalistic_part_header_in_zookeeper=1`，ZooKeeper 会存储更少的数据。更多信息参考『服务配置参数』这章中的[设置描述](#)。
- `min_merge_bytes_to_use_direct_io` — 使用直接 I/O 来操作磁盘的合并操作时要求的最小数据量。合并数据片段时，ClickHouse 会计算要被合并的所有数据的总存储空间。如果大小超过了 `min_merge_bytes_to_use_direct_io` 设置的字节数，则 ClickHouse 将使用直接 I/O 接口 (`O_DIRECT` 选项) 对磁盘读写。如果设置 `min_merge_bytes_to_use_direct_io = 0`，则会禁用直接 I/O。默认值：`10 * 1024 * 1024 * 1024` 字节。

- `merge_with_ttl_timeout` — TTL合并频率的最小间隔时间。默认值: 86400 (1 天)。
- `write_final_mark` — 启用或禁用在数据片段尾部写入最终索引标记。默认值: 1 (不建议更改)。
- `storage_policy` — 存储策略。参见[使用多个区块装置进行数据存储](#)。

## 示例配置

```
ENGINE MergeTree() PARTITION BY toYYYYMM(EventDate) ORDER BY (CounterID, EventDate, intHash32(UserID))
SAMPLE BY intHash32(UserID) SETTINGS index_granularity=8192
```

示例中，我们设为按月分区。

同时我们设置了一个按用户ID哈希的抽样表达式。这让你可以有该表中每个 CounterID 和 EventDate 下面的数据的伪随机分布。如果你在查询时指定了 `SAMPLE` 子句。ClickHouse会返回对于用户子集的一个均匀的伪随机数据采样。

`index_granularity` 可省略，默认值为 8192。

已弃用的建表方法

注意  
不要在新版项目中使用该方法，可能的话，请将旧项目切换到上述方法。

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    name1 [type1] [DEFAULT|MATERIALIZED|ALIAS expr1],
    name2 [type2] [DEFAULT|MATERIALIZED|ALIAS expr2],
    ...
) ENGINE [=] MergeTree(date-column [, sampling_expression], (primary, key), index_granularity)
```

MergeTree() 参数

- `date-column` — 类型为 `Date` 的列名。ClickHouse 会自动依据这个列按月创建分区。分区名格式为 "YYYYMM"。
- `sampling_expression` — 采样表达式。
- `(primary, key)` — 主键。类型 — [Tuple\(\)](#)
- `index_granularity` — 索引粒度。即索引中相邻『标记』之间的数据行数。设为 8192 可以适用大部分场景。

示例

```
MergeTree(EventDate, intHash32(UserID), (CounterID, EventDate, intHash32(UserID)), 8192)
```

对于主要的配置方法，这里 `MergeTree` 引擎跟前面的例子一样，可以以同样的方式配置。

## 数据存储

表由按主键排序的数据 `片段` 组成。

当数据被插入到表中时，会分成数据片段并按主键的字典序排序。例如，主键是 `(CounterID, Date)` 时，片段中数据按 `CounterID` 排序，具有相同 `CounterID` 的部分按 `Date` 排序。

不同分区的数据会被分成不同的片段，ClickHouse 在后台合并数据片段以便更高效存储。不会合并来自不同分区的数据片段。这个合并机制并不保证相同主键的所有行都会合并到同一个数据片段中。

ClickHouse 会为每个数据片段创建一个索引文件，索引文件包含每个索引行（『标记』）的主键值。索引行号定义为 `n * index_granularity`。最大的 `n` 等于总行数除以 `index_granularity` 的值的整数部分。对于每列，跟主键相同的索引行处也会写入『标记』。这些『标记』让你可以直接找到数据所在的列。

你可以只用一单一大表并不断地一块块往里面加入数据 — `MergeTree` 引擎的就是为了这样的场景。

## 主键和索引在查询中的表现

我们以 (CounterID, Date) 以主键。排序好的索引的图示会是下面这样：

全部数据 :	[-----]
CounterID:	[aaaaaaaaaaaaaaaaaaaaabbbbcdfffffffggggggghhhhhhhiiiiiiik11111111]
Date:	[11111112222223331233211112222233211111121222222311112223112233]
标记:	
标记号:	a, 1 a, 2 a, 3 b, 3 e, 2 e, 3 g, 1 h, 2 i, 1 i, 3 l, 3 0 1 2 3 4 5 6 7 8 9 10

如果指定查询如下：

- CounterID in ('a', 'h') , 服务器会读取标记号在 [0, 3) 和 [6, 8) 区间中的数据。
- CounterID IN ('a', 'h') AND Date = 3 , 服务器会读取标记号在 [1, 3) 和 [7, 8) 区间中的数据。
- Date = 3 , 服务器会读取标记号在 [1, 10] 区间中的数据。

上面例子可以看出使用索引通常会比全表描述要高效。

稀疏索引会引起额外的数据读取。当读取主键单个区间范围的数据时，每个数据块中最多会多读 `index_granularity * 2` 行额外的数据。大部分情况下，当 `index_granularity = 8192` 时，ClickHouse的性能并不会降级。

稀疏索引让你能操作有巨量行的表。因为这些索引是常驻内存 (RAM) 的。

ClickHouse 不要求主键惟一。所以，你可以插入多条具有相同主键的行。

## 主键的选择

主键中列的数量并没有明确的限制。依据数据结构，你应该让主键包含多些或少些列。这样可以：

- 改善索引的性能。

如果当前主键是 (a, b) ，然后加入另一个 c 列，满足下面条件时，则可以改善性能： - 有带有 c 列条件的查询。 - 很长的数据范围 (`index_granularity` 的数倍) 里 (a, b) 都是相同的值，并且这种情况很普遍。换言之，就是加入另一列后，可以让你的查询略过很长的数据范围。

- 改善数据压缩。

ClickHouse 以主键排序片段数据，所以，数据的一致性越高，压缩越好。

- [CollapsingMergeTree](#) 和 [SummingMergeTree](#) 引擎里，数据合并时，会有额外的处理逻辑。

在这种情况下，指定一个跟主键不同的 [排序键](#) 也是有意义的。

长的主键会对插入性能和内存消耗有负面影响，但主键中额外的列并不影响 `SELECT` 查询的性能。

## 选择跟排序键不一样主键

指定一个跟排序键（用于排序数据片段中行的表达式）不一样的主键（用于计算写到索引文件的每个标记值的表达式）是可以的。这种情况下，主键表达式元组必须是排序键表达式元组的一个前缀。

当使用 [SummingMergeTree](#) 和 [AggregatingMergeTree](#) 引擎时，这个特性非常有用。通常，使用这类引擎时，表里列分两种：[维度](#) 和 [度量](#)。典型的查询是在 `GROUP BY` 并过滤维度的情况下统计度量列的值。像 [SummingMergeTree](#) 和 [AggregatingMergeTree](#)，用相同的排序键值统计行时，通常会加上所有的维度。结果就是，这键的表达式会是一长串的列组成，并且这组列还会因为新加维度必须频繁更新。

这种情况下，主键中仅预留少量列保证高效范围扫描，剩下的维度列放到排序键元组里。这样是合理的。

[排序键的修改](#) 是轻量级的操作，因为一个新列同时被加入到表里和排序键后时，已存在的数据片段并不需要修改。由于旧的排序键是新排序键的前缀，并且刚刚添加的列中没有数据，因此在表修改时的数据对于新旧的排序键来说都是有序的。

## 索引和分区在查询中的应用

对于 `SELECT` 查询，ClickHouse 分析是否可以使用索引。如果 `WHERE/PREWHERE` 子句具有下面这些表达式（作为谓词链接一子项或整个）则可以使用索引：基于主键或分区键的列或表达式的部分的等式或比较运算表达式；基于主键或分区键的列或表达式的固定前缀的 `IN` 或 `LIKE` 表达式；基于主键或分区键的列的某些函数；基于主键或分区键的表达式的逻辑表达式。

因此，在索引键的一个或多个区间上快速地跑查询都是可能的。下面例子中，指定标签；指定标签和日期范围；指定标签和日期；指定多个标签和日期范围等运行查询，都会非常快。

当引擎配置如下时：

```
ENGINE MergeTree() PARTITION BY toYYYYMM(EventDate) ORDER BY (CounterID, EventDate) SETTINGS  
index_granularity=8192
```

这种情况下，这些查询：

```
SELECT count() FROM table WHERE EventDate = toDate(now()) AND CounterID = 34  
SELECT count() FROM table WHERE EventDate = toDate(now()) AND (CounterID = 34 OR CounterID = 42)  
SELECT count() FROM table WHERE ((EventDate >= toDate('2014-01-01') AND EventDate <= toDate('2014-01-31'))  
OR EventDate = toDate('2014-05-01')) AND CounterID IN (101500, 731962, 160656) AND (CounterID = 101500 OR  
EventDate != toDate('2014-05-01'))
```

ClickHouse 会依据主键索引剪掉不符合的数据，依据按月分区的分区键剪掉那些不包含符合数据的分区。

上文的查询显示，即使索引用于复杂表达式。因为读表操作是组织好的，所以，使用索引不会比完整扫描慢。

下面这个例子中，不会使用索引。

```
SELECT count() FROM table WHERE CounterID = 34 OR URL LIKE '%upyachka%'
```

要检查 ClickHouse 执行一个查询时能否使用索引，可设置 `force_index_by_date` 和 `force_primary_key`。

按月分区的分区键是只能读取包含适当范围日期的数据块。这种情况下，数据块会包含很多天（最多整月）的数据。在块中，数据按主键排序，主键第一列可能不包含日期。因此，仅使用日期而没有带主键前缀条件的查询将会导致读取超过这个日期范围。

### 跳数索引（分段汇总索引，实验性的）

需要设置 `allow_experimental_data_skipping_indices` 为 1 才能使用此索引。（执行 `SET allow_experimental_data_skipping_indices = 1`）。

此索引在 `CREATE` 语句的列部分里定义。

```
INDEX index_name expr TYPE type(...) GRANULARITY granularity_value
```

\*MergeTree 系列的表都能指定跳数索引。

这些索引是由数据块按粒度分割后的每部分在指定表达式上汇总信息 `granularity_value` 组成（粒度大小用表引擎里 `index_granularity` 的指定）。这些汇总信息有助于用 `where` 语句跳过大片不满足的数据，从而减少 `SELECT` 查询从磁盘读取的数据量，

### 示例

```

CREATE TABLE table_name
(
    u64 UInt64,
    i32 Int32,
    s String,
    ...
    INDEX a (u64 * i32, s) TYPE minmax GRANULARITY 3,
    INDEX b (u64 * length(s)) TYPE set(1000) GRANULARITY 4
) ENGINE = MergeTree()
...

```

上例中的索引能让 ClickHouse 执行下面这些查询时减少读取数据量。

```

SELECT count() FROM table WHERE s < 'z'
SELECT count() FROM table WHERE u64 * i32 == 10 AND u64 * length(s) >= 1234

```

索引的可用类型

- `minmax` 存储指定表达式的极值（如果表达式是 `tuple`，则存储 `tuple` 中每个元素的极值），这些信息用于跳过数据块，类似主键。
- `set(max_rows)` 存储指定表达式的惟一值（不超过 `max_rows` 个，`max_rows=0` 则表示『无限制』）。这些信息可用于检查 `WHERE` 表达式是否满足某个数据块。
- `ngrambf_v1(n, size_of_bloom_filter_in_bytes, number_of_hash_functions, random_seed)` 存储包含数据块中所有 `n` 元短语的 **布隆过滤器**。只可用在字符串上。可用于优化 `equals`，`like` 和 `in` 表达式的性能。`n` -- 短语长度。  
`size_of_bloom_filter_in_bytes` -- 布隆过滤器大小，单位字节。（因为压缩得好，可以指定比较大的值，如256或512）。  
`number_of_hash_functions` -- 布隆过滤器中使用的 hash 函数的个数。`random_seed` -- hash 函数的随机种子。
- `tokenbf_v1(size_of_bloom_filter_in_bytes, number_of_hash_functions, random_seed)` 跟 `ngrambf_v1` 类似，不同于 `ngrams` 存储字符串指定长度的所有片段。它只存储被非字母数据字符分割的片段。

```

INDEX sample_index (u64 * length(s)) TYPE minmax GRANULARITY 4
INDEX sample_index2 (u64 * length(str), i32 + f64 * 100, date, str) TYPE set(100) GRANULARITY 4
INDEX sample_index3 (lower(str), str) TYPE ngrambf_v1(3, 256, 2, 0) GRANULARITY 4

```

## 并发数据访问

应对表的并发访问，我们使用多版本机制。换言之，当同时读和更新表时，数据从当前查询到的一组片段中读取。没有冗长的锁。插入不会阻碍读取。

对表的读操作是自动并行的。

## 列和表的TTL

TTL可以设置值的生命周期，它既可以为整张表设置，也可以为每个列字段单独设置。如果 `TTL` 同时作用于表和字段，ClickHouse会使用先到期的那个。

被设置TTL的表，必须拥有 **Date** 或 **DateTime** 类型的字段。要定义数据的生命周期，需要在这个日期字段上使用操作符，例如：

```

TTL time_column
TTL time_column + interval

```

要定义 `interval`，需要使用 **time interval** 操作符。

```

TTL date_time + INTERVAL 1 MONTH
TTL date_time + INTERVAL 15 HOUR

```

## 列字段 TTL

当列字段中的值过期时, ClickHouse会将它们替换成数据类型的默认值。如果分区内, 某一列的所有值均已过期, 则ClickHouse会从文件系统中删除这个分区目录下的列文件。

TTL 子句不能被用于主键字段。

示例说明:

创建一张包含 TTL 的表

```
CREATE TABLE example_table
(
    d DateTime,
    a Int TTL d + INTERVAL 1 MONTH,
    b Int TTL d + INTERVAL 1 MONTH,
    c String
)
ENGINE = MergeTree
PARTITION BY toYYYYMM(d)
ORDER BY d;
```

为表中存在的列字段添加 TTL

```
ALTER TABLE example_table
MODIFY COLUMN
c String TTL d + INTERVAL 1 DAY;
```

修改列字段的 TTL

```
ALTER TABLE example_table
MODIFY COLUMN
c String TTL d + INTERVAL 1 MONTH;
```

## 表 TTL

当表内的数据过期时, ClickHouse会删除所有对应的行。

举例说明:

创建一张包含 TTL 的表

```
CREATE TABLE example_table
(
    d DateTime,
    a Int
)
ENGINE = MergeTree
PARTITION BY toYYYYMM(d)
ORDER BY d
TTL d + INTERVAL 1 MONTH;
```

修改表的 TTL

```
ALTER TABLE example_table
MODIFY TTL d + INTERVAL 1 DAY;
```

## 删除数据

当ClickHouse合并数据分区时, 会删除TTL过期的数据。

当ClickHouse发现数据过期时, 它将会执行一个计划外的合并。要控制这类合并的频率, 你可以设置 [merge\\_with\\_ttl\\_timeout](#)

。如果该值被设置的太低，它将导致执行许多的计划外合并，这可能会消耗大量资源。

如果在合并的时候执行 `SELECT` 查询，则可能会得到过期的数据。为了避免这种情况，可以在 `SELECT` 之前使用 `OPTIMIZE` 查询。

## Using Multiple Block Devices for Data Storage

### Configuration

## 数据副本

只有 MergeTree 系列里的表可支持副本：

- ReplicatedMergeTree
- ReplicatedSummingMergeTree
- ReplicatedReplacingMergeTree
- ReplicatedAggregatingMergeTree
- ReplicatedCollapsingMergeTree
- ReplicatedVersionedCollapsingMergeTree
- ReplicatedGraphiteMergeTree

副本是表级别的，不是整个服务器级的。所以，服务器里可以同时有复制表和非复制表。

副本不依赖分片。每个分片有它自己的独立副本。

对于 `INSERT` 和 `ALTER` 语句操作数据的会在压缩的情况下被复制（更多信息，看 [ALTER](#)）。

而 `CREATE` , `DROP` , `ATTACH` , `DETACH` 和 `RENAME` 语句只会在单个服务器上执行，不会被复制。

- The `CREATE TABLE` 在运行此语句的服务器上创建一个新的可复制表。如果此表已存在其他服务器上，则给该表添加新副本。
- The `DROP TABLE` 删除运行此查询的服务器上的副本。
- The `RENAME` 重命名一个副本。换句话说，可复制表不同的副本可以有不同的名称。

要使用副本，需在配置文件中设置 ZooKeeper 集群的地址。例如：

```
<zookeeper>
  <node index="1">
    <host>example1</host>
    <port>2181</port>
  </node>
  <node index="2">
    <host>example2</host>
    <port>2181</port>
  </node>
  <node index="3">
    <host>example3</host>
    <port>2181</port>
  </node>
</zookeeper>
```

需要 ZooKeeper 3.4.5 或更高版本。

你可以配置任何现有的 ZooKeeper 集群，系统会使用里面的目录来存取元数据（该目录在创建可复制表时指定）。

如果配置文件中没有设置 ZooKeeper，则无法创建复制表，并且任何现有的复制表都将变为只读。

`SELECT` 查询并不需要借助 ZooKeeper，复本并不影响 `SELECT` 的性能，查询复制表与非复制表速度是一样的。查询分布式表时，ClickHouse的处理方式可通过设置 `max_replica_delay_for_distributed_queries` 和 `fallback_to_stale_replicas_for_distributed_queries` 修改。

对于每个 `INSERT` 语句，会通过几个事务将十来个记录添加到 ZooKeeper。（确切地说，这是针对每个插入的数据块；每个 `INSERT` 语句的每 `max_insert_block_size = 1048576` 行和最后剩余的都各算作一个块。）相比非复制表，写 zk 会导致 `INSERT` 的延迟略长一些。但只要你按照建议每秒不超过一个 `INSERT` 地批量插入数据，不会有任何问题。一个 ZooKeeper 集群能给整个 ClickHouse 集群支撑协调每秒几百个 `INSERT`。数据插入的吞吐量（每秒的行数）可以跟不用复制的数据一样高。

对于非常大的集群，你可以把不同的 ZooKeeper 集群用于不同的分片。然而，即使 Yandex.Metrica 集群（大约300台服务器）也证明还不需要这么做。

复制是多主异步。`INSERT` 语句（以及 `ALTER`）可以发给任意可用的服务器。数据会先插入到执行该语句的服务器上，然后被复制到其他服务器。由于它是异步的，在其他副本上最近插入的数据会有一些延迟。如果部分副本不可用，则数据在其可用时再写入。副本可用的情况下，则延迟时长是通过网络传输压缩数据块所需的时间。

默认情况下，`INSERT` 语句仅等待一个副本写入成功后返回。如果数据只成功写入一个副本后该副本所在的服务器不再存在，则存储的数据会丢失。要启用数据写入多个副本才确认返回，使用 `insert_quorum` 选项。

单个数据块写入是原子的。`INSERT` 的数据按每块最多 `max_insert_block_size = 1048576` 行进行分块，换句话说，如果 `INSERT` 插入的行少于 1048576，则该 `INSERT` 是原子的。

数据块会去重。对于被多次写的相同数据块（大小相同且具有相同顺序的相同行的数据块），该块仅会写入一次。这样设计的原因是万一在网络故障时客户端应用程序不知道数据是否成功写入DB，此时可以简单地重复 `INSERT`。把相同的数据发送给多个副本 `INSERT` 并不会有错误。因为这些 `INSERT` 是完全相同的（会被去重）。去重参数参看服务器设置 `merge_tree`。（注意：Replicated\*MergeTree 才会去重，不需要 zookeeper 的不带 MergeTree 不会去重）

在复制期间，只有要插入的源数据通过网络传输。进一步的数据转换（合并）会在所有副本上以相同的方式进行处理执行。这样可以最大限度地减少网络使用，这意味着即使副本在不同的数据中心，数据同步也能工作良好。（能在不同数据中心中的同步数据是副本机制的主要目标。）

你可以给数据做任意多的副本。Yandex.Metrica 在生产中使用双副本。某一些情况下，给每台服务器都使用 RAID-5 或 RAID-6 和 RAID-10。是一种相对可靠和方便的解决方案。

系统会监视副本数据同步情况，并能在发生故障后恢复。故障转移是自动的（对于小的数据差异）或半自动的（当数据差异很大时，这可能意味着有配置错误）。

## 创建复制表

在表引擎名称上加上 `Replicated` 前缀。例如：`ReplicatedMergeTree`。

`Replicated*MergeTree` 参数

- `zoo_path` — ZooKeeper 中该表的路径。
- `replica_name` — ZooKeeper 中的该表的副本名称。

示例：

```
CREATE TABLE table_name
(
    EventDate DateTime,
    CounterID UInt32,
    UserID UInt32
) ENGINE = ReplicatedMergeTree('/clickhouse/tables/{layer}-{shard}/table_name', '{replica}')
PARTITION BY toYYYYMM(EventDate)
ORDER BY (CounterID, EventDate, intHash32(UserID))
SAMPLE BY intHash32(UserID)
```

已弃用的建表语法示例：

```
CREATE TABLE table_name
(
    EventDate DateTime,
    CounterID UInt32,
    UserID UInt32
) ENGINE = ReplicatedMergeTree('/clickhouse/tables/{layer}-{shard}/table_name', '{replica}', EventDate,
intHash32(UserID), (CounterID, EventDate, intHash32(UserID), EventTime), 8192)
```

如上例所示，这些参数可以包含宏替换的占位符，即大括号的部分。它们会被替换为配置文件里 'macros' 那部分配置的值。示例：

```
<macros>
    <layer>05</layer>
    <shard>02</shard>
    <replica>example05-02-1.yandex.ru</replica>
</macros>
```

“ZooKeeper 中该表的路径”对每个可复制表都要是唯一的。不同分片上的表要有不同的路径。这种情况下，路径包含下面这些部分：

/clickhouse/tables/ 是公共前缀，我们推荐使用这个。

{layer}-{shard} 是分片标识部分。在此示例中，由于 Yandex.Metrica 集群使用了两级分片，所以它是由两部分组成的。但对于大多数情况来说，你只需保留 {shard} 占位符即可，它会替换展开为分片标识。

table\_name 是该表在 ZooKeeper 中的名称。使其与 ClickHouse 中的表名相比较好。这里它被明确定义，跟 ClickHouse 表名不一样，它并不会被 RENAME 语句修改。

*HINT:* you could add a database name in front of table\_name as well. E.g. db\_name.table\_name

副本名称用于标识同一个表分片的不同副本。你可以使用服务器名称，如上例所示。同个分片中不同副本的副本名称要唯一。

你也可以显式指定这些参数，而不是使用宏替换。对于测试和配置小型集群这可能会很方便。但是，这种情况下，则不能使用分布式 DDL 语句（ON CLUSTER）。

使用大型集群时，我们建议使用宏替换，因为它可以降低出错的可能性。

在每个副本服务器上运行 CREATE TABLE 查询。将创建新的复制表，或给现有表添加新副本。

如果其他副本上已包含了某些数据，在表上添加新副本，则在运行语句后，数据会从其他副本复制到新副本。换句话说，新副本会与其他副本同步。

要删除副本，使用 DROP TABLE。但它只删除那个 – 位于运行该语句的服务器上的副本。

## 故障恢复

如果服务器启动时 ZooKeeper 不可用，则复制表会切换为只读模式。系统会定期尝试去连接 ZooKeeper。

如果在 INSERT 期间 ZooKeeper 不可用，或者在与 ZooKeeper 交互时发生错误，则抛出异常。

连接到 ZooKeeper 后，系统会检查本地文件系统中的数据集是否与预期的数据集（ZooKeeper 存储此信息）一致。如果存在轻微的不一致，系统会通过与副本同步数据来解决。

如果系统检测到损坏的数据片段（文件大小错误）或无法识别的片段（写入文件系统但未记录在 ZooKeeper 中的部分），则会把它们移动到 'detached' 子目录（不会删除）。而副本中其他任何缺少的但正常数据片段都会被复制同步。

注意，ClickHouse 不会执行任何破坏性操作，例如自动删除大量数据。

当服务器启动（或与 ZooKeeper 建立新会话）时，它只检查所有文件的数量和大小。如果文件大小一致但中间某处已有字节被修改过，不会立即被检测到，只有在尝试读取 SELECT 查询的数据时才会检测到。该查询会引发校验和不匹配或压缩块大小不一致的异常。这种情况下，数据片段会添加到验证队列中，并在必要时从其他副本中复制。

如果本地数据集与预期数据的差异太大，则会触发安全机制。服务器在日志中记录此内容并拒绝启动。这种情况很可能是配置错误，例如，一个分片上的副本意外配置为别的分片上的副本。然而，此机制的阈值设置得相当低，在正常故障恢复期间可能会出现这种情况。在这种情况下，数据恢复则是半自动模式，通过用户主动操作触发。

要触发启动恢复，可在 ZooKeeper 中创建节点 /path\_to\_table/replica\_name/flags/force\_restore\_data，节点值可以是任何内容，或运行命令来恢复所有的可复制表：

```
sudo -u clickhouse touch /var/lib/clickhouse/flags/force_restore_data
```

然后重启服务器。启动时，服务器会删除这些标志并开始恢复。

## 在数据完全丢失后的恢复

如果其中一个服务器的所有数据和元数据都消失了，请按照以下步骤进行恢复：

1. 在服务器上安装 ClickHouse。在包含分片标识符和副本的配置文件中正确定义宏配置，如果有用到的话，
2. 如果服务器上有非复制表则必须手动复制，可以从副本服务器上（在 /var/lib/clickhouse/data/db\_name/table\_name/ 目录中）复制它们的数据。
3. 从副本服务器上中复制位于 /var/lib/clickhouse/metadata/ 中的表定义信息。如果在表定义信息中显式指定了分片或副本标识符，请更正它以使其对应于该副本。（另外，启动服务器，然后会在 /var/lib/clickhouse/metadata/ 中的.sql文件中生成所有的 ATTACH TABLE 语句。）
4. 要开始恢复，ZooKeeper 中创建节点

```
/path_to_table/replica_name/flags/force_restore_data，节点内容不限，或运行命令来恢复所有复制的表： sudo -u clickhouse touch /var/lib/clickhouse/flags/force_restore_data
```

然后启动服务器（如果它已运行则重启）。数据会从副本中下载。

另一种恢复方式是从 ZooKeeper（/path\_to\_table/replica\_name）中删除有数据丢的副本的所有元信息，然后再按照“[创建可复制表](#)”中的描述重新创建副本。

恢复期间的网络带宽没有限制。特别注意这一点，尤其是要一次恢复很多副本。

## MergeTree 转换为 ReplicatedMergeTree

我们使用 MergeTree 来表示 MergeTree 系列 中的所有表引擎，ReplicatedMergeTree 同理。

如果你有一个手动同步的 MergeTree 表，您可以将其转换为可复制表。如果你已经在 MergeTree 表中收集了大量数据，并且现在要启用复制，则可以执行这些操作。

如果各个副本上的数据不一致，则首先对其进行同步，或者除保留的一个副本外，删除其他所有副本上的数据。

重命名现有的 MergeTree 表，然后使用旧名称创建 ReplicatedMergeTree 表。将数据从旧表移动到新表（/var/lib/clickhouse/data/db\_name/table\_name/）目录内的 'detached' 目录中。然后在其中一个副本上运行 ALTER TABLE ATTACH PARTITION，将这些数据片段添加到工作集中。

## ReplicatedMergeTree 转换为 MergeTree

使用其他名称创建 MergeTree 表。将具有 ReplicatedMergeTree 表数据的目录中的所有数据移动到新表的数据目录中。然后删除 ReplicatedMergeTree 表并重新启动服务器。

如果你想在不启动服务器的情况下清除 ReplicatedMergeTree 表：

- 删除元数据目录中的相应 .sql 文件 ( /var/lib/clickhouse/metadata/ )。
- 删除 ZooKeeper 中的相应路径 ( /path\_to\_table/replica\_name )。

之后，你可以启动服务器，创建一个 MergeTree 表，将数据移动到其目录，然后重新启动服务器。

## 当 ZooKeeper 集群中的元数据丢失或损坏时恢复方法

如果 ZooKeeper 中的数据丢失或损坏，如上所述，你可以通过将数据转移到非复制表来保存数据。

## 自定义分区键

MergeTree 系列的表（包括 可复制表）可以使用分区。基于 MergeTree 表的 物化视图 也支持分区。

一个分区是指按指定规则逻辑组合一起的表的记录集。可以按任意标准进行分区，如按月，按日或按事件类型。为了减少需要操作的数据，每个分区都是分开存储的。访问数据时，ClickHouse 尽量使用这些分区的最小子集。

分区是在 建表 的 PARTITION BY expr 子句中指定。分区键可以是关于列的任何表达式。例如，指定按月分区，表达式为 toYYYYMM(date\_column)：

```
CREATE TABLE visits
(
    VisitDate Date,
    Hour UInt8,
    ClientID UUID
)
ENGINE = MergeTree()
PARTITION BY toYYYYMM(VisitDate)
ORDER BY Hour;
```

分区键也可以是表达式元组（类似 主键）。例如：

```
ENGINE = ReplicatedCollapsingMergeTree('/clickhouse/tables/name', 'replica1', Sign)
PARTITION BY (toMonday(StartDate), EventType)
ORDER BY (CounterID, StartDate, intHash32(UserID));
```

上例中，我们设置按一周内的事件类型分区。

新数据插入到表中时，这些数据会存储为按主键排序的新片段（块）。插入后 10-15 分钟，同一分区的各个片段会合并为一个整个片段。

### ⚠ 注意

那些有相同分区表达式值的数据片段才会合并。这意味着 你不应该用太精细的分区方案（超过一千个分区）。否则，会因为文件系统中的文件数量和需要找开的文件描述符过多，导致 SELECT 查询效率不佳。

可以通过 system.parts 表查看表片段和分区信息。例如，假设我们有一个 visits 表，按月分区。对 system.parts 表执行 SELECT：

```
SELECT
    partition,
    name,
    active
FROM system.parts
WHERE table = 'visits'
```

partition	name	active
201901	201901_1_3_1	0
201901	201901_1_9_2	1
201901	201901_8_8_0	0
201901	201901_9_9_0	0
201902	201902_4_6_1	1
201902	201902_10_10_0	1
201902	201902_11_11_0	1

`partition` 列存储分区的名称。此示例中有两个分区：201901 和 201902。在 `ALTER ... PARTITION` 语句中你可以使用该列值来指定分区名称。

`name` 列为分区中数据片段的名称。在 `ALTER ATTACH PART` 语句中你可以使用此列值中来指定片段名称。

这里我们拆解下第一部分的名称：201901\_1\_3\_1：

- 201901 是分区名称。
- 1 是数据块的最小编号。
- 3 是数据块的最大编号。
- 1 是块级别（即在由块组成的合并树中，该块在树中的深度）。

### ⚠ 注意

旧类型表的片段名称为：20190117\_20190123\_2\_2\_0（最小日期 - 最大日期 - 最小块编号 - 最大块编号 - 块级别）。

`active` 列为片段状态。1 激活状态；0 非激活状态。非激活片段是那些在合并到较大片段之后剩余的源数据片段。损坏的数据片段也表示为非活动状态。

正如在示例中所看到的，同一分区中有几个独立的片段（例如，201901\_1\_3\_1 和 201901\_1\_9\_2）。这意味着这些片段尚未合并。ClickHouse 大约在插入后15分钟定期报告合并操作，合并插入的数据片段。此外，你也可以使用 `OPTIMIZE` 语句直接执行合并。例：

```
OPTIMIZE TABLE visits PARTITION 201902;
```

partition	name	active
201901	201901_1_3_1	0
201901	201901_1_9_2	1
201901	201901_8_8_0	0
201901	201901_9_9_0	0
201902	201902_4_6_1	0
201902	201902_4_11_2	1
201902	201902_10_10_0	0
201902	201902_11_11_0	0

非激活片段会在合并后的10分钟左右删除。

查看片段和分区信息的另一种方法是进入表的目录：`/var/lib/clickhouse/data/<database>/<table>/`。例如：

```
dev:/var/lib/clickhouse/data/default/visits$ ls -l
total 40
drwxr-xr-x 2 clickhouse clickhouse 4096 Feb  1 16:48 201901_1_3_1
drwxr-xr-x 2 clickhouse clickhouse 4096 Feb  5 16:17 201901_1_9_2
drwxr-xr-x 2 clickhouse clickhouse 4096 Feb  5 15:52 201901_8_8_0
drwxr-xr-x 2 clickhouse clickhouse 4096 Feb  5 15:52 201901_9_9_0
drwxr-xr-x 2 clickhouse clickhouse 4096 Feb  5 16:17 201902_10_10_0
drwxr-xr-x 2 clickhouse clickhouse 4096 Feb  5 16:17 201902_11_11_0
drwxr-xr-x 2 clickhouse clickhouse 4096 Feb  5 16:19 201902_4_11_2
drwxr-xr-x 2 clickhouse clickhouse 4096 Feb  5 12:09 201902_4_6_1
drwxr-xr-x 2 clickhouse clickhouse 4096 Feb  1 16:48 detached
```

文件夹 '201901\_1\_1\_0' , '201901\_1\_7\_1' 等是片段的目录。每个片段都与一个对应的分区相关，并且只包含这个月的数据（本例中的表按月分区）。

detached 目录存放着使用 **DETACH** 语句从表中分离的片段。损坏的片段也会移到该目录，而不是删除。服务器不使用 detached 目录中的片段。可以随时添加，删除或修改此目录中的数据 – 在运行 **ATTACH** 语句前，服务器不会感知到。

注意，在操作服务器时，你不能手动更改文件系统上的片段集或其数据，因为服务器不会感知到这些修改。对于非复制表，可以在服务器停止时执行这些操作，但不建议这样做。对于复制表，在任何情况下都不要更改片段文件。

ClickHouse 支持对分区执行这些操作：删除分区，从一个表复制到另一个表，或创建备份。了解分区的所有操作，请参阅 [分区和片段的操作](#) 一节。

## ReplacingMergeTree

该引擎和 [MergeTree](#) 的不同之处在于它会删除具有相同主键的重复项。

数据的去重只会在合并的过程中出现。合并在未知的时间在后台进行，因此你无法预先作出计划。有一些数据可能仍未被处理。尽管你可以调用 **OPTIMIZE** 语句发起计划外的合并，但请不要指望使用它，因为 **OPTIMIZE** 语句会引发对大量数据的读和写。

因此， [ReplacingMergeTree](#) 适用于在后台清除重复的数据以节省空间，但是它不保证没有重复的数据出现。

## 建表

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    name1 [type1] [DEFAULT|MATERIALIZED|ALIAS expr1],
    name2 [type2] [DEFAULT|MATERIALIZED|ALIAS expr2],
    ...
) ENGINE = ReplacingMergeTree([ver])
[PARTITION BY expr]
[ORDER BY expr]
[SAMPLE BY expr]
[SETTINGS name=value, ...]
```

请求参数的描述，参考[请求参数](#)。

### ReplacingMergeTree Parameters

- `ver` — 版本列。类型为 `UInt*`，`Date` 或 `DateTime`。可选参数。

合并的时候， [ReplacingMergeTree](#) 从所有具有相同主键的行中选择一行留下： - 如果 `ver` 列未指定，选择最后一条。 - 如果 `ver` 列已指定，选择 `ver` 值最大的版本。

## 子句

创建 [ReplacingMergeTree](#) 表时，需要与创建 [MergeTree](#) 表时相同的[子句](#)。

## 已弃用的建表方法

### 注意

不要在新项目中使用该方法，可能的话，请将旧项目切换到上述方法。

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    name1 [type1] [DEFAULT|MATERIALIZED|ALIAS expr1],
    name2 [type2] [DEFAULT|MATERIALIZED|ALIAS expr2],
    ...
) ENGINE [=] ReplacingMergeTree(date-column [, sampling_expression], (primary, key), index_granularity,
[ver])
```

除了 ver 的所有参数都与 MergeTree 中的含义相同。

- ver - 版本列。可选参数，有关说明，请参阅上文。

## SummingMergeTree

该引擎继承自 MergeTree。区别在于，当合并 SummingMergeTree 表的数据片段时，ClickHouse 会把所有具有相同主键的行合并为一行，该行包含了被合并的行中具有数值数据类型的列的汇总值。如果主键的组合方式使得单个键值对应于大量的行，则可以显著的减少存储空间并加快数据查询的速度。

我们推荐将该引擎和 MergeTree 一起使用。例如，在准备做报告的时候，将完整的数据存储在 MergeTree 表中，并且使用 SummingMergeTree 来存储聚合数据。这种方法可以使你避免因为使用不正确的主键组合方式而丢失有价值的数据。

## 建表

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    name1 [type1] [DEFAULT|MATERIALIZED|ALIAS expr1],
    name2 [type2] [DEFAULT|MATERIALIZED|ALIAS expr2],
    ...
) ENGINE = SummingMergeTree([columns])
[PARTITION BY expr]
[ORDER BY expr]
[SAMPLE BY expr]
[SETTINGS name=value, ...]
```

请求参数的描述，参考 [请求描述](#)。

SummingMergeTree 的参数

- columns - 包含了将要被汇总的列的列名的元组。可选参数。所选的列必须是数值类型，并且不可位于主键中。  
如果没有指定 columns，ClickHouse 会把所有不在主键中的数值类型的列都进行汇总。

## 子句

创建 SummingMergeTree 表时，需要与创建 MergeTree 表时相同的[子句](#)。

## 已弃用的建表方法

### 注意

不要在新项目中使用该方法，可能的话，请将旧项目切换到上述方法。

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    name1 [type1] [DEFAULT|MATERIALIZED|ALIAS expr1],
    name2 [type2] [DEFAULT|MATERIALIZED|ALIAS expr2],
    ...
) ENGINE [=] SummingMergeTree(date-column [, sampling_expression], (primary, key), index_granularity,
[columns])
```

除 columns 外的所有参数都与 MergeTree 中的含义相同。

- columns — 包含将要被汇总的列的列名的元组。可选参数。有关说明，请参阅上文。

## 用法示例

考虑如下的表：

```
CREATE TABLE summertt
(
    key UInt32,
    value UInt32
)
ENGINE = SummingMergeTree()
ORDER BY key
```

向其中插入数据：

```
:) INSERT INTO summertt Values(1,1),(1,2),(2,1)
```

ClickHouse 可能不会完整的汇总所有行（[见下文](#)），因此我们在查询中使用了聚合函数 sum 和 GROUP BY 子句。

```
SELECT key, sum(value) FROM summertt GROUP BY key
```

key	sum(value)
2	1
1	3

## 数据处理

当数据被插入到表中时，他们将被原样保存。ClickHouse 定期合并插入的数据片段，并在这个时候对所有具有相同主键的行中的列进行汇总，将这些行替换为包含汇总数据的一行记录。

ClickHouse 会按片段合并数据，以至于不同的数据片段中会包含具有相同主键的行，即单个汇总片段将会是不完整的。因此，聚合函数 sum() 和 GROUP BY 子句应该在（SELECT）查询语句中被使用，如上文中的例子所述。

### 汇总的通用规则

列中数值类型的值会被汇总。这些列的集合在参数 columns 中被定义。

如果用于汇总的所有列中的值均为0，则该行会被删除。

如果列不在主键中且无法被汇总，则会在现有的值中任选一个。

主键所在的列中的值不会被汇总。

## AggregateFunction 列中的汇总

对于 **AggregateFunction** 类型的列，ClickHouse 根据对应函数表现为 **AggregatingMergeTree** 引擎的聚合。

### 嵌套结构

表中可以具有以特殊方式处理的嵌套数据结构。

如果嵌套表的名称以 `Map` 结尾，并且包含至少两个符合以下条件的列：

- 第一列是数值类型 (`*Int*`, `Date`, `DateTime`)，我们称之为 `key`，
- 其他的列是可计算的 (`*Int*`, `Float32/64`)，我们称之为 `(values...)`，

然后这个嵌套表会被解释为一个 `key => (values...)` 的映射，当合并它们的行时，两个数据集中的元素会被根据 `key` 合并为相应的 `(values...)` 的汇总值。

示例：

```
[(1, 100)] + [(2, 150)] -> [(1, 100), (2, 150)]
[(1, 100)] + [(1, 150)] -> [(1, 250)]
[(1, 100)] + [(1, 150), (2, 150)] -> [(1, 250), (2, 150)]
[(1, 100), (2, 150)] + [(1, -100)] -> [(2, 150)]
```

请求数据时，使用 `sumMap(key, value)` 函数来对 `Map` 进行聚合。

对于嵌套数据结构，你无需在列的元组中指定列以进行汇总。

## AggregatingMergeTree

该引擎继承自 **MergeTree**，并改变了数据片段的合并逻辑。 ClickHouse 会将相同主键的所有行（在一个数据片段内）替换为单个存储一系列聚合函数状态的行。

可以使用 `AggregatingMergeTree` 表来做增量数据统计聚合，包括物化视图的数据聚合。

引擎需使用 **AggregateFunction** 类型来处理所有列。

如果要按一组规则来合并减少行数，则使用 `AggregatingMergeTree` 是合适的。

## 建表

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    name1 [type1] [DEFAULT|MATERIALIZED|ALIAS expr1],
    name2 [type2] [DEFAULT|MATERIALIZED|ALIAS expr2],
    ...
) ENGINE = AggregatingMergeTree()
[PARTITION BY expr]
[ORDER BY expr]
[SAMPLE BY expr]
[SETTINGS name=value, ...]
```

语句参数的说明，请参阅 [语句描述](#)。

### 子句

创建 `AggregatingMergeTree` 表时，需用跟创建 `MergeTree` 表一样的子句。

## 已弃用的建表方法

!!! 注意 不要在新项目中使用该方法，可能的话，请将旧项目切换到上述方法。

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    name1 [type1] [DEFAULT|MATERIALIZED|ALIAS expr1],
    name2 [type2] [DEFAULT|MATERIALIZED|ALIAS expr2],
    ...
) ENGINE [=] AggregatingMergeTree(date-column [, sampling_expression], (primary, key),
index_granularity)
```

上面的所有参数跟 MergeTree 中的一样。

## SELECT 和 INSERT

插入数据，需使用带有聚合 -State- 函数的 **INSERT SELECT** 语句。从 AggregatingMergeTree 表中查询数据时，需使用 GROUP BY 子句并且要使用与插入时相同的聚合函数，但后缀要改为 -Merge 。

在 **SELECT** 查询的结果中，对于 ClickHouse 的所有输出格式 AggregateFunction 类型的值都实现了特定的二进制表示法。如果直接用 **SELECT** 导出这些数据，例如如用 TabSeparated 格式，那么这些导出数据也能直接用 **INSERT** 语句加载导入。

## 聚合物化视图的示例

创建一个跟踪 `test.visits` 表的 AggregatingMergeTree 物化视图：

```
CREATE MATERIALIZED VIEW test.basic
ENGINE = AggregatingMergeTree() PARTITION BY toYYYYMM(StartDate) ORDER BY (CounterID, StartDate)
AS SELECT
    CounterID,
    StartDate,
    sumState(Sign) AS Visits,
    uniqState(UserID) AS Users
FROM test.visits
GROUP BY CounterID, StartDate;
```

向 `test.visits` 表中插入数据。

```
INSERT INTO test.visits ...
```

数据会同时插入到表和视图中，并且视图 `test.basic` 会将里面的数据聚合。

要获取聚合数据，我们需要在 `test.basic` 视图上执行类似 `SELECT ... GROUP BY ...` 这样的查询：

```
SELECT
    StartDate,
    sumMerge(Visits) AS Visits,
    uniqMerge(Users) AS Users
FROM test.basic
GROUP BY StartDate
ORDER BY StartDate;
```

## CollapsingMergeTree

该引擎继承于 **MergeTree**，并在数据块合并算法中添加了折叠行的逻辑。

`CollapsingMergeTree` 会异步的删除（折叠）这些除了特定列 `Sign` 有 1 和 -1 的值以外，其余所有字段的值都相等的成对

的行。没有成对的行会被保留。更多的细节请看本文的[折叠部分](#)。

因此，该引擎可以显著的降低存储量并提高 `SELECT` 查询效率。

## 建表

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    name1 [type1] [DEFAULT|MATERIALIZED|ALIAS expr1],
    name2 [type2] [DEFAULT|MATERIALIZED|ALIAS expr2],
    ...
) ENGINE = CollapsingMergeTree(sign)
[PARTITION BY expr]
[ORDER BY expr]
[SAMPLE BY expr]
[SETTINGS name=value, ...]
```

请求参数的描述，参考[请求参数](#)。

`CollapsingMergeTree` 参数

- `sign` — 类型列的名称：`1` 是“状态”行，`-1` 是“取消”行。

列数据类型 — `Int8`。

## 子句

创建 `CollapsingMergeTree` 表时，需要与创建 `MergeTree` 表时相同的[子句](#)。

 已弃用的建表方法

 注意

不要在新项目中使用该方法，可能的话，请将旧项目切换到上述方法。

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    name1 [type1] [DEFAULT|MATERIALIZED|ALIAS expr1],
    name2 [type2] [DEFAULT|MATERIALIZED|ALIAS expr2],
    ...
) ENGINE [=] CollapsingMergeTree(date-column [, sampling_expression], (primary, key),
index_granularity, sign)
```

除了 `sign` 的所有参数都与 `MergeTree` 中的含义相同。

- `sign` — 类型列的名称：`1` 是“状态”行，`-1` 是“取消”行。

列数据类型 — `Int8`。

## 折叠

### 数据

考虑你需要为某个对象保存不断变化的数据的情景。似乎为一个对象保存一行记录并在其发生任何变化时更新记录是合乎逻辑的，但是更新操作对 DBMS 来说是昂贵且缓慢的，因为它需要重写存储中的数据。如果你需要快速的写入数据，则更新操作是不可接受的，但是你可以按下面的描述顺序地更新一个对象的变化。

在写入行的时候使用特定的列 `Sign`。如果 `Sign = 1` 则表示这一行是对象的状态，我们称之为“状态”行。如果 `Sign = -1` 则表示是对具有相同属性的状态行的取消，我们称之为“取消”行。

例如，我们想要计算用户在某个站点访问的页面数以及他们在那停留的时间。在某个时候，我们将用户的活动状态写

入下面这样的行。

UserID	PageViews	Duration	Sign
4324182021466249494	5	146	1

一段时间后，我们写入下面的两行来记录用户活动的变化。

UserID	PageViews	Duration	Sign
4324182021466249494	5	146	-1
4324182021466249494	6	185	1

第一行取消了这个对象（用户）的状态。它需要复制被取消的状态行的所有除了 Sign 的属性。

第二行包含了当前的状态。

因为我们只需要用户活动的最后状态，这些行

UserID	PageViews	Duration	Sign
4324182021466249494	5	146	1
4324182021466249494	5	146	-1

可以在折叠对象的失效（老的）状态的时候被删除。 CollapsingMergeTree 会在合并数据片段的时候做这件事。

为什么我们每次改变需要 2 行可以阅读[算法](#)段。

这种方法的特殊属性

1. 写入的程序应该记住对象的状态从而可以取消它。“取消”字符串应该是“状态”字符串的复制，除了相反的 Sign。它增加了存储的初始数据的大小，但使得写入数据更快速。
2. 由于写入的负载，列中长的增长阵列会降低引擎的效率。数据越简单，效率越高。
3. SELECT 的结果很大程度取决于对象变更历史的一致性。在准备插入数据时要准确。在不一致的数据中会得到不可预料的结果，例如，像会话深度这种非负指标的负值。

## 算法

当 ClickHouse 合并数据片段时，每组具有相同主键的连续行被减少到不超过两行，一行 Sign = 1（“状态”行），另一行 Sign = -1（“取消”行），换句话说，数据项被折叠了。

对每个结果的数据部分 ClickHouse 保存：

1. 第一个“取消”和最后一个“状态”行，如果“状态”和“取消”行的数量匹配且最后一个行是“状态”行
2. 最后一个“状态”行，如果“状态”行比“取消”行多一个或一个以上。
3. 第一个“取消”行，如果“取消”行比“状态”行多一个或一个以上。
4. 没有行，在其他所有情况下。

合并会继续，但是 ClickHouse 会把此情况视为逻辑错误并将其记录在服务日志中。这个错误会在相同的数据被插入超过一次时出现。

因此，折叠不应该改变统计数据的结果。变化逐渐地被折叠，因此最终几乎每个对象都只剩下了最后的状态。

Sign 是必须的因为合并算法不保证所有有相同主键的行都会在同一个结果数据片段中，甚至是在同一台物理服务器上。 ClickHouse 用多线程来处理 SELECT 请求，所以它不能预测结果中行的顺序。如果要从 CollapsingMergeTree 表中获取完全“折叠”后的数据，则需要聚合。

要完成折叠，请使用 GROUP BY 子句和用于处理符号的聚合函数编写请求。例如，要计算数量，使用 sum(Sign) 而不是

`count()`。要计算某物的总和，使用 `sum(Sign * x)` 而不是 `sum(x)`，并添加 HAVING `sum(Sign) > 0` 子句。

聚合体 `count`, `sum` 和 `avg` 可以用这种方式计算。如果一个对象至少有一个未被折叠的状态，则可以计算 `uniq` 聚合。`min` 和 `max` 聚合无法计算，因为 `CollapsingMergeTree` 不会保存折叠状态的值的历史记录。

如果你需要在不进行聚合的情况下获取数据（例如，要检查是否存在最新值与特定条件匹配的行），你可以在 `FROM` 从句中使用 `FINAL` 修饰符。这种方法显然是更低效的。

## 示例

示例数据：

UserID	PageViews	Duration	Sign
4324182021466249494	5	146	1
4324182021466249494	5	146	-1
4324182021466249494	6	185	1

建表：

```
CREATE TABLE UAct
(
    UserID UInt64,
    PageViews UInt8,
    Duration UInt8,
    Sign Int8
)
ENGINE = CollapsingMergeTree(Sign)
ORDER BY UserID
```

插入数据：

```
INSERT INTO UAct VALUES (4324182021466249494, 5, 146, 1)
```

```
INSERT INTO UAct VALUES (4324182021466249494, 5, 146, -1), (4324182021466249494, 6, 185, 1)
```

我们使用两次 `INSERT` 请求来创建两个不同的数据片段。如果我们使用一个请求插入数据，ClickHouse 只会创建一个数据片段且不会执行任何合并操作。

获取数据：

```
SELECT * FROM UAct
```

UserID	PageViews	Duration	Sign
4324182021466249494	5	146	-1
4324182021466249494	6	185	1

UserID	PageViews	Duration	Sign
4324182021466249494	5	146	1

我们看到了什么，哪里有折叠？

通过两个 `INSERT` 请求，我们创建了两个数据片段。`SELECT` 请求在两个线程中被执行，我们得到了随机顺序的行。没有发生折叠是因为还没有合并数据片段。ClickHouse 在一个我们无法预料的未知时刻合并数据片段。

因此我们需要聚合：

```

SELECT
    UserID,
    sum(PageViews * Sign) AS PageViews,
    sum(Duration * Sign) AS Duration
FROM UAct
GROUP BY UserID
HAVING sum(Sign) > 0

```

UserID	PageViews	Duration
4324182021466249494	6	185

如果我们不需要聚合并想要强制进行折叠，我们可以在 FROM 从句中使用 FINAL 修饰语。

```
SELECT * FROM UAct FINAL
```

UserID	PageViews	Duration	Sign
4324182021466249494	6	185	1

这种查询数据的方法是非常低效的。不要在大表中使用它。

## VersionedCollapsingMergeTree

This engine:

- Allows quick writing of object states that are continually changing.
- Deletes old object states in the background. This significantly reduces the volume of storage.

See the section [Collapsing](#) for details.

The engine inherits from [MergeTree](#) and adds the logic for collapsing rows to the algorithm for merging data parts.

`VersionedCollapsingMergeTree` serves the same purpose as [CollapsingMergeTree](#) but uses a different collapsing algorithm that allows inserting the data in any order with multiple threads. In particular, the `Version` column helps to collapse the rows properly even if they are inserted in the wrong order. In contrast, [CollapsingMergeTree](#) allows only strictly consecutive insertion.

## Creating a Table

```

CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    name1 [type1] [DEFAULT|MATERIALIZED|ALIAS expr1],
    name2 [type2] [DEFAULT|MATERIALIZED|ALIAS expr2],
    ...
) ENGINE = VersionedCollapsingMergeTree(sign, version)
[PARTITION BY expr]
[ORDER BY expr]
[SAMPLE BY expr]
[SETTINGS name=value, ...]

```

For a description of query parameters, see the[query description](#).

### Engine Parameters

```
VersionedCollapsingMergeTree(sign, version)
```

- `sign` — Name of the column with the type of row:`1` is a "state" row, `-1` is a "cancel" row.

The column data type should be `Int8`.

- `version` — Name of the column with the version of the object state.

The column data type should be `UInt*`.

## Query Clauses

When creating a `VersionedCollapsingMergeTree` table, the same **clauses** are required as when creating a `MergeTree` table.

**Deprecated Method for Creating a Table**

**Attention**

Do not use this method in new projects. If possible, switch the old projects to the method described above.

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    name1 [type1] [DEFAULT|MATERIALIZED|ALIAS expr1],
    name2 [type2] [DEFAULT|MATERIALIZED|ALIAS expr2],
    ...
) ENGINE [=] VersionedCollapsingMergeTree(date-column [, sampling_expression], (primary, key),
index_granularity, sign, version)
```

All of the parameters except `sign` and `version` have the same meaning as in `MergeTree`.

- `sign` — Name of the column with the type of row: `1` is a "state" row, `-1` is a "cancel" row.  
Column Data Type — `Int8`.
- `version` — Name of the column with the version of the object state.

The column data type should be `UInt*`.

## Collapsing

### Data

Consider a situation where you need to save continually changing data for some object. It is reasonable to have one row for an object and update the row whenever there are changes. However, the update operation is expensive and slow for a DBMS because it requires rewriting the data in the storage. Update is not acceptable if you need to write data quickly, but you can write the changes to an object sequentially as follows.

Use the `Sign` column when writing the row. If `Sign = 1` it means that the row is a state of an object (let's call it the "state" row). If `Sign = -1` it indicates the cancellation of the state of an object with the same attributes (let's call it the "cancel" row). Also use the `Version` column, which should identify each state of an object with a separate number.

For example, we want to calculate how many pages users visited on some site and how long they were there. At some point in time we write the following row with the state of user activity:

UserID	PageViews	Duration	Sign	Version
4324182021466249494	5	146	1	1

At some point later we register the change of user activity and write it with the following two rows.

UserID	PageViews	Duration	Sign	Version
4324182021466249494	5	146	-1	1
4324182021466249494	6	185	1	2

The first row cancels the previous state of the object (user). It should copy all of the fields of the canceled state except

Sign .

The second row contains the current state.

Because we need only the last state of user activity, the rows

User ID	Page Views	Duration	Sign	Version
4324182021466249494	5	146	1	1
4324182021466249494	5	146	-1	1

can be deleted, collapsing the invalid (old) state of the object. `VersionedCollapsingMergeTree` does this while merging the data parts.

To find out why we need two rows for each change, see [Algorithm](#).

#### Notes on Usage

1. The program that writes the data should remember the state of an object in order to cancel it. The "cancel" string should be a copy of the "state" string with the opposite `Sign`. This increases the initial size of storage but allows to write the data quickly.
2. Long growing arrays in columns reduce the efficiency of the engine due to the load for writing. The more straightforward the data, the better the efficiency.
3. `SELECT` results depend strongly on the consistency of the history of object changes. Be accurate when preparing data for inserting. You can get unpredictable results with inconsistent data, such as negative values for non-negative metrics like session depth.

#### Algorithm

When ClickHouse merges data parts, it deletes each pair of rows that have the same primary key and version and different `Sign`. The order of rows does not matter.

When ClickHouse inserts data, it orders rows by the primary key. If the `Version` column is not in the primary key, ClickHouse adds it to the primary key implicitly as the last field and uses it for ordering.

#### Selecting Data

ClickHouse doesn't guarantee that all of the rows with the same primary key will be in the same resulting data part or even on the same physical server. This is true both for writing the data and for subsequent merging of the data parts. In addition, ClickHouse processes `SELECT` queries with multiple threads, and it cannot predict the order of rows in the result. This means that aggregation is required if there is a need to get completely "collapsed" data from a `VersionedCollapsingMergeTree` table.

To finalize collapsing, write a query with a `GROUP BY` clause and aggregate functions that account for the sign. For example, to calculate quantity, use `sum(Sign)` instead of `count()`. To calculate the sum of something, use `sum(Sign * x)` instead of `sum(x)`, and add `HAVING sum(Sign) > 0`.

The aggregates `count`, `sum` and `avg` can be calculated this way. The aggregate `uniq` can be calculated if an object has at least one non-collapsed state. The aggregates `min` and `max` can't be calculated because `VersionedCollapsingMergeTree` does not save the history of values of collapsed states.

If you need to extract the data with "collapsing" but without aggregation (for example, to check whether rows are present whose newest values match certain conditions), you can use the `FINAL` modifier for the `FROM` clause. This approach is inefficient and should not be used with large tables.

#### Example of Use

Example data:

UserID	PageViews	Duration	Sign	Version
4324182021466249494	5	146	1	1
4324182021466249494	5	146	-1	1
4324182021466249494	6	185	1	2

Creating the table:

```
CREATE TABLE UAct
(
    UserID UInt64,
    PageViews UInt8,
    Duration UInt8,
    Sign Int8,
    Version UInt8
)
ENGINE = VersionedCollapsingMergeTree(Sign, Version)
ORDER BY UserID
```

Inserting the data:

```
INSERT INTO UAct VALUES (4324182021466249494, 5, 146, 1, 1)
```

```
INSERT INTO UAct VALUES (4324182021466249494, 5, 146, -1, 1), (4324182021466249494, 6, 185, 1, 2)
```

We use two `INSERT` queries to create two different data parts. If we insert the data with a single query, ClickHouse creates one data part and will never perform any merge.

Getting the data:

```
SELECT * FROM UAct
```

UserID	PageViews	Duration	Sign	Version
4324182021466249494	5	146	1	1
4324182021466249494	5	146	-1	1
4324182021466249494	6	185	1	2

What do we see here and where are the collapsed parts? We created two data parts using two `INSERT` queries. The `SELECT` query was performed in two threads, and the result is a random order of rows. Collapsing did not occur because the data parts have not been merged yet. ClickHouse merges data parts at an unknown point in time which we cannot predict.

This is why we need aggregation:

```
SELECT
    UserID,
    sum(PageViews * Sign) AS PageViews,
    sum(Duration * Sign) AS Duration,
    Version
FROM UAct
GROUP BY UserID, Version
HAVING sum(Sign) > 0
```

UserID	PageViews	Duration	Version
4324182021466249494	6	185	2

If we don't need aggregation and want to force collapsing, we can use the `FINAL` modifier for the `FROM` clause.

```
SELECT * FROM UAct FINAL
```

UserID	PageViews	Duration	Sign	Version
4324182021466249494	6	185	1	2

This is a very inefficient way to select data. Don't use it for large tables.

## GraphiteMergeTree

This engine is designed for thinning and aggregating/averaging (rollup) [Graphite](#) data. It may be helpful to developers who want to use ClickHouse as a data store for Graphite.

You can use any ClickHouse table engine to store the Graphite data if you don't need rollup, but if you need a rollup use `GraphiteMergeTree`. The engine reduces the volume of storage and increases the efficiency of queries from Graphite.

The engine inherits properties from [MergeTree](#).

### Creating a Table

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    Path String,
    Time DateTime,
    Value <Numeric_type>,
    Version <Numeric_type>
    ...
) ENGINE = GraphiteMergeTree(config_section)
[PARTITION BY expr]
[ORDER BY expr]
[SAMPLE BY expr]
[SETTINGS name=value, ...]
```

See a detailed description of the [CREATE TABLE](#) query.

A table for the Graphite data should have the following columns for the following data:

- Metric name (Graphite sensor). Data type: `String`.
- Time of measuring the metric. Data type: `DateTime`.
- Value of the metric. Data type: any numeric.
- Version of the metric. Data type: any numeric.

ClickHouse saves the rows with the highest version or the last written if versions are the same. Other rows are deleted during the merge of data parts.

The names of these columns should be set in the rollup configuration.

### GraphiteMergeTree parameters

- `config_section` — Name of the section in the configuration file, where are the rules of rollup set.

### Query clauses

When creating a `GraphiteMergeTree` table, the same [clauses](#) are required, as when creating a `MergeTree` table.

## Deprecated Method for Creating a Table

### Attention

Do not use this method in new projects and, if possible, switch the old projects to the method described above.

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    EventDate Date,
    Path String,
    Time DateTime,
    Value <Numeric_type>,
    Version <Numeric_type>
    ...
) ENGINE [=] GraphiteMergeTree(date-column [, sampling_expression], (primary, key), index_granularity,
config_section)
```

All of the parameters excepting config\_section have the same meaning as in MergeTree .

- config\_section — Name of the section in the configuration file, where are the rules of rollup set.

## Rollup configuration

The settings for rollup are defined by the `graphite_rollup` parameter in the server configuration. The name of the parameter could be any. You can create several configurations and use them for different tables.

Rollup configuration structure:

```
required-columns
patterns
```

### Required Columns

- `path_column_name` — The name of the column storing the metric name (Graphite sensor). Default value: `Path` .
- `time_column_name` — The name of the column storing the time of measuring the metric. Default value: `Time` .
- `value_column_name` — The name of the column storing the value of the metric at the time set in `time_column_name` . Default value: `Value` .
- `version_column_name` — The name of the column storing the version of the metric. Default value: `Timestamp` .

### Patterns

Structure of the `patterns` section:

```
pattern
  regexp
  function
pattern
  regexp
  age + precision
  ...
pattern
  regexp
  function
  age + precision
  ...
pattern
  ...
default
  function
  age + precision
  ...
```

## ⚠ Attention

Patterns must be strictly ordered:

1. Patterns without function or retention .
2. Patterns with both function and retention .
3. Pattern default .

When processing a row, ClickHouse checks the rules in the pattern sections. Each of pattern (including default ) sections can contain function parameter for aggregation, retention parameters or both. If the metric name matches the regexp , the rules from the pattern section (or sections) are applied; otherwise, the rules from the default section are used.

Fields for pattern and default sections:

- regexp – A pattern for the metric name.
- age – The minimum age of the data in seconds.
- precision – How precisely to define the age of the data in seconds. Should be a divisor for 86400 (seconds in a day).
- function – The name of the aggregating function to apply to data whose age falls within the range[age, age + precision] .

## Configuration Example

```
<graphite_rollup>
    <version_column_name>Version</version_column_name>
    <pattern>
        <regexp>click_cost</regexp>
        <function>any</function>
        <retention>
            <age>0</age>
            <precision>5</precision>
        </retention>
        <retention>
            <age>86400</age>
            <precision>60</precision>
        </retention>
    </pattern>
    <default>
        <function>max</function>
        <retention>
            <age>0</age>
            <precision>60</precision>
        </retention>
        <retention>
            <age>3600</age>
            <precision>300</precision>
        </retention>
        <retention>
            <age>86400</age>
            <precision>3600</precision>
        </retention>
    </default>
</graphite_rollup>
```

## 日志引擎系列

这些引擎是为了需要写入许多小数据量（少于一百万行）的表的场景而开发的。

这系列的引擎有：

- StripeLog

- Log
- TinyLog

## 共同属性

引擎：

- 数据存储在磁盘上。
- 写入时将数据追加在文件末尾。
- 不支持突变操作。
- 不支持索引。

这意味着 SELECT 在范围查询时效率不高。

- 非原子地写入数据。

如果某些事情破坏了写操作，例如服务器的异常关闭，你将会得到一张包含了损坏数据的表。

## 差异

Log 和 StripeLog 引擎支持：

- 并发访问数据的锁。

INSERT 请求执行过程中表会被锁定，并且其他的读写数据的请求都会等待直到锁定被解除。如果没有写数据的请求，任意数量的读请求都可以并发执行。

- 并行读取数据。

在读取数据时，ClickHouse 使用多线程。每个线程处理不同的数据块。

Log 引擎为表中的每一列使用不同的文件。StripeLog 将所有的数据存储在一个文件中。因此 StripeLog 引擎在操作系统中使用更少的描述符，但是 Log 引擎提供更高的读性能。

TinyLog 引擎是该系列中最简单的引擎并且提供了最少的功能和最低的性能。TinyLog 引擎不支持并行读取和并发数据访问，并将每一列存储在不同的文件中。它比其余两种支持并行读取的引擎的读取速度更慢，并且使用了和 Log 引擎同样多的描述符。你可以在简单的低负载的情景下使用它。

## StripeLog

该引擎属于日志引擎系列。请在[日志引擎系列](#)文章中查看引擎的共同属性和差异。

在你需要写入许多小数据量（小于一百万行）的表的场景下使用这个引擎。

## 建表

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    column1_name [type1] [DEFAULT|MATERIALIZED|ALIAS expr1],
    column2_name [type2] [DEFAULT|MATERIALIZED|ALIAS expr2],
    ...
) ENGINE = StripeLog
```

查看[建表](#)请求的详细说明。

## 写数据

StripeLog 引擎将所有列存储在一个文件中。对每一次 Insert 请求，ClickHouse 将数据块追加在表文件的末尾，逐列写入。

ClickHouse 为每张表写入以下文件：

- data.bin — 数据文件。
- index.mrk — 带标记的文件。标记包含了已插入的每个数据块中每列的偏移量。

StripeLog 引擎不支持 ALTER UPDATE 和 ALTER DELETE 操作。

## 读数据

带标记的文件使得 ClickHouse 可以并行的读取数据。这意味着 SELECT 请求返回行的顺序是不可预测的。使用 ORDER BY 子句对行进行排序。

## 使用示例

建表：

```
CREATE TABLE stripe_log_table
(
    timestamp DateTime,
    message_type String,
    message String
)
ENGINE = StripeLog
```

插入数据：

```
INSERT INTO stripe_log_table VALUES (now(), 'REGULAR', 'The first regular message')
INSERT INTO stripe_log_table VALUES (now(), 'REGULAR', 'The second regular message'),(now(), 'WARNING', 'The first warning message')
```

我们使用两次 INSERT 请求从而在 data.bin 文件中创建两个数据块。

ClickHouse 在查询数据时使用多线程。每个线程读取单独的数据块并在完成后独立的返回结果行。这样的结果是，大多数情况下，输出中块的顺序和输入时相应块的顺序是不同的。例如：

```
SELECT * FROM stripe_log_table
```

timestamp	message_type	message
2019-01-18 14:27:32	REGULAR	The second regular message
2019-01-18 14:34:53	WARNING	The first warning message
timestamp	message_type	message
2019-01-18 14:23:43	REGULAR	The first regular message

对结果排序（默认增序）：

```
SELECT * FROM stripe_log_table ORDER BY timestamp
```

timestamp	message_type	message
2019-01-18 14:23:43	REGULAR	The first regular message
2019-01-18 14:27:32	REGULAR	The second regular message
2019-01-18 14:34:53	WARNING	The first warning message

## Log

日志与 TinyLog 的不同之处在于，“标记”的小文件与列文件存在一起。这些标记写在每个数据块上，并且包含偏移量，这些偏移量指示从哪里开始读取文件以便跳过指定的行数。这使得可以在多个线程中读取表数据。对于并发数据访问，可以同时执行读取操作，而写入操作则阻塞读取和其它写入。Log 引擎不支持索引。同样，如果写入表失败，则该表将被破坏，并且从该表读取将返回错误。Log 引擎适用于临时数据，write-once 表以及测试或演示目的。

## TinyLog

最简单的表引擎，用于将数据存储在磁盘上。每列都存储在单独的压缩文件中。写入时，数据将附加到文件末尾。

并发数据访问不受任何限制：- 如果同时从表中读取并在不同的查询中写入，则读取操作将抛出异常 - 如果同时写入多个查询中的表，则数据将被破坏。

这种表引擎的典型用法是 write-once：首先只写入一次数据，然后根据需要多次读取。查询在单个流中执行。换句话说，此引擎适用于相对较小的表（建议最多1,000,000行）。如果您有许多小表，则使用此表引擎是适合的，因为它比Log引擎更简单（需要打开的文件更少）。当您拥有大量小表时，可能会导致性能低下，但在可能已经在其它 DBMS 时使用过，则您可能会发现切换使用 TinyLog 类型的表更容易。不支持索引。

在 Yandex.Metrica 中，TinyLog 表用于小批量处理的中间数据。

## Kafka

此引擎与 [Apache Kafka](#) 结合使用。

Kafka 特性：

- 发布或者订阅数据流。
- 容错存储机制。
- 处理流数据。

老版格式：

```
Kafka(kafka_broker_list, kafka_topic_list, kafka_group_name, kafka_format  
[, kafka_row_delimiter, kafka_schema, kafka_num_consumers])
```

新版格式：

```
Kafka SETTINGS  
kafka_broker_list = 'localhost:9092',  
kafka_topic_list = 'topic1,topic2',  
kafka_group_name = 'group1',  
kafka_format = 'JSONEachRow',  
kafka_row_delimiter = '\n',  
kafka_schema = '',  
kafka_num_consumers = 2
```

必要参数：

- `kafka_broker_list` – 以逗号分隔的 brokers 列表 (`localhost:9092`)。
- `kafka_topic_list` – topic 列表 (`my_topic`)。
- `kafka_group_name` – Kafka 消费组名称 (`group1`)。如果不希望消息在集群中重复，请在每个分片中使用相同的组名。
- `kafka_format` – 消息体格式。使用与 SQL 部分的 `FORMAT` 函数相同表示方法，例如 `JSONEachRow`。了解详细信息，请参考 `Formats` 部分。

可选参数：

- `kafka_row_delimiter` - 每个消息体（记录）之间的分隔符。
- `kafka_schema` – 如果解析格式需要一个 schema 时，此参数必填。例如，**Cap'n Proto** 需要 schema 文件路径以及根对象 `schema.capnp:Message` 的名字。
- `kafka_num_consumers` – 单个表的消费者数量。默认值是：1，如果一个消费者的吞吐量不足，则指定更多的消费者。消费者的总数不应该超过 topic 中分区的数量，因为每个分区只能分配一个消费者。

示例：

```
CREATE TABLE queue (
    timestamp UInt64,
    level String,
    message String
) ENGINE = Kafka('localhost:9092', 'topic', 'group1', 'JSONEachRow');

SELECT * FROM queue LIMIT 5;

CREATE TABLE queue2 (
    timestamp UInt64,
    level String,
    message String
) ENGINE = Kafka SETTINGS kafka_broker_list = 'localhost:9092',
                    kafka_topic_list = 'topic',
                    kafka_group_name = 'group1',
                    kafka_format = 'JSONEachRow',
                    kafka_num_consumers = 4;

CREATE TABLE queue2 (
    timestamp UInt64,
    level String,
    message String
) ENGINE = Kafka('localhost:9092', 'topic', 'group1')
            SETTINGS kafka_format = 'JSONEachRow',
                    kafka_num_consumers = 4;
```

消费的消息会被自动追踪，因此每个消息在不同的消费组里只会记录一次。如果希望获得两次数据，则使用另一个组名创建副本。

消费组可以灵活配置并且在集群之间同步。例如，如果群集中有10个主题和5个表副本，则每个副本将获得2个主题。如果副本数量发生变化，主题将自动在副本中重新分配。了解更多信息请访问 <http://kafka.apache.org/intro>。

`SELECT` 查询对于读取消息并不是很有用（调试除外），因为每条消息只能被读取一次。使用物化视图创建实时线程更实用。您可以这样做：

1. 使用引擎创建一个 Kafka 消费者并作为一条数据流。
2. 创建一个结构表。
3. 创建物化视图，该视图会在后台转换引擎中的数据并将其放入之前创建的表中。

当 `MATERIALIZED VIEW` 添加至引擎，它将会在后台收集数据。可以持续不断地从 Kafka 收集数据并通过 `SELECT` 将数据转换为所需要的格式。

示例：

```

CREATE TABLE queue (
    timestamp UInt64,
    level String,
    message String
) ENGINE = Kafka('localhost:9092', 'topic', 'group1', 'JSONEachRow');

CREATE TABLE daily (
    day Date,
    level String,
    total UInt64
) ENGINE = SummingMergeTree(day, (day, level), 8192);

CREATE MATERIALIZED VIEW consumer TO daily
AS SELECT toDate(toDateTime(timestamp)) AS day, level, count() as total
FROM queue GROUP BY day, level;

SELECT level, sum(total) FROM daily GROUP BY level;

```

为了提高性能，接受的消息被分组为 `max_insert_block_size` 大小的块。如果未在 `stream_flush_interval_ms` 毫秒内形成块，则不关心块的完整性，都会将数据刷新到表中。

停止接收主题数据或更改转换逻辑，请 `detach` 物化视图：

```

DETACH TABLE consumer;
ATTACH MATERIALIZED VIEW consumer;

```

如果使用 `ALTER` 更改目标表，为了避免目标表与视图中的数据之间存在差异，推荐停止物化视图。

## 配置

与 `GraphiteMergeTree` 类似，`Kafka` 引擎支持使用 `ClickHouse` 配置文件进行扩展配置。可以使用两个配置键：全局 (`kafka`) 和 主题级别 (`kafka_*`)。首先应用全局配置，然后应用主题级配置（如果存在）。

```

<!-- Global configuration options for all tables of Kafka engine type -->
<kafka>
    <debug>cgrp</debug>
    <auto_offset_reset>smallest</auto_offset_reset>
</kafka>

<!-- Configuration specific for topic "logs" -->
<kafka_logs>
    <retry_backoff_ms>250</retry_backoff_ms>
    <fetch_min_bytes>100000</fetch_min_bytes>
</kafka_logs>

```

有关详细配置选项列表，请参阅 [librdkafka configuration reference](#)。在 `ClickHouse` 配置中使用下划线 (`_`)，并不是使用点 (`.`)。例如，`checkcrcs=true` 将是 `<check_crcs>true</check_crcs>`。

## MySQL

`MySQL` 引擎可以对存储在远程 MySQL 服务器上的数据执行 `SELECT` 查询。

调用格式：

```
MySQL('host:port', 'database', 'table', 'user', 'password'[, 'replace_query', 'on_duplicate_clause']);
```

### 调用参数

- `host:port` — MySQL 服务器地址。
- `database` — 数据库的名称。

- `table` — 表名称。
- `user` — 数据库用户。
- `password` — 用户密码。
- `replace_query` — 将 `INSERT INTO` 查询是否替换为 `REPLACE INTO` 的标志。如果 `replace_query=1`，则替换查询。
- `'on_duplicate_clause'` — 将 `ON DUPLICATE KEY UPDATE 'on_duplicate_clause'` 表达式添加到 `INSERT` 查询语句中。例如：`impression = VALUES(impression) + impression`。如果需要指定 `'on_duplicate_clause'`，则需要设置 `replace_query=0`。如果同时设置 `replace_query = 1` 和 `'on_duplicate_clause'`，则会抛出异常。

此时，简单的 `WHERE` 子句（例如 `=, !=, >, >=, <, <=`）是在 MySQL 服务器上执行。

其余条件以及 `LIMIT` 采样约束语句仅在对 MySQL 的查询完成后才在 ClickHouse 中执行。

MySQL 引擎不支持 `Nullable` 数据类型，因此，当从 MySQL 表中读取数据时，`NULL` 将转换为指定列类型的默认值（通常为 0 或空字符串）。

## JDBC

Allows ClickHouse to connect to external databases via [JDBC](#).

To implement the JDBC connection, ClickHouse uses the separate program [clickhouse-jdbc-bridge](#) that should run as a daemon.

This engine supports the `Nullable` data type.

### Creating a Table

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name
(
    columns list...
)
ENGINE = JDBC(dbms_uri, external_database, external_table)
```

#### Engine Parameters

- `dbms_uri` — URI of an external DBMS.

Format: `jdbc:<driver_name>://<host_name>:<port>/?user=<username>&password=<password>` . Example for MySQL:  
`jdbc:mysql://localhost:3306/?user=root&password=root` .

- `external_database` — Database in an external DBMS.
- `external_table` — Name of the table in `external_database` .

### Usage Example

Creating a table in MySQL server by connecting directly with its console client:

```

mysql> CREATE TABLE `test`.`test` (
    ->   `int_id` INT NOT NULL AUTO_INCREMENT,
    ->   `int_nullable` INT NULL DEFAULT NULL,
    ->   `float` FLOAT NOT NULL,
    ->   `float_nullable` FLOAT NULL DEFAULT NULL,
    ->   PRIMARY KEY (`int_id`));
Query OK, 0 rows affected (0,09 sec)

mysql> insert into test (`int_id`, `float`) VALUES (1,2);
Query OK, 1 row affected (0,00 sec)

mysql> select * from test;
+-----+-----+-----+-----+
| int_id | int_nullable | float | float_nullable |
+-----+-----+-----+-----+
|      1 |        NULL |     2 |        NULL |
+-----+-----+-----+-----+
1 row in set (0,00 sec)

```

Creating a table in ClickHouse server and selecting data from it:

```

CREATE TABLE jdbc_table
(
    `int_id` Int32,
    `int_nullable` Nullable(Int32),
    `float` Float32,
    `float_nullable` Nullable(Float32)
)
ENGINE JDBC('jdbc:mysql://localhost:3306/?user=root&password=root', 'test', 'test')

SELECT *
FROM jdbc_table

```

int_id	int_nullable	float	float_nullable
1	NULL	2	NULL

## See Also

- [JDBC table function](#).

## ODBC

Allows ClickHouse to connect to external databases via[ODBC](#).

To safely implement ODBC connections, ClickHouse uses a separate program `clickhouse-odbc-bridge`. If the ODBC driver is loaded directly from `clickhouse-server`, driver problems can crash the ClickHouse server. ClickHouse automatically starts `clickhouse-odbc-bridge` when it is required. The ODBC bridge program is installed from the same package as the `clickhouse-server`.

This engine supports the [Nullable](#) data type.

## Creating a Table

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    name1 [type1],
    name2 [type2],
    ...
)
ENGINE = ODBC(connection_settings, external_database, external_table)
```

See a detailed description of the [CREATE TABLE](#) query.

The table structure can differ from the source table structure:

- Column names should be the same as in the source table, but you can use just some of these columns and in any order.
- Column types may differ from those in the source table. ClickHouse tries to [cast](#) values to the ClickHouse data types.

#### Engine Parameters

- `connection_settings` — Name of the section with connection settings in the `odbc.ini` file.
- `external_database` — Name of a database in an external DBMS.
- `external_table` — Name of a table in the `external_database`.

## Usage Example

Retrieving data from the local MySQL installation via ODBC

This example is checked for Ubuntu Linux 18.04 and MySQL server 5.7.

Ensure that unixODBC and MySQL Connector are installed.

By default (if installed from packages), ClickHouse starts as user `clickhouse`. Thus, you need to create and configure this user in the MySQL server.

```
$ sudo mysql

mysql> CREATE USER 'clickhouse'@'localhost' IDENTIFIED BY 'clickhouse';
mysql> GRANT ALL PRIVILEGES ON *.* TO 'clickhouse'@'clickhouse' WITH GRANT OPTION;
```

Then configure the connection in `/etc/odbc.ini`.

```
$ cat /etc/odbc.ini
[mysqlconn]
DRIVER = /usr/local/lib/libmyodbc5w.so
SERVER = 127.0.0.1
PORT = 3306
DATABASE = test
USERNAME = clickhouse
PASSWORD = clickhouse
```

You can check the connection using the `isql` utility from the unixODBC installation.

```
$ isql -v mysqlconn
+-----+
| Connected! |
|           |
...           |
```

Table in MySQL:

```

mysql> CREATE TABLE `test`.`test` (
    ->   `int_id` INT NOT NULL AUTO_INCREMENT,
    ->   `int_nullable` INT NULL DEFAULT NULL,
    ->   `float` FLOAT NOT NULL,
    ->   `float_nullable` FLOAT NULL DEFAULT NULL,
    ->   PRIMARY KEY (`int_id`));
Query OK, 0 rows affected (0,09 sec)

mysql> insert into test (`int_id`, `float`) VALUES (1,2);
Query OK, 1 row affected (0,00 sec)

mysql> select * from test;
+-----+-----+-----+-----+
| int_id | int_nullable | float | float_nullable |
+-----+-----+-----+-----+
|      1 |        NULL |     2 |        NULL |
+-----+-----+-----+-----+
1 row in set (0,00 sec)

```

Table in ClickHouse, retrieving data from the MySQL table:

```

CREATE TABLE odbc_t
(
    `int_id` Int32,
    `float_nullable` Nullable(Float32)
)
ENGINE = ODBC('DSN=mysqlconn', 'test', 'test')

SELECT * FROM odbc_t

```

int_id	float_nullable
1	NULL

## See Also

- [ODBC external dictionaries](#)
- [ODBC table function](#)

## HDFS

This engine provides integration with [Apache Hadoop](#) ecosystem by allowing to manage data on [HDFS](#) via ClickHouse. This engine is similar to the [File](#) and [URL](#) engines, but provides Hadoop-specific features.

## Usage

```
ENGINE = HDFS(URI, format)
```

The `URI` parameter is the whole file URI in HDFS. The `format` parameter specifies one of the available file formats. To perform `SELECT` queries, the `format` must be supported for input, and to perform `INSERT` queries -- for output. The available formats are listed in the [Formats](#) section. The path part of `URI` may contain globs. In this case the table would be readonly.

Example:

1. Set up the `hdfs_engine_table` table:

```
CREATE TABLE hdfs_engine_table (name String, value UInt32) ENGINE=HDFS('hdfs://hdfs1:9000/other_storage', 'TSV')
```

2. Fill file:

```
INSERT INTO hdfs_engine_table VALUES ('one', 1), ('two', 2), ('three', 3)
```

3. Query the data:

```
SELECT * FROM hdfs_engine_table LIMIT 2
```

name	value
one	1
two	2

## Implementation Details

- Reads and writes can be parallel
- Not supported:
  - ALTER and SELECT...SAMPLE operations.
  - Indexes.
  - Replication.

### Globs in path

Multiple path components can have globs. For being processed file should exists and matches to the whole path pattern. Listing of files determines during `SELECT` (not at `CREATE` moment).

- `*` — Substitutes any number of any characters except / including empty string.
- `?` — Substitutes any single character.
- `{some_string,another_string,yet_another_one}` — Substitutes any of strings 'some\_string', 'another\_string', 'yet\_another\_one'.
- `{N..M}` — Substitutes any number in range from N to M including both borders.

Constructions with `{}` are similar to the `remote` table function.

### Example

1. Suppose we have several files in TSV format with the following URIs on HDFS:
2. 'hdfs://hdfs1:9000/some\_dir/some\_file\_1'
3. 'hdfs://hdfs1:9000/some\_dir/some\_file\_2'
4. 'hdfs://hdfs1:9000/some\_dir/some\_file\_3'
5. 'hdfs://hdfs1:9000/another\_dir/some\_file\_1'
6. 'hdfs://hdfs1:9000/another\_dir/some\_file\_2'
7. 'hdfs://hdfs1:9000/another\_dir/some\_file\_3'
8. There are several ways to make a table consisting of all six files:

```
CREATE TABLE table_with_range (name String, value UInt32) ENGINE = HDFS('hdfs://hdfs1:9000/{some,another}_dir/some_file_{1..3}', 'TSV')
```

Another way:

```
CREATE TABLE table_with_question_mark (name String, value UInt32) ENGINE =
HDFS('hdfs://hdfs1:9000/{some,another}_dir/some_file_?', 'TSV')
```

Table consists of all the files in both directories (all files should satisfy format and schema described in query):

```
CREATE TABLE table_with_asterisk (name String, value UInt32) ENGINE =
HDFS('hdfs://hdfs1:9000/{some,another}_dir/*', 'TSV')
```

### ⚠ Warning

If the listing of files contains number ranges with leading zeros, use the construction with braces for each digit separately or use `?.`

## Example

Create table with files named file000 , file001 , ... , file999 :

```
CREATE TABLE big_table (name String, value UInt32) ENGINE = HDFS('hdfs://hdfs1:9000/big_dir/file{0..9}{0..9}{0..9}', 'CSV')
```

## Virtual Columns

- `_path` — Path to the file.
- `_file` — Name of the file.

## See Also

- [Virtual columns](#)

## Distributed

分布式引擎本身不存储数据, 但可以在多个服务器上进行分布式查询。读是自动并行的。读取时, 远程服务器表的索引(如果有的话)会被使用。分布式引擎参数: 服务器配置文件中的集群名, 远程数据库名, 远程表名, 数据分片键(可选)。  
示例:

```
Distributed(logs, default, hits[, sharding_key])
```

将会从位于“logs”集群中 `default.hits` 表所有服务器上读取数据。远程服务器不仅用于读取数据, 还会对尽可能数据做部分处理。例如, 对于使用 GROUP BY 的查询, 数据首先在远程服务器聚合, 之后返回聚合函数的中间状态给查询请求的服务器。再在请求的服务器上进一步汇总数据。

数据库名参数除了用数据库名之外, 也可用返回字符串的常量表达式。例如: `currentDatabase()`。

`logs` – 服务器配置文件中的集群名称。

集群示例配置如下:

```

<remote_servers>
  <logs>
    <shard>
      <!-- Optional. Shard weight when writing data. Default: 1. -->
      <weight>1</weight>
      <!-- Optional. Whether to write data to just one of the replicas. Default: false (write data to all replicas). -->
      <internal_replication>false</internal_replication>
      <replica>
        <host>example01-01-1</host>
        <port>9000</port>
      </replica>
      <replica>
        <host>example01-01-2</host>
        <port>9000</port>
      </replica>
    </shard>
    <shard>
      <weight>2</weight>
      <internal_replication>false</internal_replication>
      <replica>
        <host>example01-02-1</host>
        <port>9000</port>
      </replica>
      <replica>
        <host>example01-02-2</host>
        <secure>1</secure>
        <port>9440</port>
      </replica>
    </shard>
  </logs>
</remote_servers>

```

这里定义了一个名为'logs'的集群，它由两个分片组成，每个分片包含两个副本。分片是指包含数据不同部分的服务器（要读取所有数据，必须访问所有分片）。副本是存储复制数据的服务器（要读取所有数据，访问任一副本上的数据即可）。

集群名称不能包含点号。

每个服务器需要指定 host , port , 和可选的 user , password , secure , compression 的参数：

- host – 远程服务器地址。可以域名、IPv4或IPv6。如果指定域名，则服务在启动时发起一个 DNS 请求，并且请求结果会在服务器运行期间一直被记录。如果 DNS 请求失败，则服务不会启动。如果你修改了 DNS 记录，则需要重启服务。
- port – 消息传递的 TCP 端口（「tcp\_port」配置通常设为 9000）。不要跟 http\_port 混淆。
- user – 用于连接远程服务器的用户名。默认值：default。该用户必须有权限访问该远程服务器。访问权限配置在 users.xml 文件中。更多信息，请查看“访问权限”部分。
- password – 用于连接远程服务器的密码。默认值：空字符串。
- secure – 是否使用ssl进行连接，设为true时，通常也应该设置 port = 9440。服务器也要监听 9440 并有正确的证书。
- compression - 是否使用数据压缩。默认值：true。

配置了副本，读取操作会从每个分片里选择一个可用的副本。可配置负载平衡算法（挑选副本的方式）- 请参阅“load\_balancing”设置。如果跟服务器的连接不可用，则在尝试短超时的重连。如果重连失败，则选择下一个副本，依此类推。如果跟所有副本的连接尝试都失败，则尝试用相同的方式再重复几次。该机制有利于系统可用性，但不保证完全容错：如有远程服务器能够接受连接，但无法正常工作或状况不佳。

你可以配置一个（这种情况下，查询操作更应该称为远程查询，而不是分布式查询）或任意多个分片。在每个分片中，可以配置一个或任意多个副本。不同分片可配置不同数量的副本。

可以在配置中配置任意数量的集群。

要查看集群，可使用“system.clusters”表。

通过分布式引擎可以像使用本地服务器一样使用集群。但是，集群不是自动扩展的：你必须编写集群配置到服务器配置文件中（最好，给所有集群的服务器写上完整配置）。

不支持用分布式表查询别的分布式表（除非该表只有一个分片）。或者说，要用分布表查查询“最终”的数据表。

分布式引擎需要将集群信息写入配置文件。配置文件中的集群信息会即时更新，无需重启服务器。如果你每次是要向不确定的一组分片和副本发送查询，则不适合创建分布式表 - 而应该使用“远程”表函数。请参阅“表函数”部分。

向集群写数据的方法有两种：

一，自己指定要将哪些数据写入哪些服务器，并直接在每个分片上执行写入。换句话说，在分布式表上“查询”，在数据表上 INSERT。这是最灵活的解决方案 – 你可以使用任何分片方案，对于复杂业务特性的需求，这可能是非常重要的。这也是最佳解决方案，因为数据可以完全独立地写入不同的分片。

二，在分布式表上执行 INSERT。在这种情况下，分布式表会跨服务器分发插入数据。为了写入分布式表，必须要配置分片键（最后一个参数）。当然，如果只有一个分片，则写操作在没有分片键的情况下也能工作，因为这种情况下分片键没有意义。

每个分片都可以在配置文件中定义权重。默认情况下，权重等于1。数据依据分片权重按比例分发到分片上。例如，如果有两个分片，第一个分片的权重是9，而第二个分片的权重是10，则发送 9 / 19 的行到第一个分片，10 / 19 的行到第二个分片。

分片可在配置文件中定义 'internal\_replication' 参数。

此参数设置为“true”时，写操作只选一个正常的副本写入数据。如果分布式表的子表是复制表(\*ReplicaMergeTree)，请使用此方案。换句话说，这其实是把数据的复制工作交给实际需要写入数据的表本身而不是分布式表。

若此参数设置为“false”（默认值），写操作会将数据写入所有副本。实质上，这意味着要分布式表本身来复制数据。这种方式不如使用复制表的好，因为不会检查副本的一致性，并且随着时间的推移，副本数据可能会有些不一样。

选择将一行数据发送到哪个分片的方法是，首先计算分片表达式，然后将这个计算结果除以所有分片的权重总和得到余数。该行会发送到那个包含该余数的从'prev\_weight'到'prev\_weights + weight'的半闭半开区间对应的分片上，其中 'prev\_weights' 是该分片前面的所有分片的权重和，'weight' 是该分片的权重。例如，如果有两个分片，第一个分片权重为9，而第二个分片权重为10，则余数在 [0,9) 中的行发给第一个分片，余数在 [9,19) 中的行发给第二个分片。

分片表达式可以是由常量和表列组成的任何返回整数表达式。例如，您可以使用表达式 'rand()' 来随机分配数据，或者使用 'UserID' 来按用户 ID 的余数分布（相同用户的 data 将分配到单个分片上，这可降低带有用户信息的 IN 和 JOIN 的语句运行的复杂度）。如果该列数据分布不够均匀，可以将其包装在散列函数中：intHash64(UserID)。

这种简单的用余数来选择分片的方案是有局限的，并不总适用。它适用于中型和大型数据（数十台服务器）的场景，但不适用于巨量数据（数百台或更多服务器）的场景。后一种情况下，应根据业务特性需求考虑的分片方案，而不是直接用分布式表的多分片。

SELECT 查询会被发送到所有分片，并且无论数据在分片中如何分布（即使数据完全随机分布）都可正常工作。添加新分片时，不必将旧数据传输到该分片。你可以给新分片分配大权重然后写新数据 - 数据可能会稍分布不均，但查询会正确高效地运行。

下面的情况，你需要关注分片方案：

- 使用需要特定键连接数据（IN 或 JOIN）的查询。如果数据是用该键进行分片，则应使用本地 IN 或 JOIN 而不是 GLOBAL IN 或 GLOBAL JOIN，这样效率更高。
- 使用大量服务器（上百或更多），但有大量小查询（个别客户的查询 - 网站，广告商或合作伙伴）。为了使小查询不影响整个集群，让单个客户的数据处于单个分片上是有意义的。或者，正如我们在 Yandex.Metrica 中所做的那样，你可以配置两级分片：将整个集群划分为“层”，一个层可以包含多个分片。单个客户的数据位于单个层上，根据需要将分片添加到层中，层中的数据随机分布。然后给每层创建分布式表，再创建一个全局的分布式表用于全局的查询。

数据是异步写入的。对于分布式表的 INSERT , 数据块只写本地文件系统。之后会尽快地在后台发送到远程服务器。你可以通过查看表目录中的文件列表 (等待发送的数据) 来检查数据是否成功发送 : /var/lib/clickhouse/data/database/table/ 。

如果在 INSERT 到分布式表时服务器节点丢失或重启 (如, 设备故障), 则插入的数据可能会丢失。如果在表目录中检测到损坏的数据分片, 则会将其转移到“broken”子目录, 并不再使用。

启用 max\_parallel\_replicas 选项后, 会在分表的所有副本上并行查询处理。更多信息, 请参阅“设置, max\_parallel\_replicas”部分。

## External Data for Query Processing

ClickHouse 允许向服务器发送处理查询所需的数据以及 SELECT 查询。这些数据放在一个临时表中 (请参阅 “临时表”一节), 可以在查询中使用 (例如, 在 IN 操作符中)。

例如, 如果您有一个包含重要用户标识符的文本文件, 则可以将其与使用此列表过滤的查询一起上传到服务器。

如果需要使用大量外部数据运行多个查询, 请不要使用该特性。最好提前把数据上传到数据库。

可以使用命令行客户端 (在非交互模式下) 或使用 HTTP 接口上传外部数据。

在命令行客户端中, 您可以指定格式的参数部分

```
--external --file=... [--name=...] [--format=...] [--types=...|--structure=...]
```

对于传输的表的数量, 可能有多个这样的部分。

--external – 标记子句的开始。--file – 带有表存储的文件的路径, 或者, 它指的是STDIN。只能从 stdin 中检索单个表。

以下的参数是可选的 : --name – 表的名称, 如果省略, 则采用 \_data。--format – 文件中的数据格式。如果省略, 则使用 TabSeparated。

以下的参数必选一个 : --types – 逗号分隔列类型的列表。例如 : UInt64,String 。列将被命名为 \_1 , \_2 , ... --structure – 表结构的格式 UserID UInt64 , URL String 。定义列的名字以及类型。

在 "file" 中指定的文件将由 "format" 中指定的格式解析, 使用在 "types" 或 "structure" 中指定的数据类型。该表将被上传到服务器, 并在作为名称为 "name" 临时表。

示例 :

```
echo -ne "1\n2\n3\n" | clickhouse-client --query="SELECT count() FROM test.visits WHERE TraficSourceID IN _data" --external --file=- --types=Int8
849897
cat /etc/passwd | sed 's/:/\t/g' | clickhouse-client --query="SELECT shell, count() AS c FROM passwd GROUP BY shell ORDER BY c DESC" --external --file=- --name=passwd --structure='login String, unused String, uid UInt16, gid UInt16, comment String, home String, shell String'
/bin/sh 20
/bin/false      5
/bin/bash        4
/usr/sbin/nologin      1
/bin/sync        1
```

当使用HTTP接口时, 外部数据以 multipart/form-data 格式传递。每个表作为一个单独的文件传输。表名取自文件名。 "query\_string" 传递参数 "name\_format"、 "name\_types" 和 "name\_structure" , 其中 "name" 是这些参数对应的表的名称。参数的含义与使用命令行客户端时的含义相同。

示例 :

```

cat /etc/passwd | sed 's/:/\t/g' > passwd.tsv

curl -F 'passwd=@passwd.tsv;' 'http://localhost:8123/?query=SELECT+shell,+count()+AS+c+FROM+passwd+GROUP+BY+shell+ORDER+BY+c+DESC&passwd_structure=login+String,+uni

/bin/sh 20
/bin/false      5
/bin/bash        4
/usr/sbin/nologin      1
/bin/sync        1

```

对于分布式查询，将临时表发送到所有远程服务器。

## Dictionary

Dictionary 引擎将字典数据展示为一个ClickHouse的表。

例如，考虑使用一个具有以下配置的 products 字典：

```

<dictionaries>
<dictionary>
    <name>products</name>
    <source>
        <odbc>
            <table>products</table>
            <connection_string>DSN=some-db-server</connection_string>
        </odbc>
    </source>
    <lifetime>
        <min>300</min>
        <max>360</max>
    </lifetime>
    <layout>
        <flat/>
    </layout>
    <structure>
        <id>
            <name>product_id</name>
        </id>
        <attribute>
            <name>title</name>
            <type>String</type>
            <null_value></null_value>
        </attribute>
    </structure>
</dictionary>
</dictionaries>

```

查询字典中的数据：

```

select name, type, key, attribute.names, attribute.types, bytes_allocated, element_count, source from
system.dictionaries where name = 'products';

SELECT
    name,
    type,
    key,
    attribute.names,
    attribute.types,
    bytes_allocated,
    element_count,
    source
FROM system.dictionaries
WHERE name = 'products'

```

name	type	key	attribute.names	attribute.types	bytes_allocated	element_count	source
.products	Flat	UInt64	['title']	['String']	23065376	175032	ODBC:

你可以使用 `dictGet*` 函数来获取这种格式的字典数据。

当你需要获取原始数据，或者是想要使用 `JOIN` 操作的时候，这种视图并没有什么帮助。对于这些情况，你可以使用 `Dictionary` 引擎，它可以将字典数据展示在表中。

语法：

```
CREATE TABLE %table_name% (%fields%) engine = Dictionary(%dictionary_name%)`
```

示例：

```
create table products (product_id UInt64, title String) Engine = Dictionary(products);

CREATE TABLE products
(
    product_id UInt64,
    title String,
)
ENGINE = Dictionary(products)
```

Ok.

0 rows in set. Elapsed: 0.004 sec.

看一看表中的内容。

```
select * from products limit 1;

SELECT *
FROM products
LIMIT 1
```

product_id	title
152689	Some item

1 rows in set. Elapsed: 0.006 sec.

## Merge

`Merge` 引擎 (不要跟 `MergeTree` 引擎混淆) 本身不存储数据，但可用于同时从任意多个其他的表中读取数据。读是自动并行的，不支持写入。读取时，那些被真正读取到数据的表的索引（如果有的话）会被使用。`Merge` 引擎的参数：一个数据库名和一个用于匹配表名的正则表达式。

示例：

```
Merge(hits, '^WatchLog')
```

数据会从 `hits` 数据库中表名匹配正则 '`^WatchLog`' 的表中读取。

除了数据库名，你也可以用一个返回字符串的常量表达式。例如，`currentDatabase()`。

正则表达式 — `re2` (支持 PCRE 一个子集的功能) , 大小写敏感。了解关于正则表达式中转义字符的说明可参看 "match" 一节。

当选择需要读的表时 , `Merge` 表本身会被排除 , 即使它匹配上了该正则。这样设计为了避免循环。当然 , 是能够创建两个相互无限递归读取对方数据的 `Merge` 表的 , 但这并没有什么意义。

`Merge` 引擎的一个典型应用是可以像使用一张表一样使用大量的 `TinyLog` 表。

示例 2 :

我们假定你有一个旧表 (`WatchLog_old`) , 你想改变数据分区了 , 但又不想把旧数据转移到新表 (`WatchLog_new`) 里 , 并且你需要同时能看到这两个表的数据。

```
CREATE TABLE WatchLog_old(date Date, UserId Int64, EventType String, Cnt UInt64)
ENGINE=MergeTree(date, (UserId, EventType), 8192);
INSERT INTO WatchLog_old VALUES ('2018-01-01', 1, 'hit', 3);

CREATE TABLE WatchLog_new(date Date, UserId Int64, EventType String, Cnt UInt64)
ENGINE=MergeTree PARTITION BY date ORDER BY (UserId, EventType) SETTINGS index_granularity=8192;
INSERT INTO WatchLog_new VALUES ('2018-01-02', 2, 'hit', 3);

CREATE TABLE WatchLog as WatchLog_old ENGINE=Merge(currentDatabase(), '^WatchLog');
```

```
SELECT *
FROM WatchLog
```

date	UserId	EventType	Cnt
2018-01-01	1	hit	3
2018-01-02	2	hit	3

## 虚拟列

虚拟列是一种由表引擎提供而不是在表定义中的列。换种说法就是 , 这些列并没有在 `CREATE TABLE` 中指定 , 但可以在 `SELECT` 中使用。

下面列出虚拟列跟普通列的不同点 :

- 虚拟列不在表结构定义里指定。
- 不能用 `INSERT` 向虚拟列写数据。
- 使用不指定列名的 `INSERT` 语句时 , 虚拟列要会被忽略掉。
- 使用星号通配符 ( `SELECT *` ) 时虚拟列不会包含在里面。
- 虚拟列不会出现在 `SHOW CREATE TABLE` 和 `DESC TABLE` 的查询结果里。

`Merge` 类型的表包括一个 `String` 类型的 `_table` 虚拟列。(如果该表本来已有了一个 `_table` 的列 , 那这个虚拟列会命名为 `_table1` ; 如果 `_table1` 也本就存在了 , 那这个虚拟列会被命名为 `_table2` , 依此类推) 该列包含被读数据的表名。

如果 `WHERE/PREWHERE` 子句包含了带 `_table` 的条件 , 并且没有依赖其他的列 (如作为表达式谓词链接的一个子项或作为整个的表达式) , 这些条件的作用会像索引一样。这些条件会在那些可能被读数据的表的表名上执行 , 并且读操作只会在那些满足了该条件的表上去执行。

## File(InputFormat)

数据源是以 Clickhouse 支持的一种输入格式 ( `TabSeparated` , `Native` 等 ) 存储数据的文件。

用法示例 :

- 从 ClickHouse 导出数据到文件。
- 将数据从一种格式转换为另一种格式。
- 通过编辑磁盘上的文件来更新 ClickHouse 中的数据。

## 在 ClickHouse 服务器中的使用

### File(Format)

选用的 Format 需要支持 INSERT 或 SELECT。有关支持格式的完整列表，请参阅 [格式](#)。

ClickHouse 不支持给 File 指定文件系统路径。它使用服务器配置中 path 设定的文件夹。

使用 File(Format) 创建表时，它会在该文件夹中创建空的子目录。当数据写入该表时，它会写到该子目录中的 data.Format 文件中。

你也可以在服务器文件系统中手动创建这些子文件夹和文件，然后通过 [ATTACH](#) 将其创建为具有对应名称的表，这样你就可以从该文件中查询数据了。

!!! 注意 注意这个功能，因为 ClickHouse 不会跟踪这些文件在外部的更改。在 ClickHouse 中和 ClickHouse 外部同时写入会造成结果是不确定的。

示例：

1. 创建 file\_engine\_table 表：

```
CREATE TABLE file_engine_table (name String, value UInt32) ENGINE=File(TabSeparated)
```

默认情况下，Clickhouse 会创建目录 /var/lib/clickhouse/data/default/file\_engine\_table。

2. 手动创建 /var/lib/clickhouse/data/default/file\_engine\_table/data.TabSeparated 文件，并且包含内容：

```
$ cat data.TabSeparated
one 1
two 2
```

3. 查询这些数据：

```
SELECT * FROM file_engine_table
```

name	value
one	1
two	2

## 在 Clickhouse-local 中的使用

使用 [clickhouse-local](#) 时，File 引擎除了 Format 之外，还可以接受文件路径参数。可以使用数字或人类可读的名称来指定标准输入/输出流，例如 0 或 stdin，1 或 stdout。例如：

```
$ echo -e "1,2\n3,4" | clickhouse-local -q "CREATE TABLE table (a Int64, b Int64) ENGINE = File(CSV, stdin); SELECT a, b FROM table; DROP TABLE table"
```

## 功能实现

- 读操作可支持并发，但写操作不支持

- 不支持:
  - ALTER
  - SELECT ... SAMPLE
- 索引
- 副本

## Null

当写入 Null 类型的表时，将忽略数据。从 Null 类型的表中读取时，返回空。

但是，可以在 Null 类型的表上创建物化视图。写入表的数据将转发到视图中。

## Set

始终存在于 RAM 中的数据集。它适用于 IN 运算符的右侧（请参见 "IN 运算符" 部分）。

可以使用 INSERT 向表中插入数据。新元素将添加到数据集中，而重复项将被忽略。但是不能对此类型表执行 SELECT 语句。检索数据的唯一方法是在 IN 运算符的右半部分使用它。

数据始终存在于 RAM 中。对于 INSERT，插入数据块也会写入磁盘上的表目录。启动服务器时，此数据将加载到 RAM。也就是说，重新启动后，数据仍然存在。

对于强制服务器重启，磁盘上的数据块可能会丢失或损坏。在数据块损坏的情况下，可能需要手动删除包含损坏数据的文件。

## Join

加载好的 JOIN 表数据会常驻内存中。

```
Join(ANY|ALL, LEFT|INNER, k1[, k2, ...])
```

引擎参数： ANY|ALL – 连接修饰； LEFT|INNER – 连接类型。更多信息可参考 [JOIN子句](#)。这些参数设置不用带引号，但必须与要 JOIN 表匹配。k1, k2, ..... 是 USING 子句中要用于连接的关键列。

此引擎表不能用于 GLOBAL JOIN。

类似于 Set 引擎，可以使用 INSERT 向表中添加数据。设置为 ANY 时，重复键的数据会被忽略（仅一条用于连接）。设置为 ALL 时，重复键的数据都会用于连接。不能直接对 JOIN 表进行 SELECT。检索其数据的唯一方法是将其作为 JOIN 语句右边的表。

跟 Set 引擎类似，Join 引擎把数据存储在磁盘中。

### Limitations and Settings

When creating a table, the following settings are applied:

- join\_use\_nulls
- max\_rows\_in\_join
- max\_bytes\_in\_join
- join\_overflow\_mode
- join\_any\_take\_last\_row

The `Join` -engine tables can't be used in `GLOBAL JOIN` operations.

## URL(URL, Format)

用于管理远程 HTTP/HTTPS 服务器上的数据。该引擎类似 [File](#) 引擎。

### 在 ClickHouse 服务器中使用引擎

`Format` 必须是 ClickHouse 可以用于 `SELECT` 查询的一种格式，若有必要，还要可用于 `INSERT`。有关支持格式的完整列表，请查看 [Formats](#)。

`URL` 必须符合统一资源定位符的结构。指定的 URL 必须指向一个 HTTP 或 HTTPS 服务器。对于服务端响应，不需要任何额外的 HTTP 头标记。

`INSERT` 和 `SELECT` 查询会分别转换为 `POST` 和 `GET` 请求。对于 `POST` 请求的处理，远程服务器必须支持 [分块传输编码](#)。

示例：

1. 在 Clickhouse 服务上创建一个 `url_engine_table` 表：

```
CREATE TABLE url_engine_table (word String, value UInt64)
ENGINE=URL('http://127.0.0.1:12345/', CSV)
```

2. 用标准的 Python 3 工具库创建一个基本的 HTTP 服务并 启动它：

```
from http.server import BaseHTTPRequestHandler, HTTPServer

class CSVHTTPServer(BaseHTTPRequestHandler):
    def do_GET(self):
        self.send_response(200)
        self.send_header('Content-type', 'text/csv')
        self.end_headers()

        self.wfile.write(bytes('Hello,1\nWorld,2\n', "utf-8"))

if __name__ == "__main__":
    server_address = ('127.0.0.1', 12345)
    HTTPServer(server_address, CSVHTTPServer).serve_forever()
```

```
python3 server.py
```

3. 查询请求：

```
SELECT * FROM url_engine_table
```

word	value
Hello	1
World	2

## 功能实现

- 读写操作都支持并发
- 不支持：
  - `ALTER` 和 `SELECT...SAMPLE` 操作。

- 索引。
- 副本。

## View

用于构建视图（有关更多信息，请参阅 [CREATE VIEW](#) 查询）。它不存储数据，仅存储指定的 `SELECT` 查询。从表中读取时，它会运行此查询（并从查询中删除所有不必要的列）。

## 物化视图

物化视图的使用（更多信息请参阅 [CREATE TABLE](#)）。它需要使用一个不同的引擎来存储数据，这个引擎要在创建物化视图时指定。当从表中读取时，它就会使用该引擎。

## Memory

`Memory` 引擎以未压缩的形式将数据存储在 RAM 中。数据完全以读取时获得的形式存储。换句话说，从这张表中读取是很轻松的。并发数据访问是同步的。锁范围小：读写操作不会相互阻塞。不支持索引。阅读是并行化的。在简单查询上达到最大生产率（超过10 GB/秒），因为没有磁盘读取，不需要解压缩或反序列化数据。（值得注意的是，在许多情况下，与 `MergeTree` 引擎的性能几乎一样高）。重新启动服务器时，表中的数据消失，表将变为空。通常，使用此表引擎是不合理的。但是，它可用于测试，以及在相对较少的行（最多约100,000,000）上需要最高性能的查询。

`Memory` 引擎是由系统用于临时表进行外部数据的查询（请参阅“外部数据用于请求处理”部分），以及用于实现 `GLOBAL IN`（请参见“`IN` 运算符”部分）。

## Buffer

缓冲数据写入 RAM 中，周期性地将数据刷新到另一个表。在读取操作时，同时从缓冲区和另一个表读取数据。

```
Buffer(database, table, num_layers, min_time, max_time, min_rows, max_rows, min_bytes, max_bytes)
```

引擎的参数：`database`，`table` - 要刷新数据的表。可以使用返回字符串的常量表达式而不是数据库名称。`num_layers` - 并行层数。在物理上，该表将表示为 `num_layers` 个独立缓冲区。建议值为16。

`min_time`，`max_time`，`min_rows`，`max_rows`，`min_bytes`，`max_bytes` - 从缓冲区刷新数据的条件。

如果满足所有 “`min`” 条件或至少一个 “`max`” 条件，则从缓冲区刷新数据并将其写入目标表。`min_time`，`max_time` — 从第一次写入缓冲区时起以秒为单位的时间条件。`min_rows`，`max_rows` - 缓冲区中行数的条件。`min_bytes`，`max_bytes` - 缓冲区中字节数的条件。

写入时，数据从 `num_layers` 个缓冲区中随机插入。或者，如果插入数据的大小足够大（大于 `max_rows` 或 `max_bytes`），则会绕过缓冲区将其写入目标表。

每个 “`num_layers`” 缓冲区刷新数据的条件是分别计算。例如，如果 `num_layers = 16` 且 `max_bytes = 100000000`，则最大 RAM 消耗将为1.6 GB。

示例：

```
CREATE TABLE merge.hits_buffer AS merge.hits ENGINE = Buffer(merge, hits, 16, 10, 100, 10000, 1000000, 100000000)
```

创建一个 `"merge.hits_buffer"` 表，其结构与 `"merge.hits"` 相同，并使用 `Buffer` 引擎。写入此表时，数据缓冲在 RAM 中，然后写入 `"merge.hits"` 表。创建了16个缓冲区。如果已经过了100秒，或者已写入100万行，或者已写入100 MB数据，则刷新每个缓冲区的数据；或者如果同时已经过了10秒并且已经写入了10,000行和10 MB的数据。例如，如果只写了一行，那么

在100秒之后，都会被刷新。但是如果写了很多行，数据将会更快地刷新。

当服务器停止时，使用 DROP TABLE 或 DETACH TABLE，缓冲区数据也会刷新到目标表。

可以为数据库和表名在单个引号中设置空字符串。这表示没有目的地表。在这种情况下，当达到数据刷新条件时，缓冲器被简单地清除。这可能对于保持数据窗口在内存中是有用的。

从 Buffer 表读取时，将从缓冲区和目标表（如果有）处理数据。请注意，Buffer 表不支持索引。换句话说，缓冲区中的数据被完全扫描，对于大缓冲区来说可能很慢。（对于目标表中的数据，将使用它支持的索引。）

如果 Buffer 表中的列集与目标表中的列集不匹配，则会插入两个表中存在的列的子集。

如果类型与 Buffer 表和目标表中的某列不匹配，则会在服务器日志中输入错误消息并清除缓冲区。如果在刷新缓冲区时目标表不存在，则会发生同样的情况。

如果需要为目标表和 Buffer 表运行 ALTER，我们建议先删除 Buffer 表，为目标表运行 ALTER，然后再次创建 Buffer 表。

如果服务器异常重启，缓冲区中的数据将丢失。

PREWHERE，FINAL 和 SAMPLE 对缓冲表不起作用。这些条件将传递到目标表，但不用于处理缓冲区中的数据。因此，我们建议只使用 Buffer 表进行写入，同时从目标表进行读取。

将数据添加到缓冲区时，其中一个缓冲区被锁定。如果同时从表执行读操作，则会导致延迟。

插入到 Buffer 表中的数据可能以不同的顺序和不同的块写入目标表中。因此，Buffer 表很难用于正确写入 CollapsingMergeTree。为避免出现问题，您可以将 "num\_layers" 设置为1。

如果目标表是复制表，则在写入 Buffer 表时会丢失复制表的某些预期特征。数据部分的行次序和大小的随机变化导致数据不能去重，这意味着无法对复制表进行可靠的 "exactly once" 写入。

由于这些缺点，我们只建议在极少数情况下使用 Buffer 表。

当在单位时间内从大量服务器接收到太多 INSERTs 并且在插入之前无法缓冲数据时使用 Buffer 表，这意味着这些 INSERTs 不能足够快地执行。

请注意，一次插入一行数据是没有意义的，即使对于 Buffer 表也是如此。这将只产生每秒几千行的速度，而插入更大的数据块每秒可以产生超过一百万行（参见 "性能" 部分）。

## GenerateRandom

The GenerateRandom table engine produces random data for given table schema.

Usage examples:

- Use in test to populate reproducible large table.
- Generate random input for fuzzing tests.

## Usage in ClickHouse Server

```
ENGINE = GenerateRandom(random_seed, max_string_length, max_array_length)
```

The `max_array_length` and `max_string_length` parameters specify maximum length of all array columns and strings correspondingly in generated data.

Generate table engine supports only `SELECT` queries.

It supports all [DataTypes](#) that can be stored in a table except `LowCardinality` and `AggregateFunction`.

Example:

1. Set up the `generate_engine_table` table:

```
CREATE TABLE generate_engine_table (name String, value UInt32) ENGINE = GenerateRandom(1, 5, 3)
```

2. Query the data:

```
SELECT * FROM generate_engine_table LIMIT 3
```

name	value
c4xJ	1412771199
r	1791099446
7#\$	124312908

## Details of Implementation

- Not supported:
  - `ALTER`
  - `SELECT ... SAMPLE`
  - `INSERT`
  - Indices
  - Replication

## SQL Reference

- `SELECT`
- `INSERT INTO`
- `CREATE`
- `ALTER`
- Other types of queries

## SELECT 查询语法

`SELECT` 语句用于执行数据的检索。

```
SELECT [DISTINCT] expr_list
[FROM [db.]table | (subquery) | table_function] [FINAL]
[SAMPLE sample_coeff]
[ARRAY JOIN ...]
[GLOBAL] ANY|ALL INNER|LEFT JOIN (subquery)|table USING columns_list
[PREWHERE expr]
[WHERE expr]
[GROUP BY expr_list] [WITH TOTALS]
[HAVING expr]
[ORDER BY expr_list]
[LIMIT n BY columns]
[LIMIT [n, ]m]
[UNION ALL ...]
[INTO OUTFILE filename]
[FORMAT format]
```

所有的子句都是可选的，除了SELECT之后的表达式列表(expr\_list)。下面将按照查询运行的顺序逐一对各个子句进行说明。

如果查询中不包含 DISTINCT , GROUP BY , ORDER BY 子句以及 IN 和 JOIN 子查询，那么它将仅使用O(1)数量的内存来完全流式的处理查询。否则，这个查询将消耗大量的内存，除非你指定了这些系统配置：max\_memory\_usage , max\_rows\_to\_group\_by , max\_rows\_to\_sort , max\_rows\_in\_distinct , max\_bytes\_in\_distinct , max\_rows\_in\_set , max\_bytes\_in\_set , max\_rows\_in\_join , max\_bytes\_in\_join , max\_bytes\_before\_external\_sort , max\_bytes\_before\_external\_group\_by。它们规定了可以使用外部排序（将临时表存储到磁盘中）以及外部聚合，目前系统不存在关于Join的配置，更多关于它们的信息，可以参见“配置”部分。

## FROM 子句

如果查询中不包含FROM子句，那么将读取 system.one 。 system.one 中仅包含一行数据（此表实现了与其他数据库管理系统中的DUAL相同的功能）。

FROM子句规定了将从哪个表、或子查询、或表函数中读取数据；同时ARRAY JOIN子句和JOIN子句也可以出现在这里（见后文）。

可以使用包含在括号里的子查询来替代表。在这种情况下，子查询的处理将会构建在外部的查询内部。不同于SQL标准，子查询后无需指定别名。为了兼容，你可以在子查询后添加‘AS 别名’，但是指定的名字不能被使用在任何地方。

也可以使用表函数来代替表，有关信息，参见“表函数”。

执行查询时，在查询中列出的所有列都将从对应的表中提取数据；如果你使用的是子查询的方式，则任何在外部查询中没有使用的列，子查询将从查询中忽略它们；如果你的查询没有列出任何的列（例如，SELECT count() FROM t），则将额外的从表中提取一些列（最好的情况下是最小的列），以便计算行数。

最后的FINAL修饰符仅能够被使用在SELECT from CollapsingMergeTree场景中。当你为FROM指定了FINAL修饰符时，你的查询结果将会在查询过程中被聚合。需要注意的是，在这种情况下，查询将在单个流中读取所有相关的主键列，同时对需要的数据进行合并。这意味着，当使用FINAL修饰符时，查询将会处理的更慢。在大多数情况下，你应该避免使用FINAL修饰符。更多信息，请参阅“CollapsingMergeTree引擎”部分。

## SAMPLE 子句

通过SAMPLE子句用户可以进行近似查询处理，近似查询处理仅能工作在MergeTree\*类型的表中，并且在创建表时需要您指定采样表达式（参见“MergeTree 引擎”部分）。

SAMPLE 子句可以使用 SAMPLE k 来表示，其中k可以是0到1的小数值，或者是一个足够大的正整数值。

当k为0到1的小数时，查询将使用‘k’作为百分比选取数据。例如，SAMPLE 0.1 查询只会检索数据总量的10%。当k为一个足够大的正整数时，查询将使用‘k’作为最大样本数。例如，SAMPLE 10000000 查询只会检索最多10,000,000行数据。

Example:

```
SELECT
    Title,
    count() * 10 AS PageViews
FROM hits_distributed
SAMPLE 0.1
WHERE
    CounterID = 34
    AND toDate(EventDate) >= toDate('2013-01-29')
    AND toDate(EventDate) <= toDate('2013-02-04')
    AND NOT DontCountHits
    AND NOT Refresh
    AND Title != ''
GROUP BY Title
ORDER BY PageViews DESC LIMIT 1000
```

在这个例子中，查询将检索数据总量的0.1（10%）的数据。值得注意的是，查询不会自动校正聚合函数最终的结果，所以

为了得到更加精确的结果，需要将 count() 的结果手动乘以10。

当使用像 SAMPLE 10000000 这样的方式进行近似查询时，由于没有了任何关于将会处理了哪些数据或聚合函数应该被乘以几的信息，所以这种方式不适合在这种场景下使用。

使用相同的采样率得到的结果总是一致的：如果我们能够看到所有可能存在在表中的数据，那么相同的采样率总是能够得到相同的结果（在建表时使用相同的采样表达式），换句话说，系统在不同的时间，不同的服务器，不同表上总以相同的方式对数据进行采样。

例如，我们可以使用采样的方式获取到与不进行采样相同的用户ID的列表。这将表明，你可以在IN子查询中使用采样，或者使用采样的结果与其他查询进行关联。

## ARRAY JOIN 子句

ARRAY JOIN子句可以帮助查询进行与数组和nested数据类型的连接。它有点类似arrayJoin函数，但它的功能更广泛。

ARRAY JOIN 本质上等同于 INNER JOIN 数组。例如：

```
:) CREATE TABLE arrays_test (s String, arr Array(UInt8)) ENGINE = Memory  
  
CREATE TABLE arrays_test  
(  
    s String,  
    arr Array(UInt8)  
) ENGINE = Memory  
  
Ok.  
  
0 rows in set. Elapsed: 0.001 sec.  
  
:) INSERT INTO arrays_test VALUES ('Hello', [1,2]), ('World', [3,4,5]), ('Goodbye', [])  
  
INSERT INTO arrays_test VALUES  
  
Ok.  
  
3 rows in set. Elapsed: 0.001 sec.  
  
:) SELECT * FROM arrays_test  
  
SELECT *  
FROM arrays_test  
  


| s       | arr     |
|---------|---------|
| Hello   | [1,2]   |
| World   | [3,4,5] |
| Goodbye | []      |

  
3 rows in set. Elapsed: 0.001 sec.  
  
:) SELECT s, arr FROM arrays_test ARRAY JOIN arr  
  
SELECT s, arr  
FROM arrays_test  
ARRAY JOIN arr  
  


| s     | arr |
|-------|-----|
| Hello | 1   |
| Hello | 2   |
| World | 3   |
| World | 4   |
| World | 5   |

  
5 rows in set. Elapsed: 0.001 sec.
```

你还可以为ARRAY JOIN子句指定一个别名，这时你可以通过这个别名来访问数组中的数据，但是数据本身仍然可以通过原

来的名称进行访问。例如：

```
:) SELECT s, arr, a FROM arrays_test ARRAY JOIN arr AS a  
  
SELECT s, arr, a  
FROM arrays_test  
ARRAY JOIN arr AS a
```

s	arr	a
Hello	[1, 2]	1
Hello	[1, 2]	2
World	[3, 4, 5]	3
World	[3, 4, 5]	4
World	[3, 4, 5]	5

```
5 rows in set. Elapsed: 0.001 sec.
```

当多个具有相同大小的数组使用逗号分割出现在ARRAY JOIN子句中时，ARRAY JOIN会将它们同时执行（直接合并，而不是它们的笛卡尔积）。例如：

```
:) SELECT s, arr, a, num, mapped FROM arrays_test ARRAY JOIN arr AS a, arrayEnumerate(arr) AS num,  
arrayMap(x -> x + 1, arr) AS mapped  
  
SELECT s, arr, a, num, mapped  
FROM arrays_test  
ARRAY JOIN arr AS a, arrayEnumerate(arr) AS num, arrayMap(lambda(tuple(x), plus(x, 1)), arr) AS mapped
```

s	arr	a	num	mapped
Hello	[1, 2]	1	1	2
Hello	[1, 2]	2	2	3
World	[3, 4, 5]	3	1	4
World	[3, 4, 5]	4	2	5
World	[3, 4, 5]	5	3	6

```
5 rows in set. Elapsed: 0.002 sec.
```

```
:) SELECT s, arr, a, num, arrayEnumerate(arr) FROM arrays_test ARRAY JOIN arr AS a, arrayEnumerate(arr) AS  
num  
  
SELECT s, arr, a, num, arrayEnumerate(arr)  
FROM arrays_test  
ARRAY JOIN arr AS a, arrayEnumerate(arr) AS num
```

s	arr	a	num	arrayEnumerate(arr)
Hello	[1, 2]	1	1	[1, 2]
Hello	[1, 2]	2	2	[1, 2]
World	[3, 4, 5]	3	1	[1, 2, 3]
World	[3, 4, 5]	4	2	[1, 2, 3]
World	[3, 4, 5]	5	3	[1, 2, 3]

```
5 rows in set. Elapsed: 0.002 sec.
```

另外ARRAY JOIN也可以工作在nested数据结构上。例如：

```

:) CREATE TABLE nested_test (s String, nest Nested(x UInt8, y UInt32)) ENGINE = Memory

CREATE TABLE nested_test
(
    s String,
    nest Nested(
        x UInt8,
        y UInt32)
) ENGINE = Memory

Ok.

0 rows in set. Elapsed: 0.006 sec.

:) INSERT INTO nested_test VALUES ('Hello', [1,2], [10,20]), ('World', [3,4,5], [30,40,50]), ('Goodbye', [], [])

INSERT INTO nested_test VALUES

Ok.

3 rows in set. Elapsed: 0.001 sec.

:) SELECT * FROM nested_test

SELECT *
FROM nested_test



| s       | nest.x  | nest.y     |
|---------|---------|------------|
| Hello   | [1,2]   | [10,20]    |
| World   | [3,4,5] | [30,40,50] |
| Goodbye | []      | []         |



3 rows in set. Elapsed: 0.001 sec.

:) SELECT s, nest.x, nest.y FROM nested_test ARRAY JOIN nest

SELECT s, `nest.x`, `nest.y`
FROM nested_test
ARRAY JOIN nest



| s     | nest.x | nest.y |
|-------|--------|--------|
| Hello | 1      | 10     |
| Hello | 2      | 20     |
| World | 3      | 30     |
| World | 4      | 40     |
| World | 5      | 50     |



5 rows in set. Elapsed: 0.001 sec.

```

当你在ARRAY JOIN指定nested数据类型的名称时，其作用与与包含所有数组元素的ARRAY JOIN相同，例如：

```

:) SELECT s, nest.x, nest.y FROM nested_test ARRAY JOIN nest.x, nest.y

SELECT s, `nest.x`, `nest.y`
FROM nested_test
ARRAY JOIN `nest.x`, `nest.y`



| s     | nest.x | nest.y |
|-------|--------|--------|
| Hello | 1      | 10     |
| Hello | 2      | 20     |
| World | 3      | 30     |
| World | 4      | 40     |
| World | 5      | 50     |



5 rows in set. Elapsed: 0.001 sec.

```

这种方式也是可以运行的：

```
:) SELECT s, nest.x, nest.y FROM nested_test ARRAY JOIN nest.x  
SELECT s, `nest.x`, `nest.y`  
FROM nested_test  
ARRAY JOIN `nest.x`
```

s	nest.x	nest.y
Hello	1	[10,20]
Hello	2	[10,20]
World	3	[30,40,50]
World	4	[30,40,50]
World	5	[30,40,50]

```
5 rows in set. Elapsed: 0.001 sec.
```

为了方便使用原来的nested类型的数组，你可以为nested类型定义一个别名。例如：

```
:) SELECT s, n.x, n.y, nest.x, nest.y FROM nested_test ARRAY JOIN nest AS n  
SELECT s, `n.x`, `n.y`, `nest.x`, `nest.y`  
FROM nested_test  
ARRAY JOIN nest AS n
```

s	n.x	n.y	nest.x	nest.y
Hello	1	10	[1,2]	[10,20]
Hello	2	20	[1,2]	[10,20]
World	3	30	[3,4,5]	[30,40,50]
World	4	40	[3,4,5]	[30,40,50]
World	5	50	[3,4,5]	[30,40,50]

```
5 rows in set. Elapsed: 0.001 sec.
```

使用arrayEnumerate函数的示例：

```
:) SELECT s, n.x, n.y, nest.x, nest.y, num FROM nested_test ARRAY JOIN nest AS n, arrayEnumerate(nest.x)  
AS num  
SELECT s, `n.x`, `n.y`, `nest.x`, `nest.y`, num  
FROM nested_test  
ARRAY JOIN nest AS n, arrayEnumerate(`nest.x`) AS num
```

s	n.x	n.y	nest.x	nest.y	num
Hello	1	10	[1,2]	[10,20]	1
Hello	2	20	[1,2]	[10,20]	2
World	3	30	[3,4,5]	[30,40,50]	1
World	4	40	[3,4,5]	[30,40,50]	2
World	5	50	[3,4,5]	[30,40,50]	3

```
5 rows in set. Elapsed: 0.002 sec.
```

在一个查询中只能出现一个ARRAY JOIN子句。

如果在WHERE/PREWHERE子句中使用了ARRAY JOIN子句的结果，它将优先于WHERE/PREWHERE子句执行，否则它将在WHERE/PRWHERE子句之后执行，以便减少计算。

## JOIN 子句

JOIN子句用于连接数据，作用与SQL JOIN的定义相同。

## i 注意

与 **ARRAY JOIN** 没有关系。

```
SELECT <expr_list>
FROM <left_subquery>
[GLOBAL] [ANY|ALL] INNER|LEFT|RIGHT|FULL|CROSS [OUTER] JOIN <right_subquery>
(ON <expr_list>)|(USING <column_list>) ...
```

可以使用具体的表名来代替 `<left_subquery>` 与 `<right_subquery>`。但这与使用 `SELECT * FROM table` 子查询的方式相同。除非你的表是[Join](./operations/table\_engines/join.md) 支持的 JOIN 类型

- INNER JOIN
- LEFT OUTER JOIN
- RIGHT OUTER JOIN
- FULL OUTER JOIN
- CROSS JOIN

你可以跳过默认的 `OUTER` 关键字。

`ANY` 与 `ALL`

在使用 `ALL` 修饰符对 `JOIN` 进行修饰时，如果右表中存在多个与左表关联的数据，那么系统则将右表中所有可以与左表关联的数据全部返回在结果中。这与 SQL 标准的 `JOIN` 行为相同。在使用 `ANY` 修饰符对 `JOIN` 进行修饰时，如果右表中存在多个与左表关联的数据，那么系统仅返回第一个与左表匹配的结果。如果左表与右表一一对应，不存在多余的行时，`ANY` 与 `ALL` 的结果相同。

你可以在会话中通过设置 `join_default_strictness` 来指定默认的 `JOIN` 修饰符。

`GLOBAL distribution`

当使用普通的 `JOIN` 时，查询将被发送给远程的服务器。并在这些远程服务器上生成右表并与它们关联。换句话说，右表来自于各个服务器本身。

当使用 `GLOBAL ... JOIN`，首先会在请求服务器上计算右表并以临时表的方式将其发送到所有服务器。这时每台服务器将直接使用它进行计算。

使用 `GLOBAL` 时需要小心。更多信息，参阅 [Distributed subqueries](#) 部分。

使用建议

从子查询中删除所有 `JOIN` 不需要的列。

当执行 `JOIN` 查询时，因为与其他阶段相比没有进行执行顺序的优化：`JOIN` 优先于 `WHERE` 与聚合执行。因此，为了显示的指定执行顺序，我们推荐你使用子查询的方式执行 `JOIN`。

示例：

```

SELECT
    CounterID,
    hits,
    visits
FROM
(
    SELECT
        CounterID,
        count() AS hits
    FROM test.hits
    GROUP BY CounterID
) ANY LEFT JOIN
(
    SELECT
        CounterID,
        sum(Sign) AS visits
    FROM test.visits
    GROUP BY CounterID
) USING CounterID
ORDER BY hits DESC
LIMIT 10

```

CounterID	hits	visits
1143050	523264	13665
731962	475698	102716
722545	337212	108187
722889	252197	10547
2237260	196036	9522
23057320	147211	7689
722818	90109	17847
48221	85379	4652
19762435	77807	7026
722884	77492	11056

子查询不允许您设置别名或在其他地方引用它们。 `USING` 中指定的列必须在两个子查询中具有相同的名称，而其他列必须具有不同的名称。您可以通过使用别名的方式来更改子查询中的列名（示例中就分别使用了`'hits'`与`'visits'`别名）。

`USING` 子句用于指定要进行链接的一个或多个列，系统会将这些列在两张表中相等的值连接起来。如果列是一个列表，不需要使用括号包裹。同时`JOIN`不支持其他更复杂的Join方式。

右表（子查询的结果）将会保存在内存中。如果没有足够的内存，则无法运行`JOIN`。

只能在查询中指定一个`JOIN`。若要运行多个`JOIN`，你可以将它们放入子查询中。

每次运行相同的`JOIN`查询，总是会再次计算 - 没有缓存结果。为了避免这种情况，可以使用‘Join’引擎，它是一个预处理的Join数据结构，总是保存在内存中。更多信息，参见“Join引擎”部分。

在一些场景下，使用`IN`代替`JOIN`将会得到更高的效率。在各种类型的`JOIN`中，最高效的是`ANY LEFT JOIN`，然后是`ANY INNER JOIN`，效率最差的是`ALL LEFT JOIN`以及`ALL INNER JOIN`。

如果你需要使用`JOIN`来关联一些纬度表（包含纬度属性的一些相对比较小的表，例如广告活动的名称），那么`JOIN`可能不是好的选择，因为语法负责，并且每次查询都将重新访问这些表。对于这种情况，您应该使用“外部字典”的功能来替换`JOIN`。更多信息，参见[外部字典](#)部分。

`NULL`的处理

`JOIN`的行为受`join_use_nulls`的影响。当`join_use_nulls=1`时，`JOIN`的工作与SQL标准相同。

如果`JOIN`的key是`Nullable`类型的字段，则其中至少一个存在`NULL`值的key不会被关联。

## WHERE子句

如果存在`WHERE`子句，则在该子句中必须包含一个`UInt8`类型的表达式。这个表达式通常是一个带有比较和逻辑的表达式。

这个表达式将会在所有数据转换前用来过滤数据。

如果在支持索引的数据库表引擎中，这个表达式将被评估是否使用索引。

## PREWHERE 子句

这个子句与WHERE子句的意思相同。主要的不同之处在于表数据的读取。当使用PREWHERE时，首先只读取PREWHERE表达式中需要的列。然后在根据PREWHERE执行的结果读取其他需要的列。

如果在过滤条件中有少量不适合索引过滤的列，但是它们又可以提供很强的过滤能力。这时使用PREWHERE是有意义的，因为它将帮助减少数据的读取。

例如，在一个需要提取大量列的查询中为少部分列编写PREWHERE是很有作用的。

PREWHERE 仅支持 \*MergeTree 系列引擎。

在一个查询中可以同时指定PREWHERE和WHERE，在这种情况下，PREWHERE优先于WHERE执行。

值得注意的是，PREWHERE不适合用于已经存在于索引中的列，因为当列已经存在于索引中的情况下，只有满足索引的数据块才会被读取。

如果将'optimize\_move\_to\_prewhere'设置为1，并且在查询中不包含PREWHERE，则系统将自动的把适合PREWHERE表达式的部分从WHERE中抽离到PREWHERE中。

## GROUP BY 子句

这是列式数据库管理系统中最重要的一部分。

如果存在GROUP BY子句，则在该子句中必须包含一个表达式列表。其中每个表达式将会被称之为“key”。

SELECT，HAVING，ORDER BY子句中的表达式列表必须来自于这些“key”或聚合函数。简而言之，被选择的列中不能包含非聚合函数或key之外的其他列。

如果查询表达式列表中仅包含聚合函数，则可以省略GROUP BY子句，这时会假定将所有数据聚合成一组空“key”。

Example:

```
SELECT
    count(),
    median(FetchTiming > 60 ? 60 : FetchTiming),
    count() - sum(Refresh)
FROM hits
```

与SQL标准不同的是，如果表中不存在任何数据（可能表本身中就不存在任何数据，或者由于被WHERE条件过滤掉了），将返回一个空结果，而不是一个包含聚合函数初始值的结果。

与MySQL不同的是（实际上这是符合SQL标准的），你不能够获得一个不在key中的非聚合函数列（除了常量表达式）。但是你可以使用'any'（返回遇到的第一个值）、max、min等聚合函数使它工作。

Example:

```
SELECT
    domainWithoutWWW(URL) AS domain,
    count(),
    any>Title AS title -- getting the first occurred page header for each domain.
FROM hits
GROUP BY domain
```

GROUP BY子句会为遇到的每一个不同的key计算一组聚合函数的值。

在GROUP BY子句中不支持使用Array类型的列。

常量不能作为聚合函数的参数传入聚合函数中。例如：`sum(1)`。这种情况下你可以省略常量。例如：`count()`。

#### NULL 处理

对于GROUP BY子句，ClickHouse将`NULL`解释为一个值，并且支持`NULL=NULL`。

下面这个例子将说明这将意味着什么。

假设你有这样一张表：

x	y
1	2
2	NULL
3	2
3	3
3	NULL

运行`SELECT sum(x), y FROM t_null_big GROUP BY y`你将得到如下结果：

sum(x)	y
4	2
3	3
5	NULL

你可以看到GROUP BY为`y=NULL`的聚合了x。

如果你在向GROUP BY中放入几个key，结果将列出所有的组合可能。就像`NULL`是一个特定的值一样。

#### WITH TOTALS 修饰符

如果你指定了WITH TOTALS修饰符，你将会在结果中得到一个被额外计算出的行。在这一行中将包含所有key的默认值（零或者空值），以及所有聚合函数对所有被选择数据行的聚合结果。

该行仅在JSON\*，TabSeparated\*，Pretty\*输出格式中与其他行分开输出。

在JSON\*输出格式中，这行将出现在Json的'totals'字段中。在TabSeparated\*输出格式中，这行将位于其他结果之后，同时与其他结果使用空白行分隔。在Pretty\*输出格式中，这行将作为单独的表在所有结果之后输出。

当WITH TOTALS与HAVING子句同时存在时，它的行为受'totals\_mode'配置的影响。默认情况下，`totals_mode = 'before_having'`，这时WITH TOTALS将会在HAVING前计算最多不超过`max_rows_to_group_by`行的数据。

在`group_by_overflow_mode = 'any'`并指定了`max_rows_to_group_by`的情况下，WITH TOTALS的行为受`totals_mode`的影响。

`after_having_exclusive` - 在HAVING后进行计算，计算不超过`max_rows_to_group_by`行的数据。

`after_having_inclusive` - 在HAVING后进行计算，计算不少于`max_rows_to_group_by`行的数据。

`after_having_auto` - 在HAVING后进行计算，采用统计通过HAVING的行数，在超过不超过'max\_rows\_to\_group\_by'指定值（默认为50%）的情况下，包含所有行的结果。否则排除这些结果。

`totals_auto_threshold` - 默认0.5，是`after_having_auto`的参数。

如果`group_by_overflow_mode != 'any'`并没有指定`max_rows_to_group_by`情况下，所有的模式都与`after_having`相同。

你可以在子查询，包含子查询的JOIN子句中使用WITH TOTALS（在这种情况下，它们各自的总值会被组合在一起）。

#### GROUP BY 使用外部存储设备

你可以在GROUP BY中允许将临时数据转存到磁盘上，以限制对内存的使用。`max_bytes_before_external_group_by`这个配置确定了在GROUP BY中启动将临时数据转存到磁盘上的内存阈值。如果你将它设置为0（这是默认值），这项功能将被禁用。

当使用 `max_bytes_before_external_group_by` 时，我们建议将 `max_memory_usage` 设置为它的两倍。这是因为一个聚合需要两个阶段来完成：(1) 读取数据并形成中间数据 (2) 合并中间数据。临时数据的转存只会发生在第一个阶段。如果没有发生临时文件的转存，那么阶段二将最多消耗与1阶段相同的内存大小。

例如：如果将 `max_memory_usage` 设置为 10000000000 并且你想要开启外部聚合，那么你需要将 `max_bytes_before_external_group_by` 设置为 10000000000 的同时将 `max_memory_usage` 设置为 20000000000。当外部聚合被触发时（如果刚好只形成了一份临时数据），它的内存使用量将会稍高与 `max_bytes_before_external_group_by`。

在分布式查询处理中，外部聚合将会在远程的服务器中执行。为了使请求服务器只使用较少的内存，可以设置 `distributed_aggregation_memory_efficient` 为 1。

当合并被刷到磁盘的临时数据以及合并远程的服务器返回的结果时，如果在启动 `distributed_aggregation_memory_efficient` 的情况下，将会消耗  $1/256 * \text{线程数的总内存大小}$ 。

当启动外部聚合时，如果数据的大小小于 `max_bytes_before_external_group_by` 设置的值（数据没有被刷到磁盘中），那么数据的聚合速度将会和没有启动外部聚合时一样快。如果有临时数据被刷到了磁盘中，那么这个查询的运行时间将会被延长几倍（大约是 3 倍）。

如果你在 GROUP BY 后面存在 ORDER BY 子句，并且 ORDER BY 后面存在一个极小限制的 LIMIT，那么 ORDER BY 子句将不会使用太多内存。否则请不要忘记启动外部排序(`max_bytes_before_external_sort`)。

## LIMIT N BY 子句

LIMIT N BY 子句和 LIMIT 没有关系，LIMIT N BY COLUMNS 子句可以用来在每一个 COLUMNS 分组中求得最大的 N 行数据。我们可以将它们同时用在一个查询中。LIMIT N BY 子句中可以包含任意多个分组字段表达式列表。

示例：

```
SELECT
    domainWithoutWWW(URL) AS domain,
    domainWithoutWWW(REFERRER_URL) AS referrer,
    device_type,
    count() cnt
FROM hits
GROUP BY domain, referrer, device_type
ORDER BY cnt DESC
LIMIT 5 BY domain, device_type
LIMIT 100
```

查询将会为每个 `domain, device_type` 的组合选出前 5 个访问最多的数据，但是结果最多将不超过 100 行（`LIMIT n BY + LIMIT`）。

## HAVING 子句

HAVING 子句可以用来过滤 GROUP BY 之后的数据，类似于 WHERE 子句。WHERE 于 HAVING 不同之处在于 WHERE 在聚合前(GROUP BY) 执行，HAVING 在聚合后执行。如果不存在聚合，则不能使用 HAVING。

## ORDER BY 子句

如果存在 ORDER BY 子句，则该子句中必须存在一个表达式列表，表达式列表中每一个表达式都可以分配一个 DESC 或 ASC（排序的方向）。如果没有指明排序的方向，将假定以 ASC 的方式进行排序。其中 ASC 表示按照升序排序，DESC 按照降序排序。示例：`ORDER BY Visits DESC, SearchPhrase`

对于字符串的排序来讲，你可以为其指定一个排序规则，在指定排序规则时，排序总是不会区分大小写。并且如果与 ASC 或 DESC 同时出现时，排序规则必须在它们的后面指定。例如：`ORDER BY SearchPhrase COLLATE 'tr'` - 使用土耳其字母表对它进行升序排序，同时排序时不会区分大小写，并按照 UTF-8 字符集进行编码。

我们推荐只在少量的数据集中使用 COLLATE，因为 COLLATE 的效率远低于正常的字节排序。

针对排序表达式中相同值的行将以任意的顺序进行输出，这是不确定的（每次都可能不同）。如果省略ORDER BY子句，则结果的顺序也是不固定的。

NaN 和 NULL 的排序规则：

- 当使用NULLS FIRST修饰符时，将会先输出NULL，然后是NaN，最后才是其他值。
- 当使用NULLS LAST修饰符时，将会先输出其他值，然后是NaN，最后才是NULL。
- 默认情况下与使用NULLS LAST修饰符相同。

示例：

假设存在如下一张表

X	Y
1	NULL
2	2
1	nan
2	2
3	4
5	6
6	nan
7	NULL
6	7
8	9

运行查询 `SELECT * FROM t_null_nan ORDER BY y NULLS FIRST` 将获得如下结果：

X	Y
1	NULL
7	NULL
1	nan
6	nan
2	2
2	2
3	4
5	6
6	7
8	9

当使用浮点类型的数值进行排序时，不管排序的顺序如何，NaNs总是出现在所有值的后面。换句话说，当你使用升序排列一个浮点数值列时，NaNs好像比所有值都要大。反之，当你使用降序排列一个浮点数值列时，NaNs好像比所有值都小。

如果你在ORDER BY子句后面存在LIMIT并给定了较小的数值，则将会使用较少的内存。否则，内存的使用量将与需要排序的数据成正比。对于分布式查询，如果省略了GROUP BY，则在远程服务器上执行部分排序，最后在请求服务器上合并排序结果。这意味着这对于分布式查询而言，要排序的数据量可以大于单台服务器的内存。

如果没有足够的内存，可以使用外部排序（在磁盘中创建一些临时文件）。可以使用`max_bytes_before_external_sort`来设置外部排序，如果你将它设置为0（默认），则表示禁用外部排序功能。如果启用该功能。当要排序的数据量达到所指定的字节数时，当前排序的结果会被转存到一个临时文件中去。当全部数据读取完毕后，所有的临时文件将会合并成最终输出结果。这些临时文件将会写到config文件配置的`/var/lib/clickhouse/tmp/`目录中（默认值，你可以通过修改`'tmp_path'`配置调整该目录的位置）。

查询运行使用的内存要高于`'max_bytes_before_external_sort'`，为此，这个配置必须要远远小于`'max_memory_usage'`配置的值。例如，如果你的服务器有128GB的内存去运行一个查询，那么推荐你将`'max_memory_usage'`设置为100GB，`'max_bytes_before_external_sort'`设置为80GB。

外部排序效率要远低于在内存中排序。

## SELECT 子句

在完成上述列出的所有子句后，将对SELECT子句中的表达式进行分析。具体来讲，如果在存在聚合函数的情况下，将对聚合函数之前的表达式进行分析。聚合函数与聚合函数之前的表达式都将在聚合期间完成计算（GROUP BY）。就像他们本身就已经存在结果上一样。

## DISTINCT 子句

如果存在DISTINCT子句，则会对结果中的完全相同的行进行去重。在GROUP BY不包含聚合函数，并对全部SELECT部分都包含在GROUP BY中时的作用一样。但该子句还是与GROUP BY子句存在以下几点不同：

- 可以与GROUP BY配合使用。
- 当不存在ORDER BY子句并存在LIMIT子句时，查询将在同时满足DISTINCT与LIMIT的情况下立即停止查询。
- 在处理数据的同时输出结果，并不是等待整个查询全部完成。

在SELECT表达式中存在Array类型的列时，不能使用DISTINCT。

DISTINCT可以与NULL一起工作，就好像NULL仅是一个特殊的值一样，并且NULL=NULL。换而言之，在DISTINCT的结果中，与NULL不同的组合仅能出现一次。

## LIMIT 子句

LIMIT m 用于在查询结果中选择前m行数据。LIMIT n, m 用于在查询结果中选择从n行开始的m行数据。

'n'与'm'必须是正整数。

如果没有指定ORDER BY子句，则结果可能是任意的顺序，并且是不确定的。

## UNION ALL 子句

UNION ALL子句可以组合任意数量的查询，例如：

```
SELECT CounterID, 1 AS table, toInt64(count()) AS c
  FROM test.hits
 GROUP BY CounterID

UNION ALL

SELECT CounterID, 2 AS table, sum(Sign) AS c
  FROM test.visits
 GROUP BY CounterID
 HAVING c > 0
```

仅支持UNION ALL，不支持其他UNION规则(UNION DISTINCT)。如果你需要UNION DISTINCT，你可以使用UNION ALL中包含SELECT DISTINCT的子查询的方式。

UNION ALL中的查询可以同时运行，它们的结果将被混合到一起。

这些查询的结果结果必须相同（列的数量和类型）。列名可以是不同的。在这种情况下，最终结果的列名将从第一个查询中获取。UNION会为查询之间进行类型转换。例如，如果组合的两个查询中包含相同的字段，并且是类型兼容的Nullable 和 non- Nullable，则结果将会将该字段转换为 Nullable 类型的字段。

作为UNION ALL查询的部分不能包含在括号内。ORDER BY与LIMIT子句应该被应用在每个查询中，而不是最终的查询中。如果你需要做最终结果转换，你可以将UNION ALL作为一个子查询包含在FROM子句中。

## INTO OUTFILE 子句

INTO OUTFILE filename 子句用于将查询结果重定向输出到指定文件中（filename是一个字符串类型的值）。与MySQL不同，执行的结果文件将在客户端建立，如果文件已存在，查询将会失败。此命令可以工作在命令行客户端与clickhouse-local中（通过HTTP借口发送将会失败）。

默认的输出格式是TabSeparated（与命令行客户端的批处理模式相同）。

## FORMAT 子句

'FORMAT format' 子句用于指定返回数据的格式。你可以使用它方便的转换或创建数据的转储。更多信息，参见“输入输出格式”部分。如果不存在FORMAT子句，则使用默认的格式，这将取决于与DB的配置以及所使用的客户端。对于批量模式的HTTP客户端和命令行客户端而言，默认的格式是TabSeparated。对于交互模式下的命令行客户端，默认的格式是PrettyCompact（它有更加美观的格式）。

当使用命令行客户端时，数据以内部高效的格式在服务器和客户端之间进行传递。客户端将单独的解析FORMAT子句，以帮助数据格式的转换（这将减轻网络和服务器的负载）。

## IN 运算符

对于 IN、NOT IN、GLOBAL IN、GLOBAL NOT IN 操作符被分别实现，因为它们的功能非常丰富。

运算符的左侧是单列或列的元组。

示例：

```
SELECT UserID IN (123, 456) FROM ...
SELECT (CounterID, UserID) IN ((34, 123), (101500, 456)) FROM ...
```

如果左侧是单个列并且是一个索引，并且右侧是一组常量时，系统将使用索引来处理查询。

不要在列表中列出太多的值（百万）。如果数据集很大，将它们放入临时表中（可以参考“”），然后使用子查询。Don't list too many values explicitly (i.e. millions). If a data set is large, put it in a temporary table (for example, see the section "External data for query processing"), then use a subquery.

右侧可以是一个由常量表达式组成的元组列表（像上面的例子一样），或者是一个数据库中的表的名称，或是一个包含在括号中的子查询。

如果右侧是一个表的名字（例如，UserID IN users），这相当于 UserID IN (SELECT \* FROM users)。在查询与外部数据表组合使用时可以使用该方法。例如，查询与包含user IDs的‘users’临时表一起被发送的同时需要对结果进行过滤时。

如果操作符的右侧是一个Set引擎的表时（数据总是在内存中准备好），则不会每次都为查询创建新的数据集。

子查询可以指定一个列以上的元组来进行过滤。示例：

```
SELECT (CounterID, UserID) IN (SELECT CounterID, UserID FROM ...) FROM ...
```

IN操作符的左右两侧应具有相同的类型。

IN操作符的子查询中可以出现任意子句，包含聚合函数与lambda函数。示例：

```
SELECT
    EventDate,
    avg(UserID IN
    (
        SELECT UserID
        FROM test.hits
        WHERE EventDate = toDate('2014-03-17')
    )) AS ratio
FROM test.hits
GROUP BY EventDate
ORDER BY EventDate ASC
```

EventDate	ratio
2014-03-17	1
2014-03-18	0.807696
2014-03-19	0.755406
2014-03-20	0.723218
2014-03-21	0.697021
2014-03-22	0.647851
2014-03-23	0.648416

为3月17日之后的每一天计算与3月17日访问该网站的用户浏览网页的百分比。 IN子句中的子查询仅在单个服务器上运行一次。不能够是相关子查询。

#### NULL 处理

在处理中，IN操作符总是假定 `NULL` 值的操作结果总是等于 0，而不管 `NULL` 位于左侧还是右侧。`NULL` 值不应该包含在任何数据集中，它们彼此不能够对应，并且不能够比较。

下面的示例中有一个 `t_null` 表：

X	Y
1	<code>NULL</code>
2	3

运行查询 `SELECT x FROM t_null WHERE y IN (NULL,3)` 将得到如下结果：

X
2

你可以看到在查询结果中不存在 `y = NULL` 的结果。这是因为ClickHouse无法确定 `NULL` 是否包含在 `(NULL,3)` 数据集中，对于这次比较操作返回了 0，并且在 `SELECT` 的最终输出中排除了这行。

```
SELECT y IN (NULL, 3)
FROM t_null

in(y, tuple(NULL, 3))
  0
  1
```

#### 分布式子查询

对于带有子查询的（类似与JOINs）IN中，有两种选择：普通的IN / JOIN与GLOBAL IN / GLOBAL JOIN。它们对于分布式查询的处理运行方式是不同的。

!!! 注意 请记住，下面描述的算法可能因为根据 `settings` 配置的不同而不同。

当使用普通的IN时，查询总是被发送到远程的服务器，并且在每个服务器中运行“IN”或“JOIN”子句中的子查询。

当使用 GLOBAL IN / GLOBAL JOIN 时，首先会为 GLOBAL IN / GLOBAL JOIN 运行所有子查询，并将结果收集到临时表中，并将临时表发送到每个远程服务器，并使用该临时表运行查询。

对于非分布式查询，请使用普通的IN / JOIN。

在分布式查询中使用IN / JOIN子句中使用子查询需要小心。

让我们来看一些例子。假设集群中的每个服务器都存在一个正常表local\_table。与一个分布式表distributed\_table。

对于所有查询distributed\_table的查询，查询会被发送到所有的远程服务器并使用local\_table表运行查询。

例如，查询

```
SELECT uniq(UserID) FROM distributed_table
```

将发送如下查询到所有远程服务器

```
SELECT uniq(UserID) FROM local_table
```

这时将并行的执行它们，直到达到可以组合数据的中间结果状态。然后中间结果将返回到请求服务器并在请求服务器上进行合并，最终将结果发送给客户端。

现在让我运行一个带有IN的查询：

```
SELECT uniq(UserID) FROM distributed_table WHERE CounterID = 101500 AND UserID IN (SELECT UserID FROM local_table WHERE CounterID = 34)
```

- 计算两个站点的用户交集。

此查询将被发送给所有的远程服务器

```
SELECT uniq(UserID) FROM local_table WHERE CounterID = 101500 AND UserID IN (SELECT UserID FROM local_table WHERE CounterID = 34)
```

换句话说，IN子句中的数据集将被在每台服务器上被独立的收集，仅与每台服务器上的本地存储上的数据计算交集。

如果您已经将数据分散到了集群的每台服务器上，并且单个UserID的数据完全分布在单个服务器上，那么这将是正确且最佳的查询方式。在这种情况下，所有需要的数据都可以在每台服务器的本地进行获取。否则，结果将是不准确的。我们将这种查询称为“local IN”。

为了修正这种在数据随机分布的集群中的工作，你可以在子查询中使用distributed\_table。查询将更改为这样：

```
SELECT uniq(UserID) FROM distributed_table WHERE CounterID = 101500 AND UserID IN (SELECT UserID FROM distributed_table WHERE CounterID = 34)
```

此查询将被发送给所有的远程服务器

```
SELECT uniq(UserID) FROM local_table WHERE CounterID = 101500 AND UserID IN (SELECT UserID FROM distributed_table WHERE CounterID = 34)
```

子查询将在每个远程服务器上执行。因为子查询使用分布式表，所有每个远程服务器上的子查询将查询再次发送给所有的远程服务器

```
SELECT UserID FROM local_table WHERE CounterID = 34
```

例如，如果你拥有100台服务器的集群，执行整个查询将需要10,000次请求，这通常被认为是不可接受的。

在这种情况下，你应该使用GLOBAL IN来替代IN。让我们看一下它是如何工作的。

```
SELECT uniq(UserID) FROM distributed_table WHERE CounterID = 101500 AND UserID GLOBAL IN (SELECT UserID FROM distributed_table WHERE CounterID = 34)
```

在请求服务器上运行子查询

```
SELECT UserID FROM distributed_table WHERE CounterID = 34
```

将结果放入内存中的临时表中。然后将请求发送到每一台远程服务器

```
SELECT uniq(UserID) FROM local_table WHERE CounterID = 101500 AND UserID GLOBAL IN _data1
```

临时表 `_data1` 也会随着查询一起发送到每一台远程服务器（临时表的名称由具体实现定义）。

这比使用普通的IN更加理想，但是，请注意以下几点：

1. 创建临时表时，数据不是唯一的，为了减少通过网络传输的数据量，请在子查询中使用DISTINCT（你不需要在普通的IN中这么做）
2. 临时表将发送到所有远程服务器。其中传输不考虑网络的拓扑结构。例如，如果你有10个远程服务器存在与请求服务器非常远的数据中心中，则数据将通过通道发送数据到远程数据中心10次。使用GLOBAL IN时应避免大数据集。
3. 当向远程服务器发送数据时，网络带宽的限制是不可配置的，这可能会网络的负载造成压力。
4. 尝试将数据跨服务器分布，这样你将不需要使用GLOBAL IN。
5. 如果你需要经常使用GLOBAL IN，请规划你的ClickHouse集群位置，以便副本之间不存在跨数据中心，并且它们之间具有快速的网络交换能力，以便查询可以完全在一个数据中心内完成。

另外，在 GLOBAL IN 子句中使用本地表也是有用的，比如，本地表仅在请求服务器上可用，并且您希望在远程服务器上使用来自本地表的数据。

## Extreme Values

除了结果外，你还可以获得结果列的最大值与最小值，可以将extremes配置设置成1来做到这一点。最大值最小值的计算是针对于数字类型，日期类型进行计算的，对于其他列，将会输出默认值。

额外计算的两行结果 - 最大值与最小值，这两行额外的结果仅在JSON\*, TabSeparated\*, and Pretty\* 格式与其他行分开的输出方式输出，不支持其他输出格式。

在JSON\*格式中，Extreme值在单独的'extremes'字段中。在TabSeparated\*格式中，在其他结果与'totals'之后输出，并使用空行与其分隔。在Pretty\* 格式中，将在其他结果与'totals'后以单独的表格输出。

如果在计算Extreme值的同时包含LIMIT。extremes的计算结果将包含offset跳过的行。在流式的请求中，它可能还包含多余LIMIT的少量行的值。

## 注意事项

不同于MySQL，GROUP BY 与 ORDER BY 子句不支持使用列的位置信息作为参数，但这实际上是符合SQL标准的。例如，`GROUP BY 1, 2` 将被解释为按照常量进行分组（即，所有的行将被聚合成一行）。

可以在查询的任何部分使用AS。

可以在查询的任何部分添加星号，而不仅仅是表达式。在分析查询时，星号被替换为所有的列（不包含 MATERIALIZED 与 ALIAS 的列）。只有少数情况下使用星号是合理的：

- 创建表转储时。
- 对于仅包含几个列的表，如系统表。
- 获取表中的列信息。在这种情况下应该使用 `LIMIT 1`。但是，更好的办法是使用 `DESC TABLE`。
- 当使用 PREWHERE 在少数的几个列上做强过滤时。
- 在子查询中（因为外部查询不需要的列被排除在子查询之外）。

在所有的其他情况下，我们不建议使用星号，因为它是列式数据库的缺点而不是优点。

## INSERT

INSERT查询主要用于向系统中添加数据。

查询的基本格式：

```
INSERT INTO [db.]table [(c1, c2, c3)] VALUES (v11, v12, v13), (v21, v22, v23), ...
```

您可以在查询中指定插入的列的列表，如：[(c1, c2, c3)]。对于存在于表结构中但不存在于插入列表中的列，它们将会按照如下方式填充数据：

- 如果存在 DEFAULT 表达式，根据 DEFAULT 表达式计算被填充的值。
- 如果没有定义 DEFAULT 表达式，则填充零或空字符串。

如果 strict\_insert\_defaults=1，你必须在查询中列出所有没有定义 DEFAULT 表达式的列。

数据可以以ClickHouse支持的任何 [输入输出格式](#) 传递给INSERT。格式的名称必须显示的指定在查询中：

```
INSERT INTO [db.]table [(c1, c2, c3)] FORMAT format_name data_set
```

例如，下面的查询所使用的输入格式就与上面INSERT ... VALUES的中使用的输入格式相同：

```
INSERT INTO [db.]table [(c1, c2, c3)] FORMAT Values (v11, v12, v13), (v21, v22, v23), ...
```

ClickHouse会清除数据前所有的空白字符与一行摘要信息（如果需要的话）。所以在进行查询时，我们建议您将数据放入到输入输出格式名称后的新的一行中去（如果数据是以空白字符开始的，这将非常重要）。

示例：

```
INSERT INTO t FORMAT TabSeparated
11 Hello, world!
22 Qwerty
```

在使用命令行客户端或HTTP客户端时，你可以将具体的查询语句与数据分开发送。更多具体信息，请参考[“客户端”部分](#)。

## 使用SELECT的结果写入

```
INSERT INTO [db.]table [(c1, c2, c3)] SELECT ...
```

写入与SELECT的列的对应关系是使用位置来进行对应的，尽管它们在SELECT表达式与INSERT中的名称可能是不同的。如果需要，会对它们执行对应的类型转换。

除了VALUES格式之外，其他格式中的数据都不允许出现诸如 now()，1 + 2 等表达式。VALUES格式允许您有限度的使用这些表达式，但是不建议您这么做，因为执行这些表达式总是低效的。

系统不支持的其他用于修改数据的查询：UPDATE，DELETE，REPLACE，MERGE，UPSERT，INSERT UPDATE。但是，您可以使用 ALTER TABLE ... DROP PARTITION 查询来删除一些旧的数据。

## 性能的注意事项

在进行 INSERT 时将会对写入的数据进行一些处理，按照主键排序，按照月份对数据进行分区等。所以如果在您的写入数据中包含多个月份的混合数据时，将会显著的降低 INSERT 的性能。为了避免这种情况：

- 数据总是以尽量大的batch进行写入，如每次写入100,000行。
- 数据在写入ClickHouse前预先的对数据进行分组。

在以下的情况下，性能不会下降：

- 数据总是被实时的写入。
- 写入的数据已经按照时间排序。

## CREATE DATABASE

该查询用于根据指定名称创建数据库。

```
CREATE DATABASE [IF NOT EXISTS] db_name
```

数据库其实只是用于存放表的一个目录。如果查询中存在 `IF NOT EXISTS`，则当数据库已经存在时，该查询不会返回任何错误。

## CREATE TABLE

对于 `CREATE TABLE`，存在以下几种方式。

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    name1 [type1] [DEFAULT|MATERIALIZED|ALIAS expr1],
    name2 [type2] [DEFAULT|MATERIALIZED|ALIAS expr2],
    ...
) ENGINE = engine
```

在指定的‘db’数据库中创建一个名为‘name’的表，如果查询中没有包含‘db’，则默认使用当前选择的数据库作为‘db’。后面的是包含在括号中的表结构以及表引擎的声明。其中表结构声明是一个包含一组列描述声明的组合。如果表引擎是支持索引的，那么可以在表引擎的参数中对其进行说明。

在最简单的情况下，列描述是指 `名称 类型` 这样的子句。例如：`RegionID UInt32`。但是也可以为列另外定义默认值表达式（见后文）。

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name AS [db2.]name2 [ENGINE = engine]
```

创建一个与 `db2.name2` 具有相同结构的表，同时你可以对其指定不同的表引擎声明。如果没有表引擎声明，则创建的表将与 `db2.name2` 使用相同的表引擎。

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name ENGINE = engine AS SELECT ...
```

使用指定的引擎创建一个与 `SELECT` 子句的结果具有相同结构的表，并使用 `SELECT` 子句的结果填充它。

以上所有情况，如果指定了 `IF NOT EXISTS`，那么在该表已经存在的情况下，查询不会返回任何错误。在这种情况下，查询几乎不会做任何事情。

在 `ENGINE` 子句后还可能存在一些其他的子句，更详细的信息可以参考 [表引擎](#) 中关于建表的描述。

### 默认值

在列描述中你可以通过以下方式之一为列指定默认表达式：`DEFAULT expr`，`MATERIALIZED expr`，`ALIAS expr`。示例：`URLDomain String DEFAULT domain(URL)`。

如果在列描述中未定义任何默认表达式，那么系统将会根据类型设置对应的默认值，如：数值类型为零、字符串类型为空字符串、数组类型为空数组、日期类型为‘0000-00-00’以及时间类型为‘0000-00-00 00:00:00’。不支持使用NULL作为普通类型的默认值。

如果定义了默认表达式，则可以不定义列的类型。如果没有明确的定义类的类型，则使用默认表达式的类型。例如：`EventDate DEFAULT toDate(EventTime)` - 最终‘EventDate’将使用‘Date’作为类型。

如果同时指定了默认表达式与列的类型，则将使用类型转换函数将默认表达式转换为指定的类型。例如：`Hits UInt32 DEFAULT 0` 与 `Hits UInt32 DEFAULT toUInt32(0)` 意思相同。

默认表达式可以包含常量或表的任意其他列。当创建或更改表结构时，系统将会运行检查，确保不会包含循环依赖。对于

INSERT, 它仅检查表达式是否是可以解析的 - 它们可以从中计算出所有需要的列的默认值。

#### DEFAULT expr

普通的默认值，如果INSERT中不包含指定的列，那么将通过表达式计算它的默认值并填充它。

#### MATERIALIZED expr

物化表达式，被该表达式指定的列不能包含在INSERT的列表中，因为它总是被计算出来的。对于INSERT而言，不需要考虑这些列。另外，在SELECT查询中如果包含星号，此列不会被用来替换星号，这是因为考虑到数据转储，在使用 `SELECT *` 查询出的结果总能够被'INSERT'回表。

#### ALIAS expr

别名。这样的列不会存储在表中。它的值不能够通过INSERT写入，同时使用SELECT查询星号时，这些列也不会被用来替换星号。但是它们可以显示的用于SELECT中，在这种情况下，在查询分析中别名将被替换。

当使用ALTER查询对添加新的列时，不同于为所有旧数据添加这个列，对于需要在旧数据中查询新列，只会在查询时动态计算这个新列的值。但是如果新列的默认表示中依赖其他列的值进行计算，那么同样会加载这些依赖的列的数据。

如果你向表中添加一个新列，并在之后的一段时间后修改它的默认表达式，则旧数据中的值将会被改变。请注意，在运行后台合并时，缺少的列的值将被计算后写入到合并后的数据部分中。

不能够为nested类型的列设置默认值。

## Constraints

Along with columns descriptions constraints could be defined:

```
CREATE TABLE [IF NOT EXISTS] [db.]table_name [ON CLUSTER cluster]
(
    name1 [type1] [DEFAULT|MATERIALIZED|ALIAS expr1] [compression_codec] [TTL expr1],
    ...
    CONSTRAINT constraint_name_1 CHECK boolean_expr_1,
    ...
) ENGINE = engine
```

`boolean_expr_1` could by any boolean expression. If constraints are defined for the table, each of them will be checked for every row in `INSERT` query. If any constraint is not satisfied — server will raise an exception with constraint name and checking expression.

Adding large amount of constraints can negatively affect performance of big `INSERT` queries.

## TTL Expression

Defines storage time for values. Can be specified only for MergeTree-family tables. For the detailed description, see [TTL for columns and tables](#).

## Column Compression Codecs

By default, ClickHouse applies the compression method, defined in [server settings](#), to columns. You can also define the compression method for each individual column in the `CREATE TABLE` query.

```

CREATE TABLE codec_example
(
    dt Date CODEC(ZSTD),
    ts DateTime CODEC(LZ4HC),
    float_value Float32 CODEC(NONE),
    double_value Float64 CODEC(LZ4HC(9))
    value Float32 CODEC(Delta, ZSTD)
)
ENGINE = <Engine>
...

```

If a codec is specified, the default codec doesn't apply. Codecs can be combined in a pipeline, for example, CODEC(Delta, ZSTD) . To select the best codec combination for your project, pass benchmarks similar to those described in the Altinity [New Encodings to Improve ClickHouse Efficiency](#) article.

### Warning

You can't decompress ClickHouse database files with external utilities like `lz4` . Instead, use the special `clickhouse-compressor` utility.

Compression is supported for the following table engines:

- [MergeTree](#) family
- [Log](#) family
- [Set](#)
- [Join](#)

ClickHouse supports common purpose codecs and specialized codecs.

### SPECIALIZED CODECS

These codecs are designed to make compression more effective by using specific features of data. Some of these codecs don't compress data themselves. Instead, they prepare the data for a common purpose codec, which compresses it better than without this preparation.

Specialized codecs:

- `Delta(delta_bytes)` — Compression approach in which raw values are replaced by the difference of two neighboring values, except for the first value that stays unchanged. Up to `delta_bytes` are used for storing delta values, so `delta_bytes` is the maximum size of raw values. Possible `delta_bytes` values: 1, 2, 4, 8. The default value for `delta_bytes` is `sizeof(type)` if equal to 1, 2, 4, or 8. In all other cases, it's 1.
- `DoubleDelta` — Calculates delta of deltas and writes it in compact binary form. Optimal compression rates are achieved for monotonic sequences with a constant stride, such as time series data. Can be used with any fixed-width type. Implements the algorithm used in Gorilla TSDB, extending it to support 64-bit types. Uses 1 extra bit for 32-byte deltas: 5-bit prefixes instead of 4-bit prefixes. For additional information, see Compressing Time Stamps in [Gorilla: A Fast, Scalable, In-Memory Time Series Database](#).
- `Gorilla` — Calculates XOR between current and previous value and writes it in compact binary form. Efficient when storing a series of floating point values that change slowly, because the best compression rate is achieved when neighboring values are binary equal. Implements the algorithm used in Gorilla TSDB, extending it to support 64-bit types. For additional information, see Compressing Values in [Gorilla: A Fast, Scalable, In-Memory Time Series Database](#).
- `T64` — Compression approach that crops unused high bits of values in integer data types (including `Enum` , `Date` and `DateTime` ). At each step of its algorithm, codec takes a block of 64 values, puts them into 64x64 bit matrix, transposes it, crops the unused bits of values and returns the rest as a sequence. Unused bits are the bits, that don't differ between maximum and minimum values in the whole data part for which the compression is used.

`DoubleDelta` 和 `Gorilla` 编码器在 Gorilla TSDB 中作为其压缩算法的组件。Gorilla 方法在场景中非常有效，当存在一个缓慢变化值的序列及其时间戳时。时间戳通过 `DoubleDelta` 编码器有效地进行压缩，而值通过 `Gorilla` 编码器有效地进行压缩。例如，要创建一个有效地存储的表，您可以在以下配置中创建它：

```
CREATE TABLE codec_example
(
    timestamp DateTime CODEC(DoubleDelta),
    slow_values Float32 CODEC(Gorilla)
)
ENGINE = MergeTree()
```

#### COMMON PURPOSE CODECS

Codecs:

- `NONE` — No compression.
- `LZ4` — Lossless **data compression algorithm** used by default. Applies LZ4 fast compression.
- `LZ4HC[(level)]` — LZ4 HC (high compression) algorithm with configurable level. Default level: 9. Setting `level <= 0` applies the default level. Possible levels: [1, 12]. Recommended level range: [4, 9].
- `ZSTD[(level)]` — **ZSTD compression algorithm** with configurable `level`. Possible levels: [1, 22]. Default value: 1.

高压缩级别对于异构场景非常有用，如压缩一次，多次解压缩。更高的级别意味着更好的压缩和更高的CPU使用。

## 临时表

ClickHouse 支持临时表，其具有以下特征：

- 当会话结束时，临时表将随会话一起消失，这包含链接中断。
- 临时表仅能够使用 Memory 表引擎。
- 无法为临时表指定数据库。它是在数据库之外创建的。
- 如果临时表与另一个表名称相同，那么当在查询时没有显示的指定 db 的情况下，将优先使用临时表。
- 对于分布式处理，查询中使用的临时表将被传递到远程服务器。

可以使用下面的语法创建一个临时表：

```
CREATE TEMPORARY TABLE [IF NOT EXISTS] table_name [ON CLUSTER cluster]
(
    name1 [type1] [DEFAULT|MATERIALIZED|ALIAS expr1],
    name2 [type2] [DEFAULT|MATERIALIZED|ALIAS expr2],
    ...
)
```

大多数情况下，临时表不是手动创建的，只有在分布式查询处理中使用 `(GLOBAL) IN` 时为外部数据创建。更多信息，可以参考相关章节。

## 分布式DDL查询（ON CLUSTER 子句）

对于 `CREATE`，`DROP`，`ALTER`，以及 `RENAME` 查询，系统支持其运行在整个集群上。例如，以下查询将在 `cluster` 集群的所有节点上创建名为 `all_hits` 的 Distributed 表：

```
CREATE TABLE IF NOT EXISTS all_hits ON CLUSTER cluster (p Date, i Int32) ENGINE = Distributed(cluster,
default, hits)
```

为了能够正确的运行这种查询，每台主机必须具有相同的cluster声明（为了简化配置的同步，你可以使用zookeeper的方式进行配置）。同时这些主机还必须链接到zookeeper服务器。这个查询将最终在集群的每台主机上运行，即使一些主机当前处于不可用状态。同时它还保证了所有的查询在单台主机中的执行顺序。

## CREATE VIEW

```
CREATE [MATERIALIZED] VIEW [IF NOT EXISTS] [db.]table_name [TO[db.]name] [ENGINE = engine] [POPULATE] AS  
SELECT ...
```

创建一个视图。它存在两种可选择的类型：普通视图与物化视图。

普通视图不存储任何数据，只是执行从另一个表中的读取。换句话说，普通视图只是保存了视图的查询，当从视图中查询时，此查询被作为子查询用于替换FROM子句。

举个例子，假设你已经创建了一个视图：

```
CREATE VIEW view AS SELECT ...
```

还有一个查询：

```
SELECT a, b, c FROM view
```

这个查询完全等价于：

```
SELECT a, b, c FROM (SELECT ...)
```

物化视图存储的数据是由相应的SELECT查询转换得来的。

在创建物化视图时，你还必须指定表的引擎 - 将会使用这个表引擎存储数据。

目前物化视图的工作原理：当将数据写入到物化视图中SELECT子句所指定的表时，插入的数据会通过SELECT子句查询进行转换并将最终结果插入到视图中。

如果创建物化视图时指定了POPULATE子句，则在创建时将该表的数据插入到物化视图中。就像使用 CREATE TABLE ... AS SELECT ... 一样。否则，物化视图只会包含在物化视图创建后的新写入的数据。我们不推荐使用POPULATE，因为在视图创建期间写入的数据将不会写入其中。

当一个SELECT子句包含 DISTINCT, GROUP BY, ORDER BY, LIMIT 时，请注意，这些仅会在插入数据时在每个单独的数据块上执行。例如，如果你在其中包含了 GROUP BY，则只会在查询期间进行聚合，但聚合范围仅限于单个批的写入数据。数据不会进一步被聚合。但是当你使用一些其他数据聚合引擎时这是例外的，如：SummingMergeTree。

目前对物化视图执行 ALTER 是不支持的，因此这可能是不方便的。如果物化视图是使用的 TO [db.]name 的方式进行构建的，你可以使用 DETACH 语句先将视图剥离，然后使用 ALTER 运行在目标表上，然后使用 ATTACH 将之前剥离的表重新加载进来。

视图看起来和普通的表相同。例如，你可以通过 SHOW TABLES 查看到它们。

没有单独的删除视图的语法。如果要删除视图，请使用 DROP TABLE。

## CREATE DICTIONARY

```

CREATE DICTIONARY [IF NOT EXISTS] [db.]dictionary_name
(
    key1 type1 [DEFAULT|EXPRESSION expr1] [HIERARCHICAL|INJECTIVE|IS_OBJECT_ID],
    key2 type2 [DEFAULT|EXPRESSION expr2] [HIERARCHICAL|INJECTIVE|IS_OBJECT_ID],
    attr1 type2 [DEFAULT|EXPRESSION expr3],
    attr2 type2 [DEFAULT|EXPRESSION expr4]
)
PRIMARY KEY key1, key2
SOURCE(SOURCE_NAME([param1 value1 ... paramN valueN]))
LAYOUT(LAYOUT_NAME([param_name param_value]))
LIFETIME([MIN val1] MAX val2)

```

## ALTER

The `ALTER` query is only supported for \*MergeTree tables, as well as Merge and Distributed . The query has several variations.

### Column Manipulations

Changing the table structure.

```
ALTER TABLE [db].name [ON CLUSTER cluster] ADD|DROP|CLEAR|COMMENT|MODIFY COLUMN ...
```

In the query, specify a list of one or more comma-separated actions. Each action is an operation on a column.

The following actions are supported:

- **ADD COLUMN** — Adds a new column to the table.
- **DROP COLUMN** — Deletes the column.
- **CLEAR COLUMN** — Resets column values.
- **COMMENT COLUMN** — Adds a text comment to the column.
- **MODIFY COLUMN** — Changes column's type, default expression and TTL.

These actions are described in detail below.

#### ADD COLUMN

```
ADD COLUMN [IF NOT EXISTS] name [type] [default_expr] [codec] [AFTER name_after]
```

Adds a new column to the table with the specified name , type , codec and default\_expr (see the section [Default expressions](#)).

If the `IF NOT EXISTS` clause is included, the query won't return an error if the column already exists. If you specify `AFTER name_after` (the name of another column), the column is added after the specified one in the list of table columns. Otherwise, the column is added to the end of the table. Note that there is no way to add a column to the beginning of a table. For a chain of actions, `name_after` can be the name of a column that is added in one of the previous actions.

Adding a column just changes the table structure, without performing any actions with data. The data doesn't appear on the disk after `ALTER` . If the data is missing for a column when reading from the table, it is filled in with default values (by performing the default expression if there is one, or using zeros or empty strings). The column appears on the disk after merging data parts (see [MergeTree](#)).

This approach allows us to complete the `ALTER` query instantly, without increasing the volume of old data.

Example:

```
ALTER TABLE visits ADD COLUMN browser String AFTER user_id
```

## DROP COLUMN

```
DROP COLUMN [IF EXISTS] name
```

Deletes the column with the name `name`. If the `IF EXISTS` clause is specified, the query won't return an error if the column doesn't exist.

Deletes data from the file system. Since this deletes entire files, the query is completed almost instantly.

Example:

```
ALTER TABLE visits DROP COLUMN browser
```

## CLEAR COLUMN

```
CLEAR COLUMN [IF EXISTS] name IN PARTITION partition_name
```

Resets all data in a column for a specified partition. Read more about setting the partition name in the section [How to specify the partition expression](#).

If the `IF EXISTS` clause is specified, the query won't return an error if the column doesn't exist.

Example:

```
ALTER TABLE visits CLEAR COLUMN browser IN PARTITION tuple()
```

## COMMENT COLUMN

```
COMMENT COLUMN [IF EXISTS] name 'comment'
```

Adds a comment to the column. If the `IF EXISTS` clause is specified, the query won't return an error if the column doesn't exist.

Each column can have one comment. If a comment already exists for the column, a new comment overwrites the previous comment.

Comments are stored in the `comment_expression` column returned by the [DESCRIBE TABLE](#) query.

Example:

```
ALTER TABLE visits COMMENT COLUMN browser 'The table shows the browser used for accessing the site.'
```

## MODIFY COLUMN

```
MODIFY COLUMN [IF EXISTS] name [type] [default_expr] [TTL]
```

This query changes the `name` column properties:

- Type
- Default expression
- TTL

For examples of columns TTL modifying, see [Column TTL](#).

If the `IF EXISTS` clause is specified, the query won't return an error if the column doesn't exist.

When changing the type, values are converted as if the `toType` functions were applied to them. If only the default

expression is changed, the query doesn't do anything complex, and is completed almost instantly.

Example:

```
ALTER TABLE visits MODIFY COLUMN browser Array(String)
```

Changing the column type is the only complex action – it changes the contents of files with data. For large tables, this may take a long time.

There are several processing stages:

- Preparing temporary (new) files with modified data.
- Renaming old files.
- Renaming the temporary (new) files to the old names.
- Deleting the old files.

Only the first stage takes time. If there is a failure at this stage, the data is not changed. If there is a failure during one of the successive stages, data can be restored manually. The exception is if the old files were deleted from the file system but the data for the new files did not get written to the disk and was lost.

The `ALTER` query for changing columns is replicated. The instructions are saved in ZooKeeper, then each replica applies them. All `ALTER` queries are run in the same order. The query waits for the appropriate actions to be completed on the other replicas. However, a query to change columns in a replicated table can be interrupted, and all actions will be performed asynchronously.

#### ALTER QUERY LIMITATIONS

The `ALTER` query lets you create and delete separate elements (columns) in nested data structures, but not whole nested data structures. To add a nested data structure, you can add columns with a name like `name.nested_name` and the type `Array(T)`. A nested data structure is equivalent to multiple array columns with a name that has the same prefix before the dot.

There is no support for deleting columns in the primary key or the sampling key (columns that are used in the `ENGINE` expression). Changing the type for columns that are included in the primary key is only possible if this change does not cause the data to be modified (for example, you are allowed to add values to an `Enum` or to change a type from `DateTime` to `UInt32`).

If the `ALTER` query is not sufficient to make the table changes you need, you can create a new table, copy the data to it using the `INSERT SELECT` query, then switch the tables using the `RENAME` query and delete the old table. You can use the `clickhouse-copier` as an alternative to the `INSERT SELECT` query.

The `ALTER` query blocks all reads and writes for the table. In other words, if a long `SELECT` is running at the time of the `ALTER` query, the `ALTER` query will wait for it to complete. At the same time, all new queries to the same table will wait while this `ALTER` is running.

For tables that don't store data themselves (such as `Merge` and `Distributed`), `ALTER` just changes the table structure, and does not change the structure of subordinate tables. For example, when running `ALTER` for a `Distributed` table, you will also need to run `ALTER` for the tables on all remote servers.

#### Manipulations With Key Expressions

The following command is supported:

```
MODIFY ORDER BY new_expression
```

It only works for tables in the `MergeTree` family (including `replicated` tables). The command changes the `sorting key` of the

table to `new_expression` (an expression or a tuple of expressions). Primary key remains the same.

The command is lightweight in a sense that it only changes metadata. To keep the property that data part rows are ordered by the sorting key expression you cannot add expressions containing existing columns to the sorting key (only columns added by the `ADD COLUMN` command in the same `ALTER` query).

## Manipulations With Data Skipping Indices

It only works for tables in the \*MergeTree family (including `replicated` tables). The following operations are available:

- `ALTER TABLE [db].name ADD INDEX name expression TYPE type GRANULARITY value AFTER name [AFTER name2]` - Adds index description to tables metadata.
- `ALTER TABLE [db].name DROP INDEX name` - Removes index description from tables metadata and deletes index files from disk.

These commands are lightweight in a sense that they only change metadata or remove files. Also, they are replicated (syncing indices metadata through ZooKeeper).

## Manipulations with constraints

See more on [constraints](#)

Constraints could be added or deleted using following syntax:

```
ALTER TABLE [db].name ADD CONSTRAINT constraint_name CHECK expression;
ALTER TABLE [db].name DROP CONSTRAINT constraint_name;
```

Queries will add or remove metadata about constraints from table so they are processed immediately.

Constraint check *will not be executed* on existing data if it was added.

All changes on replicated tables are broadcasting to ZooKeeper so will be applied on other replicas.

## Manipulations With Partitions and Parts

The following operations with [partitions](#) are available:

- **DETACH PARTITION** – Moves a partition to the `detached` directory and forget it.
- **DROP PARTITION** – Deletes a partition.
- **ATTACH PART|PARTITION** – Adds a part or partition from the `detached` directory to the table.
- **REPLACE PARTITION** - Copies the data partition from one table to another.
- **ATTACH PARTITION FROM** – Copies the data partition from one table to another and adds.
- **REPLACE PARTITION** - Copies the data partition from one table to another and replaces.
- **[MOVE PARTITION TO TABLE] (#alter\_move\_to\_table-partition)** - Move the data partition from one table to another.
- **CLEAR COLUMN IN PARTITION** - Resets the value of a specified column in a partition.
- **CLEAR INDEX IN PARTITION** - Resets the specified secondary index in a partition.
- **FREEZE PARTITION** – Creates a backup of a partition.
- **FETCH PARTITION** – Downloads a partition from another server.
- **MOVE PARTITION|PART** – Move partition/data part to another disk or volume.

### DETACH PARTITION

```
ALTER TABLE table_name DETACH PARTITION partition_expr
```

Moves all data for the specified partition to the `detached` directory. The server forgets about the detached data partition as if it does not exist. The server will not know about this data until you make the **ATTACH** query.

Example:

```
ALTER TABLE visits DETACH PARTITION 201901
```

Read about setting the partition expression in a section [How to specify the partition expression](#)

After the query is executed, you can do whatever you want with the data in the `detached` directory — delete it from the file system, or just leave it.

This query is replicated – it moves the data to the `detached` directory on all replicas. Note that you can execute this query only on a leader replica. To find out if a replica is a leader, perform the `SELECT` query to the `system.replicas` table.

Alternatively, it is easier to make a `DETACH` query on all replicas - all the replicas throw an exception, except the leader replica.

**DROP PARTITION**

```
ALTER TABLE table_name DROP PARTITION partition_expr
```

Deletes the specified partition from the table. This query tags the partition as inactive and deletes data completely, approximately in 10 minutes.

Read about setting the partition expression in a section [How to specify the partition expression](#)

The query is replicated – it deletes data on all replicas.

**DROP DETACHED PARTITION|PART**

```
ALTER TABLE table_name DROP DETACHED PARTITION|PART partition_expr
```

Removes the specified part or all parts of the specified partition from `detached`. Read more about setting the partition expression in a section [How to specify the partition expression](#)

**ATTACH PARTITION|PART**

```
ALTER TABLE table_name ATTACH PARTITION|PART partition_expr
```

Adds data to the table from the `detached` directory. It is possible to add data for an entire partition or for a separate part.  
Examples:

```
ALTER TABLE visits ATTACH PARTITION 201901;
ALTER TABLE visits ATTACH PART 201901_2_2_0;
```

Read more about setting the partition expression in a section [How to specify the partition expression](#)

This query is replicated. The replica-initiator checks whether there is data in the `detached` directory. If data exists, the query checks its integrity. If everything is correct, the query adds the data to the table. All other replicas download the data from the replica-initiator.

So you can put data to the `detached` directory on one replica, and use the `ALTER ... ATTACH` query to add it to the table on all replicas.

**ATTACH PARTITION FROM**

```
ALTER TABLE table2 ATTACH PARTITION partition_expr FROM table1
```

This query copies the data partition from the `table1` to `table2` adds data to existing in the `table2`. Note that data won't be deleted from `table1`.

For the query to run successfully, the following conditions must be met:

- Both tables must have the same structure.
- Both tables must have the same partition key.

#### REPLACE PARTITION

```
ALTER TABLE table2 REPLACE PARTITION partition_expr FROM table1
```

This query copies the data partition from the `table1` to `table2` and replaces existing partition in the `table2`. Note that data won't be deleted from `table1`.

For the query to run successfully, the following conditions must be met:

- Both tables must have the same structure.
- Both tables must have the same partition key.

#### MOVE PARTITION TO TABLE

```
ALTER TABLE table_source MOVE PARTITION partition_expr TO TABLE table_dest
```

This query move the data partition from the `table_source` to `table_dest` with deleting the data from `table_source`.

For the query to run successfully, the following conditions must be met:

- Both tables must have the same structure.
- Both tables must have the same partition key.
- Both tables must be the same engine family. (replicated or non-replicated)
- Both tables must have the same storage policy.

#### CLEAR COLUMN IN PARTITION

```
ALTER TABLE table_name CLEAR COLUMN column_name IN PARTITION partition_expr
```

Resets all values in the specified column in a partition. If the `DEFAULT` clause was determined when creating a table, this query sets the column value to a specified default value.

Example:

```
ALTER TABLE visits CLEAR COLUMN hour IN PARTITION 201902
```

#### FREEZE PARTITION

```
ALTER TABLE table_name FREEZE [PARTITION partition_expr]
```

This query creates a local backup of a specified partition. If the `PARTITION` clause is omitted, the query creates the backup of all partitions at once.

##### Note

The entire backup process is performed without stopping the server.

Note that for old-styled tables you can specify the prefix of the partition name (for example, '2019') - then the query

creates the backup for all the corresponding partitions. Read about setting the partition expression in a section [How to specify the partition expression](#).

At the time of execution, for a data snapshot, the query creates hardlinks to a table data. Hardlinks are placed in the directory `/var/lib/clickhouse/shadow/N/...`, where:

- `/var/lib/clickhouse/` is the working ClickHouse directory specified in the config.
- `N` is the incremental number of the backup.

#### Note

If you use [a set of disks for data storage in a table](#), the `shadow/N` directory appears on every disk, storing data parts that matched by the `PARTITION` expression.

The same structure of directories is created inside the backup as inside `/var/lib/clickhouse/`. The query performs 'chmod' for all files, forbidding writing into them.

After creating the backup, you can copy the data from `/var/lib/clickhouse/shadow/` to the remote server and then delete it from the local server. Note that the `ALTER t FREEZE PARTITION` query is not replicated. It creates a local backup only on the local server.

The query creates backup almost instantly (but first it waits for the current queries to the corresponding table to finish running).

`ALTER TABLE t FREEZE PARTITION` copies only the data, not table metadata. To make a backup of table metadata, copy the file `/var/lib/clickhouse/metadata/database/table.sql`

To restore data from a backup, do the following:

1. Create the table if it does not exist. To view the query, use the `.sql` file (replace `ATTACH` in it with `CREATE` ).
2. Copy the data from the `data/database/table/` directory inside the backup to the `/var/lib/clickhouse/data/database/table/detached/` directory.
3. Run `ALTER TABLE t ATTACH PARTITION` queries to add the data to a table.

Restoring from a backup doesn't require stopping the server.

For more information about backups and restoring data, see the [Data Backup](#) section.

#### CLEAR INDEX IN PARTITION

```
ALTER TABLE table_name CLEAR INDEX index_name IN PARTITION partition_expr
```

The query works similar to `CLEAR COLUMN`, but it resets an index instead of a column data.

#### FETCH PARTITION

```
ALTER TABLE table_name FETCH PARTITION partition_expr FROM 'path-in-zookeeper'
```

Downloads a partition from another server. This query only works for the replicated tables.

The query does the following:

1. Downloads the partition from the specified shard. In 'path-in-zookeeper' you must specify a path to the shard in ZooKeeper.
2. Then the query puts the downloaded data to the `detached` directory of the `table_name` table. Use the [ATTACH PARTITION|PART](#) query to add the data to the table.

For example:

```
ALTER TABLE users FETCH PARTITION 201902 FROM '/clickhouse/tables/01-01/visits';
ALTER TABLE users ATTACH PARTITION 201902;
```

Note that:

- The `ALTER ... FETCH PARTITION` query isn't replicated. It places the partition to the `detached` directory only on the local server.
- The `ALTER TABLE ... ATTACH` query is replicated. It adds the data to all replicas. The data is added to one of the replicas from the `detached` directory, and to the others - from neighboring replicas.

Before downloading, the system checks if the partition exists and the table structure matches. The most appropriate replica is selected automatically from the healthy replicas.

Although the query is called `ALTER TABLE`, it does not change the table structure and does not immediately change the data available in the table.

#### MOVE PARTITION|PART

Moves partitions or data parts to another volume or disk for MergeTree -engine tables. See [Using Multiple Block Devices for Data Storage](#).

```
ALTER TABLE table_name MOVE PARTITION|PART partition_expr TO DISK|VOLUME 'disk_name'
```

The `ALTER TABLE t MOVE` query:

- Not replicated, because different replicas can have different storage policies.
- Returns an error if the specified disk or volume is not configured. Query also returns an error if conditions of data moving, that specified in the storage policy, can't be applied.
- Can return an error in the case, when data to be moved is already moved by a background process, concurrent `ALTER TABLE t MOVE` query or as a result of background data merging. A user shouldn't perform any additional actions in this case.

Example:

```
ALTER TABLE hits MOVE PART '20190301_14343_16206_438' TO VOLUME 'slow'
ALTER TABLE hits MOVE PARTITION '2019-09-01' TO DISK 'fast_ss'
```

#### HOW TO SET PARTITION EXPRESSION

You can specify the partition expression in `ALTER ... PARTITION` queries in different ways:

- As a value from the `partition` column of the `system.parts` table. For example, `ALTER TABLE visits DETACH PARTITION 201901`.
- As the expression from the table column. Constants and constant expressions are supported. For example, `ALTER TABLE visits DETACH PARTITION toYYYYMM(toDate('2019-01-25'))`.
- Using the partition ID. Partition ID is a string identifier of the partition (human-readable, if possible) that is used as the names of partitions in the file system and in ZooKeeper. The partition ID must be specified in the `PARTITION ID` clause, in a single quotes. For example, `ALTER TABLE visits DETACH PARTITION ID '201901'`.
- In the `ALTER ATTACH PART` and `DROP DETACHED PART` query, to specify the name of a part, use string literal with a value from the `name` column of the `system.detached_parts` table. For example, `ALTER TABLE visits ATTACH PART '201901_1_1_0'`.

Usage of quotes when specifying the partition depends on the type of partition expression. For example, for theString

type, you have to specify its name in quotes (''). For the `Date` and `Int*` types no quotes are needed.

For old-style tables, you can specify the partition either as a number `201901` or a string `'201901'`. The syntax for the new-style tables is stricter with types (similar to the parser for the `VALUES` input format).

All the rules above are also true for the `OPTIMIZE` query. If you need to specify the only partition when optimizing a non-partitioned table, set the expression `PARTITION tuple()`. For example:

```
OPTIMIZE TABLE table_not_partitioned PARTITION tuple() FINAL;
```

The examples of `ALTER ... PARTITION` queries are demonstrated in the tests [00502\\_custom\\_partitioning\\_local](#) and [00502\\_custom\\_partitioning\\_replicated\\_zookeeper](#).

## Manipulations with Table TTL

You can change `table TTL` with a request of the following form:

```
ALTER TABLE table-name MODIFY TTL ttl-expression
```

## Synchronicity of ALTER Queries

For non-replicable tables, all `ALTER` queries are performed synchronously. For replicable tables, the query just adds instructions for the appropriate actions to `ZooKeeper`, and the actions themselves are performed as soon as possible. However, the query can wait for these actions to be completed on all the replicas.

For `ALTER ... ATTACH|DETACH|DROP` queries, you can use the `replication_alter_partitions_sync` setting to set up waiting. Possible values: `0` – do not wait; `1` – only wait for own execution (default); `2` – wait for all.

## Mutations

Mutations are an `ALTER` query variant that allows changing or deleting rows in a table. In contrast to standard `UPDATE` and `DELETE` queries that are intended for point data changes, mutations are intended for heavy operations that change a lot of rows in a table. Supported for the `MergeTree` family of table engines including the engines with replication support.

Existing tables are ready for mutations as-is (no conversion necessary), but after the first mutation is applied to a table, its metadata format becomes incompatible with previous server versions and falling back to a previous version becomes impossible.

Currently available commands:

```
ALTER TABLE [db.]table DELETE WHERE filter_expr
```

The `filter_expr` must be of type `UInt8`. The query deletes rows in the table for which this expression takes a non-zero value.

```
ALTER TABLE [db.]table UPDATE column1 = expr1 [, ...] WHERE filter_expr
```

The `filter_expr` must be of type `UInt8`. This query updates values of specified columns to the values of corresponding expressions in rows for which the `filter_expr` takes a non-zero value. Values are casted to the column type using the `CAST` operator. Updating columns that are used in the calculation of the primary or the partition key is not supported.

```
ALTER TABLE [db.]table MATERIALIZE INDEX name IN PARTITION partition_name
```

The query rebuilds the secondary index `name` in the partition `partition_name`.

One query can contain several commands separated by commas.

For \*MergeTree tables mutations execute by rewriting whole data parts. There is no atomicity - parts are substituted for mutated parts as soon as they are ready and a `SELECT` query that started executing during a mutation will see data from parts that have already been mutated along with data from parts that have not been mutated yet.

Mutations are totally ordered by their creation order and are applied to each part in that order. Mutations are also partially ordered with INSERTs - data that was inserted into the table before the mutation was submitted will be mutated and data that was inserted after that will not be mutated. Note that mutations do not block INSERTs in any way.

A mutation query returns immediately after the mutation entry is added (in case of replicated tables to ZooKeeper, for nonreplicated tables - to the filesystem). The mutation itself executes asynchronously using the system profile settings. To track the progress of mutations you can use the `system.mutations` table. A mutation that was successfully submitted will continue to execute even if ClickHouse servers are restarted. There is no way to roll back the mutation once it is submitted, but if the mutation is stuck for some reason it can be cancelled with the `KILL MUTATION` query.

Entries for finished mutations are not deleted right away (the number of preserved entries is determined by the `finished_mutations_to_keep` storage engine parameter). Older mutation entries are deleted.

## SYSTEM Queries

- `RELOAD DICTIONARIES`
- `RELOAD DICTIONARY`
- `DROP DNS CACHE`
- `DROP MARK CACHE`
- `FLUSH LOGS`
- `RELOAD CONFIG`
- `SHUTDOWN`
- `KILL`
- `STOP DISTRIBUTED SENDS`
- `FLUSH DISTRIBUTED`
- `START DISTRIBUTED SENDS`
- `STOP MERGES`
- `START MERGES`

### RELOAD DICTIONARIES

Reloads all dictionaries that have been successfully loaded before. By default, dictionaries are loaded lazily (see `dictionaries_lazy_load`), so instead of being loaded automatically at startup, they are initialized on first access through `dictGet` function or `SELECT` from tables with `ENGINE = Dictionary`. The `SYSTEM RELOAD DICTIONARIES` query reloads such dictionaries (LOADED). Always returns `Ok`. regardless of the result of the dictionary update.

### RELOAD DICTIONARY `dictionary_name`

Completely reloads a dictionary `dictionary_name`, regardless of the state of the dictionary (LOADED / NOT\_LOADED / FAILED). Always returns `Ok`. regardless of the result of updating the dictionary. The status of the dictionary can be checked by querying the `system.dictionaries` table.

```
SELECT name, status FROM system.dictionaries;
```

## DROP DNS CACHE

Resets ClickHouse's internal DNS cache. Sometimes (for old ClickHouse versions) it is necessary to use this command when changing the infrastructure (changing the IP address of another ClickHouse server or the server used by dictionaries).

For more convenient (automatic) cache management, see `disable_internal_dns_cache`, `dns_cache_update_period` parameters.

## DROP MARK CACHE

Resets the mark cache. Used in development of ClickHouse and performance tests.

## FLUSH LOGS

Flushes buffers of log messages to system tables (e.g. `system.query_log`). Allows you to not wait 7.5 seconds when debugging.

## RELOAD CONFIG

Reloads ClickHouse configuration. Used when configuration is stored in ZooKeeper.

## SHUTDOWN

Normally shuts down ClickHouse (like `service clickhouse-server stop` / `kill {$pid_clickhouse-server}` )

## KILL

Aborts ClickHouse process (like `kill -9 {$pid_clickhouse-server}` )

## Managing Distributed Tables

ClickHouse can manage **distributed** tables. When a user inserts data into these tables, ClickHouse first creates a queue of the data that should be sent to cluster nodes, then asynchronously sends it. You can manage queue processing with the **STOP DISTRIBUTED SENDS**, **FLUSH DISTRIBUTED**, and **START DISTRIBUTED SENDS** queries. You can also synchronously insert distributed data with the `insert_distributed_sync` setting.

### STOP DISTRIBUTED SENDS

Disables background data distribution when inserting data into distributed tables.

```
SYSTEM STOP DISTRIBUTED SENDS [db.]<distributed_table_name>
```

### FLUSH DISTRIBUTED

Forces ClickHouse to send data to cluster nodes synchronously. If any nodes are unavailable, ClickHouse throws an exception and stops query execution. You can retry the query until it succeeds, which will happen when all nodes are back online.

```
SYSTEM FLUSH DISTRIBUTED [db.]<distributed_table_name>
```

### START DISTRIBUTED SENDS

Enables background data distribution when inserting data into distributed tables.

```
SYSTEM START DISTRIBUTED SENDS [db .]<distributed_table_name>
```

## STOP MERGES

Provides possibility to stop background merges for tables in the MergeTree family:

```
SYSTEM STOP MERGES [[db .]merge_tree_family_table_name]
```



### Note

DETACH / ATTACH table will start background merges for the table even in case when merges have been stopped for all MergeTree tables before.

## START MERGES

Provides possibility to start background merges for tables in the MergeTree family:

```
SYSTEM START MERGES [[db .]merge_tree_family_table_name]
```

## SHOW Queries

### SHOW CREATE TABLE

```
SHOW CREATE [TEMPORARY] [TABLE|DICTIONARY] [db .]table [INTO OUTFILE filename] [FORMAT format]
```

Returns a single `String`-type 'statement' column, which contains a single value – the `CREATE` query used for creating the specified object.

### SHOW DATABASES

```
SHOW DATABASES [INTO OUTFILE filename] [FORMAT format]
```

Prints a list of all databases. This query is identical to `SELECT name FROM system.databases [INTO OUTFILE filename] [FORMAT format]`.

### SHOW PROCESSLIST

```
SHOW PROCESSLIST [INTO OUTFILE filename] [FORMAT format]
```

Outputs the content of the `system.processes` table, that contains a list of queries that is being processed at the moment, excepting `SHOW PROCESSLIST` queries.

The `SELECT * FROM system.processes` query returns data about all the current queries.

Tip (execute in the console):

```
$ watch -n1 "clickhouse-client --query='SHOW PROCESSLIST'"
```

## SHOW TABLES

Displays a list of tables.

```
SHOW [TEMPORARY] TABLES [{FROM | IN} <db>] [LIKE '<pattern>' | WHERE expr] [LIMIT <N>] [INTO OUTFILE <filename>] [FORMAT <format>]
```

If the `FROM` clause is not specified, the query returns the list of tables from the current database.

You can get the same results as the `SHOW TABLES` query in the following way:

```
SELECT name FROM system.tables WHERE database = <db> [AND name LIKE <pattern>] [LIMIT <N>] [INTO OUTFILE <filename>] [FORMAT <format>]
```

## Example

The following query selects the first two rows from the list of tables in the `system` database, whose names contain `co`.

```
SHOW TABLES FROM system LIKE '%co%' LIMIT 2
```

name
aggregate_function_combinators
collations

## SHOW DICTIONARIES

Displays a list of **external dictionaries**.

```
SHOW DICTIONARIES [FROM <db>] [LIKE '<pattern>'] [LIMIT <N>] [INTO OUTFILE <filename>] [FORMAT <format>]
```

If the `FROM` clause is not specified, the query returns the list of dictionaries from the current database.

You can get the same results as the `SHOW DICTIONARIES` query in the following way:

```
SELECT name FROM system.dictionaries WHERE database = <db> [AND name LIKE <pattern>] [LIMIT <N>] [INTO OUTFILE <filename>] [FORMAT <format>]
```

## Example

The following query selects the first two rows from the list of tables in the `system` database, whose names contain `reg`.

```
SHOW DICTIONARIES FROM db LIKE '%reg%' LIMIT 2
```

name
regions
region_names

## Miscellaneous Queries

### ATTACH

This query is exactly the same as `CREATE`, but

- Instead of the word `CREATE` it uses the word `ATTACH`.
- The query does not create data on the disk, but assumes that data is already in the appropriate places, and just adds information about the table to the server. After executing an `ATTACH` query, the server will know about the existence of the table.

If the table was previously detached (`DETACH`), meaning that its structure is known, you can use shorthand without defining the structure.

```
ATTACH TABLE [IF NOT EXISTS] [db.]name [ON CLUSTER cluster]
```

This query is used when starting the server. The server stores table metadata as files with `ATTACH` queries, which it simply runs at launch (with the exception of system tables, which are explicitly created on the server).

## CHECK TABLE

Checks if the data in the table is corrupted.

```
CHECK TABLE [db.]name
```

The `CHECK TABLE` query compares actual file sizes with the expected values which are stored on the server. If the file sizes do not match the stored values, it means the data is corrupted. This can be caused, for example, by a system crash during query execution.

The query response contains the `result` column with a single row. The row has a value of `Boolean` type:

- 0 - The data in the table is corrupted.
- 1 - The data maintains integrity.

The `CHECK TABLE` query supports the following table engines:

- `Log`
- `TinyLog`
- `StripeLog`
- `MergeTree family`

Performed over the tables with another table engines causes an exception.

Engines from the `*Log` family don't provide automatic data recovery on failure. Use the `CHECK TABLE` query to track data loss in a timely manner.

For `MergeTree` family engines, the `CHECK TABLE` query shows a check status for every individual data part of a table on the local server.

If the data is corrupted

If the table is corrupted, you can copy the non-corrupted data to another table. To do this:

1. Create a new table with the same structure as damaged table. To do this execute the query `CREATE TABLE <new_table_name> AS <damaged_table_name>`.
2. Set the `max_threads` value to 1 to process the next query in a single thread. To do this run the query `SET max_threads = 1`.
3. Execute the query `INSERT INTO <new_table_name> SELECT * FROM <damaged_table_name>`. This request copies the non-corrupted data from the damaged table to another table. Only the data before the corrupted part will be copied.
4. Restart the `clickhouse-client` to reset the `max_threads` value.

## DESCRIBE TABLE

```
DESC|DESCRIBE TABLE [db.]table [INTO OUTFILE filename] [FORMAT format]
```

Returns the following `String` type columns:

- `name` — Column name.
- `type` — Column type.
- `default_type` — Clause that is used in **default expression** (`DEFAULT`, `MATERIALIZED` or `ALIAS`). Column contains an empty string, if the default expression isn't specified.
- `default_expression` — Value specified in the `DEFAULT` clause.
- `comment_expression` — Comment text.

Nested data structures are output in "expanded" format. Each column is shown separately, with the name after a dot.

## DETACH

Deletes information about the 'name' table from the server. The server stops knowing about the table's existence.

```
DETACH TABLE [IF EXISTS] [db.]name [ON CLUSTER cluster]
```

This does not delete the table's data or metadata. On the next server launch, the server will read the metadata and find out about the table again. Similarly, a "detached" table can be re-attached using the `ATTACH` query (with the exception of system tables, which do not have metadata stored for them).

There is no `DETACH DATABASE` query.

## DROP

This query has two types: `DROP DATABASE` and `DROP TABLE`.

```
DROP DATABASE [IF EXISTS] db [ON CLUSTER cluster]
```

Deletes all tables inside the 'db' database, then deletes the 'db' database itself. If `IF EXISTS` is specified, it doesn't return an error if the database doesn't exist.

```
DROP [TEMPORARY] TABLE [IF EXISTS] [db.]name [ON CLUSTER cluster]
```

Deletes the table. If `IF EXISTS` is specified, it doesn't return an error if the table doesn't exist or the database doesn't exist.

```
DROP DICTIONARY [IF EXISTS] [db.]name
```

Deletes the dictionary. If `IF EXISTS` is specified, it doesn't return an error if the table doesn't exist or the database doesn't exist.

## EXISTS

```
EXISTS [TEMPORARY] [TABLE|DICTIONARY] [db.]name [INTO OUTFILE filename] [FORMAT format]
```

Returns a single `UInt8`-type column, which contains the single value `0` if the table or database doesn't exist, or `1` if the table exists in the specified database.

## KILL QUERY

```
KILL QUERY [ON CLUSTER cluster]
  WHERE <where expression to SELECT FROM system.processes query>
    [SYNC|ASYNC|TEST]
    [FORMAT format]
```

Attempts to forcibly terminate the currently running queries. The queries to terminate are selected from the `system.processes` table using the criteria defined in the `WHERE` clause of the `KILL` query.

Examples:

```
-- Forcibly terminates all queries with the specified query_id:
KILL QUERY WHERE query_id='2-857d-4a57-9ee0-327da5d60a90'

-- Synchronously terminates all queries run by 'username':
KILL QUERY WHERE user='username' SYNC
```

Read-only users can only stop their own queries.

By default, the asynchronous version of queries is used (`ASYNC`), which doesn't wait for confirmation that queries have stopped.

The synchronous version (`SYNC`) waits for all queries to stop and displays information about each process as it stops. The response contains the `kill_status` column, which can take the following values:

1. 'finished' – The query was terminated successfully.
2. 'waiting' – Waiting for the query to end after sending it a signal to terminate.
3. The other values explain why the query can't be stopped.

A test query (`TEST`) only checks the user's rights and displays a list of queries to stop.

## KILL MUTATION

```
KILL MUTATION [ON CLUSTER cluster]
  WHERE <where expression to SELECT FROM system.mutations query>
    [TEST]
    [FORMAT format]
```

Tries to cancel and remove **mutations** that are currently executing. Mutations to cancel are selected from the `system.mutations` table using the filter specified by the `WHERE` clause of the `KILL` query.

A test query (`TEST`) only checks the user's rights and displays a list of queries to stop.

Examples:

```
-- Cancel and remove all mutations of the single table:
KILL MUTATION WHERE database = 'default' AND table = 'table'

-- Cancel the specific mutation:
KILL MUTATION WHERE database = 'default' AND table = 'table' AND mutation_id = 'mutation_3.txt'
```

The query is useful when a mutation is stuck and cannot finish (e.g. if some function in the mutation query throws an exception when applied to the data contained in the table).

Changes already made by the mutation are not rolled back.

## OPTIMIZE

```
OPTIMIZE TABLE [db.]name [ON CLUSTER cluster] [PARTITION partition | PARTITION ID 'partition_id'] [FINAL]
[DEDUPLICATE]
```

This query tries to initialize an unscheduled merge of data parts for tables with a table engine from the [MergeTree](#) family.

The `OPTIMIZE` query is also supported for the [MaterializedView](#) and the [Buffer](#) engines. Other table engines aren't supported.

When `OPTIMIZE` is used with the [ReplicatedMergeTree](#) family of table engines, ClickHouse creates a task for merging and waits for execution on all nodes (if the `replication_alter_partitions_sync` setting is enabled).

- If `OPTIMIZE` doesn't perform a merge for any reason, it doesn't notify the client. To enable notifications, use the `optimize_throw_if_noop` setting.
- If you specify a `PARTITION`, only the specified partition is optimized. [How to set partition expression](#).
- If you specify `FINAL`, optimization is performed even when all the data is already in one part.
- If you specify `DEDUPLICATE`, then completely identical rows will be deduplicated (all columns are compared), it makes sense only for the MergeTree engine.

#### Warning

`OPTIMIZE` can't fix the "Too many parts" error.

## RENAME

Renames one or more tables.

```
RENAME TABLE [db11.]name11 TO [db12.]name12, [db21.]name21 TO [db22.]name22, ... [ON CLUSTER cluster]
```

All tables are renamed under global locking. Renaming tables is a light operation. If you indicated another database after `TO`, the table will be moved to this database. However, the directories with databases must reside in the same file system (otherwise, an error is returned).

## SET

```
SET param = value
```

Assigns `value` to the param `setting` for the current session. You cannot change [server settings](#) this way.

You can also set all the values from the specified settings profile in a single query.

```
SET profile = 'profile-name-from-the-settings-file'
```

For more information, see [Settings](#).

## TRUNCATE

```
TRUNCATE TABLE [IF EXISTS] [db.]name [ON CLUSTER cluster]
```

Removes all data from a table. When the clause `IF EXISTS` is omitted, the query returns an error if the table does not exist.

The `TRUNCATE` query is not supported for [View](#), [File](#), [URL](#) and [Null](#) table engines.

## USE

```
USE db
```

Lets you set the current database for the session. The current database is used for searching for tables if the database is not explicitly defined in the query with a dot before the table name. This query can't be made when using the HTTP protocol, since there is no concept of a session.

## 函数

ClickHouse中至少存在两种类型的函数 - 常规函数（它们称之为“函数”）和聚合函数。 常规函数的工作就像分别为每一行执行一次函数计算一样（对于每一行，函数的结果不依赖于其他行）。 聚合函数则从各行累积一组值（即函数的结果以来整个结果集）。

在本节中，我们将讨论常规函数。 有关聚合函数，请参阅“聚合函数”一节。

\\* - 'arrayJoin'函数与表函数均属于第三种类型的函数。 \\*

## 强类型

与标准SQL相比，ClickHouse具有强类型。 换句话说，它不会在类型之间进行隐式转换。 每个函数适用于特定的一组类型。 这意味着有时您需要使用类型转换函数。

## 常见的子表达式消除

查询中具有相同AST（相同语句或语法分析结果相同）的所有表达式都被视为具有相同的值。 这样的表达式被连接并执行一次。 通过这种方式也可以消除相同的子查询。

## 结果类型

所有函数都只能够返回一个返回值。 结果类型通常由参数的类型决定。 但tupleElement函数（a.N运算符）和toFixedString函数是例外的。

## 常量

为了简单起见，某些函数的某些参数只能是常量。 例如，LIKE运算符的右参数必须是常量。 几乎所有函数都为常量参数返回常量。 除了用于生成随机数的函数。 'now'函数为在不同时间运行的查询返回不同的值，但结果被视为常量，因为常量在单个查询中很重要。 常量表达式也被视为常量（例如，LIKE运算符的右半部分可以由多个常量构造）。

对于常量和非常量参数，可以以不同方式实现函数（执行不同的代码）。 但是，对于包含相同数据的常量和非常量参数它们的结果应该是一致的。

## NULL值处理

函数具有以下行为：

- 如果函数的参数至少一个是“NULL”，则函数结果也是“NULL”。
- 在每个函数的描述中单独指定的特殊行为。在ClickHouse源代码中，这些函数具有“UseDefaultImplementationForNulls = false”。

## 不可变性

函数不能更改其参数的值 - 任何更改都将作为结果返回。因此，计算单独函数的结果不依赖于在查询中写入函数的顺序。

## 错误处理

如果数据无效，某些函数可能会抛出异常。在这种情况下，将取消查询并将错误信息返回给客户端。对于分布式处理，当其中一个服务器发生异常时，其他服务器也会尝试中止查询。

## 表达式参数的计算

在几乎所有编程语言中，某些函数可能无法预先计算其中一个参数。这通常是运算符 `&&`，`||` 和 `?:`。但是在ClickHouse中，函数（运算符）的参数总是被预先计算。这是因为一次评估列的整个部分，而不是分别计算每一行。

## 执行分布式查询处理的功能

对于分布式查询处理，在远程服务器上执行尽可能多的查询处理阶段，并且在请求者服务器上执行其余阶段（合并中间结果和之后的所有内容）。

这意味着可以在不同的服务器上执行功能。例如，在查询 `SELECT f( sum( g( x ) ) ) FROM distributed_table GROUP BY h( y )` 中，

- 如果 `distributed_table` 至少有两个分片，则在远程服务器上执行函数'`g`'和'`h`'，并在请求服务器上执行函数'`f`'。
- 如果 `distributed_table` 只有一个分片，则在该分片的服务器上执行所有'`f`'，'`g`'和'`h`'功能。

函数的结果通常不依赖于它在哪个服务器上执行。但是，有时这很重要。例如，使用字典的函数时将使用运行它们的服务器上存在的字典。另一个例子是 `hostName` 函数，它返回运行它的服务器的名称，以便在 `SELECT` 查询中对服务器进行 `GROUP BY`。

如果查询中的函数在请求服务器上执行，但您需要在远程服务器上执行它，则可以将其包装在“any”聚合函数中，或将其添加到“GROUP BY”中。

## 算术函数

对于所有算术函数，结果类型为结果适合的最小数字类型（如果存在这样的类型）。最小数字类型是根据数字的位数，是否有符号以及是否是浮点类型而同时进行的。如果没有足够的位，则采用最高位类型。

例如：

```
SELECT toTypeName(0), toTypeName(0 + 0), toTypeName(0 + 0 + 0), toTypeName(0 + 0 + 0 + 0)
```

```
+-----+-----+-----+-----+
| toTypeName(0) | toTypeName(plus(0, 0)) | toTypeName(plus(plus(0, 0), 0)) | toTypeName(plus(plus(plus(0, 0), 0), 0)) |
| UInt8         | UInt16           | UInt32           | UInt64           |
+-----+-----+-----+-----+
```

算术函数适用于 `UInt8`，`UInt16`，`UInt32`，`UInt64`，`Int8`，`Int16`，`Int32`，`Int64`，`Float32` 或 `Float64` 中的任何类型。

溢出的产生方式与C++相同。

### `plus(a, b)`, `a + b`

计算数字的总和。您还可以将 `Date` 或 `DateTime` 与整数进行相加。在 `Date` 的情况下，添加的整数意味着添加相应的天数。对于 `DateTime`，这意味着添加相应的描述。

**minus(a, b), a - b**

计算数字之间的差，结果总是有符号的。

您还可以将Date或DateTime与整数进行相减。见上面的'plus'。

**multiply(a, b), a \* b**

计算数字的乘积。

**divide(a, b), a / b**

计算数字的商。结果类型始终是浮点类型。它不是整数除法。对于整数除法，请使用'intDiv'函数。当除以零时，你得到'inf'，'- inf'或'nan'。

**intDiv(a, b)**

计算整数数字的商，向下舍入（按绝对值）。除以零或将最小负数除以-1时抛出异常。

**intDivOrZero(a, b)**

与'intDiv'的不同之处在于它在除以零或将最小负数除以-1时返回零。

**modulo(a, b), a % b**

计算除法后的余数。如果参数是浮点数，则通过删除小数部分将它们预转换为整数。其余部分与C++中的含义相同。截断除法用于负数。除以零或将最小负数除以-1时抛出异常。

**negate(a), -a**

计算一个数字的用反转符号计算一个数字。结果始终是签名的。Calculates a number with the reverse sign. The result is always signed.

**abs(a)**

计算数字 (a) 的绝对值。也就是说，如果  $a < 0$ ，它返回  $-a$ 。对于无符号类型，它不执行任何操作。对于有符号整数类型，它返回无符号数。

**gcd(a, b)**

返回数字的最大公约数。除以零或将最小负数除以-1时抛出异常。

**lcm(a, b)**

返回数字的最小公倍数。除以零或将最小负数除以-1时抛出异常。

## 比较函数

比较函数始终返回0或1 ( UInt8 )。

可以比较以下类型：

- Numbers
- String 和 FixedString
- Date
- DateTime

以上每个组内的类型均可互相比较，但是对于不同组的类型间不能够进行比较。

例如，您无法将日期与字符串进行比较。您必须使用函数将字符串转换为日期，反之亦然。

字符串按字节进行比较。较短的字符串小于以其开头并且至少包含一个字符的所有字符串。

注意。直到1.1.54134版本，有符号和无符号数字的比较方式与C++相同。换句话说，在SELECT 9223372036854775807 &gt; -1 等情况下，您可能会得到错误的结果。此行为在版本1.1.54134中已更改，现在在数学上是正确的。

**equals, a = b and a == b operator**

**notEquals, a ! operator= b and a <> b**

**less, < operator**

**greater, > operator**

**lessOrEquals, <= operator**

**greaterOrEquals, >= operator**

## 逻辑函数

逻辑函数可以接受任何数字类型的参数，并返回UInt8类型的0或1。

当向函数传递零时，函数将判定为“false”，否则，任何其他非零的值都将被判定为“true”。

**and, AND operator**

**or, OR operator**

**not, NOT operator**

**xor**

## 类型转换函数

**toUInt8, toUInt16, toUInt32, toUInt64**

**toInt8,.toInt16,.toInt32,.toInt64**

toFloat32, toFloat64

toDate, toDateTime

toUInt8OrZero, toUInt16OrZero, toUInt32OrZero, toUInt64OrZero,.toInt8OrZero,.toInt16OrZero,  
toInt32OrZero,.toInt64OrZero, toFloat32OrZero, toFloat64OrZero, toDateOrZero,  
toDateTimeOrZero

toUInt8OrNull, toUInt16OrNull, toUInt32OrNull, toUInt64OrNull,.toInt8OrNull,.toInt16OrNull,  
toInt32OrNull,.toInt64OrNull, toFloat32OrNull, toFloat64OrNull, toDateOrNull, toDateTimeOrNull

toString

这些函数用于在数字、字符串（不包含FixedString）、Date以及DateTime之间互相转换。所有的函数都接受一个参数。

当将其他类型转换到字符串或从字符串转换到其他类型时，使用与TabSeparated格式相同的规则对字符串的值进行格式化或解析。如果无法解析字符串则抛出异常并取消查询。

当将Date转换为数字或反之，Date对应Unix时间戳的天数。将DateTime转换为数字或反之，DateTime对应Unix时间戳的秒数。

toDate/toDateTime函数的日期和日期时间格式定义如下：

```
YYYY-MM-DD  
YYYY-MM-DD hh:mm:ss
```

例外的是，如果将UInt32、Int32、UInt64或Int64类型的数值转换为Date类型，并且其对应的值大于等于65536，则该数值将被解析成unix时间戳（而不是对应的天数）。这意味着允许写入‘toDate(unix\_timestamp)’这种常见情况，否则这将是错误的，并且需要便携更加繁琐的‘toDate(toDateTime(unix\_timestamp))’。

Date与DateTime之间的转换以更为自然的方式进行：通过添加空的time或删除time。

数值类型之间的转换与C++中不同数字类型之间的赋值相同的规则。

此外，DateTime参数的toString函数可以在第二个参数中包含时区名称。例如：Asia/Yekaterinburg 在这种情况下，时间根据指定的时区进行格式化。

```
SELECT  
now() AS now_local,  
toString(now(), 'Asia/Yekaterinburg') AS now_yekat
```

now_local	now_yekat
2016-06-15 00:11:21	2016-06-15 02:11:21

另请参阅 [toUnixTimestamp](#) 函数。

toDecimal32(value, S), toDecimal64(value, S), toDecimal128(value, S)

将 value 转换为精度为 S 的Decimal。value 可以是数字或字符串。S 参数为指定的小数位数。

toFixedString(s, N)

将String类型的参数转换为FixedString(N)类型的值（具有固定长度N的字符串）。N必须是一个常量。如果字符串的字节数少于N，则向右填充空字节。如果字符串的字节数多于N，则抛出异常。

## toStringCutToZero(s)

接受String或FixedString参数。返回String，其内容在找到的第一个零字节处被截断。

示例：

```
SELECT toFixedString('foo', 8) AS s, toStringCutToZero(s) AS s_cut
```



```
SELECT toFixedString('foo\0bar', 8) AS s, toStringCutToZero(s) AS s_cut
```



reinterpretAsUInt8, reinterpretAsUInt16, reinterpretAsUInt32, reinterpretAsUInt64

reinterpretAsInt8, reinterpretAsInt16, reinterpretAsInt32, reinterpretAsInt64

reinterpretAsFloat32, reinterpretAsFloat64

reinterpretAsDate, reinterpretAsDateTime

这些函数接受一个字符串，并将放在字符串开头的字节解释为主机顺序中的数字（little endian）。如果字符串不够长，则函数就像使用必要数量的空字节填充字符串一样。如果字符串比需要的长，则忽略额外的字节。Date被解释为Unix时间戳的天数，DateTime被解释为Unix时间戳。

## reinterpretAsString

此函数接受数字、Date或DateTime，并返回一个字符串，其中包含表示主机顺序（小端）的相应值的字节。从末尾删除空字节。例如，UInt32类型值255是一个字节长的字符串。

## reinterpretAsFixedString

此函数接受数字、Date或DateTime，并返回包含表示主机顺序（小端）的相应值的字节的FixedString。从末尾删除空字节。例如，UInt32类型值255是一个长度为一个字节的FixedString。

## CAST(x, t)

将‘x’转换为‘t’数据类型。还支持语法CAST ( x AS t )

示例：

```
SELECT
    '2016-06-15 23:00:00' AS timestamp,
    CAST(timestamp AS DateTime) AS datetime,
    CAST(timestamp AS Date) AS date,
    CAST(timestamp, 'String') AS string,
    CAST(timestamp, 'FixedString(22)') AS fixed_string
```

timestamp	datetime	date	string	fixed_string
2016-06-15 23:00:00	2016-06-15 23:00:00	2016-06-15	2016-06-15 23:00:00	2016-06-15 23:00:00\0\0\0

将参数转换为FixedString(N) , 仅适用于String或FixedString(N)类型的参数。

支持将数据转换为Nullable。例如：

```
SELECT toTypeName(x) FROM t_null

toTypeName(x)
Int8
Int8

SELECT toTypeName(CAST(x, 'Nullable(UInt16)')) FROM t_null

toTypeName(CAST(x, 'Nullable(UInt16)'))
Nullable(UInt16)
Nullable(UInt16)
```

toIntervalYear, toIntervalQuarter, toIntervalMonth, toIntervalWeek, toIntervalDay, toIntervalHour, toIntervalMinute, toIntervalSecond

将数字类型参数转换为Interval类型（时间区间）。Interval类型实际上是非常有用的，您可以使用此类型的数据直接与Date或DateTime执行算术运算。同时，ClickHouse为Interval类型数据的声明提供了更方便的语法。例如：

```
WITH
    toDate('2019-01-01') AS date,
    INTERVAL 1 WEEK AS interval_week,
    toIntervalWeek(1) AS interval_to_week
SELECT
    date + interval_week,
    date + interval_to_week
```

plus(date, interval_week)	plus(date, interval_to_week)
2019-01-08	2019-01-08

parseDateTimeBestEffort

将数字类型参数解析为Date或DateTime类型。与toDate和toDate不同，parseDateTimeBestEffort可以进行更复杂的日期格式。有关详细信息，请参阅链接：[复杂日期格式](#)。

parseDateTimeBestEffortOrNull

与parseDateTimeBestEffort相同，但它遇到无法处理的日期格式时返回null。

## parseDateTimeBestEffortOrZero

与parseDateTimeBestEffort相同，但它遇到无法处理的日期格式时返回零Date或零DateTime。

## 时间日期函数

支持时区。

所有的时间日期函数都可以在第二个可选参数中接受时区参数。示例：Asia / Yekaterinburg。在这种情况下，它们使用指定的时区而不是本地（默认）时区。

```
SELECT
    toDateTime('2016-06-15 23:00:00') AS time,
    toDate(time) AS date_local,
    toDate(time, 'Asia/Yekaterinburg') AS date_yekat,
    toString(time, 'US/Samoa') AS time_samoa
```

time	date_local	date_yekat	time_samoa
2016-06-15 23:00:00	2016-06-15	2016-06-16	2016-06-15 09:00:00

仅支持与UTC相差一整小时的时区。

### toTimeZone

将Date或DateTime转换为指定的时区。

### toYear

将Date或DateTime转换为包含年份编号（AD）的UInt16类型的数字。

### toQuarter

将Date或DateTime转换为包含季度编号的UInt8类型的数字。

### toMonth

将Date或DateTime转换为包含月份编号（1-12）的UInt8类型的数字。

### toDayOfYear

将Date或DateTime转换为包含一年中的某一天的编号的UInt16（1-366）类型的数字。

### toDayOfMonth

将Date或DateTime转换为包含一月中的某一天的编号的UInt8（1-31）类型的数字。

### toDayOfWeek

将Date或DateTime转换为包含一周中的某一天的编号的UInt8（周一为1，周日为7）类型的数字。

### toHour

将DateTime转换为包含24小时制（0-23）小时数的UInt8数字。这个函数假设如果时钟向前移动，它是一个小时，发生在凌晨2点，如果时钟被移回，它是一个小时，发生在凌晨3点（这并非总是如此 - 即使在莫斯科时钟在不同的时间两次改变）。

### toMinute

将DateTime转换为包含一小时中分钟数（0-59）的UInt8数字。

### toSecond

将DateTime转换为包含一分钟中秒数（0-59）的UInt8数字。闰秒不计算在内。

### toUnixTimestamp

将DateTime转换为unix时间戳。

### toStartOfYear

将Date或DateTime向前取整到本年的第一天。返回Date类型。

### toStartOfISOYear

将Date或DateTime向前取整到ISO本年的第一天。返回Date类型。

### toStartOfQuarter

将Date或DateTime向前取整到本季度的第一天。返回Date类型。

### toStartOfMonth

将Date或DateTime向前取整到本月的第一天。返回Date类型。

!!! 注意 解析不正确日期的行为是特定于实现的。ClickHouse可能会返回零日期，抛出异常或执行“natural”溢出。

### toMonday

将Date或DateTime向前取整到本周的星期一。返回Date类型。

### toStartOfDay

将DateTime向前取整到当日的开始。

### toStartOfHour

将DateTime向前取整到当前小时的开始。

### toStartOfMinute

将DateTime向前取整到当前分钟的开始。

## **toStartOfFiveMinute**

将DateTime以五分钟为单位向前取整到最接近的时间点。

## **toStartOfTenMinutes**

将DateTime以十分钟为单位向前取整到最接近的时间点。

## **toStartOfFifteenMinutes**

将DateTime以十五分钟为单位向前取整到最接近的时间点。

## **toStartOfInterval(time\_or\_data, INTERVAL x unit [, time\_zone])**

这是名为 toStartOf\* 的所有函数的通用函数。例如， toStartOfInterval ( t , INTERVAL 1 year ) 返回与 toStartOfYear ( t ) 相同的结果， toStartOfInterval ( t , INTERVAL 1 month ) 返回与 toStartOfMonth ( t ) 相同的结果， toStartOfInterval ( t , INTERVAL 1 day ) 返回与 toStartOfDay ( t ) 相同的结果， toStartOfInterval ( t , INTERVAL 15 minute ) 返回与 toStartOfFifteenMinutes ( t ) 相同的结果。

## **toTime**

将DateTime中的日期转换为一个固定的日期，同时保留时间部分。

## **toRelativeYearNum**

将Date或DateTime转换为年份的编号，从过去的某个固定时间点开始。

## **toRelativeQuarterNum**

将Date或DateTime转换为季度的数字，从过去的某个固定时间点开始。

## **toRelativeMonthNum**

将Date或DateTime转换为月份的编号，从过去的某个固定时间点开始。

## **toRelativeWeekNum**

将Date或DateTime转换为星期数，从过去的某个固定时间点开始。

## **toRelativeDayNum**

将Date或DateTime转换为当天的编号，从过去的某个固定时间点开始。

## **toRelativeHourNum**

将DateTime转换为小时数，从过去的某个固定时间点开始。

## **toRelativeMinuteNum**

将DateTime转换为分钟数，从过去的某个固定时间点开始。

## **toRelativeSecondNum**

将DateTime转换为秒数，从过去的某个固定时间点开始。

## **toISOYear**

将Date或DateTime转换为包含ISO年份的UInt16类型的编号。

## **toISOWeek**

将Date或DateTime转换为包含ISO周数的UInt8类型的编号。

## **now**

不接受任何参数并在请求执行时的某一刻返回当前时间（DateTime）。此函数返回一个常量，即时请求需要很长时间能够完成。

## **today**

不接受任何参数并在请求执行时的某一刻返回当前日期(Date)。其功能与'toDate ( now ( ) )'相同。

## **yesterday**

不接受任何参数并在请求执行时的某一刻返回昨天的日期(Date)。其功能与'today ( ) - 1'相同。

## **timeSlot**

将时间向前取整半小时。此功能用于Yandex.Metrica，因为如果跟踪标记显示单个用户的连续综合浏览量在时间上严格超过此数量，则半小时是将会话分成两个会话的最短时间。这意味着 (tag id, user id, time slot) 可用于搜索相应会话中包含的综合浏览量。

## **toYYYYMM**

将Date或DateTime转换为包含年份和月份编号的UInt32类型的数字 (YYYY \* 100 + MM)。

## **toYYYYMMDD**

将Date或DateTime转换为包含年份和月份编号的UInt32类型的数字 (YYYY \* 10000 + MM \* 100 + DD)。

## **toYYYYMMDDhhmmss**

将Date或DateTime转换为包含年份和月份编号的UInt64类型的数字 (YYYY \* 10000000000 + MM \* 100000000 + DD \* 1000000 + hh \* 10000 + mm \* 100 + ss)。

## **addYears, addMonths, addWeeks, addDays, addHours, addMinutes, addSeconds, addQuarters**

函数将一段时间间隔添加到Date/DateTime，然后返回Date/DateTime。例如：

```

WITH
    toDate('2018-01-01') AS date,
    toDateTime('2018-01-01 00:00:00') AS date_time
SELECT
    addYears(date, 1) AS add_years_with_date,
    addYears(date_time, 1) AS add_years_with_date_time

```

add_years_with_date	add_years_with_date_time
2019-01-01	2019-01-01 00:00:00

subtractYears, subtractMonths, subtractWeeks, subtractDays, subtractHours, subtractMinutes, subtractSeconds, subtractQuarters

函数将Date/DateTime减去一段时间间隔，然后返回Date/DateTime。例如：

```

WITH
    toDate('2019-01-01') AS date,
    toDateTime('2019-01-01 00:00:00') AS date_time
SELECT
    subtractYears(date, 1) AS subtract_years_with_date,
    subtractYears(date_time, 1) AS subtract_years_with_date_time

```

subtract_years_with_date	subtract_years_with_date_time
2018-01-01	2018-01-01 00:00:00

dateDiff('unit', t1, t2, [timezone])

返回以'unit'为单位表示的两个时间之间的差异，例如 'hours'。't1'和't2'可以是Date或DateTime，如果指定'timezone'，它将应用于两个参数。如果不是，则使用来自数据类型't1'和't2'的时区。如果时区不相同，则结果将是未定义的。

Supported unit values:

unit
second
minute
hour
day
week
month
quarter
year

timeSlots(StartTime, Duration[, Size])

它返回一个时间数组，其中包括从从“StartTime”开始到“StartTime + Duration 秒”内的所有符合“size”（以秒为单位）步长的时间点。其中“size”是一个可选参数，默认为1800。例如，timeSlots(toDateTime('2012-01-01 12:20:00'), 600) =

[`toDateTime ('2012-01-01 12:00:00')` , `toDateTime ('2012-01-01 12:30:00')`]。这对于搜索在相应会话中综合浏览量是非常有用的。

## formatDateTime(Time, Format[, Timezone])

函数根据给定的格式字符串来格式化时间。请注意：格式字符串必须是常量表达式，例如：单个结果列不能有多种格式字符串。

支持的格式修饰符：("Example" 列是对 2018-01-02 22:33:44 的格式化结果)

Modifier	Description	Example
%C	year divided by 100 and truncated to integer (00-99)	20
%d	day of the month, zero-padded (01-31)	02
%D	Short MM/DD/YY date, equivalent to %m/%d/%y	01/02/2018
%e	day of the month, space-padded ( 1-31)	2
%F	short YYYY-MM-DD date, equivalent to %Y-%m-%d	2018-01-02
%H	hour in 24h format (00-23)	22
%I	hour in 12h format (01-12)	10
%j	day of the year (001-366)	002
%m	month as a decimal number (01-12)	01
%M	minute (00-59)	33
%n	new-line character ('\n')	
%p	AM or PM designation	PM
%R	24-hour HH:MM time, equivalent to %H:%M	22:33
%S	second (00-59)	44
%t	horizontal-tab character ('\t')	
%T	ISO 8601 time format (HH:MM:SS), equivalent to %H:%M:%S	22:33:44
%u	ISO 8601 weekday as number with Monday as 1 (1-7)	2
%V	ISO 8601 week number (01-53)	01
%w	weekday as a decimal number with Sunday as 0 (0-6)	2
%y	Year, last two digits (00-99)	18
%Y	Year	2018
%%	a % sign	%

# 字符串函数

## empty

对于空字符串返回1，对于非空字符串返回0。结果类型是UInt8。如果字符串包含至少一个字节，则该字符串被视为非空字符串，即使这是一个空格或空字符。该函数也适用于数组。

## notEmpty

对于空字符串返回0，对于非空字符串返回1。结果类型是UInt8。该函数也适用于数组。

## length

返回字符串的字节长度。结果类型是UInt64。该函数也适用于数组。

## lengthUTF8

假定字符串以UTF-8编码组成的文本，返回此字符串的Unicode字符长度。如果传入的字符串不是UTF-8编码，则函数可能返回一个预期外的值（不会抛出异常）。结果类型是UInt64。

## char\_length, CHAR\_LENGTH

假定字符串以UTF-8编码组成的文本，返回此字符串的Unicode字符长度。如果传入的字符串不是UTF-8编码，则函数可能返回一个预期外的值（不会抛出异常）。结果类型是UInt64。

## character\_length, CHARACTER\_LENGTH

假定字符串以UTF-8编码组成的文本，返回此字符串的Unicode字符长度。如果传入的字符串不是UTF-8编码，则函数可能返回一个预期外的值（不会抛出异常）。结果类型是UInt64。

## lower, lcase

将字符串中的ASCII转换为小写。

## upper, ucase

将字符串中的ASCII转换为大写。

## lowerUTF8

将字符串转换为小写，函数假设字符串是以UTF-8编码文本的字符集。同时函数不检测语言。因此对土耳其人来说，结果可能不完全正确。如果UTF-8字节序列的长度对于代码点的大写和小写不同，则该代码点的结果可能不正确。如果字符串包含一组非UTF-8的字节，则将引发未定义行为。

## upperUTF8

将字符串转换为大写，函数假设字符串是以UTF-8编码文本的字符集。同时函数不检测语言。因此对土耳其人来说，结果可能不完全正确。如果UTF-8字节序列的长度对于代码点的大写和小写不同，则该代码点的结果可能不正确。如果字符串包含一组非UTF-8的字节，则将引发未定义行为。

## isValidUTF8

检查字符串是否为有效的UTF-8编码，是则返回1，否则返回0。

## toValidUTF8

用◆(U+FFFD)字符替换无效的UTF-8字符。所有连续的无效字符都会被替换为一个替换字符。

```
toValidUTF8( input_string )
```

参数：

- input\_string — 任何一个String类型的对象。

返回值：有效的UTF-8字符串。

## 示例

```
SELECT toValidUTF8('b')
```

```
toValidUTF8('ab')  
ab
```

## reverse

反转字符串。

## reverseUTF8

以Unicode字符为单位反转UTF-8编码的字符串。如果字符串不是UTF-8编码，则可能获取到一个非预期的结果（不会抛出异常）。

## format(pattern, s0, s1, ...)

使用常量字符串 pattern 格式化其他参数。pattern字符串中包含由大括号 {} 包围的“替换字段”。未被包含在大括号中的任何内容都被视为文本内容，它将原样保留在返回值中。如果你需要在文本内容中包含一个大括号字符，它可以通过加倍来转义：{{ 和 }}。字段名称可以是数字（从零开始）或空（然后将它们视为连续数字）

```
SELECT format('{1} {0} {1}', 'World', 'Hello')
```

```
format('{1} {0} {1}', 'World', 'Hello')  
Hello World Hello
```

```
SELECT format('{} {}', 'Hello', 'World')
```

```
format('{} {}', 'Hello', 'World')  
Hello World
```

## concat(s1, s2, ...)

将参数中的多个字符串拼接，不带分隔符。

`concatAssumeInjective(s1, s2, ...)`

与`concat`相同，区别在于，你需要保证`concat(s1, s2, s3) -> s4`是单射的，它将用于GROUP BY的优化。

`substring(s, offset, length), mid(s, offset, length), substr(s, offset, length)`

以字节为单位截取指定位置字符串，返回以‘offset’位置为开头，长度为‘length’的子串。‘offset’从1开始（与标准SQL相同）。‘offset’和‘length’参数必须是常量。

`substringUTF8(s, offset, length)`

与‘substring’相同，但其操作单位为Unicode字符，函数假设字符串是以UTF-8进行编码的文本。如果不是则可能返回一个预期外的结果（不会抛出异常）。

`appendTrailingCharIfAbsent(s, c)`

如果‘s’字符串非空并且末尾不包含‘c’字符，则将‘c’字符附加到末尾。

`convertCharset(s, from, to)`

返回从‘from’中的编码转换为‘to’中的编码的字符串‘s’。

`base64Encode(s)`

将字符串‘s’编码成base64

`base64Decode(s)`

使用base64将字符串解码成原始字符串。如果失败则抛出异常。

`tryBase64Decode(s)`

使用base64将字符串解码成原始字符串。但如果出现错误，将返回空字符串。

`endsWith(s, suffix)`

返回是否以指定的后缀结尾。如果字符串以指定的后缀结束，则返回1，否则返回0。

`startsWith(s, prefix)`

返回是否以指定的前缀开头。如果字符串以指定的前缀开头，则返回1，否则返回0。

`trimLeft(s)`

返回一个字符串，用于删除左侧的空白字符。

`trimRight(s)`

返回一个字符串，用于删除右侧的空白字符。

## trimBoth(s)

返回一个字符串，用于删除任一侧的空白字符。

## 字符串搜索函数

下列所有函数在默认的情况下区分大小写。对于不区分大小写的搜索，存在单独的变体。

### position(haystack, needle), locate(haystack, needle)

在字符串 haystack 中搜索子串 needle。返回子串的位置（以字节为单位），从1开始，如果未找到子串，则返回0。

对于不区分大小写的搜索，请使用函数 positionCaseInsensitive。

### positionUTF8(haystack, needle)

与 position 相同，但位置以Unicode字符返回。此函数工作在UTF-8编码的文本字符集中。如非此编码的字符集，则返回一些非预期结果（他不会抛出异常）。

对于不区分大小写的搜索，请使用函数 positionCaseInsensitiveUTF8。

### multiSearchAllPositions(haystack, [needle<sub>1</sub>, needle<sub>2</sub>, ..., needle<sub>n</sub>])

与 position 相同，但函数返回一个数组，其中包含所有匹配needle<sub>i</sub>的位置。

对于不区分大小写的搜索或/和UTF-8格式，使用函

数 multiSearchAllPositionsCaseInsensitive, multiSearchAllPositionsUTF8, multiSearchAllPositionsCaseInsensitiveUTF8。

### multiSearchFirstPosition(haystack, [needle<sub>1</sub>, needle<sub>2</sub>, ..., needle<sub>n</sub>])

与 position 相同，但返回在 haystack 中与needles字符串匹配的最左偏移。

对于不区分大小写的搜索或/和UTF-8格式，使用函

数 multiSearchFirstPositionCaseInsensitive, multiSearchFirstPositionUTF8, multiSearchFirstPositionCaseInsensitiveUTF8。

### multiSearchFirstIndex(haystack, [needle<sub>1</sub>, needle<sub>2</sub>, ..., needle<sub>n</sub>])

返回在字符串 haystack 中最先查找到的needle<sub>i</sub>的索引 i（从1开始），没有找到任何匹配项则返回0。

对于不区分大小写的搜索或/和UTF-8格式，使用函

数 multiSearchFirstIndexCaseInsensitive, multiSearchFirstIndexUTF8, multiSearchFirstIndexCaseInsensitiveUTF8。

### multiSearchAny(haystack, [needle<sub>1</sub>, needle<sub>2</sub>, ..., needle<sub>n</sub>])

如果 haystack 中至少存在一个needle<sub>i</sub>匹配则返回1，否则返回0。

对于不区分大小写的搜索或/和UTF-8格式，使用函

数 multiSearchAnyCaseInsensitive, multiSearchAnyUTF8, multiSearchAnyCaseInsensitiveUTF8。

#### 注意

在所有 multiSearch\* 函数中，由于实现规范，needles的数量应小于2<sup>8</sup>。

## match(haystack, pattern)

检查字符串是否与 pattern 正则表达式匹配。 pattern 可以是一个任意的 re2 正则表达式。 re2 正则表达式的语法比Perl正则表达式的语法存在更多限制。

如果不匹配返回0，否则返回1。

请注意，反斜杠符号（\）用于在正则表达式中转义。由于字符串中采用相同的符号来进行转义。因此，为了在正则表达式中转义符号，必须在字符串文字中写入两个反斜杠（\\）。

正则表达式与字符串一起使用，就像它是一组字节一样。正则表达式中不能包含空字节。对于在字符串中搜索子字符串的模式，最好使用LIKE或“position”，因为它们更加高效。

## multiMatchAny(haystack, [pattern<sub>1</sub>, pattern<sub>2</sub>, ..., pattern<sub>n</sub>])

与 match 相同，但如果所有正则表达式都不匹配，则返回0；如果任何模式匹配，则返回1。它使用hyperscan库。对于在字符串中搜索子字符串的模式，最好使用“multisearchany”，因为它更高效。

### 注意

任何 haystack 字符串的长度必须小于2<sup>32</sup>字节，否则抛出异常。这种限制是因为hyperscan API而产生的。

## multiMatchAnyIndex(haystack, [pattern<sub>1</sub>, pattern<sub>2</sub>, ..., pattern<sub>n</sub>])

与 multiMatchAny 相同，但返回与haystack匹配的任何内容的索引位置。

## multiFuzzyMatchAny(haystack, distance, [pattern<sub>1</sub>, pattern<sub>2</sub>, ..., pattern<sub>n</sub>])

与 multiMatchAny 相同，但如果在haystack能够查找到任何模式匹配能够在指定的编辑距离内进行匹配，则返回1。此功能也处于实验模式，可能非常慢。有关更多信息，请参阅[hyperscan文档](#)。

## multiFuzzyMatchAnyIndex(haystack, distance, [pattern<sub>1</sub>, pattern<sub>2</sub>, ..., pattern<sub>n</sub>])

与 multiFuzzyMatchAny 相同，但返回匹配项的匹配能容的索引位置。

### 注意

multiFuzzyMatch\* 函数不支持UTF-8正则表达式，由于hyperscan限制，这些表达式被按字节解析。

### 注意

如要关闭所有hyperscan函数的使用，请设置 SET allow\_hyperscan = 0;。

## extract(haystack, pattern)

使用正则表达式截取字符串。如果‘haystack’与‘pattern’不匹配，则返回空字符串。如果正则表达式中不包含子模式，它将获取与整个正则表达式匹配的子串。否则，它将获取与第一个子模式匹配的子串。

## extractAll(haystack, pattern)

使用正则表达式提取字符串的所有片段。如果‘haystack’与‘pattern’正则表达式不匹配，则返回一个空字符串。否则返回所有与正则表达式匹配的字符串数组。通常，行为与‘extract’函数相同（它采用第一个子模式，如果没有子模式，则采用整个表

达式)。

## like(haystack, pattern), haystack LIKE pattern operator

检查字符串是否与简单正则表达式匹配。正则表达式可以包含的元符号有 % 和 \_。

% 表示任何字节数(包括零字符)。

\_ 表示任何一个字节。

可以使用反斜杠(\)来对元符号进行转义。请参阅“match”函数说明中有关转义的说明。

对于像 %needle% 这样的正则表达式，改函数与 position 函数一样快。对于其他正则表达式，函数与‘match’函数相同。

## notLike(haystack, pattern), haystack NOT LIKE pattern operator

与‘like’函数返回相反的结果。

## ngramDistance(haystack, needle)

基于4-gram计算 haystack 和 needle 之间的距离：计算两个4-gram集合之间的对称差异，并用它们的基数和对其进行归一化。返回0到1之间的任何浮点数 -- 越接近0则表示越多的字符串彼此相似。如果常量的 needle 或 haystack 超过32KB，函数将抛出异常。如果非常量的 haystack 或 needle 字符串超过32Kb，则距离始终为1。

对于不区分大小写的搜索或/和UTF-8格式，使用函

数 ngramDistanceCaseInsensitive , ngramDistanceUTF8 , ngramDistanceCaseInsensitiveUTF8 。

## ngramSearch(haystack, needle)

与 ngramDistance 相同，但计算 needle 和 haystack 之间的非对称差异—— needle 的n-gram减去 needle 归一化n-gram。可用于模糊字符串搜索。

对于不区分大小写的搜索或/和UTF-8格式，使用函

数 ngramSearchCaseInsensitive , ngramSearchUTF8 , ngramSearchCaseInsensitiveUTF8 。

### 注意

对于UTF-8，我们使用3-gram。所有这些都不是完全公平的n-gram距离。我们使用2字节哈希来散列n-gram，然后计算这些哈希表之间的(非)对称差异 - 可能会发生冲突。对于UTF-8不区分大小写的格式，我们不使用公平的 tolower 函数 - 我们将每个Unicode字符字节的第5位(从零开始)和字节的第一位归零 - 这适用于拉丁语，主要用于所有西里尔字母。

## 字符串替换函数

### replaceOne(haystack, pattern, replacement)

用‘replacement’子串替换‘haystack’中与‘pattern’子串第一个匹配的匹配项(如果存在)。‘pattern’和‘replacement’必须是常量。

### replaceAll(haystack, pattern, replacement), replace(haystack, pattern, replacement)

用‘replacement’子串替换‘haystack’中出现的所有‘pattern’子串。

### replaceRegexpOne(haystack, pattern, replacement)

使用‘pattern’正则表达式替换。‘pattern’可以是任意一个有效的re2正则表达式。如果存在与正则表达式匹配的匹配项，仅替换第一个匹配项。同时‘replacement’可以指定为正则表达式中的捕获组。可以包含`\0-\9`。在这种情况下，函数将使用正则表达式的整个匹配项替换`\0`。使用其他与之对应的子模式替换对应的`\1-\9`。要在模版中使用‘\’字符，请使用`\``将其转义。另外还请记住，字符串文字需要额外的转义。

示例1.将日期转换为美国格式：

```
SELECT DISTINCT
  EventDate,
  replaceRegexpOne(toString(EventDate), '(\d{4})-(\d{2})-(\d{2})', '$2/$3/$1') AS res
FROM test.hits
LIMIT 7
FORMAT TabSeparated
```

```
2014-03-17 03/17/2014
2014-03-18 03/18/2014
2014-03-19 03/19/2014
2014-03-20 03/20/2014
2014-03-21 03/21/2014
2014-03-22 03/22/2014
2014-03-23 03/23/2014
```

示例2.复制字符串十次：

```
SELECT replaceRegexpOne('Hello, World!', '.', '\\0\\0\\0\\0\\0\\0\\0\\0\\0\\0\\0') AS res
```

```
res
| Hello, World!Hello, World!Hello, World!Hello, World!Hello, World!Hello, World!Hello, World!Hello,
World!Hello, World!Hello, World! |
```

`replaceRegexpAll(haystack, pattern, replacement)`

与`replaceRegexpOne`相同，但会替换所有出现的匹配项。例如：

```
SELECT replaceRegexpAll('Hello, World!', '.', '\\0\\0') AS res
```

```
res
| HHeelllloo,, WWoorrlldd!! |
```

例外的是，如果使用正则表达式捕获空白子串，则仅会进行一次替换。示例：

```
SELECT replaceRegexpAll('Hello, World!', '^', 'here: ') AS res
```

```
res
| here: Hello, World! |
```

`regexpQuoteMeta(s)`

该函数用于在字符串中的某些预定义字符之前添加反斜杠。预定义字符：`'0', '\', '|', '(', ')', '^', '$', '.', '[', ']', '?', '*', '+', '{', ':', '-'`。这个实现与`re2 :: RE2 :: QuoteMeta`略有不同。它以`\0`而不是`\x00`转义零字节，它只转义所需的字符。有关详细信息，请参阅链接：[\[RE2\]](https://github.com/google/re2/blob/master/re2/re2.cc#L473) (<https://github.com/google/re2/blob/master/re2/re2.cc#L473>)

## 条件函数

`if(cond, then, else)`, `cond ? operator then : else`

如果 `cond != 0` 则返回 `then` , 如果 `cond = 0` 则返回 `else` 。 `cond` 必须是 `UInt8` 类型 , `then` 和 `else` 必须存在最低的共同类型。

`then` 和 `else` 可以是 `NULL`

## multilf

允许您在查询中更紧凑地编写 **CASE** 运算符。

```
multiIf(cond_1, then_1, cond_2, then_2...else)
```

参数:

- `cond_N` — 函数返回 `then_N` 的条件。
- `then_N` — 执行时函数的结果。
- `else` — 如果没有满足任何条件 , 则为函数的结果。

该函数接受  $2N + 1$  参数。

返回值

该函数返回值“`then_N`”或“`else`”之一 , 具体取决于条件 `cond_N` 。

示例

存在如下一张表

x	y
1	NULL
2	3

执行查询 `SELECT multilf(isNull(y) x, y < 3, y, NULL) FROM t_null` 。结果 :

```
multiIf(isNull(y), x, less(y, 3), y, NULL)
        1
        NULL
```

## 数学函数

以下所有的函数都返回一个 `Float64` 类型的数值。返回结果总是以尽可能最大精度返回 , 但还是可能与机器中可表示最接近该值的数字不同。

`e()`

返回一个接近数学常量  $e$  的 `Float64` 数字。

`pi()`

返回一个接近数学常量  $\pi$  的 `Float64` 数字。

**exp(x)**

接受一个数值类型的参数并返回它的指数。

**log(x), ln(x)**

接受一个数值类型的参数并返回它的自然对数。

**exp2(x)**

接受一个数值类型的参数并返回它的2的x次幂。

**log2(x)**

接受一个数值类型的参数并返回它的底2对数。

**exp10(x)**

接受一个数值类型的参数并返回它的10的x次幂。

**log10(x)**

接受一个数值类型的参数并返回它的底10对数。

**sqrt(x)**

接受一个数值类型的参数并返回它的平方根。

**cbrt(x)**

接受一个数值类型的参数并返回它的立方根。

**erf(x)**

如果'x'是非负数，那么 $\text{erf}(x / \sigma\sqrt{2})$ 是具有正态分布且标准偏差为“ $\sigma$ ”的随机变量的值与预期值之间的距离大于“x”。

示例（三西格玛准则）：

```
SELECT erf(3 / sqrt(2))
```

```
erf(divide(3, sqrt(2)))  
0.9973002039367398
```

**erfc(x)**

接受一个数值参数并返回一个接近 $1 - \text{erf}(x)$ 的Float64数字，但不会丢失大“x”值的精度。

**lgamma(x)**

返回x的绝对值的自然对数的伽玛函数。

**tgamma(x)**

返回x的伽玛函数。

**sin(x)**

返回x的三角正弦值。

**cos(x)**

返回x的三角余弦值。

**tan(x)**

返回x的三角正切值。

**asin(x)**

返回x的反三角正弦值。

**acos(x)**

返回x的反三角余弦值。

**atan(x)**

返回x的反三角正切值。

**pow(x, y), power(x, y)**

接受x和y两个参数。返回x的y次方。

**intExp2**

接受一个数值类型的参数并返回它的2的x次幂 ( UInt64 )。

**intExp10**

接受一个数值类型的参数并返回它的10的x次幂 ( UInt64 )。

## 取整函数

**floor(x[, N])**

返回小于或等于x的最大舍入数。该函数使用参数乘 $1/10^N$ ，如果 $1/10^N$ 不精确，则选择最接近的精确的适当数据类型的数。 $'N'$ 是一个整数常量，可选参数。默认为0，这意味着不对其进行舍入。 $'N'$ 可以是负数。

示例:  $\text{floor}(123.45, 1) = 123.4$ ,  $\text{floor}(123.45, -1) = 120$ .

$x$ 是任何数字类型。结果与其为相同类型。对于整数参数，使用负 $'N'$ 值进行舍入是有意义的（对于非负“ $N$ ”，该函数不执行任何操作）。如果取整导致溢出（例如， $\text{floor}(-128, -1)$ ），则返回特定于实现的结果。

## `ceil(x[, N]), ceiling(x[, N])`

返回大于或等于'x'的最小舍入数。在其他方面，它与'floor'功能相同（见上文）。

## `round(x[, N])`

将值取整到指定的小数位数。

该函数按顺序返回最近的数字。如果给定数字包含多个最近数字，则函数返回其中最接近偶数的数字（银行的取整方式）。

```
round(expression [, decimal_places])
```

参数：

- `expression` — 要进行取整的数字。可以是任何返回数字类型的表达式。
- `decimal-places` — 整数类型。
  - 如果 `decimal-places > 0`，则该函数将值舍入小数点右侧。
  - 如果 `decimal-places < 0`，则该函数将小数点左侧的值四舍五入。
  - 如果 `decimal-places = 0`，则该函数将该值舍入为整数。在这种情况下，可以省略参数。

返回值：

与输入数字相同类型的取整后的数字。

### 示例

使用示例

```
SELECT number / 2 AS x, round(x) FROM system.numbers LIMIT 3
```

x	round(divide(number, 2))
0	0
0.5	0
1	1

取整的示例

取整到最近的数字。

```
round(3.2, 0) = 3
round(4.1267, 2) = 4.13
round(22, -1) = 20
round(467, -2) = 500
round(-467, -2) = -500
```

银行的取整。

```
round(3.5) = 4
round(4.5) = 4
round(3.55, 1) = 3.6
round(3.65, 1) = 3.6
```

## `roundToExp2(num)`

接受一个数字。如果数字小于1，则返回0。否则，它将数字向下舍入到最接近的（整个非负） $2^x$ 的次幂。

### **roundDuration(num)**

接受一个数字。如果数字小于1，则返回0。否则，它将数字向下舍入为集合中的数字：

1 , 10 , 30 , 60 , 120 , 180 , 240 , 300 , 600 , 1200 , 1800 , 3600 , 7200 , 18000 , 36000。此函数用于Yandex.Metrica报表中计算会话的持续时长。

### **roundAge(num)**

接受一个数字。如果数字小于18，则返回0。否则，它将数字向下舍入为集合中的数字：18 , 25 , 35 , 45 , 55。此函数用于Yandex.Metrica报表中用户年龄的计算。

### **roundDown(num, arr)**

接受一个数字，将其向下舍入到指定数组中的元素。如果该值小于数组中的最低边界，则返回最低边界。

## **数组函数**

### **empty**

对于空数组返回1，对于非空数组返回0。结果类型是UInt8。该函数也适用于字符串。

### **notEmpty**

对于空数组返回0，对于非空数组返回1。结果类型是UInt8。该函数也适用于字符串。

### **length**

返回数组中的元素个数。结果类型是UInt64。该函数也适用于字符串。

**emptyArrayUInt8, emptyArrayUInt16, emptyArrayUInt32, emptyArrayUInt64**

**emptyArrayInt8, emptyArrayInt16, emptyArrayInt32, emptyArrayInt64**

**emptyArrayFloat32, emptyArrayFloat64**

**emptyArrayDate, emptyArrayDateTime**

### **emptyArrayString**

不接受任何参数并返回适当类型的空数组。

### **emptyArrayToSingle**

接受一个空数组并返回一个仅包含一个默认值元素的数组。

### **range(N)**

返回从0到N-1的数字数组。以防万一，如果在数据块中创建总长度超过100,000,000个元素的数组，则抛出异常。

## array(x1, ...), operator [x1, ...]

使用函数的参数作为数组元素创建一个数组。参数必须是常量，并且具有最小公共类型的类型。必须至少传递一个参数，否则将不清楚要创建哪种类型的数组。也就是说，你不能使用这个函数来创建一个空数组（为此，使用上面描述的'emptyArray \\*'函数）。返回'Array (T)'类型的结果，其中'T'是传递的参数中最小的公共类型。

## arrayConcat

合并参数中传递的所有数组。

```
arrayConcat(arrays)
```

### 参数

- arrays – 任意数量的Array类型的参数。示例

```
SELECT arrayConcat([1, 2], [3, 4], [5, 6]) AS res
```

```
res  
[1, 2, 3, 4, 5, 6]
```

## arrayElement(arr, n), operator arr[n]

从数组 arr 中获取索引为“n”的元素。n 必须是任何整数类型。数组中的索引从一开始。支持负索引。在这种情况下，它选择从未尾开始编号的相应元素。例如，arr [-1] 是数组中的最后一项。

如果索引超出数组的边界，则返回默认值（数字为0，字符串为空字符串等）。

## has(arr, elem)

检查'arr'数组是否具有'elem'元素。如果元素不在数组中，则返回0；如果在，则返回1。

NULL 值的处理。

```
SELECT has([1, 2, NULL], NULL)
```

```
has([1, 2, NULL], NULL)  
1
```

## hasAll

检查一个数组是否是另一个数组的子集。

```
hasAll(set, subset)
```

### 参数

- set – 具有一组元素的任何类型的数组。
- subset – 任何类型的数组，其元素应该被测试为 set 的子集。

### 返回值

- 1，如果 set 包含 subset 中的所有元素。

- `0` , 否则。

### 特殊的定义

- 空数组是任何数组的子集。
- “Null”作为数组中的元素值进行处理。
- 忽略两个数组中的元素值的顺序。

### 示例

```
SELECT hasAll([], []) returns 1.
```

```
SELECT hasAll([1, Null], [Null]) returns 1.
```

```
SELECT hasAll([1.0, 2, 3, 4], [1, 3]) returns 1.
```

```
SELECT hasAll(['a', 'b'], ['a']) returns 1.
```

```
SELECT hasAll([1], ['a']) returns 0.
```

```
SELECT hasAll([[1, 2], [3, 4]], [[1, 2], [3, 5]]) returns 0.
```

## hasAny

检查两个数组是否存在交集。

```
hasAny(array1, array2)
```

### 参数

- `array1` – 具有一组元素的任何类型的数组。
- `array2` – 具有一组元素的任何类型的数组。

### 返回值

- `1` , 如果 `array1` 和 `array2` 存在交集。
- `0` , 否则。

### 特殊的定义

- “Null”作为数组中的元素值进行处理。
- 忽略两个数组中的元素值的顺序。

### 示例

```
SELECT hasAny([1], []) returns 0 .
```

```
SELECT hasAny([Null], [Null, 1]) returns 1 .
```

```
SELECT hasAny([-128, 1., 512], [1]) returns 1 .
```

```
SELECT hasAny([[1, 2], [3, 4]], ['a', 'c']) returns 0 .
```

```
SELECT hasAll([[1, 2], [3, 4]], [[1, 2], [1, 2]]) returns 1 .
```

## indexOf(arr, x)

返回数组中第一个‘x’元素的索引（从1开始），如果‘x’元素不存在在数组中，则返回0。

示例：

```
:) SELECT indexOf([1, 3, NULL, NULL], NULL)
SELECT indexOf([1, 3, NULL, NULL], NULL)
indexOf([1, 3, NULL, NULL], NULL) 3
```

设置为“NULL”的元素将作为普通的元素值处理。

### countEqual(arr, x)

返回数组中等于x的元素的个数。相当于arrayCount ( elem -> elem = x , arr )。

NULL 值将作为单独的元素值处理。

示例：

```
SELECT countEqual([1, 2, NULL, NULL], NULL)
countEqual([1, 2, NULL, NULL], NULL) 2
```

### arrayEnumerate(arr)

返回 Array [1, 2, 3, ..., length (arr) ]

此功能通常与ARRAY JOIN一起使用。它允许在应用ARRAY JOIN后为每个数组计算一次。例如：

```
SELECT
    count() AS Reaches,
    countIf(num = 1) AS Hits
FROM test.hits
ARRAY JOIN
    GoalsReached,
    arrayEnumerate(GoalsReached) AS num
WHERE CounterID = 160656
LIMIT 10
```

Reaches	Hits
95606	31406

在此示例中，Reaches是转换次数（应用ARRAY JOIN后接收的字符串），Hits是浏览量（ARRAY JOIN之前的字符串）。在这种特殊情况下，您可以更轻松地获得相同的结果：

```
SELECT
    sum(length(GoalsReached)) AS Reaches,
    count() AS Hits
FROM test.hits
WHERE (CounterID = 160656) AND notEmpty(GoalsReached)
```

Reaches	Hits
95606	31406

此功能也可用于高阶函数。例如，您可以使用它来获取与条件匹配的元素的数组索引。

## arrayEnumerateUniq(arr, ...)

返回与源数组大小相同的数组，其中每个元素表示与其下标对应的源数组元素在源数组中出现的次数。例如：  
arrayEnumerateUniq ([10,20,10,30]) = [1,1,2,1]。

使用ARRAY JOIN和数组元素的聚合时，此函数很有用。

示例：

```
SELECT
    Goals.ID AS GoalID,
    sum(Sign) AS Reaches,
    sumIf(Sign, num = 1) AS Visits
FROM test.visits
ARRAY JOIN
    Goals,
    arrayEnumerateUniq(Goals.ID) AS num
WHERE CounterID = 160656
GROUP BY GoalID
ORDER BY Reaches DESC
LIMIT 10
```

GoalID	Reaches	Visits
53225	3214	1097
2825062	3188	1097
56600	2803	488
1989037	2401	365
2830064	2396	910
1113562	2372	373
3270895	2262	812
1084657	2262	345
56599	2260	799
3271094	2256	812

在此示例中，每个GoalID都计算转换次数（目标嵌套数据结构中的每个元素都是达到的目标，我们称之为转换）和会话数。如果没有ARRAY JOIN，我们会将会话数计为总和（Sign）。但在这种特殊情况下，行乘以嵌套的Goals结构，因此为了在此之后计算每个会话一次，我们将一个条件应用于arrayEnumerateUniq ( Goals.ID ) 函数的值。

arrayEnumerateUniq函数可以使用与参数大小相同的多个数组。在这种情况下，对于所有阵列中相同位置的元素元组，考虑唯一性。

```
SELECT arrayEnumerateUniq([1, 1, 1, 2, 2, 2], [1, 1, 2, 1, 1, 2]) AS res
```

res
[1,2,1,1,2,1]

当使用带有嵌套数据结构的ARRAY JOIN并在此结构中跨多个元素进一步聚合时，这是必需的。

## arrayPopBack

从数组中删除最后一项。

```
arrayPopBack(array)
```

参数

- `array` – 数组。

## 示例

```
SELECT arrayPopBack([1, 2, 3]) AS res
```

```
res  
[1, 2]
```

## arrayPopFront

从数组中删除第一项。

```
arrayPopFront(array)
```

## 参数

- `array` – 数组。

## 示例

```
SELECT arrayPopFront([1, 2, 3]) AS res
```

```
res  
[2, 3]
```

## arrayPushBack

添加一个元素到数组的末尾。

```
arrayPushBack(array, single_value)
```

## 参数

- `array` – 数组。
- `single_value` – 单个值。只能将数字添加到带数字的数组中，并且只能将字符串添加到字符串数组中。添加数字时，ClickHouse会自动为数组的数据类型设置 `single_value` 类型。有关ClickHouse中数据类型的更多信息，请参阅“[数据类型](#)”。可以是'NULL'。该函数向数组添加一个“NULL”元素，数组元素的类型转换为 `Nullable``。

## 示例

```
SELECT arrayPushBack(['a'], 'b') AS res
```

```
res  
['a', 'b']
```

## arrayPushFront

将一个元素添加到数组的开头。

```
arrayPushFront(array, single_value)
```

## 参数

- `array` — 数组。
- `single_value` — 单个值。只能将数字添加到带数字的数组中，并且只能将字符串添加到字符串数组中。添加数字时，ClickHouse会自动为数组的数据类型设置 `single_value` 类型。有关ClickHouse中数据类型的更多信息，请参阅[“数据类型”](#)。可以是'NULL'。该函数向数组添加一个“NULL”元素，数组元素的类型转换为 `Nullable``。

## 示例

```
SELECT arrayPushFront(['b'], 'a') AS res
```

```
res  
['a', 'b']
```

## arrayResize

更改数组的长度。

```
arrayResize(array, size[, extender])
```

### 参数:

- `array` — 数组。
- `size` — 数组所需的长度。
  - 如果 `size` 小于数组的原始大小，则数组将从右侧截断。
  - 如果 `size` 大于数组的初始大小，则使用 `extender` 值或数组项的数据类型的默认值将数组扩展到右侧。
- `extender` — 扩展数组的值。可以是'NULL`。

### 返回值:

一个 `size` 长度的数组。

## 调用示例

```
SELECT arrayResize([1], 3)
```

```
arrayResize([1], 3)  
[1, 0, 0]
```

```
SELECT arrayResize([1], 3, NULL)
```

```
arrayResize([1], 3, NULL)  
[1, NULL, NULL]
```

## arraySlice

返回一个子数组，包含从指定位置的指定长度的元素。

```
arraySlice(array, offset[, length])
```

## 参数

- `array` – 数组。
- `offset` – 数组的偏移。正值表示左侧的偏移量，负值表示右侧的缩进值。数组下标从1开始。
- `length` - 子数组的长度。如果指定负值，则该函数返回 `[offset, array_length - length]`。如果省略该值，则该函数返回 `[offset, the_end_of_array]`。

## 示例

```
SELECT arraySlice([1, 2, NULL, 4, 5], 2, 3) AS res
```

```
res  
[2, NULL, 4]
```

设置为“NULL”的数组元素作为普通的数组元素值处理。

## arraySort([func,] arr, ...)

以升序对 `arr` 数组的元素进行排序。如果指定了 `func` 函数，则排序顺序由 `func` 函数的调用结果决定。如果 `func` 接受多个参数，那么 `arraySort` 函数也将解析与 `func` 函数参数相同数量的数组参数。更详细的示例在 `arraySort` 的末尾。

### 整数排序示例:

```
SELECT arraySort([1, 3, 3, 0]);
```

```
arraySort([1, 3, 3, 0])  
[0,1,3,3]
```

### 字符串排序示例:

```
SELECT arraySort(['hello', 'world', '!']);
```

```
arraySort(['hello', 'world', '!'])  
['!', 'hello', 'world']
```

`NULL`，`NaN` 和 `Inf` 的排序顺序：

```
SELECT arraySort([1, nan, 2, NULL, 3, nan, -4, NULL, inf, -inf]);
```

```
arraySort([1, nan, 2, NULL, 3, nan, -4, NULL, inf, -inf])  
[-inf, -4, 1, 2, 3, inf, nan, nan, NULL, NULL]
```

- `-Inf` 是数组中的第一个。
- `NULL` 是数组中的最后一个。
- `NaN` 在 `NULL` 的前面。
- `Inf` 在 `NaN` 的前面。

注意：`arraySort` 是高阶函数。您可以将lambda函数作为第一个参数传递给它。在这种情况下，排序顺序由lambda函数的调用结果决定。

让我们来看一下如下示例：

```
SELECT arraySort((x) -> -x, [1, 2, 3]) as res;
```

```
res  
[3, 2, 1]
```

对于源数组的每个元素，lambda函数返回排序键，即 $[1 \rightarrow -1, 2 \rightarrow -2, 3 \rightarrow -3]$ 。由于arraySort 函数按升序对键进行排序，因此结果为 $[3,2,1]$ 。因此， $(x) \rightarrow -x$  lambda函数将排序设置为降序。

lambda函数可以接受多个参数。在这种情况下，您需要为 arraySort 传递与lambda参数个数相同的数组。函数使用第一个输入的数组中的元素组成返回结果；使用接下来传入的数组作为排序键。例如：

```
SELECT arraySort((x, y) -> y, ['hello', 'world'], [2, 1]) as res;
```

```
res  
['world', 'hello']
```

这里，在第二个数组 $([2, 1])$ 中定义了第一个数组 $(['hello', 'world'])$ 的相应元素的排序键，即 $['hello' \rightarrow 2, 'world' \rightarrow 1]$ 。由于lambda函数中没有使用 $x$ ，因此源数组中的实际值不会影响结果的顺序。所以，‘world’将是结果中的第一个元素，‘hello’将是结果中的第二个元素。

其他示例如下所示。

```
SELECT arraySort((x, y) -> y, [0, 1, 2], ['c', 'b', 'a']) as res;
```

```
res  
[2, 1, 0]
```

```
SELECT arraySort((x, y) -> -y, [0, 1, 2], [1, 2, 3]) as res;
```

```
res  
[2, 1, 0]
```

!!! 注意 为了提高排序效率， 使用了Schwartzian transform。

## arrayReverseSort([func,] arr, ...)

以降序对 arr 数组的元素进行排序。如果指定了 func 函数，则排序顺序由 func 函数的调用结果决定。如果 func 接受多个参数，那么 arrayReverseSort 函数也将解析与 func 函数参数相同数量的数组作为参数。更详细的示例在 arrayReverseSort 的末尾。

整数排序示例：

```
SELECT arrayReverseSort([1, 3, 3, 0]);
```

```
arrayReverseSort([1, 3, 3, 0])  
[3, 3, 1, 0]
```

字符串排序示例：

```
SELECT arrayReverseSort(['hello', 'world', '!']);
```

```
arrayReverseSort(['hello', 'world', '!'])  
| ['world','hello','!']
```

NULL , NaN 和 Inf 的排序顺序 :

```
SELECT arrayReverseSort([1, nan, 2, NULL, 3, nan, -4, NULL, inf, -inf]) as res;
```

```
res  
[inf, 3, 2, 1, -4, -inf, nan, nan, NULL, NULL]
```

- Inf 是数组中的第一个。
- NULL 是数组中的最后一个。
- NaN 在 NULL 的前面。
- -Inf 在 NaN 的前面。

注意 : arraySort 是高阶函数。您可以将lambda函数作为第一个参数传递给它。如下示例所示。

```
SELECT arrayReverseSort((x) -> -x, [1, 2, 3]) as res;
```

```
res  
[1, 2, 3]
```

数组按以下方式排序 : The array is sorted in the following way:

1. 首先 , 根据lambda函数的调用结果对源数组 ([1, 2, 3]) 进行排序。 结果是[3, 2, 1]。
2. 反转上一步获得的数组。 所以 , 最终的结果是[1, 2, 3]。

lambda函数可以接受多个参数。在这种情况下 , 您需要为 arrayReverseSort 传递与lambda参数个数相同的数组。 函数使用第一个输入的数组中的元素组成返回结果 ; 使用接下来传入的数组作为排序键。例如 :

```
SELECT arrayReverseSort((x, y) -> y, ['hello', 'world'], [2, 1]) as res;
```

```
res  
['hello', 'world']
```

在这个例子中 , 数组按以下方式排序 :

1. 首先 , 根据lambda函数的调用结果对源数组 ('hello', 'world') 进行排序。 其中 , 在第二个数组 ([2,1]) 中定义了源数组中相应元素的排序键。 所以 , 排序结果['world', 'hello']。
2. 反转上一步骤中获得的排序数组。 所以 , 最终的结果是['hello' , 'world']。

其他示例如下所示。

```
SELECT arrayReverseSort((x, y) -> y, [4, 3, 5], ['a', 'b', 'c']) AS res;
```

```
res  
[5, 3, 4]
```

```
SELECT arrayReverseSort((x, y) -> -y, [4, 3, 5], [1, 2, 3]) AS res;
```

```
└─ res
    └─ [4, 3, 5]
```

## arrayUniq(arr, ...)

如果传递一个参数，则计算数组中不同元素的数量。如果传递了多个参数，则它计算多个数组中相应位置的不同元素元组的数量。

如果要获取数组中唯一项的列表，可以使用arrayReduce ('groupUniqArray' , arr)。

## arrayJoin(arr)

一个特殊的功能。请参见“[ArrayJoin函数](#)”部分。

## arrayDifference(arr)

返回一个数组，其中包含所有相邻元素对之间的差值。例如：

```
SELECT arrayDifference([1, 2, 3, 4])
```

```
└─ arrayDifference([1, 2, 3, 4])
    └─ [0,1,1,1]
```

## arrayDistinct(arr)

返回一个包含所有数组中不同元素的数组。例如：

```
SELECT arrayDistinct([1, 2, 2, 3, 1])
```

```
└─ arrayDistinct([1, 2, 2, 3, 1])
    └─ [1,2,3]
```

## arrayEnumerateDense(arr)

返回与源数组大小相同的数组，指示每个元素首次出现在源数组中的位置。例如：

arrayEnumerateDense ([10,20,10,30]) = [1,2,1,3]。

## arrayIntersect(arr)

返回所有数组元素的交集。例如：

```
SELECT
  arrayIntersect([1, 2], [1, 3], [2, 3]) AS no_intersect,
  arrayIntersect([1, 2], [1, 3], [1, 4]) AS intersect
```

```
└─ no_intersect └─ intersect
    └─ []           └─ [1]
```

## arrayReduce(agg\_func, arr1, ...)

将聚合函数应用于数组并返回其结果。如果聚合函数具有多个参数，则此函数可应用于相同大小的多个数组。

arrayReduce ('agg\_func' , arr1 , ... ) - 将聚合函数 agg\_func 应用于数组 arr1 ... 。如果传递了多个数组，则相应位置上的元素将作为多个参数传递给聚合函数。例如：SELECT arrayReduce ('max' , [1,2,3] ) = 3

## arrayReverse(arr)

返回与源数组大小相同的数组，包含反转源数组的所有元素的结果。

# 字符串拆分合并函数

## splitByChar(separator, s)

将字符串以‘separator’拆分成多个子串。‘separator’必须为仅包含一个字符的字符串常量。返回拆分后的子串的数组。如果分隔符出现在字符串的开头或结尾，或者如果有多个连续的分隔符，则将在对应位置填充空的子串。

## splitByString(separator, s)

与上面相同，但它使用多个字符的字符串作为分隔符。该字符串必须为非空。

## arrayStringConcat(arr[, separator])

使用separator将数组中列出的字符串拼接起来。‘separator’是一个可选参数：一个常量字符串，默认情况下设置为空字符串。返回拼接后的字符串。

## alphaTokens(s)

从范围a-z和A-Z中选择连续字节的子字符串。返回子字符串数组。

示例：

```
SELECT alphaTokens('abca1abc')  
alphaTokens('abca1abc')  
[ 'abca' , 'abc' ]
```

# 位操作函数

位操作函数适用于UInt8 , UInt16 , UInt32 , UInt64 , Int8 , Int16 , Int32 , Int64 , Float32或Float64中的任何类型。

结果类型是一个整数，其位数等于其参数的最大位。如果至少有一个参数为有符数字，则结果为有符数字。如果参数是浮点数，则将其强制转换为Int64。

## bitAnd(a, b)

## bitOr(a, b)

## bitXor(a, b)

`bitNot(a)`

`bitShiftLeft(a, b)`

`bitShiftRight(a, b)`

`bitRotateLeft(a, b)`

`bitRotateRight(a, b)`

`bitTest(a, b)`

`bitTestAll(a, b)`

`bitTestAny(a, b)`

## 位图函数

位图函数用于对两个位图对象进行计算，对于任何一个位图函数，它都将返回一个位图对象，例如and，or，xor，not等等。

位图对象有两种构造方法。一个是由聚合函数groupBitmapState构造的，另一个是由Array Object构造的。同时还可以将位图对象转化为数组对象。

我们使用RoaringBitmap实际存储位图对象，当基数小于或等于32时，它使用Set保存。当基数大于32时，它使用RoaringBitmap保存。这也是为什么低基数集的存储更快的原因。

有关RoaringBitmap的更多信息，请参阅：[CRoaring](#)。

### bitmapBuild

从无符号整数数组构建位图对象。

```
bitmapBuild(array)
```

#### 参数

- array – 无符号整数数组.

#### 示例

```
SELECT bitmapBuild([1, 2, 3, 4, 5]) AS res
```

### bitmapToArray

将位图转换为整数数组。

```
bitmapToArray(bitmap)
```

## 参数

- bitmap – 位图对象.

## 示例

```
SELECT bitmapToArray(bitmapBuild([1, 2, 3, 4, 5])) AS res
```

```
res  
[1,2,3,4,5]
```

## bitmapSubsetInRange

将位图指定范围（不包含range\_end）转换为另一个位图。

```
bitmapSubsetInRange(bitmap, range_start, range_end)
```

## 参数

- bitmap – 位图对象.
- range\_start – 范围起始点（含）.
- range\_end – 范围结束点（不含）.

## 示例

```
SELECT  
bitmapToArray(bitmapSubsetInRange(bitmapBuild([0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23  
toUInt32(30), toUInt32(200))) AS res
```

```
res  
[30,31,32,33,100]
```

## bitmapSubsetLimit

将位图指定范围（起始点和数目上限）转换为另一个位图。

```
bitmapSubsetLimit(bitmap, range_start, limit)
```

## 参数

- bitmap – 位图对象.
- range\_start – 范围起始点（含）.
- limit – 子位图基数上限.

## 示例

```
SELECT  
bitmapToArray(bitmapSubsetInRange(bitmapBuild([0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23  
toUInt32(30), toUInt32(200))) AS res
```

```
└── res
    └── [30, 31, 32, 33, 100, 200, 500]
```

## bitmapContains

检查位图是否包含指定元素。

```
bitmapContains(haystack, needle)
```

### 参数

- haystack – 位图对象.
- needle – 元素，类型UInt32.

### 示例

```
SELECT bitmapContains(bitmapBuild([1, 5, 7, 9]), toUInt32(9)) AS res
```

```
└── res
    └── 1
```

## bitmapHasAny

与 hasAny(array, array) 类似，如果位图有任何公共元素则返回1，否则返回0。对于空位图，返回0。

```
bitmapHasAny(bitmap, bitmap)
```

### 参数

- bitmap – bitmap对象。

### 示例

```
SELECT bitmapHasAny(bitmapBuild([1, 2, 3]), bitmapBuild([3, 4, 5])) AS res
```

```
└── res
    └── 1
```

## bitmapHasAll

与 hasAll(array, array) 类似，如果第一个位图包含第二个位图的所有元素，则返回1，否则返回0。如果第二个参数是空位图，则返回1。

```
bitmapHasAll(bitmap, bitmap)
```

### 参数

- bitmap – bitmap 对象。

### 示例

```
SELECT bitmapHasAll(bitmapBuild([1,2,3]),bitmapBuild([3,4,5])) AS res
```

```
res  
0
```

## bitmapAnd

为两个位图对象进行与操作，返回一个新的位图对象。

```
bitmapAnd(bitmap1,bitmap2)
```

### 参数

- bitmap1 – 位图对象。
- bitmap2 – 位图对象。

### 示例

```
SELECT bitmapToArray(bitmapAnd(bitmapBuild([1,2,3]),bitmapBuild([3,4,5]))) AS res
```

```
res  
[3]
```

## bitmapOr

为两个位图对象进行或操作，返回一个新的位图对象。

```
bitmapOr(bitmap1,bitmap2)
```

### Parameters

- bitmap1 – 位图对象。
- bitmap2 – 位图对象。

### 示例

```
SELECT bitmapToArray(bitmapOr(bitmapBuild([1,2,3]),bitmapBuild([3,4,5]))) AS res
```

```
res  
[1,2,3,4,5]
```

## bitmapXor

为两个位图对象进行异或操作，返回一个新的位图对象。

```
bitmapXor(bitmap1,bitmap2)
```

### 参数

- bitmap1 – 位图对象。

- `bitmap2` – 位图对象。

## 示例

```
SELECT bitmapToArray(bitmapXor(bitmapBuild([1,2,3]),bitmapBuild([3,4,5]))) AS res
```

```
res  
[1,2,4,5]
```

## bitmapAndnot

计算两个位图的差异，返回一个新的位图对象。

```
bitmapAndnot(bitmap1,bitmap2)
```

## 参数

- `bitmap1` – 位图对象。
- `bitmap2` – 位图对象。

## 示例

```
SELECT bitmapToArray(bitmapAndnot(bitmapBuild([1,2,3]),bitmapBuild([3,4,5]))) AS res
```

```
res  
[1,2]
```

## bitmapCardinality

返回一个UInt64类型的数值，表示位图对象的基数。

```
bitmapCardinality(bitmap)
```

## Parameters

- `bitmap` – 位图对象。

## 示例

```
SELECT bitmapCardinality(bitmapBuild([1, 2, 3, 4, 5])) AS res
```

```
res  
5
```

## bitmapMin

返回一个UInt64类型的数值，表示位图中的最小值。如果位图为空则返回UINT32\_MAX。

```
bitmapMin(bitmap)
```

## Parameters

- bitmap – 位图对象。

## 示例

```
SELECT bitmapMin(bitmapBuild([1, 2, 3, 4, 5])) AS res
```



## bitmapMax

返回一个UInt64类型的数值，表示位图中的最大值。如果位图为空则返回0。

```
bitmapMax(bitmap)
```

## Parameters

- bitmap – 位图对象。

## 示例

```
SELECT bitmapMax(bitmapBuild([1, 2, 3, 4, 5])) AS res
```



## bitmapAndCardinality

为两个位图对象进行与操作，返回结果位图的基数。

```
bitmapAndCardinality(bitmap1,bitmap2)
```

## 参数

- bitmap1 – 位图对象。
- bitmap2 – 位图对象。

## 示例

```
SELECT bitmapAndCardinality(bitmapBuild([1,2,3]),bitmapBuild([3,4,5])) AS res;
```



## bitmapOrCardinality

为两个位图进行或运算，返回结果位图的基数。

```
bitmapOrCardinality(bitmap1,bitmap2)
```

## 参数

- `bitmap1` – 位图对象。
- `bitmap2` – 位图对象。

## 示例

```
SELECT bitmapOrCardinality(bitmapBuild([1,2,3]),bitmapBuild([3,4,5])) AS res;
```

```
res  
5
```

## bitmapXorCardinality

为两个位图进行异或运算，返回结果位图的基数。

```
bitmapXorCardinality(bitmap1,bitmap2)
```

## 参数

- `bitmap1` – 位图对象。
- `bitmap2` – 位图对象。

## 示例

```
SELECT bitmapXorCardinality(bitmapBuild([1,2,3]),bitmapBuild([3,4,5])) AS res;
```

```
res  
4
```

## bitmapAndnotCardinality

计算两个位图的差异，返回结果位图的基数。

```
bitmapAndnotCardinality(bitmap1,bitmap2)
```

## 参数

- `bitmap1` – 位图对象。
- `bitmap2` - 位图对象。

## 示例

```
SELECT bitmapAndnotCardinality(bitmapBuild([1,2,3]),bitmapBuild([3,4,5])) AS res;
```

```
res  
2
```

## Hash函数

Hash函数可以用于将元素不可逆的伪随机打乱。

## halfMD5

计算字符串的MD5。然后获取结果的前8个字节并将它们作为UInt64（大端）返回。此函数相当低效（500万个短字符串/秒/核心）。如果您不需要一定使用MD5，请使用'sipHash64'函数。

## MD5

计算字符串的MD5并将结果放入FixedString(16)中返回。如果您只是需要一个128位的hash，同时不需要一定使用MD5，请使用'sipHash128'函数。如果您要获得与md5sum程序相同的输出结果，请使用lower(hex(MD5(s)))。

## sipHash64

计算字符串的SipHash。接受String类型的参数，返回UInt64。SipHash是一种加密哈希函数。它的处理性能至少比MD5快三倍。有关详细信息，请参阅链接：<https://131002.net/siphash/>

## sipHash128

计算字符串的SipHash。接受String类型的参数，返回FixedString(16)。与sipHash64函数的不同在于它的最终计算结果为128位。

## cityHash64

计算任意数量字符串的CityHash64或使用特定实现的Hash函数计算任意数量其他类型的Hash。对于字符串，使用CityHash算法。这是一个快速的非加密哈希函数，用于字符串。对于其他类型的参数，使用特定实现的Hash函数，这是一种快速的非加密的散列函数。如果传递了多个参数，则使用CityHash组合这些参数的Hash结果。例如，您可以计算整个表的checksum，其结果取决于行的顺序：SELECT sum(cityHash64(\*)) FROM table。

## intHash32

为任何类型的整数计算32位的哈希。这是相对高效的非加密Hash函数。

## intHash64

从任何类型的整数计算64位哈希码。它的工作速度比intHash32函数快。

## SHA1

## SHA224

## SHA256

计算字符串的SHA-1，SHA-224或SHA-256，并将结果字节集返回为FixedString(20)，FixedString(28)或FixedString(32)。该函数相当低效（SHA-1大约500万个短字符串/秒/核心，而SHA-224和SHA-256大约220万个短字符串/秒/核心）。我们建议仅在必须使用这些Hash函数且无法更改的情况下使用这些函数。即使在这些情况下，我们仍建议将函数采用在写入数据时使用预计算的方式将其计算完毕。而不是在SELECT中计算它们。

## URLHash(url[, N])

一种快速的非加密哈希函数，用于规范化的从URL获得的字符串。URLHash(s) - 从一个字符串计算一个哈希，如果结尾存在尾随符号 /，? 或 # 则忽略。URLHash(s, N) - 计算URL层次结构中字符串到N级别的哈希值，如果末尾存在尾随符

号 / , ? 或 # 则忽略。 URL的层级与URLHierarchy中的层级相同。 此函数被用于Yandex.Metrica。

## farmHash64

计算字符串的FarmHash64。 接受一个String类型的参数。返回UInt64。 有关详细信息，请参阅链接：[FarmHash64](#)

## javaHash

计算字符串的JavaHash。 接受一个String类型的参数。返回Int32。 有关更多信息，请参阅链接：[JavaHash](#)

## hiveHash

计算字符串的HiveHash。 接受一个String类型的参数。返回Int32。 与[JavaHash](#)相同，但不会返回负数。

## metroHash64

计算字符串的MetroHash。 接受一个String类型的参数。返回UInt64。 有关详细信息，请参阅链接：[MetroHash64](#)

## jumpConsistentHash

计算UInt64的JumpConsistentHash。 接受UInt64类型的参数。返回Int32。 有关更多信息，请参见链接：[JumpConsistentHash](#)

## murmurHash2\_32, murmurHash2\_64

计算字符串的MurmurHash2。 接受一个String类型的参数。返回UInt64或UInt32。 有关更多信息，请参阅链接：[MurmurHash2](#)

## murmurHash3\_32, murmurHash3\_64, murmurHash3\_128

计算字符串的MurmurHash3。 接受一个String类型的参数。返回UInt64或UInt32或FixedString(16)。 有关更多信息，请参阅链接：[MurmurHash3](#)

## xxHash32, xxHash64

计算字符串的xxHash。 接受一个String类型的参数。返回UInt64或UInt32。 有关更多信息，请参见链接：[xxHash](#)

# 随机函数

随机函数使用非加密方式生成伪随机数字。

所有随机函数都只接受一个参数或不接受任何参数。 您可以向它传递任何类型的参数，但传递的参数将不会使用在任何随机数生成过程中。 此参数的唯一目的是防止公共子表达式消除，以便在相同的查询中使用相同的随机函数生成不同的随机数。

## rand

返回一个UInt32类型的随机数字，所有UInt32类型的数字被生成的概率均相等。此函数线性同余的方式生成随机数。

## rand64

返回一个UInt64类型的随机数字，所有UInt64类型的数字被生成的概率均相等。此函数线性同于的方式生成随机数。

### randConstant

返回一个UInt32类型的随机数字，该函数不同之处在于仅为每个数据块参数一个随机数。

## 编码函数

### hex

接受 String , unsigned integer , Date 或 DateTime 类型的参数。返回包含参数的十六进制表示的字符串。使用大写字母 A-F。不使用 0x 前缀或 h 后缀。对于字符串，所有字节都简单地编码为两个十六进制数字。数字转换为大端（“易阅读”）格式。对于数字，去除其中较旧的零，但仅限整个字节。例如，hex(1)='01'。Date 被编码为自 Unix 时间开始以来的天数。DateTime 编码为自 Unix 时间开始以来的秒数。

### unhex(str)

接受包含任意数量的十六进制数字的字符串，并返回包含相应字节的字符串。支持大写和小写字母A-F。十六进制数字的数量不必是偶数。如果是奇数，则最后一位数被解释为00-0F字节的低位。如果参数字符串包含除十六进制数字以外的任何内容，则返回一些实现定义的结果（不抛出异常）。如果要将结果转换为数字，可以使用“reverse”和“reinterpretAsType”函数。

### UUIDStringToNum(str)

接受包含36个字符的字符串，格式为“123e4567-e89b-12d3-a456-426655440000”，并将其转化为FixedString(16)返回。

### UUIDNumToString(str)

接受FixedString(16)值。返回包含36个字符的文本格式的字符串。

### bitmaskToList(num)

接受一个整数。返回一个字符串，其中包含一组2的幂列表，其列表中的所有值相加等于这个整数。列表使用逗号分割，按升序排列。

### bitmaskToArray(num)

接受一个整数。返回一个UInt64类型数组，其中包含一组2的幂列表，其列表中的所有值相加等于这个整数。数组中的数字按升序排列。

## UUID函数

下面列出了所有UUID的相关函数

### generateUUIDv4

生成一个UUID（**版本4**）。

```
generateUUIDv4()
```

## 返回值

UUID类型的值。

## 使用示例

此示例演示如何在表中创建UUID类型的列，并对其写入数据。

```
:) CREATE TABLE t_uuid (x UUID) ENGINE=TinyLog  
:) INSERT INTO t_uuid SELECT generateUUIDv4()  
:) SELECT * FROM t_uuid
```

f4bf890f-f9dc-**4332**-ad5c-0c18e73f28e9

## toUUID (x)

将String类型的值转换为UUID类型的值。

```
toUUID(String)
```

## 返回值

UUID类型的值

## 使用示例

```
:) SELECT toUUID('61f0c404-5cb3-11e7-907b-a6006ad3dba0') AS uuid
```

**61f0c404-5cb3-11e7-907b-a6006ad3dba0**

## UUIDStringToNum

接受一个String类型的值，其中包含36个字符且格式为 xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxx，将其转换为UUID的数值并以**FixedString(16)**将其返回。

```
UUIDStringToNum(String)
```

## 返回值

FixedString(16)

## 使用示例

```
:) SELECT  
'612f3c40-5d3b-217e-707b-6a546a3d7b29' AS uuid,  
UUIDStringToNum(uuid) AS bytes
```

**612f3c40-5d3b-217e-707b-6a546a3d7b29** a/<@];!~p{jTj={}

## UUIDNumToString

接受一个`FixedString(16)`类型的值，返回其对应的String表现形式。

```
UUIDNumToString(FixedString(16))
```

返回值

`String.`

使用示例

```
SELECT
    'a/<@];!~p{jTj={} AS bytes,
    UUIDNumToString(toFixedString(bytes, 16)) AS uuid
    bytes          |  uuid
    a/<@];!~p{jTj={} |  612f3c40-5d3b-217e-707b-6a546a3d7b29
```

另请参阅

- [dictGetUUID](#)

## URL函数

所有这些功能都不遵循RFC。它们被最大程度简化以提高性能。

### URL截取函数

如果URL中没有要截取的内容则返回空字符串。

#### protocol

返回URL的协议。例如：`http`、`ftp`、`mailto`、`magnet`...

#### domain

获取域名。

#### domainWithoutWWW

返回域名并删除第一个‘www.’。

#### topLevelDomain

返回顶级域名。例如：`.ru`。

#### firstSignificantSubdomain

返回“第一个有效子域名”。这并不是一个标准概念，仅用于Yandex.Metrica。如果顶级域名为‘com’，‘net’，‘org’或者‘co’则第一个有效子域名为二级域名。否则则返回三级域名。例如，`firstSignificantSubdomain('https://news.yandex.ru/')` = ‘yandex’，`firstSignificantSubdomain('https://news.yandex.com.tr/')` = ‘yandex’。一些实现细节在未来可能会进行改变。

#### cutToFirstSignificantSubdomain

返回包含顶级域名与第一个有效子域名之间的内容（请参阅上面的内容）。

例如，`cutToFirstSignificantSubdomain('https://news.yandex.com.tr/')` = ‘yandex.com.tr’。

#### path

返回URL路径。例如：/top/news.html，不包含请求参数。

### pathFull

与上面相同，但包括请求参数和fragment。例如：/top/news.html?page=2#comments

### queryString

返回请求参数。例如：page=1&lr=213。请求参数不包含问号已经# 以及# 之后所有的内容。

### fragment

返回URL的fragment标识。fragment不包含#。

### queryStringAndFragment

返回请求参数和fragment标识。例如：page=1#29390。

### extractURLParameter(URL, name)

返回URL请求参数中名称为'name'的参数。如果不存在则返回一个空字符串。如果存在多个匹配项则返回第一个相匹配的。此函数假设参数名称与参数值在url中的编码方式相同。

### extractURLParameters(URL)

返回一个数组，其中以name=value的字符串形式返回url的所有请求参数。不以任何编码解析任何内容。

### extractURLParameterNames(URL)

返回一个数组，其中包含url的所有请求参数的名称。不以任何编码解析任何内容。

### URLHierarchy(URL)

返回一个数组，其中包含以/切割的URL的所有内容。?将被包含在URL路径以及请求参数中。连续的分割符号被视为一个。

### URLPathHierarchy(URL)

与上面相同，但结果不包含协议和host部分。/element(root)不包括在内。该函数用于在Yandex.Metric中实现导出URL的树形结构。

```
URLPathHierarchy('https://example.com/browse/CONV-6788') =  
[  
  '/browse/',  
  '/browse/CONV-6788'  
]
```

### decodeURLComponent(URL)

返回已经解码的URL。例如：

```
SELECT decodeURLComponent('http://127.0.0.1:8123/?query=SELECT%201%3B') AS DecodedURL;
```

```
DecodedURL  
| http://127.0.0.1:8123/?query=SELECT 1;
```

## 删除URL中的部分内容

如果URL中不包含指定的部分，则URL不变。

### **cutWWW**

删除开始的第一个'www.'。

### **cutQueryString**

删除请求参数。问号也将被删除。

### **cutFragment**

删除fragment标识。#同样也会被删除。

### **cutQueryStringAndFragment**

删除请求参数以及fragment标识。问号以及#也会被删除。

### **cutURLParameter(URL, name)**

删除URL中名称为'name'的参数。改函数假设参数名称以及参数值经过URL相同的编码。

## **IP函数**

### **IPv4NumToString(num)**

接受一个UInt32（大端）表示的IPv4的地址，返回相应IPv4的字符串表现形式，格式为A.B.C.D（以点分割的十进制数字）。

### **IPv4StringToNum(s)**

与IPv4NumToString函数相反。如果IPv4地址格式无效，则返回0。

### **IPv4NumToStringClassC(num)**

与IPv4NumToString类似，但使用xxx替换最后一个字节。

示例：

```
SELECT
    IPv4NumToStringClassC(ClientIP) AS k,
    count() AS c
FROM test.hits
GROUP BY k
ORDER BY c DESC
LIMIT 10
```

k	c
83.149.9.xxx	26238
217.118.81.xxx	26074
213.87.129.xxx	25481
83.149.8.xxx	24984
217.118.83.xxx	22797
78.25.120.xxx	22354
213.87.131.xxx	21285
78.25.121.xxx	20887
188.162.65.xxx	19694
83.149.48.xxx	17406

由于使用'xxx'是不规范的，因此将来可能会更改。我们建议您不要依赖此格式。

## IPv6NumToString(x)

接受FixedString(16)类型的二进制格式的IPv6地址。以文本格式返回此地址的字符串。 IPv6映射的IPv4地址以::ffff:111.222.33。例如：

```
SELECT IPv6NumToString(toFixedString(unhex('2A0206B800000000000000000000000011'), 16)) AS addr
```

```
└─addr ─────────  
| 2a02:6b8::11
```

```
SELECT
    IPv6NumToString(ClientIP6 AS k),
    count() AS c
FROM hits_all
WHERE EventDate = today() AND substring(ClientIP6, 1, 12) != unhex('00000000000000000000FFFF')
GROUP BY k
ORDER BY c DESC
LIMIT 10
```

IPv6NumToString(ClientIP6)	C
2a02:2168:aaa:bbbb::2	24695
2a02:2698:abcd:abcd:abcd:8888:5555	22408
2a02:6b8:0:ffff::ff	16389
2a01:4f8:111:6666::2	16016
2a02:2168:888:222::1	15896
2a01:7e00::ffff:ffff:ffff:222	14774
2a02:8109:eee:ee:eeee:eeee:eeee:eeee	14443
2a02:810b:8888:888:8888:8888:8888:8888	14345
2a02:6b8:0:444:4444:4444:4444:4444	14279
2a01:7e00::ffff:ffff:ffff:ffff	13880

```
SELECT
    IPv6NumToString(ClientIP6 AS k),
    count() AS c
FROM hits_all
WHERE EventDate = today()
GROUP BY k
ORDER BY c DESC
LIMIT 10
```

IPv6NumToString(ClientIP6)	c
::ffff:94.26.111.111	747440
::ffff:37.143.222.4	529483
::ffff:5.166.111.99	317707
::ffff:46.38.11.77	263086
::ffff:79.105.111.111	186611
::ffff:93.92.111.88	176773
::ffff:84.53.111.33	158709
::ffff:217.118.11.22	154004
::ffff:217.118.11.33	148449
::ffff:217.118.11.44	148243

## IPv6StringToNum(s)

与IPv6NumToString的相反。如果IPv6地址格式无效，则返回空字节字符串。十六进制可以是大写的或小写的。

IPv4ToIPv6(x)

接受一个UInt32类型的IPv4地址，返回FixedString(16)类型的IPv6地址。例如：

```
SELECT IPv6NumToString(IPv4ToIPv6(IPv4StringToNum('192.168.0.1'))) AS addr
```

```
addr  
::ffff:192.168.0.1
```

### cutIPv6(x, bitsToCutForIPv6, bitsToCutForIPv4)

接受一个FixedString(16)类型的IPv6地址，返回一个String，这个String中包含了删除指定位之后的地址的文本格式。例如：

```
WITH  
IPv6StringToNum('2001:0db8:ac10:fe01:feed:babe:cafe:f00d') AS ipv6,  
IPv4ToIPv6(IPv4StringToNum('192.168.0.1')) AS ipv4  
SELECT  
cutIPv6(ipv6, 2, 0),  
cutIPv6(ipv4, 0, 2)
```

```
cutIPv6(ipv6, 2, 0) cutIPv6(ipv4, 0, 2)  
2001:db8:ac10:fe01:feed:babe:cafe:0 ::ffff:192.168.0.0
```

### IPv4CIDRToRange(ipv4, cidr),

接受一个IPv4地址以及一个UInt8类型的CIDR。返回包含子网最低范围以及最高范围的元组。

```
SELECT IPv4CIDRToRange(toIPv4('192.168.5.2'), 16)
```

```
IPv4CIDRToRange(toIPv4('192.168.5.2'), 16)  
( '192.168.0.0', '192.168.255.255' )
```

### IPv6CIDRToRange(ipv6, cidr),

接受一个IPv6地址以及一个UInt8类型的CIDR。返回包含子网最低范围以及最高范围的元组。

```
SELECT IPv6CIDRToRange(toIPv6('2001:0db8:0000:85a3:0000:0000:ac1f:8001'), 32);
```

```
IPv6CIDRToRange(toIPv6('2001:0db8:0000:85a3:0000:0000:ac1f:8001'), 32)  
( '2001:db8::', '2001:db8:ffff:ffff:ffff:ffff:ffff:ffff' )
```

### toIPv4(string)

IPv4StringToNum() 的别名，它采用字符串形式的IPv4地址并返回IPv4类型的值，该二进制值等于 IPv4StringToNum() 返回的值。

```
WITH  
'171.225.130.45' as IPv4_string  
SELECT  
toTypeName(IPv4StringToNum(IPv4_string)),  
toTypeName(toIPv4(IPv4_string))
```

```
└─ toTypeName(IPv4StringToNum(IPv4_string)) ── toTypeName(toIPv4(IPv4_string)) ──  
  ┌── UInt32 ── IPv4
```

```
WITH  
  '171.225.130.45' as IPv4_string  
SELECT  
  hex(IPv4StringToNum(IPv4_string)),  
  hex(toIPv4(IPv4_string))
```

```
└─ hex(IPv4StringToNum(IPv4_string)) ── hex(toIPv4(IPv4_string)) ──  
  ┌── ABE1822D ── ABE1822D
```

## toIPv6(string)

IPv6StringToNum() 的别名，它采用字符串形式的IPv6地址并返回IPv6类型的值，该二进制值等于 IPv6StringToNum() 返回的值。

```
WITH  
  '2001:438:ffff::407d:1bc1' as IPv6_string  
SELECT  
  toTypeName(IPv6StringToNum(IPv6_string)),  
  toTypeName(toIPv6(IPv6_string))
```

```
└─ toTypeName(IPv6StringToNum(IPv6_string)) ── toTypeName(toIPv6(IPv6_string)) ──  
  ┌── FixedString(16) ── IPv6
```

```
WITH  
  '2001:438:ffff::407d:1bc1' as IPv6_string  
SELECT  
  hex(IPv6StringToNum(IPv6_string)),  
  hex(toIPv6(IPv6_string))
```

```
└─ hex(IPv6StringToNum(IPv6_string)) ── hex(toIPv6(IPv6_string)) ──  
  ┌── 20010438FFFF000000000000407D1BC1 ── 20010438FFFF000000000000407D1BC1
```

## JSON函数

在Yandex.Metrica中，用户使用JSON作为访问参数。为了处理这些JSON，实现了一些函数。（尽管在大多数情况下，JSON是预先进行额外处理的，并将结果值放在单独的列中。）所有的这些函数都进行了尽可能的假设。以使函数能够尽快的完成工作。

我们对JSON格式做了如下假设：

1. 字段名称（函数的参数）必须使常量。
2. 字段名称必须使用规范的编码。例如：visitParamHas('{"abc":"def"}', 'abc') = 1，但是visitParamHas('"\u0061\u0062\u0063":"def"', 'abc') = 0
3. 函数可以随意的在多层嵌套结构下查找字段。如果存在多个匹配字段，则返回第一个匹配字段。
4. JSON除字符串文本外不存在空格字符。

### visitParamHas(params, name)

检查是否存在“name”名称的字段

### visitParamExtractUInt(params, name)

将名为“name”的字段的值解析成UInt64。如果这是一个字符串字段，函数将尝试从字符串的开头解析一个数字。如果该字段不存在，或无法从它中解析到数字，则返回0。

### visitParamExtractInt(params, name)

与visitParamExtractUInt相同，但返回Int64。

### visitParamExtractFloat(params, name)

与visitParamExtractUInt相同，但返回Float64。

### visitParamExtractBool(params, name)

解析true/false值。其结果是UInt8类型的。

### visitParamExtractRaw(params, name)

返回字段的值，包含空格符。

示例：

```
visitParamExtractRaw('{"abc": "\n\u0000"}', 'abc') = "\n\u0000"
visitParamExtractRaw('{"abc": {"def": [1, 2, 3]}}', 'abc') = '{"def": [1, 2, 3]}
```

### visitParamExtractString(params, name)

使用双引号解析字符串。这个值没有进行转义。如果转义失败，它将返回一个空白字符串。

示例：

```
visitParamExtractString('{"abc": "\n\u0000"}', 'abc') = '\n\0'
visitParamExtractString('{"abc": "\u263a"}', 'abc') = '@'
visitParamExtractString('{"abc": "\u263"}', 'abc') = ''
visitParamExtractString('{"abc": "hello"}', 'abc') = ''
```

目前不支持 \uXXXX\uYYYY 这些字符编码，这些编码不在基本多文种平面中（它们被转化为CESU-8而不是UTF-8）。

以下函数基于[simdjson](#)，专为更复杂的JSON解析要求而设计。但上述假设2仍然适用。

### JSONHas(json[, indices\_or\_keys]...)

如果JSON中存在该值，则返回 1。

如果该值不存在，则返回 0。

示例：

```
select JSONHas('{"a": "hello", "b": [-100, 200.0, 300]}', 'b') = 1
select JSONHas('{"a": "hello", "b": [-100, 200.0, 300]}', 'b', 4) = 0
```

indices\_or\_keys 可以是零个或多个参数的列表，每个参数可以是字符串或整数。

- String = 按成员名称访问JSON对象成员。
- 正整数 = 从头开始访问第n个成员/成员名称。
- 负整数 = 从末尾访问第n个成员/成员名称。

您可以使用整数来访问JSON数组和JSON对象。

例如：

```
select JSONExtractKey('{"a": "hello", "b": [-100, 200.0, 300]}', 1) = 'a'
select JSONExtractKey('{"a": "hello", "b": [-100, 200.0, 300]}', 2) = 'b'
select JSONExtractKey('{"a": "hello", "b": [-100, 200.0, 300]}', -1) = 'b'
select JSONExtractKey('{"a": "hello", "b": [-100, 200.0, 300]}', -2) = 'a'
select JSONExtractString('{"a": "hello", "b": [-100, 200.0, 300]}', 1) = 'hello'
```

### JSONLength(json[, indices\_or\_keys]...)

返回JSON数组或JSON对象的长度。

如果该值不存在或类型错误，将返回 0。

示例：

```
select JSONLength('{"a": "hello", "b": [-100, 200.0, 300]}', 'b') = 3
select JSONLength('{"a": "hello", "b": [-100, 200.0, 300]}') = 2
```

### JSONType(json[, indices\_or\_keys]...)

返回JSON值的类型。

如果该值不存在，将返回 Null。

示例：

```
select JSONType('{"a": "hello", "b": [-100, 200.0, 300]}') = 'Object'
select JSONType('{"a": "hello", "b": [-100, 200.0, 300]}', 'a') = 'String'
select JSONType('{"a": "hello", "b": [-100, 200.0, 300]}', 'b') = 'Array'
```

### JSONExtractUInt(json[, indices\_or\_keys]...)

### JSONExtractInt(json[, indices\_or\_keys]...)

### JSONExtractFloat(json[, indices\_or\_keys]...)

### JSONExtractBool(json[, indices\_or\_keys]...)

解析JSON并提取值。这些函数类似于 visitParam\* 函数。

如果该值不存在或类型错误，将返回 0。

示例：

```
select JSONExtractInt('{"a": "hello", "b": [-100, 200.0, 300]}', 'b', 1) = -100
select JSONExtractFloat('{"a": "hello", "b": [-100, 200.0, 300]}', 'b', 2) = 200.0
select JSONExtractUInt('{"a": "hello", "b": [-100, 200.0, 300]}', 'b', -1) = 300
```

## JSONExtractString(json[, indices\_or\_keys]...)

解析JSON并提取字符串。此函数类似于 visitParamExtractString 函数。

如果该值不存在或类型错误，则返回空字符串。

该值未转义。如果unescaping失败，则返回一个空字符串。

示例：

```
select JSONExtractString('{"a": "hello", "b": [-100, 200.0, 300]}', 'a') = 'hello'
select JSONExtractString('{"abc": "\n\u0000"}', 'abc') = '\n\0'
select JSONExtractString('{"abc": "\u263a"}', 'abc') = '@'
select JSONExtractString('{"abc": "\u263"}', 'abc') = ''
select JSONExtractString('{"abc": "hello"}', 'abc') = ''
```

## JSONExtract(json[, indices\_or\_keys...], return\_type)

解析JSON并提取给定ClickHouse数据类型的值。

这是以前的 JSONExtract<type>函数的变体。

这意味着 JSONExtract(..., 'String') 返回与 JSONExtractString() 返回完全相同。 JSONExtract(..., 'Float64') 返回于 JSONExtractFloat(`返回完全相同。

示例：

```
SELECT JSONExtract('{"a": "hello", "b": [-100, 200.0, 300]}', 'Tuple(String, Array(Float64))') = ('hello', [-100, 200, 300])
SELECT JSONExtract('{"a": "hello", "b": [-100, 200.0, 300]}', 'Tuple(b Array(Float64), a String)') = ([-100, 200, 300], 'hello')
SELECT JSONExtract('{"a": "hello", "b": [-100, 200.0, 300]}', 'b', 'Array(Nullable(Int8))') = [-100, NULL, NULL]
SELECT JSONExtract('{"a": "hello", "b": [-100, 200.0, 300]}', 'b', 4, 'Nullable(Int64)') = NULL
SELECT JSONExtract('{"passed": true}', 'passed', 'UInt8') = 1
SELECT JSONExtract('{"day": "Thursday"}', 'day', 'Enum8(\\"Sunday\\' = 0, \\"Monday\\' = 1, \\"Tuesday\\' = 2, \\"Wednesday\\' = 3, \\"Thursday\\' = 4, \\"Friday\\' = 5, \\"Saturday\\' = 6)') = 'Thursday'
SELECT JSONExtract('{"day": 5}', 'day', 'Enum8(\\"Sunday\\' = 0, \\"Monday\\' = 1, \\"Tuesday\\' = 2, \\"Wednesday\\' = 3, \\"Thursday\\' = 4, \\"Friday\\' = 5, \\"Saturday\\' = 6)') = 'Friday'
```

## JSONExtractKeysAndValues(json[, indices\_or\_keys...], value\_type)

从JSON中解析键值对，其中值是给定的ClickHouse数据类型。

示例：

```
SELECT JSONExtractKeysAndValues('{"x": {"a": 5, "b": 7, "c": 11}}', 'x', 'Int8') = [(('a', 5), ('b', 7), ('c', 11))];
```

## JSONExtractRaw(json[, indices\_or\_keys]...)

返回JSON的部分。

如果部件不存在或类型错误，将返回空字符串。

示例:

```
select JSONExtractRaw('{"a": "hello", "b": [-100, 200.0, 300]}', 'b') = '[-100, 200.0, 300]'
```

## 高阶函数

-> 运算符, lambda(params, expr) 函数

用于描述一个lambda函数用来传递给其他高阶函数。箭头的左侧有一个形式参数，它可以是一个标识符或多个标识符所组成的元组。箭头的右侧是一个表达式，在这个表达式中可以使用形式参数列表中的任何一个标识符或表的任何一个列名。

示例: `x -> 2 * x, str -> str != Referer.`

高阶函数只能接受lambda函数作为其参数。

高阶函数可以接受多个参数的lambda函数作为其参数，在这种情况下，高阶函数需要同时传递几个长度相等的数组，这些数组将被传递给lambda参数。

除了'arrayMap'和'arrayFilter'以外的所有其他函数，都可以省略第一个参数（lambda函数）。在这种情况下，默认返回数组元素本身。

**arrayMap(func, arr1, ...)**

将arr 将从'func'函数的原始应用程序获得的数组返回到'arr'数组中的每个元素。 Returns an array obtained from the original application of the 'func' function to each element in the 'arr' array.

**arrayFilter(func, arr1, ...)**

Returns an array containing only the elements in 'arr1' for which 'func' returns something other than 0.

示例:

```
SELECT arrayFilter(x -> x LIKE '%World%', ['Hello', 'abc World']) AS res
```

```
res  
['abc World']
```

```
SELECT  
arrayFilter(  
    (i, x) -> x LIKE '%World%',  
    arrayEnumerate(arr),  
    ['Hello', 'abc World'] AS arr)  
AS res
```

```
res  
[2]
```

**arrayCount([func,] arr1, ...)**

返回数组arr中非零元素的数量，如果指定了'func'，则通过'func'的返回值确定元素是否为非零元素。

**arrayExists([func,] arr1, ...)**

返回数组'arr'中是否存在非零元素，如果指定了'func'，则使用'func'的返回值确定元素是否为非零元素。

**arrayAll([func,] arr1, ...)**

返回数组'arr'中是否存在为零的元素，如果指定了'func'，则使用'func'的返回值确定元素是否为零元素。

### arraySum([func,] arr1, ...)

计算arr数组的总和，如果指定了'func'，则通过'func'的返回值计算数组的总和。

### arrayFirst(func, arr1, ...)

返回数组中第一个匹配的元素，函数使用'func'匹配所有元素，直到找到第一个匹配的元素。

### arrayFirstIndex(func, arr1, ...)

返回数组中第一个匹配的元素的下标索引，函数使用'func'匹配所有元素，直到找到第一个匹配的元素。

### arrayCumSum([func,] arr1, ...)

返回源数组部分数据的总和，如果指定了 func 函数，则使用 func 的返回值计算总和。

示例：

```
SELECT arrayCumSum([1, 1, 1, 1]) AS res
```

```
res  
[1, 2, 3, 4]
```

### arrayCumSumNonNegative(arr)

与arrayCumSum相同，返回源数组部分数据的总和。不同于arrayCumSum，当返回值包含小于零的值时，该值替换为零，后续计算使用零继续计算。例如：

```
SELECT arrayCumSumNonNegative([1, 1, -4, 1]) AS res
```

```
res  
[1, 2, 0, 1]
```

### arraySort([func,] arr1, ...)

返回升序排序 arr1 的结果。如果指定了 func 函数，则排序顺序由 func 的结果决定。

Schwartzian变换用于提高排序效率。

示例：

```
SELECT arraySort((x, y) -> y, ['hello', 'world'], [2, 1]);
```

```
res  
['world', 'hello']
```

请注意，NULL和NaN在最后（NaN在NULL之前）。例如：

```
SELECT arraySort([1, nan, 2, NULL, 3, nan, 4, NULL])
```

```
arraySort([1, nan, 2, NULL, 3, nan, 4, NULL])  
[1, 2, 3, 4, nan, nan, NULL, NULL]
```

## arrayReverseSort([func,] arr1, ...)

返回降序排序 arr1 的结果。如果指定了 func 函数，则排序顺序由 func 的结果决定。

请注意，NULL和NaN在最后（NaN在NULL之前）。例如：

```
SELECT arrayReverseSort([1, nan, 2, NULL, 3, nan, 4, NULL])
```

```
arrayReverseSort([1, nan, 2, NULL, 3, nan, 4, NULL])
[4, 3, 2, 1, nan, nan, NULL, NULL]
```

## 字典函数

有关连接和配置外部词典的信息，请参阅[外部词典](#)。

`dictGetUInt8, dictGetUInt16, dictGetUInt32, dictGetUInt64`

`dictGetInt8, dictGetInt16, dictGetInt32, dictGetInt64`

`dictGetFloat32, dictGetFloat64`

`dictGetDate, dictGetDateTime`

`dictGetUUID`

`dictGetString`

```
dictGetT('dict_name', 'attr_name', id)
```

- 使用'id'键获取dict\_name字典中attr\_name属性的值。dict\_name 和 attr\_name 是常量字符串。id 必须是UInt64。如果字典中没有 id 键，则返回字典描述中指定的默认值。

`dictGetTOrDefault`

```
dictGetTOrDefault('dict_name', 'attr_name', id, default)
```

与 dictGetT 函数相同，但默认值取自函数的最后一个参数。

`dictIsIn`

```
dictIsIn ('dict_name', child_id, ancestor_id)
```

- 对于'dict\_name'分层字典，查找'child\_id'键是否位于'ancestor\_id'内（或匹配'ancestor\_id'）。返回UInt8。

`dictGetHierarchy`

```
dictGetHierarchy('dict_name', id)
```

- 对于'dict\_name'分层字典，返回从'id'开始并沿父元素链继续的字典键数组。返回Array ( UInt64 )

## dictHas

```
dictHas('dict_name', id)
```

- 检查字典是否存在指定的 `id`。如果不存在，则返回0;如果存在，则返回1。

## Functions for working with Yandex.Metrica dictionaries

In order for the functions below to work, the server config must specify the paths and addresses for getting all the Yandex.Metrica dictionaries. The dictionaries are loaded at the first call of any of these functions. If the reference lists can't be loaded, an exception is thrown.

For information about creating reference lists, see the section "Dictionaries".

### Multiple geobases

ClickHouse supports working with multiple alternative geobases (regional hierarchies) simultaneously, in order to support various perspectives on which countries certain regions belong to.

The 'clickhouse-server' config specifies the file with the regional

```
hierarchy:: <path_to_regions_hierarchy_file>/opt/geo/regions_hierarchy.txt</path_to_regions_hierarchy_file>
```

Besides this file, it also searches for files nearby that have the `_` symbol and any suffix appended to the name (before the file extension). For example, it will also find the file `/opt/geo/regions_hierarchy_ua.txt`, if present.

`ua` is called the dictionary key. For a dictionary without a suffix, the key is an empty string.

All the dictionaries are re-loaded in runtime (once every certain number of seconds, as defined in the `builtin_dictionaries_reload_interval` config parameter, or once an hour by default). However, the list of available dictionaries is defined one time, when the server starts.

All functions for working with regions have an optional argument at the end – the dictionary key. It is referred to as the geobase. Example:

```
regionToCountry(RegionID) - Uses the default dictionary: /opt/geo/regions_hierarchy.txt  
regionToCountry(RegionID, '') - Uses the default dictionary: /opt/geo/regions_hierarchy.txt  
regionToCountry(RegionID, 'ua') - Uses the dictionary for the 'ua' key: /opt/geo/regions_hierarchy_ua.txt
```

### regionToCity(id[, geobase])

Accepts a UInt32 number – the region ID from the Yandex geobase. If this region is a city or part of a city, it returns the region ID for the appropriate city. Otherwise, returns 0.

### regionToArea(id[, geobase])

Converts a region to an area (type 5 in the geobase). In every other way, this function is the same as 'regionToCity'.

```
SELECT DISTINCT regionToName(regionToArea(toUInt32(number), 'ua'))  
FROM system.numbers  
LIMIT 15
```

```
regionToName(regionToArea(toUInt32(number), \ua\))—  
| Moscow and Moscow region  
| St. Petersburg and Leningrad region  
| Belgorod region  
| Ivanovsk region  
| Kaluga region  
| Kostroma region  
| Kursk region  
| Lipetsk region  
| Orlov region  
| Ryazan region  
| Smolensk region  
| Tambov region  
| Tver region  
| Tula region
```

### **regionToDistrict(id[, geobase])**

Converts a region to a federal district (type 4 in the geobase). In every other way, this function is the same as 'regionToCity'.

```
SELECT DISTINCT regionToName(regionToDistrict(toUInt32(number), 'ua'))  
FROM system.numbers  
LIMIT 15
```

```
regionToName(regionToDistrict(toUInt32(number), \ua\))—  
| Central federal district  
| Northwest federal district  
| South federal district  
| North Caucases federal district  
| Privilga federal district  
| Ural federal district  
| Siberian federal district  
| Far East federal district  
| Scotland  
| Faroe Islands  
| Flemish region  
| Brussels capital region  
| Wallonia  
| Federation of Bosnia and Herzegovina
```

### **regionToCountry(id[, geobase])**

Converts a region to a country. In every other way, this function is the same as 'regionToCity'. Example:

`regionToCountry(toUInt32(213)) = 225` converts Moscow (213) to Russia (225).

### **regionToContinent(id[, geobase])**

Converts a region to a continent. In every other way, this function is the same as 'regionToCity'. Example:

`regionToContinent(toUInt32(213)) = 10001` converts Moscow (213) to Eurasia (10001).

### **regionToPopulation(id[, geobase])**

Gets the population for a region. The population can be recorded in files with the geobase. See the section "External dictionaries". If the population is not recorded for the region, it returns 0. In the Yandex geobase, the population might be recorded for child regions, but not for parent regions.

### **regionIn(lhs, rhs[, geobase])**

Checks whether a 'lhs' region belongs to a 'rhs' region. Returns a UInt8 number equal to 1 if it belongs, or 0 if it doesn't

belong. The relationship is reflexive – any region also belongs to itself.

### **regionHierarchy(id[, geobase])**

Accepts a UInt32 number – the region ID from the Yandex geobase. Returns an array of region IDs consisting of the passed region and all parents along the chain. Example: `regionHierarchy(toUInt32(213)) = [213,1,3,225,10001,10000]`.

### **regionToName(id[, lang])**

Accepts a UInt32 number – the region ID from the Yandex geobase. A string with the name of the language can be passed as a second argument. Supported languages are: ru, en, ua, uk, by, kz, tr. If the second argument is omitted, the language 'ru' is used. If the language is not supported, an exception is thrown. Returns a string – the name of the region in the corresponding language. If the region with the specified ID doesn't exist, an empty string is returned.

`ua` and `uk` both mean Ukrainian.

## IN运算符相关函数

### **in, notIn, globalIn, globalNotIn**

请参阅[IN 运算符部分](#)。

### **tuple(x, y, ...), operator (x, y, ...)**

函数用于对多个列进行分组。对于具有类型T1, T2, ...的列，它返回包含这些列的元组(T1, T2, ...)。执行该函数没有任何成本。元组通常用作IN运算符的中间参数值，或用于创建lambda函数的形参列表。元组不能写入表。

### **tupleElement(tuple, n), operator x.N**

函数用于从元组中获取列。`'N'`是列索引，从1开始。`N`必须是常量正整数常数，并且不大于元组的大小。执行该函数没有任何成本。

## arrayJoin函数

这是一个非常有用的函数。

普通函数不会更改结果集的行数，而只是计算每行中的值(`map`)。聚合函数将多行压缩到一行中(`fold`或`reduce`)。`'arrayJoin'`函数获取每一行并将他们展开到多行(`unfold`)。

此函数将数组作为参数，并将该行在结果集中复制数组元素个数。除了应用此函数的列中的值之外，简单地复制列中的所有值；它被替换为相应的数组值。

查询可以使用多个`arrayJoin`函数。在这种情况下，转换被执行多次。

请注意SELECT查询中的ARRAY JOIN语法，它提供了更广泛的可能性。

示例：

```
SELECT arrayJoin([1, 2, 3] AS src) AS dst, 'Hello', src
```

dst		src
1	Hello	[1, 2, 3]
2	Hello	[1, 2, 3]
3	Hello	[1, 2, 3]

# GEO函数

## greatCircleDistance

使用great-circle distance公式计算地球表面两点之间的距离。

```
greatCircleDistance(lon1Deg, lat1Deg, lon2Deg, lat2Deg)
```

### 输入参数

- `lon1Deg` — 第一个点的经度，单位：度，范围：[-180°, 180°]。
- `lat1Deg` — 第一个点的纬度，单位：度，范围：[-90°, 90°]。
- `lon2Deg` — 第二个点的经度，单位：度，范围：[-180°, 180°]。
- `lat2Deg` — 第二个点的纬度，单位：度，范围：[-90°, 90°]。

正值对应北纬和东经，负值对应南纬和西经。

### 返回值

地球表面的两点之间的距离，以米为单位。

当输入参数值超出规定的范围时将抛出异常。

### 示例

```
SELECT greatCircleDistance(55.755831, 37.617673, -55.755831, -37.617673)
```

```
greatCircleDistance(55.755831, 37.617673, -55.755831, -37.617673) |  
14132374.194975413 |
```

## pointInEllipses

检查指定的点是否至少包含在指定的一个椭圆中。下述中的坐标是几何图形在笛卡尔坐标系中的位置。

```
pointInEllipses(x, y, x0, y0, a0, b0, ..., xn, yn, an, bn)
```

### 输入参数

- `x, y` — 平面上某个点的坐标。
- `xi, yi` — 第*i*个椭圆的中心坐标。
- `ai, bi` — 以x, y坐标为单位的第*i*个椭圆的轴。

输入参数的个数必须是 `2+4·n`，其中 `n` 是椭圆的数量。

### 返回值

如果该点至少包含在一个椭圆中，则返回 1；否则，则返回 0。

### 示例

```
SELECT pointInEllipses(55.755831, 37.617673, 55.755831, 37.617673, 1.0, 2.0)
```

```
└─pointInEllipses(55.755831, 37.617673, 55.755831, 37.617673, 1., 2.) ─  
    └─1
```

## pointInPolygon

检查指定的点是否包含在指定的多边形中。

```
pointInPolygon((x, y), [(a, b), (c, d) ...], ...)
```

### 输入参数

- $(x, y)$  — 平面上某个点的坐标。 Tuple 类型，包含坐标的两个数字。
- $[(a, b), (c, d) \dots]$  — 多边形的顶点。 Array 类型。 每个顶点由一对坐标  $(a, b)$  表示。 顶点可以按顺时针或逆时针指定。 顶点的个数应该大于等于3。 同时只能是常量的。
- 该函数还支持镂空的多边形（切除部分）。 如果需要，可以使用函数的其他参数定义需要切除部分的多边形。（The function does not support non-simply-connected polygons.）

### 返回值

如果坐标点存在在多边形范围内，则返回 1。 否则返回 0。 如果坐标位于多边形的边界上，则该函数可能返回 1，或可能返回 0。

### 示例

```
SELECT pointInPolygon((3., 3.), [(6, 0), (8, 4), (5, 8), (0, 2)]) AS res
```

```
└─res  
    └─1
```

## geohashEncode

将经度和纬度编码为 geohash-string，请参阅 (<http://geohash.org/>,<https://en.wikipedia.org/wiki/Geohash>)。

```
geohashEncode(longitude, latitude, [precision])
```

### 输入值

- longitude - 要编码的坐标的经度部分。 其值应在  $[-180^\circ, 180^\circ]$  范围内
- latitude - 要编码的坐标的纬度部分。 其值应在  $[-90^\circ, 90^\circ]$  范围内
- precision - 可选，生成的 geohash-string 的长度，默認為 12。 取值范围为  $[1, 12]$ 。 任何小于 1 或大于 12 的值都会默认转换为 12。

### 返回值

- 坐标编码的字符串（使用 base32 编码的修改版本）。

### 示例

```
SELECT geohashEncode(-5.60302734375, 42.593994140625, 0) AS res
```

```
└── res
    └── ezs42d000000
```

## geohashDecode

将任何geohash编码的字符串解码为经度和纬度。

### 输入值

- encoded string - geohash编码的字符串。

### 返回值

- (longitude, latitude) - 经度和纬度的 Float64 值的2元组。

### 示例

```
SELECT geohashDecode('ezs42') AS res
```

```
└── res
    └── (-5.60302734375, 42.60498046875)
```

## geoToH3

计算指定的分辨率的H3索引 (lon, lat)。

```
geoToH3(lon, lat, resolution)
```

### 输入值

- lon — 经度。 Float64类型。
- lat — 纬度。 Float64类型。
- resolution — 索引的分辨率。 取值范围为: [0, 15]。 UInt8类型。

### 返回值

- H3中六边形的索引值。
- 发生异常时返回0。

UInt64类型。

### 示例

```
SELECT geoToH3(37.79506683, 55.71290588, 15) as h3Index
```

```
└── h3Index
    └── 644325524701193974
```

## geohashesInBox

计算在指定精度下计算最小包含指定的经纬范围的最小图形的geohash数组。

## 输入值

- longitude\_min - 最小经度。其值应在 [-180° , 180°] 范围内
- latitude\_min - 最小纬度。其值应在 [-90° , 90°] 范围内
- longitude\_max - 最大经度。其值应在 [-180° , 180°] 范围内
- latitude\_max - 最大纬度。其值应在 [-90° , 90°] 范围内
- precision - geohash的精度。其值应在 [1, 12] 内的 UInt8 类型的数字

请注意，上述所有的坐标参数必须同为 Float32 或 Float64 中的一种类型。

## 返回值

- 包含指定范围内的指定精度的geohash字符串数组。注意，您不应该依赖返回数组中geohash的顺序。
- [] - 当传入的最小经纬度大于最大经纬度时将返回一个空数组。

请注意，如果生成的数组长度超过10000时，则函数将抛出异常。

## 示例

```
SELECT geohashesInBox(24.48, 40.56, 24.785, 40.81, 4) AS thasos
```

```
thasos
['sx1q', 'sx1r', 'sx32', 'sx1w', 'sx1x', 'sx38']
```

## Nullable处理函数

### isNull

检查参数是否为NULL。

```
isNull(x)
```

## 参数

- x — 一个非复合数据类型的值。

## 返回值

- 1 如果 x 为 NULL 。
- 0 如果 x 不为 NULL 。

## 示例

存在以下内容的表

X	Y
1	NULL
2	3

对其进行查询

```
:) SELECT x FROM t_null WHERE isNull(y)
```

```
SELECT x  
FROM t_null  
WHERE isNull(y)
```

x
1

```
1 rows in set. Elapsed: 0.010 sec.
```

## isNotNull

检查参数是否不为 **NULL**.

```
isNotNull(x)
```

参数:

- x — 一个非复合数据类型的值。

返回值

- 0 如果 x 为 NULL。
- 1 如果 x 不为 NULL。

示例

存在以下内容的表

x	y
1	NULL
2	3

对其进行查询

```
:) SELECT x FROM t_null WHERE isNotNull(y)
```

```
SELECT x  
FROM t_null  
WHERE isNotNull(y)
```

x
2

```
1 rows in set. Elapsed: 0.010 sec.
```

## coalesce

检查从左到右是否传递了“NULL”参数并返回第一个非 'NULL' 参数。

```
coalesce(x, ...)
```

参数:

- 任何数量的非复合类型的参数。所有参数必须与数据类型兼容。

## 返回值

- 第一个非'NULL`参数。
- `NULL`，如果所有参数都是'NULL`。

## 示例

考虑可以指定多种联系客户的方式的联系人列表。

name	mail	phone	icq
client 1	NULL	123-45-67	123
client 2	NULL	NULL	NULL

`mail` 和 `phone` 字段是 `String` 类型，但 `icq` 字段是 `UInt32`，所以它需要转换为 `String`。

从联系人列表中获取客户的第一个可用联系方式：

```
:) SELECT coalesce(mail, phone, CAST(icq, 'Nullable(String)')) FROM aBook
SELECT coalesce(mail, phone, CAST(icq, 'Nullable(String)'))
FROM aBook

name      coalesce(mail, phone, CAST(icq, 'Nullable(String)'))
client 1 | 123-45-67
client 2 | NULL

2 rows in set. Elapsed: 0.006 sec.
```

## ifNull

如果第一个参数为“NULL”，则返回第二个参数的值。

```
ifNull(x, alt)
```

参数:

- `x` — 要检查“NULL”的值。
- `alt` — 如果 `x` 为'NULL`，函数返回的值。

## 返回值

- The value `x` , if `x` is not `NULL` .
- The value `alt` , if `x` is `NULL` .

## 示例

```
SELECT ifNull('a', 'b')

ifNull('a', 'b')
a
```

```
SELECT ifNull(NULL, 'b')

ifNull(NULL, 'b')
b
```

## nullIf

如果参数相等，则返回 NULL。

```
nullIf(x, y)
```

参数：

x, y — 用于比较的值。它们必须是类型兼容的，否则将抛出异常。

返回值

- 如果参数相等，则为 NULL。
- 如果参数不相等，则为 x 值。

示例

```
SELECT nullIf(1, 1)
```

```
nullIf(1, 1)  
      NULL
```

```
SELECT nullIf(1, 2)
```

```
nullIf(1, 2)  
      1
```

## assumeNotNull

将 Nullable 类型的值转换为非 Nullable 类型的值。

```
assumeNotNull(x)
```

参数：

- x — 原始值。

返回值

- 如果 x 不为 NULL，返回非 Nullable 类型的原始值。
- 如果 x 为 NULL，返回对应非 Nullable 类型的默认值。

示例

存在如下 t\_null 表。

```
SHOW CREATE TABLE t_null
```

```
statement  
CREATE TABLE default.t_null ( x Int8, y Nullable(Int8) ) ENGINE = TinyLog
```

X	Y
1	NULL
2	3

将列 y 作为 assumeNotNull 函数的参数。

```
SELECT assumeNotNull(y) FROM t_null
```

```
assumeNotNull(y)  
| 0  
| 3
```

```
SELECT toTypeName(assumeNotNull(y)) FROM t_null
```

```
toTypeName(assumeNotNull(y))  
| Int8  
| Int8
```

## toNullable

将参数的类型转换为 Nullable。

```
toNullable(x)
```

参数：

- x — 任何非复合类型的值。

返回值

- 输入的值，但其类型为 Nullable。

示例

```
SELECT toTypeName(10)
```

```
toTypeName(10)  
| UInt8
```

```
SELECT toTypeName(toNullable(10))
```

```
toTypeName(toNullable(10))  
| Nullable(UInt8)
```

## 机器学习函数

### evalMLMethod (prediction)

使用拟合回归模型的预测请使用 evalMLMethod 函数。 请参阅 linearRegression 中的链接。

### Stochastic Linear Regression

stochasticLinearRegression 聚合函数使用线性模型和MSE损失函数实现随机梯度下降法。 使用 evalMLMethod 来预测新数据。 请参阅示例和注释[此处](#)。

### Stochastic Logistic Regression

stochasticLogisticRegression 聚合函数实现了二元分类问题的随机梯度下降法。 使用 evalMLMethod 来预测新数据。 请参阅示

例和注释[此处](#)。

## Introspection Functions

You can use functions described in this chapter to introspect[ELF](#) and [DWARF](#) for query profiling.

### Warning

These functions are slow and may impose security considerations.

For proper operation of introspection functions:

- Install the `clickhouse-common-static-dbg` package.
- Set the `allow_introspection_functions` setting to 1.

For security reasons introspection functions are disabled by default.

ClickHouse saves profiler reports to the `trace_log` system table. Make sure the table and profiler are configured properly.

### addressToLine

Converts virtual memory address inside ClickHouse server process to the filename and the line number in ClickHouse source code.

If you use official ClickHouse packages, you need to install the `clickhouse-common-static-dbg` package.

#### Syntax

```
addressToLine(address_of_binary_instruction)
```

#### Parameters

- `address_of_binary_instruction` ([UInt64](#)) — Address of instruction in a running process.

#### Returned value

- Source code filename and the line number in this file delimited by colon.

For example, `/build/obj-x86_64-linux-gnu/../dbms/src/Common/ThreadPool.cpp:199`, where `199` is a line number.

- Name of a binary, if the function couldn't find the debug information.
- Empty string, if the address is not valid.

Type: [String](#).

#### Example

Enabling introspection functions:

```
SET allow_introspection_functions=1
```

Selecting the first string from the `trace_log` system table:

```
SELECT * FROM system.trace_log LIMIT 1 \G
```

```
Row 1:  
_____  
event_date: 2019-11-19  
event_time: 2019-11-19 18:57:23  
revision: 54429  
timer_type: Real  
thread_number: 48  
query_id: 421b6855-1858-45a5-8f37-f383409d6d72  
trace: [140658411141617, 94784174532828, 94784076370703, 94784076372094, 94784076361020, 94784175007680, 140658411116251, 1]
```

The `trace` field contains the stack trace at the moment of sampling.

Getting the source code filename and the line number for a single address:

```
SELECT addressToLine(94784076370703) \G
```

```
Row 1:
```

```
addressToLine(94784076370703): /build/obj-x86_64-linux-gnu/./dbms/src/Common/ThreadPool.cpp:199
```

Applying the function to the whole stack trace:

```
SELECT  
    arrayStringConcat(arrayMap(x -> addressToLine(x), trace), '\n') AS trace_source_code_lines  
FROM system.trace_log  
LIMIT 1  
\G
```

The `arrayMap` function allows to process each individual element of the `trace` array by the `addressToLine` function. The result of this processing you see in the `trace_source_code_lines` column of output.

```
Row 1:  
_____  
trace_source_code_lines: /lib/x86_64-linux-gnu/libpthread-2.27.so  
/usr/lib/debug/usr/bin/clickhouse  
/build/obj-x86_64-linux-gnu/./dbms/src/Common/ThreadPool.cpp:199  
/build/obj-x86_64-linux-gnu/./dbms/src/Common/ThreadPool.h:155  
/usr/include/c++/9/bits/atomic_base.h:551  
/usr/lib/debug/usr/bin/clickhouse  
/lib/x86_64-linux-gnu/libpthread-2.27.so  
/build/glibc-OTsEL5/glibc-2.27/misc/./sysdeps/unix/sysv/linux/x86_64/clone.S:97
```

## addressToSymbol

Converts virtual memory address inside ClickHouse server process to the symbol from ClickHouse object files.

### Syntax

```
addressToSymbol(address_of_binary_instruction)
```

### Parameters

- `address_of_binary_instruction` (`UInt64`) — Address of instruction in a running process.

### Returned value

- Symbol from ClickHouse object files.
- Empty string, if the address is not valid.

Type: **String**.

## Example

Enabling introspection functions:

```
SET allow_introspection_functions=1
```

Selecting the first string from the `trace_log` system table:

```
SELECT * FROM system.trace_log LIMIT 1 \G
```

Row 1:

```
event_date: 2019-11-20
event_time: 2019-11-20 16:57:59
revision: 54429
timer_type: Real
thread_number: 48
query_id: 724028bf-f550-45aa-910d-2af6212b94ac
trace:
[94138803686098, 94138815010911, 94138815096522, 94138815101224, 94138815102091, 94138814222988, 94138806823642, 94138815102091]
```

The `trace` field contains the stack trace at the moment of sampling.

Getting a symbol for a single address:

```
SELECT addressToSymbol(94138803686098) \G
```

Row 1:

```
addressToSymbol(94138803686098):
_ZNK2DB24IAggregateFunctionHelperINS_20AggregateFunctionSumImmNS_24AggregateFunctionSumDataImEEEE19addBatchS:
```

Applying the function to the whole stack trace:

```
SELECT
    arrayStringConcat(arrayMap(x -> addressToSymbol(x), trace), '\n') AS trace_symbols
FROM system.trace_log
LIMIT 1
\G
```

The **arrayMap** function allows to process each individual element of the `trace` array by the `addressToSymbols` function. The result of this processing you see in the `trace_symbols` column of output.

```
Row 1:  
_____  
trace_symbols:  
_ZNK2DB24IAggregateFunctionHelperINS_20AggregateFunctionSumImmNS_24AggregateFunctionSumDataImEEEE19addBatchS:  
_ZN2DB10Aggregator21executeWithoutKeyImplERPcmPNS0_28AggregateFunctionInstructionEPNS_5ArenaE  
_ZN2DB10Aggregator14executeOnBlockEST6vectorIN3COWINS_7IColumnEE13immutable_ptrIS3_EESaIS6_EEmRNS_22AggregateE  
_ZN2DB10Aggregator14executeOnBlockERKNS_5BlockERNS_22AggregatedDataVariantsERSt6vectorIPKNS_7IColumnESaIS9_EE  
_ZN2DB10Aggregator7executeERKSt10shared_ptrINS_17IBlockInputStreamEERNS_22AggregatedDataVariantsE  
_ZN2DB27AggregatingBlockInputStream8readImplEv  
_ZN2DB17IBlockInputStream4readEv  
_ZN2DB26ExpressionBlockInputStream8readImplEv  
_ZN2DB17IBlockInputStream4readEv  
_ZN2DB26ExpressionBlockInputStream8readImplEv  
_ZN2DB17IBlockInputStream4readEv  
_ZN2DB28AsynchronousBlockInputStream9calculateEv  
_ZNSt17_Function_handlerIFvvEZN2DB28AsynchronousBlockInputStream4nextEvEUlvE_E9_M_invokeERKSt9_Any_data  
_ZN14ThreadPoolImplI20ThreadFromGlobalPoolE6workerEST14_List_iteratorISO_E  
_ZZN20ThreadFromGlobalPoolc4IZN14ThreadPoolImplIS_E12scheduleImplIVET_St8functionIFvvEEiSt8optionalImEEUlvE1  
_ZN14ThreadPoolImplISt6threadE6workerEST14_List_iteratorISO_E  
execute_native_thread_routine  
start_thread  
clone
```

## demangle

Converts a symbol that you can get using the [addressToSymbol](#) function to the C++ function name.

### Syntax

```
demangle(symbol)
```

### Parameters

- `symbol` ([String](#)) — Symbol from an object file.

### Returned value

- Name of the C++ function.
- Empty string if a symbol is not valid.

Type: [String](#).

### Example

Enabling introspection functions:

```
SET allow_introspection_functions=1
```

Selecting the first string from the `trace_log` system table:

```
SELECT * FROM system.trace_log LIMIT 1 \G
```

```
Row 1:  
_____  
event_date: 2019-11-20  
event_time: 2019-11-20 16:57:59  
revision: 54429  
timer_type: Real  
thread_number: 48  
query_id: 724028bf-f550-45aa-910d-2af6212b94ac  
trace:  
[94138803686098, 94138815010911, 94138815096522, 94138815101224, 94138815102091, 94138814222988, 94138806823642, 941:
```

The `trace` field contains the stack trace at the moment of sampling.

Getting a function name for a single address:

```
SELECT demangle(addressToSymbol(94138803686098)) \G
```

```
Row 1:  
_____  
demangle(addressToSymbol(94138803686098)): DB::IAggregateFunctionHelper<DB::AggregateFunctionSum<unsigned long, unsigned long, DB::AggregateFunctionSumData<unsigned long> >::addBatchSinglePlace(unsigned long, char*, DB::IColumn const**, DB::Arena*) const
```

Applying the function to the whole stack trace:

```
SELECT  
    arrayStringConcat(arrayMap(x -> demangle(addressToSymbol(x)), trace), '\n') AS trace_functions  
FROM system.trace_log  
LIMIT 1  
\G
```

The `arrayMap` function allows to process each individual element of the `trace` array by the `demangle` function. The result of this processing you see in the `trace_functions` column of output.

Row 1:

```
trace_functions: DB::IAggregateFunctionHelper<DB::AggregateFunctionSum<unsigned long, unsigned long, DB::AggregateFunctionSumData<unsigned long> >::addBatchSinglePlace(unsigned long, char*, DB::IColumn const**, DB::Arena*) const
DB::Aggregator::executeWithoutKeyImpl(char*&, unsigned long, DB::Aggregator::AggregateFunctionInstruction*, DB::Arena*) const
DB::Aggregator::executeOnBlock(std::vector<COW<DB::IColumn>::immutable_ptr<DB::IColumn>, std::allocator<COW<DB::IColumn>::immutable_ptr<DB::IColumn> > >, unsigned long, DB::AggregatedDataVariants&, std::vector<DB::IColumn const*, std::allocator<DB::IColumn const*> >&, std::vector<std::vector<DB::IColumn const*, std::allocator<DB::IColumn const*> >, std::allocator<std::vector<DB::IColumn const*, std::allocator<DB::IColumn const*> >>>&, bool&)
DB::Aggregator::executeOnBlock(DB::Block const&, DB::AggregatedDataVariants&, std::vector<DB::IColumn const*, std::allocator<DB::IColumn const*> >&, std::vector<std::vector<DB::IColumn const*, std::allocator<DB::IColumn const*> >>>&, bool&)
DB::Aggregator::execute(std::shared_ptr<DB::IBlockInputStream> const&, DB::AggregatedDataVariants&)
DB::AggregatingBlockInputStream::readImpl()
DB::IBlockInputStream::read()
DB::ExpressionBlockInputStream::readImpl()
DB::IBlockInputStream::read()
DB::ExpressionBlockInputStream::readImpl()
DB::IBlockInputStream::read()
DB::AsynchronousBlockInputStream::calculate()
std::function<void ()> DB::AsynchronousBlockInputStream::next()::
{lambda()#1}>::_M_invoke(std::any const&)
ThreadPoolImpl<ThreadFromGlobalPool>::worker(std::list<ThreadFromGlobalPool>)
ThreadFromGlobalPool::ThreadFromGlobalPool<ThreadPoolImpl<ThreadFromGlobalPool>::scheduleImpl<void>(std::function<void ()>, int, std::optional<unsigned long>::{lambda()#3}>
(ThreadPoolImpl<ThreadFromGlobalPool>::scheduleImpl<void>(std::function<void ()>, int, std::optional<unsigned long>::{lambda()#3} &&){lambda()#1}::operator()() const
ThreadPoolImpl<std::thread>::worker(std::list<std::thread>)
execute_native_thread_routine
start_thread
clone
```

## 其他函数

### hostName()

返回一个字符串，其中包含执行此函数的主机的名称。对于分布式处理，如果在远程服务器上执行此函数，则将返回远程服务器主机的名称。

### basename

在最后一个斜杠或反斜杠后的字符串文本。此函数通常用于从路径中提取文件名。

```
basename( expr )
```

### 参数

- expr — 任何一个返回String结果的表达式。String

### 返回值

一个String类型的值，其包含：

- 在最后一个斜杠或反斜杠后的字符串文本内容。  
如果输入的字符串以斜杠或反斜杠结尾，例如：/ 或 c:\，函数将返回一个空字符串。
- 如果输入的字符串中不包含斜杠或反斜杠，函数返回输入字符串本身。

### 示例

```
SELECT 'some/long/path/to/file' AS a, basename(a)
```

a	basename('some\\long\\path\\to\\file')
some\long\path\to\file	file

```
SELECT 'some\\long\\path\\to\\file' AS a, basename(a)
```

a	basename('some\\long\\path\\to\\file')
some\long\path\to\file	file

```
SELECT 'some-file-name' AS a, basename(a)
```

a	basename('some-file-name')
some-file-name	some-file-name

## visibleWidth(x)

以文本格式（以制表符分隔）向控制台输出值时，计算近似宽度。 系统使用此函数实现Pretty格式。 Calculates the approximate width when outputting values to the console in text format (tab-separated). This function is used by the system for implementing Pretty formats.

NULL 是代表一个字符串，对应于 Pretty 格式中的 NULL。

```
SELECT visibleWidth(NULL)
```

visibleWidth(NULL)  
4

## toTypeName(x)

返回包含参数的类型的字符串。

如果将 NULL 作为参数传递给函数，那么它返回 Nullable ( Nothing ) 类型，它对应于 ClickHouse 中的内部 NULL。

## blockSize()

获取 Block 的大小。 在 ClickHouse 中，查询始终工作在 Block（包含列的部分的集合）上。 此函数允许您获取调用其的块的大小。

## materialize(x)

将一个常量列变为一个非常量列。 在 ClickHouse 中，非常量列和常量列在内存中的表示方式不同。 尽管函数对于常量列和非常量总是返回相同的结果，但它们的工作方式可能完全不同（执行不同的代码）。 此函数用于调试这种行为。

## ignore(...)

接受任何参数，包括 NULL。 始终返回 0。 但是，函数的参数总是被计算的。 该函数可以用于基准测试。

## sleep(seconds)

在每个Block上休眠'seconds'秒。可以是整数或浮点数。

### sleepEachRow(seconds)

在每行上休眠'seconds'秒。可以是整数或浮点数。

### currentDatabase()

返回当前数据库的名称。当您需要在CREATE TABLE中的表引擎参数中指定数据库，您可以使用此函数。

### isFinite(x)

接受Float32或Float64类型的参数，如果参数不是infinite且不是NaN，则返回1，否则返回0。

### isInfinite(x)

接受Float32或Float64类型的参数，如果参数是infinite，则返回1，否则返回0。注意NaN返回0。

### isNaN(x)

接受Float32或Float64类型的参数，如果参数是Nan，则返回1，否则返回0。

### hasColumnInTable(['hostname'][, 'username'][, 'password'][], 'database', 'table', 'column')

Accepts constant strings: database name, table name, and column name. Returns a UInt8 constant expression equal to 1 if there is a column, otherwise 0. If the hostname parameter is set, the test will run on a remote server. The function throws an exception if the table does not exist. For elements in a nested data structure, the function checks for the existence of a column. For the nested data structure itself, the function returns 0.

### bar

使用unicode构建图表。

bar(x, min, max, width) 当 x = max 时，绘制一个宽度与 (x - min) 成正比且等于 width 的字符带。


参数:

- x — 要显示的尺寸。
- min, max — 整数常量，该值必须是 Int64。
- width — 常量，可以是正整数或小数。

字符带的绘制精度是符号的八分之一。

示例:

```
SELECT
    toHour(EventTime) AS h,
    count() AS c,
    bar(c, 0, 600000, 20) AS bar
FROM test.hits
GROUP BY h
ORDER BY h ASC
```

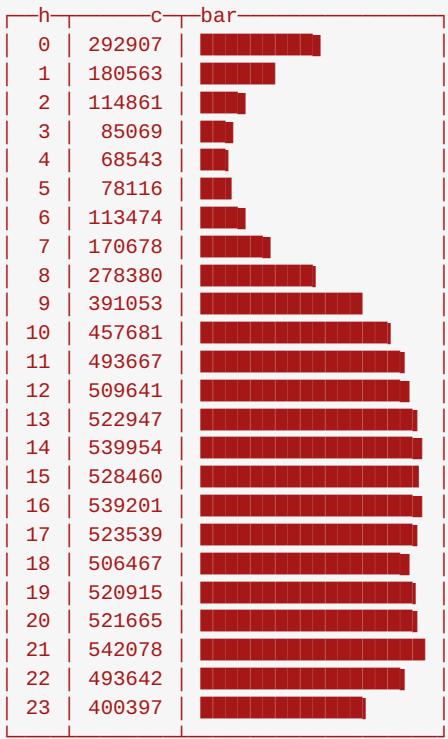

## transform

根据定义，将某些元素转换为其他元素。此函数有两种使用方式：

1. `transform(x, array_from, array_to, default)`

`x` – 要转换的值。

`array_from` – 用于转换的常量数组。

`array_to` – 将‘from’中的值转换为的常量数组。

`default` – 如果‘x’不等于‘from’中的任何值，则默认转换的值。

`array_from` 和 `array_to` – 拥有相同大小的数组。

类型约束:

`transform(T, Array(T), Array(U), U) -> U`

`T` 和 `U` 可以是`String`，`Date`，`DateTime`或任意数值类型的。对于相同的字母（`T`或`U`），如果数值类型，那么它们不可不完全匹配的，只需要具备共同的类型即可。例如，第一个参数是`Int64`类型，第二个参数是`Array(UInt16)`类型。

如果‘x’值等于‘array\_from’数组中的一个元素，它将从‘array\_to’数组返回一个对应的元素（下标相同）。否则，它返回‘default’。如果‘array\_from’匹配到了多个元素，则返回第一个匹配的元素。

示例:

```

SELECT
  transform(SearchEngineID, [2, 3], ['Yandex', 'Google'], 'Other') AS title,
  count() AS c
FROM test.hits
WHERE SearchEngineID != 0
GROUP BY title
ORDER BY c DESC
  
```

title	c
Yandex	498635
Google	229872
Other	104472

### 1. transform(x, array\_from, array\_to)

与第一种不同在于省略了'default'参数。如果'x'值等于'array\_from'数组中的一个元素，它将从'array\_to'数组返回相应的元素（下标相同）。否则，它返回'x'。

类型约束：

transform(T, Array(T), Array(T)) -> T

示例：

```
SELECT
    transform(domain(Referer), ['yandex.ru', 'google.ru', 'vk.com'], ['www.yandex', 'example.com']) AS s,
    count() AS c
FROM test.hits
GROUP BY domain(Referer)
ORDER BY count() DESC
LIMIT 10
```

s	c
www.yandex	2906259
████████.ru	867767
████████.ru	313599
mail.yandex.ru	107147
████████.ru	100355
████████.ru	65040
news.yandex.ru	64515
████████.net	59141
example.com	57316

### formatReadableSize(x)

接受大小（字节数）。返回带有后缀（KiB, MiB等）的字符串。

示例：

```
SELECT
    arrayJoin([1, 1024, 1024*1024, 192851925]) AS filesize_bytes,
    formatReadableSize(filesize_bytes) AS filesize
```

filesize_bytes	filesize
1	1.00 B
1024	1.00 KiB
1048576	1.00 MiB
192851925	183.92 MiB

### least(a, b)

返回a和b中的最小值。

### greatest(a, b)

返回a和b的最大值。

### uptime()

返回服务正常运行的秒数。

### version()

以字符串形式返回服务器的版本。

### timezone()

返回服务器的时区。

### blockNumber

返回行所在的Block的序列号。

### rowNumberInBlock

返回行所在Block中行的序列号。 针对不同的Block始终重新计算。

### rowNumberInAllBlocks()

返回行所在结果集中的序列号。此函数仅考虑受影响的Block。

### runningDifference(x)

计算数据块中相邻行的值之间的差异。对于第一行返回0，并为每个后续行返回与前一行的差异。

函数的结果取决于受影响的Block和Block中的数据顺序。如果使用ORDER BY创建子查询并从子查询外部调用该函数，则可以获得预期结果。

示例：

```
SELECT
    EventID,
    EventTime,
    runningDifference(EventTime) AS delta
FROM
(
    SELECT
        EventID,
        EventTime
    FROM events
    WHERE EventDate = '2016-11-24'
    ORDER BY EventTime ASC
    LIMIT 5
)
```

EventID	EventTime	delta
1106	2016-11-24 00:00:04	0
1107	2016-11-24 00:00:05	1
1108	2016-11-24 00:00:05	0
1109	2016-11-24 00:00:09	4
1110	2016-11-24 00:00:10	1

## runningDifferenceStartingWithFirstValue

与runningDifference相同，区别在于第一行返回第一行的值，后续每个后续行返回与上一行的差值。

## MACNumToString(num)

接受一个UInt64类型的数字。 将其解释为big endian的MAC地址。 返回包含相应MAC地址的字符串，格式为AA:BB:CC:DD:EE:FF（以冒号分隔的十六进制形式的数字）。

## MACStringToNum(s)

与MACNumToString相反。 如果MAC地址格式无效，则返回0。

## MACStringToOUI(s)

接受格式为AA:BB:CC:DD:EE:FF（十六进制形式的冒号分隔数字）的MAC地址。 返回前三个八位字节作为UInt64编号。如果MAC地址格式无效，则返回0。

## getSizeOfEnumType

返回Enum中的枚举数量。

```
getSizeOfEnumType(value)
```

参数:

- value — Enum 类型的值。

返回值

- Enum 的枚举数量。
- 如果类型不是Enum，则抛出异常。

示例

```
SELECT getSizeOfEnumType( CAST('a' AS Enum8('a' = 1, 'b' = 2) ) ) AS x
```

```
x  
2
```

## toColumnName

返回在RAM中列的数据类型的名称。

```
toColumnName(value)
```

参数:

- value — 任何类型的值。

返回值

- 一个字符串，其内容是value在RAM中的类型名称。

## toTypeName '与 ' toColumnType Name 的区别示例

```
:) select toTypeName(cast('2018-01-01 01:02:03' AS DateTime))

SELECT toTypeName(CAST('2018-01-01 01:02:03', 'DateTime'))

[ toTypeName(CAST('2018-01-01 01:02:03', 'DateTime')) ]
  DateTime

1 rows in set. Elapsed: 0.008 sec.

:) select toColumnType Name(cast('2018-01-01 01:02:03' AS DateTime))

SELECT toColumnType Name(CAST('2018-01-01 01:02:03', 'DateTime'))

[ toColumnType Name(CAST('2018-01-01 01:02:03', 'DateTime')) ]
  Const(UInt32)
```

该示例显示 DateTime 数据类型作为 Const(UInt32) 存储在内存中。

## dumpColumnStructure

输出在RAM中的数据结果的详细信息。

```
dumpColumnStructure(value)
```

参数:

- value — 任何类型的值.

返回值

- 一个字符串 , 其内容是 value 在RAM中的数据结构的详细描述。

示例

```
SELECT dumpColumnStructure(CAST('2018-01-01 01:02:03', 'DateTime'))

[ dumpColumnStructure(CAST('2018-01-01 01:02:03', 'DateTime')) ]
  DateTime, Const(size = 1, UInt32(size = 1))
```

## defaultValueOfTypeArgument

输出数据类型的默认值。

不包括用户设置的自定义列的默认值。

```
defaultValueOfTypeArgument(expression)
```

参数:

- expression — 任意类型的值或导致任意类型值的表达式。

返回值

- 数值类型返回 0 。
- 字符串类型返回空的字符串。

- **Nullable**类型返回 `NULL`。

## 示例

```
:) SELECT defaultValueOfArgumentType( CAST(1 AS Int8) )

SELECT defaultValueOfArgumentType(CAST(1, 'Int8'))

defaultValueOfArgumentType(CAST(1, 'Int8'))  
0

1 rows in set. Elapsed: 0.002 sec.

:) SELECT defaultValueOfArgumentType( CAST(1 AS Nullable(Int8) ) )

SELECT defaultValueOfArgumentType(CAST(1, 'Nullable(Int8)'))

defaultValueOfArgumentType(CAST(1, 'Nullable(Int8)'))  
NULL

1 rows in set. Elapsed: 0.002 sec.
```

## replicate

使用单个值填充一个数组。

用于**arrayJoin**的内部实现。

```
replicate(x, arr)
```

参数:

- `arr` — 原始数组。 ClickHouse创建一个与原始数据长度相同的新数组，并用值`x`填充它。
- `x` — 生成的数组将被填充的值。

## 输出

- 一个被`x`填充的数组。

## 示例

```
SELECT replicate(1, ['a', 'b', 'c'])

replicate(1, ['a', 'b', 'c'])  
[1,1,1]
```

## filesystemAvailable

返回磁盘的剩余空间信息（以字节为单位）。使用配置文件中的path配置评估此信息。

## filesystemCapacity

返回磁盘的容量信息，以字节为单位。使用配置文件中的path配置评估此信息。

## finalizeAggregation

获取聚合函数的状态。返回聚合结果（最终状态）。

## runningAccumulate

获取聚合函数的状态并返回其具体的值。这是从第一行到当前行的所有行累计的结果。

例如，获取聚合函数的状态（示例runningAccumulate(uniqState(UserID))），对于数据块的每一行，返回所有先前行和当前行的状态合并后的聚合函数的结果。因此，函数的结果取决于分区中数据块的顺序以及数据块中行的顺序。

## joinGet('join\_storage\_table\_name', 'get\_column', join\_key)

使用指定的连接键从Join类型引擎的表中获取数据。

## modelEvaluate(model\_name, ...)

使用外部模型计算。接受模型的名称以及模型的参数。返回Float64类型的值。

## throwIf(x)

如果参数不为零则抛出异常。

# Aggregate functions

Aggregate functions work in the **normal** way as expected by database experts.

ClickHouse also supports:

- **Parametric aggregate functions**, which accept other parameters in addition to columns.
- **Combinators**, which change the behavior of aggregate functions.

## NULL processing

During aggregation, all `NULL`s are skipped.

Examples:

Consider this table:

X	Y
1	2
2	NULL
3	2
3	3
3	NULL

Let's say you need to total the values in the `y` column:

```
SELECT sum(y) FROM t_null_big
```

```
sum(y)  
7
```

The `sum` function interprets `NULL` as `0`. In particular, this means that if the function receives input of a selection where all

the values are `NULL`, then the result will be `0`, not `NULL`.

Now you can use the `groupArray` function to create an array from the `y` column:

```
SELECT groupArray(y) FROM t_null_big
```

```
└─groupArray(y)─  
| [2,2,3] |
```

`groupArray` does not include `NULL` in the resulting array.

## Function Reference

### count

Counts the number of rows or not-`NULL` values.

ClickHouse supports the following syntaxes for `count`: - `count(expr)` or `COUNT(DISTINCT expr)`. - `count()` or `COUNT(*)`. The `count()` syntax is ClickHouse-specific.

#### Parameters

The function can take:

- Zero parameters.
- One `expression`.

#### Returned value

- If the function is called without parameters it counts the number of rows.
- If the `expression` is passed, then the function counts how many times this expression returned not `null`. If the expression returns a `Nullable`-type value, then the result of `count` stays not `Nullable`. The function returns `0` if the expression returned `NULL` for all the rows.

In both cases the type of the returned value is `UInt64`.

#### Details

ClickHouse supports the `COUNT(DISTINCT ...)` syntax. The behavior of this construction depends on the `count_distinctImplementation` setting. It defines which of the `uniq*` functions is used to perform the operation. The default is the `uniqExact` function.

The `SELECT count() FROM table` query is not optimized, because the number of entries in the table is not stored separately. It chooses a small column from the table and counts the number of values in it.

#### Examples

Example 1:

```
SELECT count() FROM t
```

```
└─count()─  
| 5 |
```

Example 2:

```
SELECT name, value FROM system.settings WHERE name = 'count_distinctImplementation'
```

name	value
count_distinctImplementation	uniqExact

```
SELECT count(DISTINCT num) FROM t
```

uniqExact(num)
3

This example shows that `count(DISTINCT num)` is performed by the `uniqExact` function according to the `count_distinctImplementation` setting value.

## any(x)

Selects the first encountered value. The query can be executed in any order and even in a different order each time, so the result of this function is indeterminate. To get a determinate result, you can use the 'min' or 'max' function instead of 'any'.

In some cases, you can rely on the order of execution. This applies to cases when SELECT comes from a subquery that uses ORDER BY.

When a `SELECT` query has the `GROUP BY` clause or at least one aggregate function, ClickHouse (in contrast to MySQL) requires that all expressions in the `SELECT`, `HAVING`, and `ORDER BY` clauses be calculated from keys or from aggregate functions. In other words, each column selected from the table must be used either in keys or inside aggregate functions. To get behavior like in MySQL, you can put the other columns in the `any` aggregate function.

## anyHeavy(x)

Selects a frequently occurring value using the **heavy hitters** algorithm. If there is a value that occurs more than in half the cases in each of the query's execution threads, this value is returned. Normally, the result is nondeterministic.

```
anyHeavy(column)
```

### Arguments

- `column` – The column name.

### Example

Take the **OnTime** data set and select any frequently occurring value in the `AirlineID` column.

```
SELECT anyHeavy(AirlineID) AS res
FROM ontime
```

res
19690

## anyLast(x)

Selects the last value encountered. The result is just as indeterminate as for the `any` function.

## groupBitAnd

Applies bitwise `AND` for series of numbers.

```
groupBitAnd(expr)
```

### Parameters

`expr` – An expression that results in `UInt*` type.

### Return value

Value of the `UInt*` type.

### Example

Test data:

```
binary      decimal
00101100 = 44
00011100 = 28
00001101 = 13
01010101 = 85
```

Query:

```
SELECT groupBitAnd(num) FROM t
```

Where `num` is the column with the test data.

Result:

```
binary      decimal
00000100 = 4
```

## groupBitOr

Applies bitwise `OR` for series of numbers.

```
groupBitOr(expr)
```

### Parameters

`expr` – An expression that results in `UInt*` type.

### Return value

Value of the `UInt*` type.

### Example

Test data:

```
binary      decimal
00101100 = 44
00011100 = 28
00001101 = 13
01010101 = 85
```

Query:

```
SELECT groupBitOr(num) FROM t
```

Where `num` is the column with the test data.

Result:

```
binary      decimal
01111101 = 125
```

## groupBitXor

Applies bitwise XOR for series of numbers.

```
groupBitXor(expr)
```

Parameters

`expr` – An expression that results in `UInt*` type.

Return value

Value of the `UInt*` type.

Example

Test data:

```
binary      decimal
00101100 = 44
00011100 = 28
00001101 = 13
01010101 = 85
```

Query:

```
SELECT groupBitXor(num) FROM t
```

Where `num` is the column with the test data.

Result:

```
binary      decimal
01101000 = 104
```

## groupBitmap

Bitmap or Aggregate calculations from a unsigned integer column, return cardinality of type `UInt64`, if add suffix `-State`, then return [bitmap object](#).

```
groupBitmap(expr)
```

Parameters

`expr` – An expression that results in `UInt*` type.

Return value

Value of the UInt64 type.

Example

Test data:

```
UserID
1
1
2
3
```

Query:

```
SELECT groupBitmap(UserID) as num FROM t
```

Result:

```
num
3
```

**min(x)**

Calculates the minimum.

**max(x)**

Calculates the maximum.

**argMin(arg, val)**

Calculates the 'arg' value for a minimal 'val' value. If there are several different values of 'arg' for minimal values of 'val', the first of these values encountered is output.

Example:

user	salary
director	5000
manager	3000
worker	1000

```
SELECT argMin(user, salary) FROM salary
```

argMin(user, salary)
worker

**argMax(arg, val)**

Calculates the 'arg' value for a maximum 'val' value. If there are several different values of 'arg' for maximum values of 'val', the first of these values encountered is output.

## sum(x)

Calculates the sum. Only works for numbers.

## sumWithOverflow(x)

Computes the sum of the numbers, using the same data type for the result as for the input parameters. If the sum exceeds the maximum value for this data type, the function returns an error.

Only works for numbers.

## sumMap(key, value)

Totals the 'value' array according to the keys specified in the 'key' array. The number of elements in 'key' and 'value' must be the same for each row that is totaled. Returns a tuple of two arrays: keys in sorted order, and values summed for the corresponding keys.

Example:

```
CREATE TABLE sum_map(
    date Date,
    timeslot DateTime,
    statusMap Nested(
        status UInt16,
        requests UInt64
    )
) ENGINE = Log;
INSERT INTO sum_map VALUES
    ('2000-01-01', '2000-01-01 00:00:00', [1, 2, 3], [10, 10, 10]),
    ('2000-01-01', '2000-01-01 00:00:00', [3, 4, 5], [10, 10, 10]),
    ('2000-01-01', '2000-01-01 00:01:00', [4, 5, 6], [10, 10, 10]),
    ('2000-01-01', '2000-01-01 00:01:00', [6, 7, 8], [10, 10, 10]);
SELECT
    timeslot,
    sumMap(statusMap.status, statusMap.requests)
FROM sum_map
GROUP BY timeslot
```

timeslot	sumMap(statusMap.status, statusMap.requests)
2000-01-01 00:00:00	([1,2,3,4,5],[10,10,20,10,10])
2000-01-01 00:01:00	([4,5,6,7,8],[10,10,20,10,10])

## skewPop

Computes the **skewness** of a sequence.

```
skewPop(expr)
```

### Parameters

expr — **Expression** returning a number.

### Returned value

The skewness of the given distribution. Type — **Float64**

Example

```
SELECT skewPop(value) FROM series_with_value_column
```

## skewSamp

Computes the **sample skewness** of a sequence.

It represents an unbiased estimate of the skewness of a random variable if passed values form its sample.

```
skewSamp(expr)
```

### Parameters

expr — **Expression** returning a number.

### Returned value

The skewness of the given distribution. Type —**Float64**. If `n <= 1` (`n` is the size of the sample), then the function returns `nan`.

### Example

```
SELECT skewSamp(value) FROM series_with_value_column
```

## kurtPop

Computes the **kurtosis** of a sequence.

```
kurtPop(expr)
```

### Parameters

expr — **Expression** returning a number.

### Returned value

The kurtosis of the given distribution. Type —**Float64**

### Example

```
SELECT kurtPop(value) FROM series_with_value_column
```

## kurtSamp

Computes the **sample kurtosis** of a sequence.

It represents an unbiased estimate of the kurtosis of a random variable if passed values form its sample.

```
kurtSamp(expr)
```

### Parameters

expr — **Expression** returning a number.

### Returned value

The kurtosis of the given distribution. Type —**Float64**. If `n <= 1` (`n` is a size of the sample), then the function returns `nan`.

## Example

```
SELECT kurtSamp(value) FROM series_with_value_column
```

## timeSeriesGroupSum(uid, timestamp, value)

timeSeriesGroupSum can aggregate different time series that sample timestamp not alignment. It will use linear interpolation between two sample timestamp and then sum time-series together.

- uid is the time series unique id, UInt64 .
- timestamp is Int64 type in order to support millisecond or microsecond.
- value is the metric.

The function returns array of tuples with (timestamp, aggregated\_value) pairs.

Before using this function make sure timestamp is in ascending order.

Example:

uid	timestamp	value
1	2	0.2
1	7	0.7
1	12	1.2
1	17	1.7
1	25	2.5
2	3	0.6
2	8	1.6
2	12	2.4
2	18	3.6
2	24	4.8

```
CREATE TABLE time_series(
    uid        UInt64,
    timestamp  Int64,
    value      Float64
) ENGINE = Memory;
INSERT INTO time_series VALUES
    (1,2,0.2),(1,7,0.7),(1,12,1.2),(1,17,1.7),(1,25,2.5),
    (2,3,0.6),(2,8,1.6),(2,12,2.4),(2,18,3.6),(2,24,4.8);

SELECT timeSeriesGroupSum(uid, timestamp, value)
FROM (
    SELECT * FROM time_series ORDER BY timestamp ASC
);
```

And the result will be:

```
[(2,0.2),(3,0.9),(7,2.1),(8,2.4),(12,3.6),(17,5.1),(18,5.4),(24,7.2),(25,2.5)]
```

## timeSeriesGroupRateSum(uid, ts, val)

Similarly timeSeriesGroupRateSum, timeSeriesGroupRateSum will Calculate the rate of time-series and then sum rates together. Also, timestamp should be in ascend order before use this function.

Use this function, the result above case will be:

```
[(2,0),(3,0.1),(7,0.3),(8,0.3),(12,0.3),(17,0.3),(18,0.3),(24,0.3),(25,0.1)]
```

## avg(x)

Calculates the average. Only works for numbers. The result is always Float64.

## uniq

Calculates the approximate number of different values of the argument.

```
uniq(x[, ...])
```

### Parameters

The function takes a variable number of parameters. Parameters can be Tuple , Array , Date , DateTime , String , or numeric types.

### Returned value

- A UInt64-type number.

### Implementation details

#### Function:

- Calculates a hash for all parameters in the aggregate, then uses it in calculations.
- Uses an adaptive sampling algorithm. For the calculation state, the function uses a sample of element hash values up to 65536.

This algorithm is very accurate and very efficient on the CPU. When the query contains several of these functions, using uniq is almost as fast as using other aggregate functions.

- Provides the result deterministically (it doesn't depend on the query processing order).

We recommend using this function in almost all scenarios.

### See Also

- [uniqCombined](#)
- [uniqCombined64](#)
- [uniqHLL12](#)
- [uniqExact](#)

## uniqCombined

Calculates the approximate number of different argument values.

```
uniqCombined(HLL_precision)(x[, ...])
```

The uniqCombined function is a good choice for calculating the number of different values.

### Parameters

The function takes a variable number of parameters. Parameters can be Tuple , Array , Date , DateTime , String , or numeric types.

HLL\_precision is the base-2 logarithm of the number of cells inHyperLogLog. Optional, you can use the function as uniqCombined(x[, ...]) . The default value for HLL\_precision is 17, which is effectively 96 KiB of space (2^17 cells, 6 bits each).

## Returned value

- A number `UInt64`-type number.

## Implementation details

### Function:

- Calculates a hash (64-bit hash for `String` and 32-bit otherwise) for all parameters in the aggregate, then uses it in calculations.
- Uses a combination of three algorithms: array, hash table, and HyperLogLog with an error correction table.

For a small number of distinct elements, an array is used. When the set size is larger, a hash table is used. For a larger number of elements, HyperLogLog is used, which will occupy a fixed amount of memory.

- Provides the result deterministically (it doesn't depend on the query processing order).

### Note

Since it uses 32-bit hash for non-`String` type, the result will have very high error for cardinalities significantly larger than `UINT_MAX` (error will raise quickly after a few tens of billions of distinct values), hence in this case you should use `uniqCombined64`

Compared to the `uniq` function, the `uniqCombined`:

- Consumes several times less memory.
- Calculates with several times higher accuracy.
- Usually has slightly lower performance. In some scenarios, `uniqCombined` can perform better than `uniq`, for example, with distributed queries that transmit a large number of aggregation states over the network.

## See Also

- [uniq](#)
- [uniqCombined64](#)
- [uniqHLL12](#)
- [uniqExact](#)

## uniqCombined64

Same as `uniqCombined`, but uses 64-bit hash for all data types.

## uniqHLL12

Calculates the approximate number of different argument values, using the [HyperLogLog](#) algorithm.

```
uniqHLL12(x[, ...])
```

## Parameters

The function takes a variable number of parameters. Parameters can be `Tuple`, `Array`, `Date`, `DateTime`, `String`, or numeric types.

## Returned value

- A `UInt64`-type number.

## Implementation details

Function:

- Calculates a hash for all parameters in the aggregate, then uses it in calculations.
- Uses the HyperLogLog algorithm to approximate the number of different argument values.  
212 5-bit cells are used. The size of the state is slightly more than 2.5 KB. The result is not very accurate (up to ~10% error) for small data sets (<10K elements). However, the result is fairly accurate for high-cardinality data sets (10K-100M), with a maximum error of ~1.6%. Starting from 100M, the estimation error increases, and the function will return very inaccurate results for data sets with extremely high cardinality (1B+ elements).
- Provides the determinate result (it doesn't depend on the query processing order).

We don't recommend using this function. In most cases, use the [uniq](#) or [uniqCombined](#) function.

See Also

- [uniq](#)
- [uniqCombined](#)
- [uniqExact](#)

## uniqExact

Calculates the exact number of different argument values.

```
uniqExact(x[, ...])
```

Use the `uniqExact` function if you absolutely need an exact result. Otherwise use the [uniq](#) function.

The `uniqExact` function uses more memory than `uniq`, because the size of the state has unbounded growth as the number of different values increases.

Parameters

The function takes a variable number of parameters. Parameters can be `Tuple`, `Array`, `Date`, `DateTime`, `String`, or numeric types.

See Also

- [uniq](#)
- [uniqCombined](#)
- [uniqHLL12](#)

## groupArray(x), groupArray(max\_size)(x)

Creates an array of argument values. Values can be added to the array in any (indeterminate) order.

The second version (with the `max_size` parameter) limits the size of the resulting array to `max_size` elements. For example, `groupArray(1)(x)` is equivalent to `[any(x)]`.

In some cases, you can still rely on the order of execution. This applies to cases when `SELECT` comes from a subquery that uses `ORDER BY`.

## groupArrayInsertAt(value, position)

Inserts a value into the array in the specified position.

## Note

This function uses zero-based positions, contrary to the conventional one-based positions for SQL arrays.

Accepts the value and position as input. If several values are inserted into the same position, any of them might end up in the resulting array (the first one will be used in the case of single-threaded execution). If no value is inserted into a position, the position is assigned the default value.

Optional parameters:

- The default value for substituting in empty positions.
- The length of the resulting array. This allows you to receive arrays of the same size for all the aggregate keys. When using this parameter, the default value must be specified.

## groupArrayMovingSum

Calculates the moving sum of input values.

```
groupArrayMovingSum(numbers_for_summing)
groupArrayMovingSum(window_size)(numbers_for_summing)
```

The function can take the window size as a parameter. If left unspecified, the function takes the window size equal to the number of rows in the column.

Parameters

- `numbers_for_summing` — [Expression](#) resulting in a numeric data type value.
- `window_size` — Size of the calculation window.

Returned values

- Array of the same size and type as the input data.

Example

The sample table:

```
CREATE TABLE t
(
    `int` UInt8,
    `float` Float32,
    `dec` Decimal32(2)
)
ENGINE = TinyLog
```

int	float	dec
1	1.1	1.10
2	2.2	2.20
4	4.4	4.40
7	7.77	7.77

The queries:

```

SELECT
    groupArrayMovingSum(int) AS I,
    groupArrayMovingSum(float) AS F,
    groupArrayMovingSum(dec) AS D
FROM t

```

I	F	D
[1, 3, 7, 14]	[1.1, 3.3000002, 7.7000003, 15.47]	[1.10, 3.30, 7.70, 15.47]

```

SELECT
    groupArrayMovingSum(2)(int) AS I,
    groupArrayMovingSum(2)(float) AS F,
    groupArrayMovingSum(2)(dec) AS D
FROM t

```

I	F	D
[1, 3, 6, 11]	[1.1, 3.3000002, 6.6000004, 12.17]	[1.10, 3.30, 6.60, 12.17]

## groupArrayMovingAvg

Calculates the moving average of input values.

```

groupArrayMovingAvg(numbers_for_summing)
groupArrayMovingAvg(window_size)(numbers_for_summing)

```

The function can take the window size as a parameter. If left unspecified, the function takes the window size equal to the number of rows in the column.

### Parameters

- `numbers_for_summing` — [Expression](#) resulting in a numeric data type value.
- `window_size` — Size of the calculation window.

### Returned values

- Array of the same size and type as the input data.

The function uses [rounding towards zero](#). It truncates the decimal places insignificant for the resulting data type.

### Example

The sample table `t`:

```

CREATE TABLE t
(
    `int` UInt8,
    `float` Float32,
    `dec` Decimal32(2)
)
ENGINE = TinyLog

```

int	float	dec
1	1.1	1.10
2	2.2	2.20
4	4.4	4.40
7	7.77	7.77

The queries:

```
SELECT
    groupArrayMovingAvg(int) AS I,
    groupArrayMovingAvg(float) AS F,
    groupArrayMovingAvg(dec) AS D
FROM t
```

I	F	D
[0,0,1,3]	[0.275,0.82500005,1.9250001,3.8675]	[0.27,0.82,1.92,3.86]

```
SELECT
    groupArrayMovingAvg(2)(int) AS I,
    groupArrayMovingAvg(2)(float) AS F,
    groupArrayMovingAvg(2)(dec) AS D
FROM t
```

I	F	D
[0,1,3,5]	[0.55,1.6500001,3.3000002,6.085]	[0.55,1.65,3.30,6.08]

## groupUniqArray(x), groupUniqArray(max\_size)(x)

Creates an array from different argument values. Memory consumption is the same as for the `uniqExact` function.

The second version (with the `max_size` parameter) limits the size of the resulting array to `max_size` elements. For example, `groupUniqArray(1)(x)` is equivalent to `[any(x)]`.

## quantile

Computes an approximate `quantile` of a numeric data sequence.

This function applies **reservoir sampling** with a reservoir size up to 8192 and a random number generator for sampling.

The result is non-deterministic. To get an exact quantile, use the `quantileExact` function.

When using multiple `quantile*` functions with different levels in a query, the internal states are not combined (that is, the query works less efficiently than it could). In this case, use the `quantiles` function.

### Syntax

```
quantile(level)(expr)
```

Alias: `median`.

### Parameters

- `level` — Level of quantile. Optional parameter. Constant floating-point number from 0 to 1. We recommend using a `level` value in the range of [0.01, 0.99]. Default value: 0.5. At `level=0.5` the function calculates `median`.
- `expr` — Expression over the column values resulting in numeric [data types](#), [Date](#) or [DateTime](#).

### Returned value

- Approximate quantile of the specified level.

### Type:

- [Float64](#) for numeric data type input.

- **Date** if input values have the `Date` type.
- **DateTime** if input values have the `DateTime` type.

Example

Input table:

val
1
1
2
3

Query:

```
SELECT quantile(val) FROM t
```

Result:

quantile(val)
1.5

See Also

- [median](#)
- [quantiles](#)

## quantileDeterministic

Computes an approximate [quantile](#) of a numeric data sequence.

This function applies [reservoir sampling](#) with a reservoir size up to 8192 and deterministic algorithm of sampling. The result is deterministic. To get an exact quantile, use the [quantileExact](#) function.

When using multiple `quantile*` functions with different levels in a query, the internal states are not combined (that is, the query works less efficiently than it could). In this case, use the [quantiles](#) function.

Syntax

```
quantileDeterministic(level)(expr, determinator)
```

Alias: `medianDeterministic`.

Parameters

- `level` — Level of quantile. Optional parameter. Constant floating-point number from 0 to 1. We recommend using a `level` value in the range of [0.01, 0.99]. Default value: 0.5. At `level=0.5` the function calculates [median](#).
- `expr` — Expression over the column values resulting in numeric[data types](#), [Date](#) or [DateTime](#).
- `determinator` — Number whose hash is used instead of a random number generator in the reservoir sampling algorithm to make the result of sampling deterministic. As a determinator you can use any deterministic positive number, for example, a user id or an event id. If the same determinator value occurs too often, the function works incorrectly.

Returned value

- Approximate quantile of the specified level.

Type:

- [Float64](#) for numeric data type input.
- [Date](#) if input values have the `Date` type.
- [DateTime](#) if input values have the `DateTime` type.

Example

Input table:

val
1
1
2
3

Query:

```
SELECT quantileDeterministic(val, 1) FROM t
```

Result:

quantileDeterministic(val, 1)
1.5

See Also

- [median](#)
- [quantiles](#)

## quantileExact

Exactly computes the [quantile](#) of a numeric data sequence.

To get exact value, all the passed values are combined into an array, which is then partially sorted. Therefore, the function consumes  $O(n)$  memory, where  $n$  is a number of values that were passed. However, for a small number of values, the function is very effective.

When using multiple `quantile*` functions with different levels in a query, the internal states are not combined (that is, the query works less efficiently than it could). In this case, use the [quantiles](#) function.

Syntax

```
quantileExact(level)(expr)
```

Alias: `medianExact`.

Parameters

- `level` — Level of quantile. Optional parameter. Constant floating-point number from 0 to 1. We recommend using a `level` value in the range of [0.01, 0.99]. Default value: 0.5. At `level=0.5` the function calculates [median](#).
- `expr` — Expression over the column values resulting in numeric[data types](#), [Date](#) or [DateTime](#).

Returned value

- Quantile of the specified level.

Type:

- `Float64` for numeric data type input.
- `Date` if input values have the `Date` type.
- `DateTime` if input values have the `DateTime` type.

Example

Query:

```
SELECT quantileExact(number) FROM numbers(10)
```

Result:

```
+-----+  
| quantileExact(number) |  
+-----+  
| 5 |
```

See Also

- [median](#)
- [quantiles](#)

## quantileExactWeighted

Exactly computes the `quantile` of a numeric data sequence, taking into account the weight of each element.

To get exact value, all the passed values are combined into an array, which is then partially sorted. Each value is counted with its weight, as if it is present `weight` times. A hash table is used in the algorithm. Because of this, if the passed values are frequently repeated, the function consumes less RAM than `quantileExact`. You can use this function instead of `quantileExact` and specify the weight 1.

When using multiple `quantile*` functions with different levels in a query, the internal states are not combined (that is, the query works less efficiently than it could). In this case, use the `quantiles` function.

Syntax

```
quantileExactWeighted(level)(expr, weight)
```

Alias: `medianExactWeighted`.

Parameters

- `level` — Level of quantile. Optional parameter. Constant floating-point number from 0 to 1. We recommend using a `level` value in the range of [0.01, 0.99]. Default value: 0.5. At `level=0.5` the function calculates `median`.
- `expr` — Expression over the column values resulting in numeric `data types`, `Date` or `DateTime`.
- `weight` — Column with weights of sequence members. Weight is a number of value occurrences.

Returned value

- Quantile of the specified level.

Type:

- **Float64** for numeric data type input.
- **Date** if input values have the `Date` type.
- **DateTime** if input values have the `DateTime` type.

Example

Input table:

n	val
0	3
1	2
2	1
5	4

Query:

```
SELECT quantileExactWeighted(n, val) FROM t
```

Result:

quantileExactWeighted(n, val)
1

See Also

- [median](#)
- [quantiles](#)

## quantileTiming

With the determined precision computes the [quantile](#) of a numeric data sequence.

The result is deterministic (it doesn't depend on the query processing order). The function is optimized for working with sequences which describe distributions like loading web pages times or backend response times.

When using multiple `quantile*` functions with different levels in a query, the internal states are not combined (that is, the query works less efficiently than it could). In this case, use the [quantiles](#) function.

Syntax

```
quantileTiming(level)(expr)
```

Alias: `medianTiming`.

Parameters

- `level` — Level of quantile. Optional parameter. Constant floating-point number from 0 to 1. We recommend using a `level` value in the range of [0.01, 0.99]. Default value: 0.5. At `level=0.5` the function calculates [median](#).
- `expr` — [Expression](#) over a column values returning a `Float*`-type number.
  - If negative values are passed to the function, the behavior is undefined.
  - If the value is greater than 30,000 (a page loading time of more than 30 seconds), it is assumed to be 30,000.

## Accuracy

The calculation is accurate if:

- Total number of values doesn't exceed 5670.
- Total number of values exceeds 5670, but the page loading time is less than 1024ms.

Otherwise, the result of the calculation is rounded to the nearest multiple of 16 ms.

### Note

For calculating page loading time quantiles, this function is more effective and accurate than [quantile](#).

## Returned value

- Quantile of the specified level.

Type: `Float32`.

### Note

If no values are passed to the function (when using `quantileTimingIf`), `NaN` is returned. The purpose of this is to differentiate these cases from cases that result in zero. See [ORDER BY clause](#) for notes on sorting `NaN` values.

## Example

Input table:

response_time
72
112
126
145
104
242
313
168
108

Query:

```
SELECT quantileTiming(response_time) FROM t
```

Result:

quantileTiming(response_time)
126

## See Also

- [median](#)
- [quantiles](#)

## quantileTimingWeighted

With the determined precision computes the [quantile](#) of a numeric data sequence according to the weight of each

sequence member.

The result is deterministic (it doesn't depend on the query processing order). The function is optimized for working with sequences which describe distributions like loading web pages times or backend response times.

When using multiple `quantile*` functions with different levels in a query, the internal states are not combined (that is, the query works less efficiently than it could). In this case, use the `quantiles` function.

## Syntax

```
quantileTimingWeighted(level)(expr, weight)
```

Alias: `medianTimingWeighted`.

## Parameters

- `level` — Level of quantile. Optional parameter. Constant floating-point number from 0 to 1. We recommend using a `level` value in the range of [0.01, 0.99]. Default value: 0.5. At `level=0.5` the function calculates `median`.
- `expr` — [Expression](#) over a column values returning a `Float*`-type number.
  - If negative values are passed to the function, the behavior is undefined.
  - If the value is greater than 30,000 (a page loading time of more than 30 seconds), it is assumed to be 30,000.
- `weight` — Column with weights of sequence elements. Weight is a number of value occurrences.

## Accuracy

The calculation is accurate if:

- Total number of values doesn't exceed 5670.
- Total number of values exceeds 5670, but the page loading time is less than 1024ms.

Otherwise, the result of the calculation is rounded to the nearest multiple of 16 ms.

### Note

For calculating page loading time quantiles, this function is more effective and accurate than `quantile`.

## Returned value

- Quantile of the specified level.

Type: `Float32`.

### Note

If no values are passed to the function (when using `quantileTimingIf`), `NaN` is returned. The purpose of this is to differentiate these cases from cases that result in zero. See [ORDER BY clause](#) for notes on sorting `NaN` values.

## Example

Input table:

response_time	weight
68	1
104	2
112	3
126	2
138	1
162	1

Query:

```
SELECT quantileTimingWeighted(response_time, weight) FROM t
```

Result:

quantileTimingWeighted(response_time, weight)
112

See Also

- [median](#)
- [quantiles](#)

## quantileTDigest

Computes an approximate [quantile](#) of a numeric data sequence using the [t-digest](#) algorithm.

The maximum error is 1%. Memory consumption is  $\log(n)$ , where  $n$  is a number of values. The result depends on the order of running the query, and is nondeterministic.

The performance of the function is lower than performance of [quantile](#) or [quantileTiming](#). In terms of the ratio of State size to precision, this function is much better than [quantile](#).

When using multiple `quantile*` functions with different levels in a query, the internal states are not combined (that is, the query works less efficiently than it could). In this case, use the [quantiles](#) function.

### Syntax

```
quantileTDigest(level)(expr)
```

Alias: `medianTDigest`.

### Parameters

- `level` — Level of quantile. Optional parameter. Constant floating-point number from 0 to 1. We recommend using a `level` value in the range of [0.01, 0.99]. Default value: 0.5. At `level=0.5` the function calculates [median](#).
- `expr` — Expression over the column values resulting in numeric[data types](#), [Date](#) or [DateTime](#).

### Returned value

- Approximate quantile of the specified level.

### Type:

- [Float64](#) for numeric data type input.
- [Date](#) if input values have the `Date` type.

- **DateTime** if input values have the `DateTime` type.

Example

Query:

```
SELECT quantileTDigest(number) FROM numbers(10)
```

Result:

<code>quantileTDigest(number)</code>
4.5

See Also

- [median](#)
- [quantiles](#)

## quantileTDigestWeighted

Computes an approximate [quantile](#) of a numeric data sequence using the [t-digest](#) algorithm. The function takes into account the weight of each sequence member. The maximum error is 1%. Memory consumption is  $\log(n)$ , where `n` is a number of values.

The performance of the function is lower than performance of [quantile](#) or [quantileTiming](#). In terms of the ratio of State size to precision, this function is much better than `quantile`.

The result depends on the order of running the query, and is nondeterministic.

When using multiple `quantile*` functions with different levels in a query, the internal states are not combined (that is, the query works less efficiently than it could). In this case, use the [quantiles](#) function.

Syntax

```
quantileTDigest(level)(expr)
```

Alias: `medianTDigest`.

Parameters

- `level` — Level of quantile. Optional parameter. Constant floating-point number from 0 to 1. We recommend using a `level` value in the range of [0.01, 0.99]. Default value: 0.5. At `level=0.5` the function calculates [median](#).
- `expr` — Expression over the column values resulting in numeric [data types](#), [Date](#) or [DateTime](#).
- `weight` — Column with weights of sequence elements. Weight is a number of value occurrences.

Returned value

- Approximate quantile of the specified level.

Type:

- [Float64](#) for numeric data type input.
- [Date](#) if input values have the `Date` type.
- [DateTime](#) if input values have the `DateTime` type.

## Example

Query:

```
SELECT quantileTDigestWeighted(number, 1) FROM numbers(10)
```

Result:

```
quantileTDigestWeighted(number, 1)
4.5
```

See Also

- [median](#)
- [quantiles](#)

## median

The `median*` functions are the aliases for the corresponding `quantile*` functions. They calculate median of a numeric data sample.

Functions:

- `median` — Alias for [quantile](#).
- `medianDeterministic` — Alias for [quantileDeterministic](#).
- `medianExact` — Alias for [quantileExact](#).
- `medianExactWeighted` — Alias for [quantileExactWeighted](#).
- `medianTiming` — Alias for [quantileTiming](#).
- `medianTimingWeighted` — Alias for [quantileTimingWeighted](#).
- `medianTDigest` — Alias for [quantileTDigest](#).
- `medianTDigestWeighted` — Alias for [quantileTDigestWeighted](#).

## Example

Input table:

```
val
1
1
2
3
```

Query:

```
SELECT medianDeterministic(val, 1) FROM t
```

Result:

```
medianDeterministic(val, 1)
1.5
```

## `quantiles(level1, level2, ...)(x)`

All the quantile functions also have corresponding quantiles functions: `quantiles` , `quantilesDeterministic` , `quantilesTiming` , `quantilesTimingWeighted` , `quantilesExact` , `quantilesExactWeighted` , `quantilesTDigest` . These functions calculate all the quantiles of the listed levels in one pass, and return an array of the resulting values.

## `varSamp(x)`

Calculates the amount  $\Sigma((x - \bar{x})^2) / (n - 1)$  , where `n` is the sample size and  $\bar{x}$  is the average value of `x` .

It represents an unbiased estimate of the variance of a random variable if passed values form its sample.

Returns `Float64` . When `n <= 1` , returns `+∞` .

## `varPop(x)`

Calculates the amount  $\Sigma((x - \bar{x})^2) / n$  , where `n` is the sample size and  $\bar{x}$  is the average value of `x` .

In other words, dispersion for a set of values. Returns `Float64` .

## `stddevSamp(x)`

The result is equal to the square root of `varSamp(x)` .

## `stddevPop(x)`

The result is equal to the square root of `varPop(x)` .

## `topK(N)(x)`

Returns an array of the approximately most frequent values in the specified column. The resulting array is sorted in descending order of approximate frequency of values (not by the values themselves).

Implements the [Filtered Space-Saving](#) algorithm for analyzing TopK, based on the reduce-and-combine algorithm from [Parallel Space Saving](#).

```
topK(N)(column)
```

This function doesn't provide a guaranteed result. In certain situations, errors might occur and it might return frequent values that aren't the most frequent values.

We recommend using the `N < 10` value; performance is reduced with large `N` values. Maximum value of `N = 65536` .

### Parameters

- 'N' is the number of elements to return.

If the parameter is omitted, default value 10 is used.

### Arguments

- 'x' – The value to calculate frequency.

### Example

Take the [OnTime](#) data set and select the three most frequently occurring values in the `AirlineID` column.

```
SELECT topK(3)(AirlineID) AS res
FROM ontime
```

```
└── res
  └── [19393, 19790, 19805]
```

## topKWeighted

Similar to `topK` but takes one additional argument of integer type - `weight`. Every value is accounted `weight` times for frequency calculation.

### Syntax

```
topKWeighted(N)(x, weight)
```

### Parameters

- `N` — The number of elements to return.

### Arguments

- `x` — The value.
- `weight` — The weight. `UInt8`.

### Returned value

Returns an array of the values with maximum approximate sum of weights.

### Example

#### Query:

```
SELECT topKWeighted(10)(number, number) FROM numbers(1000)
```

#### Result:

```
└── topKWeighted(10)(number, number)
  └── [999, 998, 997, 996, 995, 994, 993, 992, 991, 990]
```

## covarSamp(x, y)

Calculates the value of  $\sum((x - \bar{x})(y - \bar{y})) / (n - 1)$ .

Returns `Float64`. When `n <= 1`, returns  $+\infty$ .

## covarPop(x, y)

Calculates the value of  $\sum((x - \bar{x})(y - \bar{y})) / n$ .

## corr(x, y)

Calculates the Pearson correlation coefficient:  $\sum((x - \bar{x})(y - \bar{y})) / \sqrt{\sum((x - \bar{x})^2) * \sum((y - \bar{y})^2)}$ .

## categoricalInformationValue

Calculates the value of  $(P(\text{tag} = 1) - P(\text{tag} = 0))(\log(P(\text{tag} = 1)) - \log(P(\text{tag} = 0)))$  for each category.

```
categoricalInformationValue(category1, category2, ..., tag)
```

The result indicates how a discrete (categorical) feature [category1, category2, ...] contribute to a learning model which predicting the value of tag .

## simpleLinearRegression

Performs simple (unidimensional) linear regression.

```
simpleLinearRegression(x, y)
```

Parameters:

- x — Column with dependent variable values.
- y — Column with explanatory variable values.

Returned values:

Constants (a, b) of the resulting line  $y = a*x + b$  .

### Examples

```
SELECT arrayReduce('simpleLinearRegression', [0, 1, 2, 3], [0, 1, 2, 3])
```

```
|arrayReduce('simpleLinearRegression', [0, 1, 2, 3], [0, 1, 2, 3])|  
|(1,0)|
```

```
SELECT arrayReduce('simpleLinearRegression', [0, 1, 2, 3], [3, 4, 5, 6])
```

```
|arrayReduce('simpleLinearRegression', [0, 1, 2, 3], [3, 4, 5, 6])|  
|(1,3)|
```

## stochasticLinearRegression

This function implements stochastic linear regression. It supports custom parameters for learning rate, L2 regularization coefficient, mini-batch size and has few methods for updating weights ([Adam](#) (used by default), [simple SGD](#), [Momentum](#), [Nesterov](#)).

### Parameters

There are 4 customizable parameters. They are passed to the function sequentially, but there is no need to pass all four - default values will be used, however good model required some parameter tuning.

```
stochasticLinearRegression(1.0, 1.0, 10, 'SGD')
```

1. learning rate is the coefficient on step length, when gradient descent step is performed. Too big learning rate may cause infinite weights of the model. Default is 0.00001 .
2. l2 regularization coefficient which may help to prevent overfitting. Default is 0.1 .

3. `mini-batch size` sets the number of elements, which gradients will be computed and summed to perform one step of gradient descent. Pure stochastic descent uses one element, however having small batches (about 10 elements) make gradient steps more stable. Default is `15`.
4. method for updating weights , they are: `Adam` (by default), `SGD` , `Momentum` , `Nesterov` . `Momentum` and `Nesterov` require little bit more computations and memory, however they happen to be useful in terms of speed of convergance and stability of stochastic gradient methods.

## Usage

`stochasticLinearRegression` is used in two steps: fitting the model and predicting on new data. In order to fit the model and save its state for later usage we use `-State` combinator, which basically saves the state (model weights, etc). To predict we use function `evalMLMethod`, which takes a state as an argument as well as features to predict on.

### 1. Fitting

Such query may be used.

```
CREATE TABLE IF NOT EXISTS train_data
(
    param1 Float64,
    param2 Float64,
    target Float64
) ENGINE = Memory;

CREATE TABLE your_model ENGINE = Memory AS SELECT
stochasticLinearRegressionState(0.1, 0.0, 5, 'SGD')(target, param1, param2)
AS state FROM train_data;
```

Here we also need to insert data into `train_data` table. The number of parameters is not fixed, it depends only on number of arguments, passed into `linearRegressionState` . They all must be numeric values. Note that the column with target value(which we would like to learn to predict) is inserted as the first argument.

### 2. Predicting

After saving a state into the table, we may use it multiple times for prediction, or even merge with other states and create new even better models.

```
WITH (SELECT state FROM your_model) AS model SELECT
evalMLMethod(model, param1, param2) FROM test_data
```

The query will return a column of predicted values. Note that first argument of `evalMLMethod` is `AggregateFunctionState` object, next are columns of features.

`test_data` is a table like `train_data` but may not contain target value.

## Notes

1. To merge two models user may create such query: `sql`

```
SELECT state1 + state2 FROM your_models where your_models table contains both models. This query will return new AggregateFunctionState object.
```
2. User may fetch weights of the created model for its own purposes without saving the model if no `-State` combinator is used. `sql`

```
SELECT stochasticLinearRegression(0.01)(target, param1, param2) FROM train_data Such query will fit the model and return its weights - first are weights, which correspond to the parameters of the model, the last one is bias. So in the example above the query will return a column with 3 values.
```

## See Also

- [stochasticLogisticRegression](#)
- Difference between linear and logistic regressions

## stochasticLogisticRegression

This function implements stochastic logistic regression. It can be used for binary classification problem, supports the same custom parameters as stochasticLinearRegression and works the same way.

### Parameters

Parameters are exactly the same as in stochasticLinearRegression: learning rate , l2 regularization coefficient , mini-batch size , method for updating weights . For more information see[parameters](#).

```
stochasticLogisticRegression(1.0, 1.0, 10, 'SGD')
```

#### 1. Fitting

See the [Fitting](#) section in the [stochasticLinearRegression](#) description.

Predicted labels have to be in [-1, 1].

#### 2. Predicting

Using saved state we can predict probability of object having label 1 .

```
sql
WITH (SELECT state FROM your_model) AS model SELECT
evalMLMethod(model, param1, param2) FROM test_data
```

The query will return a column of probabilities. Note that first argument of evalMLMethod is AggregateFunctionState object, next are columns of features.

We can also set a bound of probability, which assigns elements to different labels.

```
sql
SELECT ans < 1.1 AND ans > 0.5 FROM
(WITH (SELECT state FROM your_model) AS model SELECT
evalMLMethod(model, param1, param2) AS ans FROM test_data)
```

Then the result will be labels.

`test_data` is a table like `train_data` but may not contain target value.

### See Also

- [stochasticLinearRegression](#)
- Difference between linear and logistic regressions.

## groupBitmapAnd

Calculations the AND of a bitmap column, return cardinality of type UInt64, if add suffix -State, then return[bitmap object](#).

```
groupBitmapAnd(expr)
```

### Parameters

`expr` – An expression that results in `AggregateFunction(groupBitmap, UInt*)` type.

### Return value

Value of the `UInt64` type.

## Example

```
DROP TABLE IF EXISTS bitmap_column_expr_test2;
CREATE TABLE bitmap_column_expr_test2
(
    tag_id String,
    z AggregateFunction(groupBitmap, UInt32)
)
ENGINE = MergeTree
ORDER BY tag_id;

INSERT INTO bitmap_column_expr_test2 VALUES ('tag1', bitmapBuild(cast([1,2,3,4,5,6,7,8,9,10] as Array(UInt32)));
INSERT INTO bitmap_column_expr_test2 VALUES ('tag2', bitmapBuild(cast([6,7,8,9,10,11,12,13,14,15] as Array(UInt32)));
INSERT INTO bitmap_column_expr_test2 VALUES ('tag3', bitmapBuild(cast([2,4,6,8,10,12] as Array(UInt32))));

SELECT groupBitmapAnd(z) FROM bitmap_column_expr_test2 WHERE like(tag_id, 'tag%');
groupBitmapAnd(z)
    3

SELECT arraySort(bitmapToArray(groupBitmapAndState(z))) FROM bitmap_column_expr_test2 WHERE like(tag_id, 'tag%');
arraySort(bitmapToArray(groupBitmapAndState(z)))
    [6,8,10]
```

## groupBitmapOr

Calculations the OR of a bitmap column, return cardinality of type UInt64, if add suffix -State, then return [bitmap object](#).  
This is equivalent to `groupBitmapMerge`.

```
groupBitmapOr(expr)
```

### Parameters

`expr` – An expression that results in `AggregateFunction(groupBitmap, UInt*)` type.

### Return value

Value of the UInt64 type.

## Example

```

DROP TABLE IF EXISTS bitmap_column_expr_test2;
CREATE TABLE bitmap_column_expr_test2
(
    tag_id String,
    z AggregateFunction(groupBitmap, UInt32)
)
ENGINE = MergeTree
ORDER BY tag_id;

INSERT INTO bitmap_column_expr_test2 VALUES ('tag1', bitmapBuild(cast([1,2,3,4,5,6,7,8,9,10] as
Array(UInt32))));
INSERT INTO bitmap_column_expr_test2 VALUES ('tag2', bitmapBuild(cast([6,7,8,9,10,11,12,13,14,15] as
Array(UInt32))));
INSERT INTO bitmap_column_expr_test2 VALUES ('tag3', bitmapBuild(cast([2,4,6,8,10,12] as Array(UInt32))));

SELECT groupBitmapOr(z) FROM bitmap_column_expr_test2 WHERE like(tag_id, 'tag%');
groupBitmapOr(z)
    15

SELECT arraySort(bitmapToArray(groupBitmapOrState(z))) FROM bitmap_column_expr_test2 WHERE like(tag_id,
'tag%');
arraySort(bitmapToArray(groupBitmapOrState(z)))
| [1,2,3,4,5,6,7,8,9,10,11,12,13,14,15]
|

```

## groupBitmapXor

Calculations the XOR of a bitmap column, return cardinality of type UInt64, if add suffix -State, then return **bitmap object**.

```
groupBitmapOr(expr)
```

### Parameters

`expr` – An expression that results in `AggregateFunction(groupBitmap, UInt*)` type.

### Return value

Value of the `UInt64` type.

### Example

```
DROP TABLE IF EXISTS bitmap_column_expr_test2;
CREATE TABLE bitmap_column_expr_test2
(
    tag_id String,
    z AggregateFunction(groupBitmap, UInt32)
)
ENGINE = MergeTree
ORDER BY tag_id;

INSERT INTO bitmap_column_expr_test2 VALUES ('tag1', bitmapBuild(cast([1,2,3,4,5,6,7,8,9,10] as Array(UInt32))));
INSERT INTO bitmap_column_expr_test2 VALUES ('tag2', bitmapBuild(cast([6,7,8,9,10,11,12,13,14,15] as Array(UInt32))));
INSERT INTO bitmap_column_expr_test2 VALUES ('tag3', bitmapBuild(cast([2,4,6,8,10,12] as Array(UInt32))));

SELECT groupBitmapXor(z) FROM bitmap_column_expr_test2 WHERE like(tag_id, 'tag%');
groupBitmapXor(z)
  10

SELECT arraySort(bitmapToArray(groupBitmapXorState(z))) FROM bitmap_column_expr_test2 WHERE like(tag_id, 'tag%');
arraySort(bitmapToArray(groupBitmapXorState(z)))
  [1,3,5,6,8,10,11,13,14,15]
```

# Aggregate function combinator

The name of an aggregate function can have a suffix appended to it. This changes the way the aggregate function works.

-If

The suffix `-If` can be appended to the name of any aggregate function. In this case, the aggregate function accepts an extra argument – a condition (Uint8 type). The aggregate function processes only the rows that trigger the condition. If the condition was not triggered even once, it returns a default value (usually zeros or empty strings).

Examples: `sumIf(column, cond)` , `countIf(cond)` , `avgIf(x, cond)` , `quantilesTimingIf(level1, level2)(x, cond)` , `argMinIf(arg, val, cond)` and so on.

With conditional aggregate functions, you can calculate aggregates for several conditions at once, without using subqueries and JOINs. For example, in Yandex.Metrica, conditional aggregate functions are used to implement the segment comparison functionality.

## -Array

The `-Array` suffix can be appended to any aggregate function. In this case, the aggregate function takes arguments of the `'Array(T)` type (arrays) instead of `'T'` type arguments. If the aggregate function accepts multiple arguments, this must be arrays of equal lengths. When processing arrays, the aggregate function works like the original aggregate function across all array elements.

Example 1: `sumArray(arr)` - Totals all the elements of all 'arr' arrays. In this example, it could have been written more simply: `sum(arraySum(arr))` .

Example 2: `uniqArray(arr)` – Counts the number of unique elements in all 'arr' arrays. This could be done an easier way: `uniq(arrayJoin(arr))`, but it's not always possible to add 'arrayJoin' to a query.

-If and -Array can be combined. However, 'Array' must come first, then 'If'. Examples: `uniqArrayIf(arr, cond)`, `quantilesTimingArrayIf(level1, level2)(arr, cond)`. Due to this order, the 'cond' argument won't be an array.

## -State

If you apply this combinator, the aggregate function doesn't return the resulting value (such as the number of unique values for the `uniq` function), but an intermediate state of the aggregation (for `uniq`, this is the hash table for calculating the number of unique values). This is an `AggregateFunction(...)` that can be used for further processing or stored in a table to finish aggregating later.

To work with these states, use:

- `AggregatingMergeTree` table engine.
- `finalizeAggregation` function.
- `runningAccumulate` function.
- `-Merge` combinator.
- `-MergeState` combinator.

## -Merge

If you apply this combinator, the aggregate function takes the intermediate aggregation state as an argument, combines the states to finish aggregation, and returns the resulting value.

## -MergeState

Merges the intermediate aggregation states in the same way as the `-Merge` combinator. However, it doesn't return the resulting value, but an intermediate aggregation state, similar to the `-State` combinator.

## -ForEach

Converts an aggregate function for tables into an aggregate function for arrays that aggregates the corresponding array items and returns an array of results. For example, `sumForEach` for the arrays `[1, 2]`, `[3, 4, 5]` and `[6, 7]` returns the result `[10, 13, 5]` after adding together the corresponding array items.

## -OrDefault

Fills the default value of the aggregate function's return type if there is nothing to aggregate.

```
SELECT avg(number), avgOrDefault(number) FROM numbers(0)
```

avg(number)	avgOrDefault(number)
nan	0

## -OrNull

Fills `null` if there is nothing to aggregate. The return column will be nullable.

```
SELECT avg(number), avgOrNull(number) FROM numbers(0)
```

avg(number)	avgOrNull(number)
nan	NULL

`-OrDefault` and `-OrNull` can be combined with other combinators. It is useful when the aggregate function does not accept

the empty input.

```
SELECT avgOrNullIf(x, x > 10)
FROM
(
    SELECT toDecimal32(1.23, 2) AS x
)
```

```
avgOrNullIf(x, greater(x, 10))  
      NULL
```

## -Resample

Lets you divide data into groups, and then separately aggregates the data in those groups. Groups are created by splitting the values from one column into intervals.

```
<aggFunction>Resample(start, end, step)(<aggFunction_params>, resampling_key)
```

### Parameters

- `start` — Starting value of the whole required interval for `resampling_key` values.
- `stop` — Ending value of the whole required interval for `resampling_key` values. The whole interval doesn't include the `stop` value `[start, stop)`.
- `step` — Step for separating the whole interval into subintervals. The `aggFunction` is executed over each of those subintervals independently.
- `resampling_key` — Column whose values are used for separating data into intervals.
- `aggFunction_params` — `aggFunction` parameters.

### Returned values

- Array of `aggFunction` results for each subinterval.

### Example

Consider the `people` table with the following data:

name	age	wage
John	16	10
Alice	30	15
Mary	35	8
Evelyn	48	11.5
David	62	9.9
Brian	60	16

Let's get the names of the people whose age lies in the intervals of [30,60] and [60,75]. Since we use integer representation for age, we get ages in the [30, 59] and [60,74] intervals.

To aggregate names in an array, we use the `groupArray` aggregate function. It takes one argument. In our case, it's the `name` column. The `groupArrayResample` function should use the `age` column to aggregate names by age. To define the required intervals, we pass the `30, 75, 30` arguments into the `groupArrayResample` function.

```
SELECT groupArrayResample(30, 75, 30)(name, age) FROM people
```

```
groupArrayResample(30, 75, 30)(name, age)
| [['Alice', 'Mary', 'Evelyn'], ['David', 'Brian']]
```

Consider the results.

John is out of the sample because he's too young. Other people are distributed according to the specified age intervals.

Now let's count the total number of people and their average wage in the specified age intervals.

```
SELECT
    countResample(30, 75, 30)(name, age) AS amount,
    avgResample(30, 75, 30)(wage, age) AS avg_wage
FROM people
```

amount	avg_wage
[3, 2]	[11.5, 12.949999809265137]

## Parametric aggregate functions

Some aggregate functions can accept not only argument columns (used for compression), but a set of parameters – constants for initialization. The syntax is two pairs of brackets instead of one. The first is for parameters, and the second is for arguments.

### histogram

Calculates an adaptive histogram. It doesn't guarantee precise results.

```
histogram(number_of_bins)(values)
```

The function uses [A Streaming Parallel Decision Tree Algorithm](#). The borders of histogram bins are adjusted as new data enters a function. In common case, the widths of bins are not equal.

#### Parameters

`number_of_bins` — Upper limit for the number of bins in the histogram. The function automatically calculates the number of bins. It tries to reach the specified number of bins, but if it fails, it uses fewer bins. `values` — [Expression](#) resulting in input values.

#### Returned values

- [Array](#) of [Tuples](#) of the following format:

```
[(lower_1, upper_1, height_1), ... (lower_N, upper_N, height_N)]
```

- `lower` — Lower bound of the bin.
- `upper` — Upper bound of the bin.
- `height` — Calculated height of the bin.


#### Example

```
SELECT histogram(5)(number + 1)
FROM (
    SELECT *
    FROM system.numbers
    LIMIT 20
)
```

```
└─histogram(5)(plus(number, 1))────────────────────────────────────────────────────────
| [(1,4.5,4),(4.5,8.5,4),(8.5,12.75,4.125),(12.75,17,4.625),(17,20,3.25)] ┌
```

You can visualize a histogram with the `bar` function, for example:

```
WITH histogram(5)(rand() % 100) AS hist
SELECT
    arrayJoin(hist).3 AS height,
    bar(height, 0, 6, 5) AS bar
FROM
(
    SELECT *
    FROM system.numbers
    LIMIT 20
)
```



In this case, you should remember that you don't know the histogram bin borders.

## sequenceMatch(pattern)(timestamp, cond1, cond2, ...)

Checks whether the sequence contains an event chain that matches the pattern.

```
sequenceMatch(pattern)(timestamp, cond1, cond2, ...)
```

### ⚠ Warning

Events that occur at the same second may lay in the sequence in an undefined order affecting the result.

#### Parameters

- `pattern` — Pattern string. See [Pattern syntax](#).
- `timestamp` — Column considered to contain time data. Typical data types are `Date` and `DateTime`. You can also use any of the supported [UInt](#) data types.
- `cond1`, `cond2` — Conditions that describe the chain of events. Data type: `UInt8`. You can pass up to 32 condition arguments. The function takes only the events described in these conditions into account. If the sequence contains data that isn't described in a condition, the function skips them.

#### Returned values

- 1, if the pattern is matched.
- 0, if the pattern isn't matched.

Type: UInt8 .

## Pattern syntax

- `(?N)` — Matches the condition argument at position `N`. Conditions are numbered in the `[1, 32]` range. For example, `(?1)` matches the argument passed to the `cond1` parameter.
- `.*` — Matches any number of events. You don't need conditional arguments to match this element of the pattern.
- `(?t operator value)` — Sets the time in seconds that should separate two events. For example, pattern `(?1)(?t>1800)(?2)` matches events that occur more than 1800 seconds from each other. An arbitrary number of any events can lay between these events. You can use the `>=`, `>`, `<`, `<=` operators.

## Examples

Consider data in the `t` table:

time	number
1	1
2	3
3	2

Perform the query:

```
SELECT sequenceMatch('(?1)(?2)')(time, number = 1, number = 2) FROM t
```

```
sequenceMatch('(?1)(?2)')(time, equals(number, 1), equals(number, 2))
```

1

The function found the event chain where number 2 follows number 1. It skipped number 3 between them, because the number is not described as an event. If we want to take this number into account when searching for the event chain given in the example, we should make a condition for it.

```
SELECT sequenceMatch('(?1)(?2)')(time, number = 1, number = 2, number = 3) FROM t
```

```
sequenceMatch('(?1)(?2)')(time, equals(number, 1), equals(number, 2), equals(number, 3))
```

0

In this case, the function couldn't find the event chain matching the pattern, because the event for number 3 occurred between 1 and 2. If in the same case we checked the condition for number 4, the sequence would match the pattern.

```
SELECT sequenceMatch('(?1)(?2)')(time, number = 1, number = 2, number = 4) FROM t
```

```
sequenceMatch('(?1)(?2)')(time, equals(number, 1), equals(number, 2), equals(number, 4))
```

1

## See Also

- [sequenceCount](#)

## sequenceCount(pattern)(time, cond1, cond2, ...)

Counts the number of event chains that matched the pattern. The function searches event chains that don't overlap. It starts to search for the next chain after the current chain is matched.

## Warning

Events that occur at the same second may lay in the sequence in an undefined order affecting the result.

```
sequenceCount(pattern)(timestamp, cond1, cond2, ...)
```

### Parameters

- `pattern` — Pattern string. See [Pattern syntax](#).
- `timestamp` — Column considered to contain time data. Typical data types are `Date` and `DateTime`. You can also use any of the supported `UInt` data types.
- `cond1, cond2` — Conditions that describe the chain of events. Data type: `UInt8`. You can pass up to 32 condition arguments. The function takes only the events described in these conditions into account. If the sequence contains data that isn't described in a condition, the function skips them.

### Returned values

- Number of non-overlapping event chains that are matched.

Type: `UInt64`.

### Example

Consider data in the `t` table:

time	number
1	1
2	3
3	2
4	1
5	3
6	2

Count how many times the number 2 occurs after the number 1 with any amount of other numbers between them:

```
SELECT sequenceCount('(?1).*(?2)')(time, number = 1, number = 2) FROM t
```

```
sequenceCount('(?1).*(?2)')(time, equals(number, 1), equals(number, 2))
```

2

### See Also

- [sequenceMatch](#)

## windowFunnel

Searches for event chains in a sliding time window and calculates the maximum number of events that occurred from the chain.

The function works according to the algorithm:

- The function searches for data that triggers the first condition in the chain and sets the event counter to 1. This is the moment when the sliding window starts.
- If events from the chain occur sequentially within the window, the counter is incremented. If the sequence of events is disrupted, the counter isn't incremented.

- If the data has multiple event chains at varying points of completion, the function will only output the size of the longest chain.

## Syntax

```
windowFunnel(window, [mode])(timestamp, cond1, cond2, ..., condN)
```

## Parameters

- `window` — Length of the sliding window in seconds.
- `mode` - It is an optional argument.
- 'strict' - When the 'strict' is set, the `windowFunnel()` applies conditions only for the unique values.
- `timestamp` — Name of the column containing the timestamp. Data types supported:`Date`, `DateTime` and other unsigned integer types (note that even though `timestamp` supports the `UInt64` type, its value can't exceed the `Int64` maximum, which is  $2^{63} - 1$ ).
- `cond` — Conditions or data describing the chain of events.`UInt8`.

## Returned value

The maximum number of consecutive triggered conditions from the chain within the sliding time window. All the chains in the selection are analyzed.

Type: `Integer`.

## Example

Determine if a set period of time is enough for the user to select a phone and purchase it twice in the online store.

Set the following chain of events:

1. The user logged in to their account on the store (`eventID = 1003` ).
2. The user searches for a phone (`eventID = 1007, product = 'phone'` ).
3. The user placed an order (`eventID = 1009` ).
4. The user made the order again (`eventID = 1010` ).

Input table:

event_date	user_id	timestamp	eventID	product
2019-01-28	1	2019-01-29 10:00:00	1003	phone
2019-01-31	1	2019-01-31 09:00:00	1007	phone
2019-01-30	1	2019-01-30 08:00:00	1009	phone
2019-02-01	1	2019-02-01 08:00:00	1010	phone

Find out how far the user `user_id` could get through the chain in a period in January-February of 2019.

Query:

```

SELECT
    level,
    count() AS c
FROM
(
    SELECT
        user_id,
        windowFunnel(6048000000000000)(timestamp, eventID = 1003, eventID = 1009, eventID = 1007, eventID = 1010) AS level
        FROM trend
        WHERE (event_date >= '2019-01-01') AND (event_date <= '2019-02-02')
        GROUP BY user_id
)
GROUP BY level
ORDER BY level ASC

```

Result:

level	c
4	1

## retention

The function takes as arguments a set of conditions from 1 to 32 arguments of type UInt8 that indicate whether a certain condition was met for the event. Any condition can be specified as an argument (as in [WHERE](#)).

The conditions, except the first, apply in pairs: the result of the second will be true if the first and second are true, of the third if the first and fird are true, etc.

### Syntax

```
retention(cond1, cond2, ..., cond32);
```

### Parameters

- `cond` — an expression that returns a `UInt8` result (1 or 0).

### Returned value

The array of 1 or 0.

- 1 — condition was met for the event.
- 0 — condition wasn't met for the event.

Type: `UInt8`.

### Example

Let's consider an example of calculating the `retention` function to determine site traffic.

1. Create a table to illustrate an example.

```

CREATE TABLE retention_test(date Date, uid Int32) ENGINE = Memory;

INSERT INTO retention_test SELECT '2020-01-01', number FROM numbers(5);
INSERT INTO retention_test SELECT '2020-01-02', number FROM numbers(10);
INSERT INTO retention_test SELECT '2020-01-03', number FROM numbers(15);

```

Input table:

Query:

```
SELECT * FROM retention_test
```

Result:

date	uid
2020-01-01	0
2020-01-01	1
2020-01-01	2
2020-01-01	3
2020-01-01	4

date	uid
2020-01-02	0
2020-01-02	1
2020-01-02	2
2020-01-02	3
2020-01-02	4
2020-01-02	5
2020-01-02	6
2020-01-02	7
2020-01-02	8
2020-01-02	9

date	uid
2020-01-03	0
2020-01-03	1
2020-01-03	2
2020-01-03	3
2020-01-03	4
2020-01-03	5
2020-01-03	6
2020-01-03	7
2020-01-03	8
2020-01-03	9
2020-01-03	10
2020-01-03	11
2020-01-03	12
2020-01-03	13
2020-01-03	14

2. Group users by unique ID uid using the retention function.

Query:

```
SELECT
    uid,
    retention(date = '2020-01-01', date = '2020-01-02', date = '2020-01-03') AS r
FROM retention_test
WHERE date IN ('2020-01-01', '2020-01-02', '2020-01-03')
GROUP BY uid
ORDER BY uid ASC
```

Result:

uid	r
0	[1,1,1]
1	[1,1,1]
2	[1,1,1]
3	[1,1,1]
4	[1,1,1]
5	[0,0,0]
6	[0,0,0]
7	[0,0,0]
8	[0,0,0]
9	[0,0,0]
10	[0,0,0]
11	[0,0,0]
12	[0,0,0]
13	[0,0,0]
14	[0,0,0]

3. Calculate the total number of site visits per day.

Query:

```

SELECT
    sum(r[1]) AS r1,
    sum(r[2]) AS r2,
    sum(r[3]) AS r3
FROM
(
    SELECT
        uid,
        retention(date = '2020-01-01', date = '2020-01-02', date = '2020-01-03') AS r
    FROM retention_test
    WHERE date IN ('2020-01-01', '2020-01-02', '2020-01-03')
    GROUP BY uid
)
    
```

Result:

r1	r2	r3
5	5	5

Where:

- r1 - the number of unique visitors who visited the site during 2020-01-01 (the `cond1` condition).
- r2 - the number of unique visitors who visited the site during a specific time period between 2020-01-01 and 2020-01-02 ( `cond1` and `cond2` conditions).
- r3 - the number of unique visitors who visited the site during a specific time period between 2020-01-01 and 2020-01-03 ( `cond1` and `cond3` conditions).

## uniqUpTo(N)(x)

Calculates the number of different argument values if it is less than or equal to N. If the number of different argument values is greater than N, it returns N + 1.

Recommended for use with small Ns, up to 10. The maximum value of N is 100.

For the state of an aggregate function, it uses the amount of memory equal to  $1 + N * \text{the size of one value of bytes}$ . For strings, it stores a non-cryptographic hash of 8 bytes. That is, the calculation is approximated for strings.

The function also works for several arguments.

It works as fast as possible, except for cases when a large N value is used and the number of unique values is slightly less than N.

Usage example:

Problem: Generate a report that shows only keywords that produced at least 5 unique users.  
Solution: Write in the GROUP BY query `SearchPhrase HAVING uniqUpTo(4)(UserID) >= 5`

## sumMapFiltered(keys\_to\_keep)(keys, values)

Same behavior as `sumMap` except that an array of keys is passed as a parameter. This can be especially useful when working with a high cardinality of keys.

# Table Functions

Table functions are methods for constructing tables.

You can use table functions in:

- `FROM` clause of the `SELECT` query.

The method for creating a temporary table that is available only in the current query. The table is deleted when the query finishes.

- `CREATE TABLE AS` query.

It's one of the methods of creating a table.

### ⚠ Warning

You can't use table functions if the `allow_ddl` setting is disabled.

Function	Description
<code>file</code>	Creates a <code>File</code> -engine table.
<code>merge</code>	Creates a <code>Merge</code> -engine table.
<code>numbers</code>	Creates a table with a single column filled with integer numbers.
<code>remote</code>	Allows you to access remote servers without creating a <code>Distributed</code> -engine table.
<code>url</code>	Creates a <code>Url</code> -engine table.
<code>mysql</code>	Creates a <code>MySQL</code> -engine table.
<code>jdbc</code>	Creates a <code>JDBC</code> -engine table.
<code>odbc</code>	Creates a <code>ODBC</code> -engine table.
<code>hdfs</code>	Creates a <code>HDFS</code> -engine table.

## file

Creates a table from a file. This table function is similar to `url` and `hdfs` ones.

```
file(path, format, structure)
```

## Input parameters

- `path` — The relative path to the file from `user_files_path`. Path to file support following globs in readonly mode: `*`, `?`, `{abc,def}` and `{N..M}` where `N`, `M` — numbers, `'abc', 'def'` — strings.
- `format` — The `format` of the file.
- `structure` — Structure of the table. Format `'column1_name column1_type, column2_name column2_type, ...'`.

## Returned value

A table with the specified structure for reading or writing data in the specified file.

## Example

Setting `user_files_path` and the contents of the file `test.csv`:

```
$ grep user_files_path /etc/clickhouse-server/config.xml
<user_files_path>/var/lib/clickhouse/user_files/</user_files_path>

$ cat /var/lib/clickhouse/user_files/test.csv
1,2,3
3,2,1
78,43,45
```

Table from `test.csv` and selection of the first two rows from it:

```
SELECT *
FROM file('test.csv', 'CSV', 'column1 UInt32, column2 UInt32, column3 UInt32')
LIMIT 2
```

column1	column2	column3
1	2	3
3	2	1

```
-- getting the first 10 lines of a table that contains 3 columns of UInt32 type from a CSV file
SELECT * FROM file('test.csv', 'CSV', 'column1 UInt32, column2 UInt32, column3 UInt32') LIMIT 10
```

## Globs in path

Multiple path components can have globs. For being processed file should exists and matches to the whole path pattern (not only suffix or prefix).

- `*` — Substitutes any number of any characters except / including empty string.
- `?` — Substitutes any single character.
- `{some_string,another_string,yet_another_one}` — Substitutes any of strings `'some_string', 'another_string', 'yet_another_one'`.
- `{N..M}` — Substitutes any number in range from `N` to `M` including both borders.

Constructions with `{}` are similar to the [remote table function](#)).

## Example

1. Suppose we have several files with the following relative paths:
2. `'some_dir/some_file_1'`
3. `'some_dir/some_file_2'`

4. 'some\_dir/some\_file\_3'
5. 'another\_dir/some\_file\_1'
6. 'another\_dir/some\_file\_2'
7. 'another\_dir/some\_file\_3'
8. Query the amount of rows in these files:

```
SELECT count(*)
FROM file('{some,another}_dir/some_file_{1..3}', 'TSV', 'name String, value UInt32')
```

1. Query the amount of rows in all files of these two directories:

```
SELECT count(*)
FROM file('{some,another}_dir/*', 'TSV', 'name String, value UInt32')
```

### Warning

If your listing of files contains number ranges with leading zeros, use the construction with braces for each digit separately or use `?.`

## Example

Query the data from files named `file000` , `file001` , ... , `file999` :

```
SELECT count(*)
FROM file('big_dir/file{0..9}{0..9}{0..9}', 'CSV', 'name String, value UInt32')
```

## Virtual Columns

- `_path` — Path to the file.
- `_file` — Name of the file.

## See Also

- [Virtual columns](#)

## merge

`merge(db_name, 'tables_regexp')` – Creates a temporary Merge table. For more information, see the section "Table engines, Merge".

The table structure is taken from the first table encountered that matches the regular expression.

## numbers

`numbers(N)` – Returns a table with the single 'number' column (UInt64) that contains integers from 0 to N-1.  
`numbers(N, M)` – Returns a table with the single 'number' column (UInt64) that contains integers from N to (N + M - 1).

Similar to the `system.numbers` table, it can be used for testing and generating successive values, `numbers(N, M)` more efficient than `system.numbers`.

The following queries are equivalent:

```
SELECT * FROM numbers(10);
SELECT * FROM numbers(0, 10);
SELECT * FROM system.numbers LIMIT 10;
```

Examples:

```
-- Generate a sequence of dates from 2010-01-01 to 2010-12-31
select toDate('2010-01-01') + number as d FROM numbers(365);
```

## remote, remoteSecure

Allows you to access remote servers without creating a `Distributed` table.

Signatures:

```
remote('addresses_expr', db, table[, 'user'][, 'password']])
remote('addresses_expr', db.table[, 'user'][, 'password'])
```

`addresses_expr` – An expression that generates addresses of remote servers. This may be just one server address. The server address is `host:port`, or just `host`. The host can be specified as the server name, or as the IPv4 or IPv6 address. An IPv6 address is specified in square brackets. The port is the TCP port on the remote server. If the port is omitted, it uses `tcp_port` from the server's config file (by default, 9000).

### Important

The port is required for an IPv6 address.

Examples:

```
example01-01-1
example01-01-1:9000
localhost
127.0.0.1
[::]:9000
[2a02:6b8:0:1111::11]:9000
```

Multiple addresses can be comma-separated. In this case, ClickHouse will use distributed processing, so it will send the query to all specified addresses (like to shards with different data).

Example:

```
example01-01-1,example01-02-1
```

Part of the expression can be specified in curly brackets. The previous example can be written as follows:

```
example01-0{1,2}-1
```

Curly brackets can contain a range of numbers separated by two dots (non-negative integers). In this case, the range is expanded to a set of values that generate shard addresses. If the first number starts with zero, the values are formed with the same zero alignment. The previous example can be written as follows:

```
example01-{01..02}-1
```

If you have multiple pairs of curly brackets, it generates the direct product of the corresponding sets.

Addresses and parts of addresses in curly brackets can be separated by the pipe symbol (`|`). In this case, the

corresponding sets of addresses are interpreted as replicas, and the query will be sent to the first healthy replica. However, the replicas are iterated in the order currently set in the `load_balancing` setting.

Example:

```
example01-{01..02}-{1|2}
```

This example specifies two shards that each have two replicas.

The number of addresses generated is limited by a constant. Right now this is 1000 addresses.

Using the `remote` table function is less optimal than creating a `Distributed` table, because in this case, the server connection is re-established for every request. In addition, if host names are set, the names are resolved, and errors are not counted when working with various replicas. When processing a large number of queries, always create the `Distributed` table ahead of time, and don't use the `remote` table function.

The `remote` table function can be useful in the following cases:

- Accessing a specific server for data comparison, debugging, and testing.
- Queries between various ClickHouse clusters for research purposes.
- Infrequent distributed requests that are made manually.
- Distributed requests where the set of servers is re-defined each time.

If the user is not specified, `default` is used. If the password is not specified, an empty password is used.

`remoteSecure` - same as `remote` but with secured connection. Default port —`tcp_port_secure` from config or 9440.

## url

`url(URL, format, structure)` - returns a table created from the `URL` with given `format` and `structure`.

`URL` - HTTP or HTTPS server address, which can accept `GET` and/or `POST` requests.

`format` - **format** of the data.

`structure` - table structure in '`UserID UInt64, Name String`' format. Determines column names and types.

Example

```
-- getting the first 3 lines of a table that contains columns of String and UInt32 type from HTTP-server  
which answers in CSV format.  
SELECT * FROM url('http://127.0.0.1:12345/', CSV, 'column1 String, column2 UInt32') LIMIT 3
```

## mysql

Allows `SELECT` queries to be performed on data that is stored on a remote MySQL server.

```
mysql('host:port', 'database', 'table', 'user', 'password'[, replace_query, 'on_duplicate_clause']);
```

Parameters

- `host:port` — MySQL server address.
- `database` — Remote database name.
- `table` — Remote table name.

- `user` — MySQL user.
- `password` — User password.
- `replace_query` — Flag that converts `INSERT INTO` queries to `REPLACE INTO`. If `replace_query=1`, the query is replaced.
- `on_duplicate_clause` — The `ON DUPLICATE KEY on_duplicate_clause` expression that is added to the `INSERT` query.

Example: `INSERT INTO t (c1,c2) VALUES ('a', 2) ON DUPLICATE KEY UPDATE c2 = c2 + 1`, where `on_duplicate_clause` is `UPDATE c2 = c2 + 1`. See the MySQL documentation to find which `on_duplicate_clause` you can use with the `ON DUPLICATE KEY` clause.

To specify `on_duplicate_clause` you need to pass `0` to the `replace_query` parameter. If you simultaneously pass `replace_query = 1` and `on_duplicate_clause`, ClickHouse generates an exception.

Simple `WHERE` clauses such as `=, !=, >, >=, <, <=` are currently executed on the MySQL server.

The rest of the conditions and the `LIMIT` sampling constraint are executed in ClickHouse only after the query to MySQL finishes.

#### Returned Value

A table object with the same columns as the original MySQL table.

## Usage Example

Table in MySQL:

```
mysql> CREATE TABLE `test`.`test` (
    ->   `int_id` INT NOT NULL AUTO_INCREMENT,
    ->   `int_nullable` INT NULL DEFAULT NULL,
    ->   `float` FLOAT NOT NULL,
    ->   `float_nullable` FLOAT NULL DEFAULT NULL,
    ->   PRIMARY KEY (`int_id`));
Query OK, 0 rows affected (0,09 sec)

mysql> insert into test (`int_id`, `float`) VALUES (1,2);
Query OK, 1 row affected (0,00 sec)

mysql> select * from test;
+-----+-----+-----+
| int_id | int_nullable | float | float_nullable |
+-----+-----+-----+
|     1 |         NULL |     2 |          NULL |
+-----+-----+-----+
1 row in set (0,00 sec)
```

Selecting data from ClickHouse:

```
SELECT * FROM mysql('localhost:3306', 'test', 'test', 'bayonet', '123')
```

int_id	int_nullable	float	float_nullable
1	NULL	2	NULL

## See Also

- [The 'MySQL' table engine](#)
- [Using MySQL as a source of external dictionary](#)

## jdbc

`jdbc(jdbc_connection_uri, schema, table)` - returns table that is connected via JDBC driver.

This table function requires separate `clickhouse-jdbc-bridge` program to be running. It supports Nullable types (based on DDL of remote table that is queried).

### Examples

```
SELECT * FROM jdbc('jdbc:mysql://localhost:3306/?user=root&password=root', 'schema', 'table')

SELECT * FROM jdbc('mysql://localhost:3306/?user=root&password=root', 'schema', 'table')

SELECT * FROM jdbc('datasource://mysql-local', 'schema', 'table')
```

## odbc

Returns table that is connected via **ODBC**.

```
odbc(connection_settings, external_database, external_table)
```

### Parameters:

- `connection_settings` — Name of the section with connection settings in the `odbc.ini` file.
- `external_database` — Name of a database in an external DBMS.
- `external_table` — Name of a table in the `external_database`.

To safely implement ODBC connections, ClickHouse uses a separate program `clickhouse-odbc-bridge`. If the ODBC driver is loaded directly from `clickhouse-server`, driver problems can crash the ClickHouse server. ClickHouse automatically starts `clickhouse-odbc-bridge` when it is required. The ODBC bridge program is installed from the same package as the `clickhouse-server`.

The fields with the `NULL` values from the external table are converted into the default values for the base data type. For example, if a remote MySQL table field has the `INT NULL` type it is converted to 0 (the default value for ClickHouse `Int32` data type).

## Usage example

Getting data from the local MySQL installation via ODBC

This example is checked for Ubuntu Linux 18.04 and MySQL server 5.7.

Ensure that unixODBC and MySQL Connector are installed.

By default (if installed from packages), ClickHouse starts as user `clickhouse`. Thus you need to create and configure this user in the MySQL server.

```
$ sudo mysql

mysql> CREATE USER 'clickhouse'@'localhost' IDENTIFIED BY 'clickhouse';
mysql> GRANT ALL PRIVILEGES ON *.* TO 'clickhouse'@'clickhouse' WITH GRANT OPTION;
```

Then configure the connection in `/etc/odbc.ini`.

```
$ cat /etc/odbc.ini
[mysqlconn]
DRIVER = /usr/local/lib/libmyodbc5w.so
SERVER = 127.0.0.1
PORT = 3306
DATABASE = test
USERNAME = clickhouse
PASSWORD = clickhouse
```

You can check the connection using the `isql` utility from the unixODBC installation.

```
$ isql -v mysqlconn
+-----+
| Connected! |
|           |
... 
```

Table in MySQL:

```
mysql> CREATE TABLE `test`.`test` (
    ->   `int_id` INT NOT NULL AUTO_INCREMENT,
    ->   `int_nullable` INT NULL DEFAULT NULL,
    ->   `float` FLOAT NOT NULL,
    ->   `float_nullable` FLOAT NULL DEFAULT NULL,
    ->   PRIMARY KEY (`int_id`);
Query OK, 0 rows affected (0,09 sec)

mysql> insert into test (`int_id`, `float`) VALUES (1,2);
Query OK, 1 row affected (0,00 sec)

mysql> select * from test;
+-----+-----+-----+-----+
| int_id | int_nullable | float | float_nullable |
+-----+-----+-----+-----+
|      1 |         NULL |     2 |          NULL |
+-----+-----+-----+-----+
1 row in set (0,00 sec)
```

Retrieving data from the MySQL table in ClickHouse:

```
SELECT * FROM odbc('DSN=mysqlconn', 'test', 'test')
```

int_id	int_nullable	float	float_nullable
1	0	2	0

## See Also

- [ODBC external dictionaries](#)
- [ODBC table engine.](#)

## hdfs

Creates a table from files in HDFS. This table function is similar to `url` and `file` ones.

```
hdfs(URI, format, structure)
```

### Input parameters

- `URI` — The relative URI to the file in HDFS. Path to file support following globs in readonly mode`*`, `?`, `{abc,def}` and

{N..M} where N, M — numbers, 'abc', 'def' — strings.

- format — The [format](#) of the file.
- structure — Structure of the table. Format 'column1\_name column1\_type, column2\_name column2\_type, ...' .

#### Returned value

A table with the specified structure for reading or writing data in the specified file.

#### Example

Table from `hdfs://hdfs1:9000/test` and selection of the first two rows from it:

```
SELECT *
FROM hdfs('hdfs://hdfs1:9000/test', 'TSV', 'column1 UInt32, column2 UInt32, column3 UInt32')
LIMIT 2
```

column1	column2	column3
1	2	3
3	2	1

#### Globs in path

Multiple path components can have globs. For being processed file should exists and matches to the whole path pattern (not only suffix or prefix).

- \* — Substitutes any number of any characters except / including empty string.
- ? — Substitutes any single character.
- {some\_string,another\_string,yet\_another\_one} — Substitutes any of strings 'some\_string', 'another\_string', 'yet\_another\_one'.
- {N..M} — Substitutes any number in range from N to M including both borders.

Constructions with {} are similar to the [remote table function](#)).

#### Example

1. Suppose that we have several files with following URIs on HDFS:

2. 'hdfs://hdfs1:9000/some\_dir/some\_file\_1'
3. 'hdfs://hdfs1:9000/some\_dir/some\_file\_2'
4. 'hdfs://hdfs1:9000/some\_dir/some\_file\_3'
5. 'hdfs://hdfs1:9000/another\_dir/some\_file\_1'
6. 'hdfs://hdfs1:9000/another\_dir/some\_file\_2'
7. 'hdfs://hdfs1:9000/another\_dir/some\_file\_3'
8. Query the amount of rows in these files:

```
SELECT count(*)
FROM hdfs('hdfs://hdfs1:9000/{some,another}_dir/some_file_{1..3}', 'TSV', 'name String, value UInt32')
```

1. Query the amount of rows in all files of these two directories:

```
SELECT count(*)
FROM hdfs('hdfs://hdfs1:9000/{some,another}_dir/*', 'TSV', 'name String, value UInt32')
```

## ⚠ Warning

If your listing of files contains number ranges with leading zeros, use the construction with braces for each digit separately or use `?.`

## Example

Query the data from files named `file000` , `file001` , ... , `file999` :

```
SELECT count(*)
FROM hdfs('hdfs://hdfs1:9000/big_dir/file{0..9}{0..9}{0..9}', 'CSV', 'name String, value UInt32')
```

## Virtual Columns

- `_path` — Path to the file.
- `_file` — Name of the file.

## See Also

- [Virtual columns](#)

## input

`input(structure)` - table function that allows effectively convert and insert data sent to the server with given structure to the table with another structure.

`structure` - structure of data sent to the server in following format`'column1_name column1_type, column2_name column2_type, ...'`. For example, `'id UInt32, name String'`.

This function can be used only in `INSERT SELECT` query and only once but otherwise behaves like ordinary table function (for example, it can be used in subquery, etc.).

Data can be sent in any way like for ordinary `INSERT` query and passed in any available `format` that must be specified in the end of query (unlike ordinary `INSERT SELECT` ).

The main feature of this function is that when server receives data from client it simultaneously converts it according to the list of expressions in the `SELECT` clause and inserts into the target table. Temporary table with all transferred data is not created.

## Examples

- Let the `test` table has the following structure `(a String, b String)` and data in `data.csv` has a different structure `(col1 String, col2 Date, col3 Int32)` . Query for insert data from the `data.csv` into the `test` table with simultaneous conversion looks like this:

```
$ cat data.csv | clickhouse-client --query="INSERT INTO test SELECT lower(col1), col3 * col3 FROM
input('col1 String, col2 Date, col3 Int32') FORMAT CSV";
```

- If `data.csv` contains data of the same structure `test_structure` as the table `test` then these two queries are equal:

```
$ cat data.csv | clickhouse-client --query="INSERT INTO test FORMAT CSV"
$ cat data.csv | clickhouse-client --query="INSERT INTO test SELECT * FROM input('test_structure') FORMAT
CSV"
```

## generateRandom

Generates random data with given schema. Allows to populate test tables with data. Supports all data types that can be stored in table except `LowCardinality` and `AggregateFunction`.

```
generateRandom('name TypeName[, name TypeName]...', [, 'random_seed'][, 'max_string_length'][, 'max_array_length']]));
```

## Parameters

- `name` — Name of corresponding column.
- `TypeName` — Type of corresponding column.
- `limit` — Number of rows to generate.
- `max_array_length` — Maximum array length for all generated arrays. Defaults to `10`.
- `max_string_length` — Maximum string length for all generated strings. Defaults to `10`.
- `random_seed` — Specify random seed manually to produce stable results. If `NULL` — seed is randomly generated.

## Returned Value

A table object with requested schema.

## Usage Example

```
SELECT * FROM generateRandom('a Array(Int8), d Decimal32(4), c Tuple(DateTime64(3), UUID)', 1, 10, 2);
```

a	d	c
[77]	-124167.6723	('2061-04-17 21:59:44.573', '3f72f405-ec3e-13c8-44ca-66ef335f7835')
[32, 110]	-141397.7312	('1979-02-09 03:43:48.526', '982486d1-5a5d-a308-e525-7bd8b80ffa73')
[68]	-67417.0770	('2080-03-12 14:17:31.269', '110425e5-413f-10a6-05ba-fa6b3e929f15')

## Dictionaries

A dictionary is a mapping (`key -> attributes`) that is convenient for various types of reference lists.

ClickHouse supports special functions for working with dictionaries that can be used in queries. It is easier and more efficient to use dictionaries with functions than a `JOIN` with reference tables.

`NULL` values can't be stored in a dictionary.

ClickHouse supports:

- **Built-in dictionaries** with a specific set of functions.
- **Plug-in (external) dictionaries** with a set of functions.

## External Dictionaries

You can add your own dictionaries from various data sources. The data source for a dictionary can be a local text or executable file, an HTTP(s) resource, or another DBMS. For more information, see "[Sources for external dictionaries](#)".

ClickHouse:

- Fully or partially stores dictionaries in RAM.
- Periodically updates dictionaries and dynamically loads missing values. In other words, dictionaries can be loaded

dynamically.

- Allows to create external dictionaries with xml files or [DDL queries](#).

The configuration of external dictionaries can be located in one or more xml-files. The path to the configuration is specified in the [dictionaries\\_config](#) parameter.

Dictionaries can be loaded at server startup or at first use, depending on the [dictionaries\\_lazy\\_load](#) setting.

The dictionary configuration file has the following format:

```
<yandex>
    <comment>An optional element with any content. Ignored by the ClickHouse server.</comment>

    <!--Optional element. File name with substitutions-->
    <include_from>/etc/metrika.xml</include_from>

    <dictionary>
        <!-- Dictionary configuration. -->
        <!-- There can be any number of <dictionary> sections in the configuration file. -->
    </dictionary>

</yandex>
```

You can [configure](#) any number of dictionaries in the same file.

[DDL queries for dictionaries](#) doesn't require any additional records in server configuration. They allow to work with dictionaries as first-class entities, like tables or views.

#### Attention

You can convert values for a small dictionary by describing it in a `SELECT` query (see the [transform](#) function). This functionality is not related to external dictionaries.

## See also

- [Configuring an External Dictionary](#)
- [Storing Dictionaries in Memory](#)
- [Dictionary Updates](#)
- [Sources of External Dictionaries](#)
- [Dictionary Key and Fields](#)
- [Functions for Working with External Dictionaries](#)

## Configuring an External Dictionary

If dictionary is configured using xml file, than dictionary configuration has the following structure:

```

<dictionary>
  <name>dict_name</name>

  <structure>
    <!-- Complex key configuration -->
  </structure>

  <source>
    <!-- Source configuration -->
  </source>

  <layout>
    <!-- Memory layout configuration -->
  </layout>

  <lifetime>
    <!-- Lifetime of dictionary in memory -->
  </lifetime>
</dictionary>

```

Corresponding **DDL-query** has the following structure:

```

CREATE DICTIONARY dict_name
(
  ...
  -- attributes
)
PRIMARY KEY ... -- complex or single key configuration
SOURCE(...) -- Source configuration
LAYOUT(...) -- Memory layout configuration
LIFETIME(...) -- Lifetime of dictionary in memory

```

- **name** – The identifier that can be used to access the dictionary. Use the characters [a-zA-Z0-9\\_].
- **source** — Source of the dictionary.
- **layout** — Dictionary layout in memory.
- **structure** — Structure of the dictionary . A key and attributes that can be retrieved by this key.
- **lifetime** — Frequency of dictionary updates.

## Storing Dictionaries in Memory

There are a variety of ways to store dictionaries in memory.

We recommend **flat**, **hashed** and **complex\_key\_hashed**. which provide optimal processing speed.

Caching is not recommended because of potentially poor performance and difficulties in selecting optimal parameters.  
Read more in the section "[cache](#)".

There are several ways to improve dictionary performance:

- Call the function for working with the dictionary after **GROUP BY** .
- Mark attributes to extract as injective. An attribute is called injective if different attribute values correspond to different keys. So when **GROUP BY** uses a function that fetches an attribute value by the key, this function is automatically taken out of **GROUP BY** .

ClickHouse generates an exception for errors with dictionaries. Examples of errors:

- The dictionary being accessed could not be loaded.
- Error querying a cached dictionary.

You can view the list of external dictionaries and their statuses in the `system.dictionaries` table.

The configuration looks like this:

```
<yandex>
  <dictionary>
    ...
    <layout>
      <layout_type>
        <!-- layout settings -->
      </layout_type>
    </layout>
    ...
  </dictionary>
</yandex>
```

Corresponding **DDL-query**:

```
CREATE DICTIONARY (...)

...
LAYOUT(LAYOUT_TYPE(param value)) -- layout settings
...
```

## Ways to Store Dictionaries in Memory

- **flat**
- **hashed**
- **sparse\_hashed**
- **cache**
- **range\_hashed**
- **complex\_key\_hashed**
- **complex\_key\_cache**
- **ip\_trie**

### **flat**

The dictionary is completely stored in memory in the form of flat arrays. How much memory does the dictionary use? The amount is proportional to the size of the largest key (in space used).

The dictionary key has the `UInt64` type and the value is limited to 500,000. If a larger key is discovered when creating the dictionary, ClickHouse throws an exception and does not create the dictionary.

All types of sources are supported. When updating, data (from a file or from a table) is read in its entirety.

This method provides the best performance among all available methods of storing the dictionary.

Configuration example:

```
<layout>
  <flat />
</layout>
```

or

```
LAYOUT(FLAT())
```

### **hashed**

The dictionary is completely stored in memory in the form of a hash table. The dictionary can contain any number of

elements with any identifiers In practice, the number of keys can reach tens of millions of items.

All types of sources are supported. When updating, data (from a file or from a table) is read in its entirety.

Configuration example:

```
<layout>
  <hashed />
</layout>
```

or

```
LAYOUT(HASHED())
```

### **sparse\_hashed**

Similar to `hashed`, but uses less memory in favor more CPU usage.

Configuration example:

```
<layout>
  <sparse_hashed />
</layout>
```

```
LAYOUT(SPARSE_HASHED())
```

### **complex\_key\_hashed**

This type of storage is for use with composite**keys**. Similar to `hashed`.

Configuration example:

```
<layout>
  <complex_key_hashed />
</layout>
```

```
LAYOUT(COMPLEX_KEY_HASHED())
```

### **range\_hashed**

The dictionary is stored in memory in the form of a hash table with an ordered array of ranges and their corresponding values.

This storage method works the same way as `hashed` and allows using date/time (arbitrary numeric type) ranges in addition to the key.

Example: The table contains discounts for each advertiser in the format:

advertiser id	discount start date	discount end date	amount
123	2015-01-01	2015-01-15	0.15
123	2015-01-16	2015-01-31	0.25
456	2015-01-01	2015-01-15	0.05

To use a sample for date ranges, define the `range_min` and `range_max` elements in the **structure**. These elements must contain elements `name` and `type` (if `type` is not specified, the default type will be used - Date). `type` can be any numeric

type (Date / DateTime / UInt64 / Int32 / others).

Example:

```
<structure>
  <id>
    <name>Id</name>
  </id>
  <range_min>
    <name>first</name>
    <type>Date</type>
  </range_min>
  <range_max>
    <name>last</name>
    <type>Date</type>
  </range_max>
  ...
  ...
```

or

```
CREATE DICTIONARY somedict (
  id UInt64,
  first Date,
  last Date
)
PRIMARY KEY id
LAYOUT(RANGE_HASHED())
RANGE(MIN first MAX last)
```

To work with these dictionaries, you need to pass an additional argument to the dictGetT function, for which a range is selected:

```
dictGetT('dict_name', 'attr_name', id, date)
```

This function returns the value for the specified id s and the date range that includes the passed date.

Details of the algorithm:

- If the id is not found or a range is not found for the id , it returns the default value for the dictionary.
- If there are overlapping ranges, you can use any.
- If the range delimiter is NULL or an invalid date (such as 1900-01-01 or 2039-01-01), the range is left open. The range can be open on both sides.

Configuration example:

```

<yandex>
    <dictionary>

        ...

        <layout>
            <range_hashed />
        </layout>

        <structure>
            <id>
                <name>Abcdef</name>
            </id>
            <range_min>
                <name>StartTimeStamp</name>
                <type>UInt64</type>
            </range_min>
            <range_max>
                <name>EndTimeStamp</name>
                <type>UInt64</type>
            </range_max>
            <attribute>
                <name>XXXTYPE</name>
                <type>String</type>
                <null_value />
            </attribute>
        </structure>

    </dictionary>
</yandex>

```

or

```

CREATE DICTIONARY somedict(
    Abcdef UInt64,
    StartTimeStamp UInt64,
    EndTimeStamp UInt64,
    XXXTYPE String DEFAULT ''
)
PRIMARY KEY Abcdef
RANGE(MIN StartTimeStamp MAX EndTimeStamp)

```

## cache

The dictionary is stored in a cache that has a fixed number of cells. These cells contain frequently used elements.

When searching for a dictionary, the cache is searched first. For each block of data, all keys that are not found in the cache or are outdated are requested from the source using `SELECT attrs... FROM db.table WHERE id IN (k1, k2, ...)`. The received data is then written to the cache.

For cache dictionaries, the expiration `lifetime` of data in the cache can be set. If more time than `lifetime` has passed since loading the data in a cell, the cell's value is not used, and it is re-requested the next time it needs to be used. This is the least effective of all the ways to store dictionaries. The speed of the cache depends strongly on correct settings and the usage scenario. A cache type dictionary performs well only when the hit rates are high enough (recommended 99% and higher). You can view the average hit rate in the `system.dictionaries` table.

To improve cache performance, use a subquery with `LIMIT`, and call the function with the dictionary externally.

Supported sources: MySQL, ClickHouse, executable, HTTP.

Example of settings:

```
<layout>
  <cache>
    <!-- The size of the cache, in number of cells. Rounded up to a power of two. -->
    <size_in_cells>1000000000</size_in_cells>
  </cache>
</layout>
```

or

```
LAYOUT(CACHE(SIZE_IN_CELLS 1000000000))
```

Set a large enough cache size. You need to experiment to select the number of cells:

1. Set some value.
2. Run queries until the cache is completely full.
3. Assess memory consumption using the `system.dictionaries` table.
4. Increase or decrease the number of cells until the required memory consumption is reached.

### Warning

Do not use ClickHouse as a source, because it is slow to process queries with random reads.

## **complex\_key\_cache**

This type of storage is for use with composite**keys**. Similar to `cache`.

## **ip\_trie**

This type of storage is for mapping network prefixes (IP addresses) to metadata such as ASN.

Example: The table contains network prefixes and their corresponding AS number and country code:

prefix	asn	ccaa2
202.79.32.0/20	17501	NP
2620:0:870::/48	3856	US
2a02:6b8:1::/48	13238	RU
2001:db8::/32	65536	ZZ

When using this type of layout, the structure must have a composite key.

Example:

```

<structure>
  <key>
    <attribute>
      <name>prefix</name>
      <type>String</type>
    </attribute>
  </key>
  <attribute>
    <name>asn</name>
    <type>UInt32</type>
    <null_value />
  </attribute>
  <attribute>
    <name>cca2</name>
    <type>String</type>
    <null_value>??</null_value>
  </attribute>
  ...

```

or

```

CREATE DICTIONARY somedict (
  prefix String,
  asn UInt32,
  cca2 String DEFAULT '??'
)
PRIMARY KEY prefix

```

The key must have only one String type attribute that contains an allowed IP prefix. Other types are not supported yet.

For queries, you must use the same functions (`dictGetT` with a tuple) as for dictionaries with composite keys:

```
dictGetT('dict_name', 'attr_name', tuple(ip))
```

The function takes either `UInt32` for IPv4, or `FixedString(16)` for IPv6:

```
dictGetString('prefix', 'asn', tuple(IPv6StringToNum('2001:db8::1')))
```

Other types are not supported yet. The function returns the attribute for the prefix that corresponds to this IP address. If there are overlapping prefixes, the most specific one is returned.

Data is stored in a `trie`. It must completely fit into RAM.

## Dictionary Updates

ClickHouse periodically updates the dictionaries. The update interval for fully downloaded dictionaries and the invalidation interval for cached dictionaries are defined in the `<lifetime>` tag in seconds.

Dictionary updates (other than loading for first use) do not block queries. During updates, the old version of a dictionary is used. If an error occurs during an update, the error is written to the server log, and queries continue using the old version of dictionaries.

Example of settings:

```

<dictionary>
  ...
  <lifetime>300</lifetime>
  ...
</dictionary>

```

```
CREATE DICTIONARY (...)
```

```
...
```

```
LIFETIME(300)
```

```
...
```

Setting `<lifetime>0</lifetime>` (`LIFETIME(0)`) prevents dictionaries from updating.

You can set a time interval for upgrades, and ClickHouse will choose a uniformly random time within this range. This is necessary in order to distribute the load on the dictionary source when upgrading on a large number of servers.

Example of settings:

```
<dictionary>
...
<lifetime>
    <min>300</min>
    <max>360</max>
</lifetime>
...
</dictionary>
```

or

```
LIFETIME(MIN 300 MAX 360)
```

When upgrading the dictionaries, the ClickHouse server applies different logic depending on the type of **source**:

- For a text file, it checks the time of modification. If the time differs from the previously recorded time, the dictionary is updated.
- For MyISAM tables, the time of modification is checked using a `SHOW TABLE STATUS` query.
- Dictionaries from other sources are updated every time by default.

For MySQL (InnoDB), ODBC and ClickHouse sources, you can set up a query that will update the dictionaries only if they really changed, rather than each time. To do this, follow these steps:

- The dictionary table must have a field that always changes when the source data is updated.
- The settings of the source must specify a query that retrieves the changing field. The ClickHouse server interprets the query result as a row, and if this row has changed relative to its previous state, the dictionary is updated. Specify the query in the `<invalidate_query>` field in the settings for the **source**.

Example of settings:

```
<dictionary>
...
<odbc>
...
<invalidate_query>SELECT update_time FROM dictionary_source where id = 1</invalidate_query>
</odbc>
...
</dictionary>
```

or

```
...
SOURCE(ODBC(... invalidate_query 'SELECT update_time FROM dictionary_source where id = 1'))
...
```

## Sources of External Dictionaries

An external dictionary can be connected from many different sources.

If dictionary is configured using xml-file, the configuration looks like this:

```
<yandex>
  <dictionary>
    ...
    <source>
      <source_type>
        <!-- Source configuration -->
      </source_type>
    </source>
    ...
  </dictionary>
  ...
</yandex>
```

In case of [DDL-query](#), equal configuration will looks like:

```
CREATE DICTIONARY dict_name (...)
...
SOURCE(SOURCE_TYPE(param1 val1 ... paramN valN)) -- Source configuration
...
```

The source is configured in the `source` section.

Types of sources (`source_type`):

- [Local file](#)
- [Executable file](#)
- [HTTP\(s\)](#)
- DBMS
  - [ODBC](#)
  - [MySQL](#)
  - [ClickHouse](#)
  - [MongoDB](#)
  - [Redis](#)

## Local File

Example of settings:

```
<source>
  <file>
    <path>/opt/dictionaries/os.tsv</path>
    <format>TabSeparated</format>
  </file>
</source>
```

or

```
SOURCE(FILE(path '/opt/dictionaries/os.tsv' format 'TabSeparated'))
```

Setting fields:

- `path` – The absolute path to the file.

- `format` – The file format. All the formats described in "Formats" are supported.

## Executable File

Working with executable files depends on how the dictionary is stored in memory. If the dictionary is stored using `cache` and `complex_key_cache`, ClickHouse requests the necessary keys by sending a request to the executable file's STDIN. Otherwise, ClickHouse starts executable file and treats its output as dictionary data.

Example of settings:

```
<source>
  <executable>
    <command>cat /opt/dictionaries/os.tsv</command>
    <format>TabSeparated</format>
  </executable>
</source>
```

or

```
SOURCE(EXECUTABLE(command 'cat /opt/dictionaries/os.tsv' format 'TabSeparated'))
```

Setting fields:

- `command` – The absolute path to the executable file, or the file name (if the program directory is written to PATH).
- `format` – The file format. All the formats described in "Formats" are supported.

## HTTP(s)

Working with an HTTP(s) server depends on how the dictionary is stored in memory. If the dictionary is stored using `cache` and `complex_key_cache`, ClickHouse requests the necessary keys by sending a request via the POST method.

Example of settings:

```
<source>
  <http>
    <url>http://[::1]/os.tsv</url>
    <format>TabSeparated</format>
    <credentials>
      <user>user</user>
      <password>password</password>
    </credentials>
    <headers>
      <header>
        <name>API-KEY</name>
        <value>key</value>
      </header>
    </headers>
  </http>
</source>
```

or

```
SOURCE(HTTP(
  url 'http://[::1]/os.tsv'
  format 'TabSeparated'
  credentials(user 'user' password 'password')
  headers(header(name 'API-KEY' value 'key'))
))
```

In order for ClickHouse to access an HTTPS resource, you must configure openSSL in the server configuration.

Setting fields:

- `url` – The source URL.
- `format` – The file format. All the formats described in ["Formats"](#) are supported.
- `credentials` – Basic HTTP authentication. Optional parameter.
  - `user` – Username required for the authentication.
  - `password` – Password required for the authentication.
- `headers` – All custom HTTP headers entries used for the HTTP request. Optional parameter.
  - `header` – Single HTTP header entry.
    - `name` – Identifiant name used for the header send on the request.
    - `value` – Value set for a specific identifiant name.

## ODBC

You can use this method to connect any database that has an ODBC driver.

Example of settings:

```
<source>
  <odbc>
    <db>DatabaseName</db>
    <table>SchemaName.TableName</table>
    <connection_string>DSN=some_parameters</connection_string>
    <invalidate_query>SQL_QUERY</invalidate_query>
  </odbc>
</source>
```

or

```
SOURCE(ODBC(
  db 'DatabaseName'
  table 'SchemaName.TableName'
  connection_string 'DSN=some_parameters'
  invalidate_query 'SQL_QUERY'
))
```

Setting fields:

- `db` – Name of the database. Omit it if the database name is set in the `<connection_string>` parameters.
- `table` – Name of the table and schema if exists.
- `connection_string` – Connection string.
- `invalidate_query` – Query for checking the dictionary status. Optional parameter. Read more in the section [Updating dictionaries](#).

ClickHouse receives quoting symbols from ODBC-driver and quote all settings in queries to driver, so it's necessary to set table name accordingly to table name case in database.

If you have a problems with encodings when using Oracle, see the corresponding [FAQ](#) article.

### Known vulnerability of the ODBC dictionary functionality

## Attention

When connecting to the database through the ODBC driver connection parameter `Servername` can be substituted. In this case values of `USERNAME` and `PASSWORD` from `odbc.ini` are sent to the remote server and can be compromised.

Example of insecure use

Let's configure unixODBC for PostgreSQL. Content of `/etc/odbc.ini` :

```
[gregtest]
Driver = /usr/lib/pgsqlodbc.so
Servername = localhost
PORT = 5432
DATABASE = test_db
##OPTION = 3
USERNAME = test
PASSWORD = test
```

If you then make a query such as

```
SELECT * FROM odbc('DSN=gregtest;Servername=some-server.com', 'test_db');
```

ODBC driver will send values of `USERNAME` and `PASSWORD` from `odbc.ini` to `some-server.com`.

## Example of Connecting PostgreSQL

Ubuntu OS.

Installing unixODBC and the ODBC driver for PostgreSQL:

```
$ sudo apt-get install -y unixodbc odbcinst odbc-postgresql
```

Configuring `/etc/odbc.ini` (or `~/.odbc.ini`):

```
[DEFAULT]
Driver = myconnection

[myconnection]
Description      = PostgreSQL connection to my_db
Driver          = PostgreSQL Unicode
Database        = my_db
Servername      = 127.0.0.1
UserName        = username
Password        = password
Port            = 5432
Protocol        = 9.3
ReadOnly        = No
RowVersioning   = No
ShowSystemTables = No
ConnSettings    =
```

The dictionary configuration in ClickHouse:

```

<yandex>
  <dictionary>
    <name>table_name</name>
    <source>
      <odbc>
        <!-- You can specify the following parameters in connection_string: -->
        <!-- DSN=myconnection;UID=username;PWD=password;HOST=127.0.0.1;PORT=5432;DATABASE=my_db -->
        <connection_string>DSN=myconnection</connection_string>
        <table>postgresql_table</table>
      </odbc>
    </source>
    <lifetime>
      <min>300</min>
      <max>360</max>
    </lifetime>
    <layout>
      <hashed/>
    </layout>
    <structure>
      <id>
        <name>id</name>
      </id>
      <attribute>
        <name>some_column</name>
        <type>UInt64</type>
        <null_value>0</null_value>
      </attribute>
    </structure>
  </dictionary>
</yandex>

```

Or

```

CREATE DICTIONARY table_name (
  id UInt64,
  some_column UInt64 DEFAULT 0
)
PRIMARY KEY id
SOURCE(ODBC(connection_string 'DSN=myconnection' table 'postgresql_table'))
LAYOUT(HASHED())
LIFETIME(MIN 300 MAX 360)

```

You may need to edit `odbc.ini` to specify the full path to the library with the driver `DRIVER=/usr/local/lib/psqlodbcw.so`.

## Example of Connecting MS SQL Server

Ubuntu OS.

Installing the driver:

```
$ sudo apt-get install tdsodbc freetds-bin sqsh
```

Configuring the driver:

```

$ cat /etc/freetds/freetds.conf
...
[MSSQL]
host = 192.168.56.101
port = 1433
tds version = 7.0
client charset = UTF-8

$ cat /etc/odbcinst.ini
...

[FreeTDS]
Description      = FreeTDS
Driver          = /usr/lib/x86_64-linux-gnu/odbc/libtdsodbc.so
Setup           = /usr/lib/x86_64-linux-gnu/odbc/libtdsS.so
FileUsage        = 1
UsageCount       = 5

$ cat ~/.odbc.ini
...

[MSSQL]
Description      = FreeTDS
Driver          = FreeTDS
Servername      = MSSQL
Database        = test
UID             = test
PWD             = test
Port            = 1433

```

Configuring the dictionary in ClickHouse:

```

<yandex>
  <dictionary>
    <name>test</name>
    <source>
      <odbc>
        <table>dict</table>
        <connection_string>DSN=MSSQL;UID=test;PWD=test</connection_string>
      </odbc>
    </source>

    <lifetime>
      <min>300</min>
      <max>360</max>
    </lifetime>

    <layout>
      <flat />
    </layout>

    <structure>
      <id>
        <name>k</name>
      </id>
      <attribute>
        <name>s</name>
        <type>String</type>
        <null_value></null_value>
      </attribute>
    </structure>
  </dictionary>
</yandex>

```

or

```

CREATE DICTIONARY test (
    k UInt64,
    s String DEFAULT ''
)
PRIMARY KEY k
SOURCE(ODBC(table 'dict' connection_string 'DSN=MSSQL;UID=test;PWD=test'))
LAYOUT(FLAT())
LIFETIME(MIN 300 MAX 360)

```

## DBMS

### MySQL

Example of settings:

```

<source>
  <mysql>
    <port>3306</port>
    <user>clickhouse</user>
    <password>qwerty</password>
    <replica>
      <host>example01-1</host>
      <priority>1</priority>
    </replica>
    <replica>
      <host>example01-2</host>
      <priority>1</priority>
    </replica>
    <db>db_name</db>
    <table>table_name</table>
    <where>id=10</where>
    <invalidate_query>SQL_QUERY</invalidate_query>
  </mysql>
</source>

```

or

```

SOURCE(MYSQL(
  port 3306
  user 'clickhouse'
  password 'qwerty'
  replica(host 'example01-1' priority 1)
  replica(host 'example01-2' priority 1)
  db 'db_name'
  table 'table_name'
  where 'id=10'
  invalidate_query 'SQL_QUERY'
))

```

Setting fields:

- `port` – The port on the MySQL server. You can specify it for all replicas, or for each one individually (inside `<replica>` ).
- `user` – Name of the MySQL user. You can specify it for all replicas, or for each one individually (inside `<replica>` ).
- `password` – Password of the MySQL user. You can specify it for all replicas, or for each one individually (inside `<replica>` ).
- `replica` – Section of replica configurations. There can be multiple sections.
  - `replica/host` – The MySQL host.
  - `replica/priority` – The replica priority. When attempting to connect, ClickHouse traverses the replicas in order of priority. The lower the number, the higher the priority.
- `db` – Name of the database.

- `table` – Name of the table.
- `where` – The selection criteria. The syntax for conditions is the same as for `WHERE` clause in MySQL, for example, `id > 10 AND id < 20`. Optional parameter.
- `invalidate_query` – Query for checking the dictionary status. Optional parameter. Read more in the section [Updating dictionaries](#).

MySQL can be connected on a local host via sockets. To do this, set `host` and `socket`.

Example of settings:

```
<source>
<mysql>
  <host>localhost</host>
  <socket>/path/to/socket/file.sock</socket>
  <user>clickhouse</user>
  <password>qwerty</password>
  <db>db_name</db>
  <table>table_name</table>
  <where>id=10</where>
  <invalidate_query>SQL_QUERY</invalidate_query>
</mysql>
</source>
```

or

```
SOURCE(MYSQL(
  host 'localhost'
  socket '/path/to/socket/file.sock'
  user 'clickhouse'
  password 'qwerty'
  db 'db_name'
  table 'table_name'
  where 'id=10'
  invalidate_query 'SQL_QUERY'
))
```

## ClickHouse

Example of settings:

```
<source>
<clickhouse>
  <host>example01-01-1</host>
  <port>9000</port>
  <user>default</user>
  <password></password>
  <db>default</db>
  <table>ids</table>
  <where>id=10</where>
</clickhouse>
</source>
```

or

```
SOURCE(CLICKHOUSE(
  host 'example01-01-1'
  port 9000
  user 'default'
  password ''
  db 'default'
  table 'ids'
  where 'id=10'
))
```

Setting fields:

- host – The ClickHouse host. If it is a local host, the query is processed without any network activity. To improve fault tolerance, you can create a **Distributed** table and enter it in subsequent configurations.
- port – The port on the ClickHouse server.
- user – Name of the ClickHouse user.
- password – Password of the ClickHouse user.
- db – Name of the database.
- table – Name of the table.
- where – The selection criteria. May be omitted.
- invalidate\_query – Query for checking the dictionary status. Optional parameter. Read more in the section [Updating dictionaries](#).

## MongoDB

Example of settings:

```
<source>
  <mongodb>
    <host>localhost</host>
    <port>27017</port>
    <user></user>
    <password></password>
    <db>test</db>
    <collection>dictionary_source</collection>
  </mongodb>
</source>
```

or

```
SOURCE(MONGO(
  host 'localhost'
  port 27017
  user ''
  password ''
  db 'test'
  collection 'dictionary_source'
))
```

Setting fields:

- host – The MongoDB host.
- port – The port on the MongoDB server.
- user – Name of the MongoDB user.
- password – Password of the MongoDB user.
- db – Name of the database.
- collection – Name of the collection.

## Redis

Example of settings:

```

<source>
  <redis>
    <host>localhost</host>
    <port>6379</port>
    <storage_type>simple</storage_type>
    <db_index>0</db_index>
  </redis>
</source>

```

or

```

SOURCE(REDIS(
  host 'localhost'
  port 6379
  storage_type 'simple'
  db_index 0
))

```

Setting fields:

- `host` — The Redis host.
- `port` — The port on the Redis server.
- `storage_type` — The structure of internal Redis storage using for work with keys. `simple` is for simple sources and for hashed single key sources, `hash_map` is for hashed sources with two keys. Ranged sources and cache sources with complex key are unsupported. May be omitted, default value is `simple`.
- `db_index` — The specific numeric index of Redis logical database. May be omitted, default value is 0.

## Dictionary Key and Fields

The `<structure>` clause describes the dictionary key and fields available for queries.

XML description:

```

<dictionary>
  <structure>
    <id>
      <name>Id</name>
    </id>

    <attribute>
      <!-- Attribute parameters -->
    </attribute>

    ...
  </structure>
</dictionary>

```

Attributes are described in the elements:

- `<id>` — **Key column**.
- `<attribute>` — **Data column**. There can be a multiple number of attributes.

DDL query:

```
CREATE DICTIONARY dict_name (
    Id UInt64,
    -- attributes
)
PRIMARY KEY Id
...
```

Attributes are described in the query body:

- PRIMARY KEY — **Key column**
- AttrName AttrType — **Data column**. There can be a multiple number of attributes.

## Key

ClickHouse supports the following types of keys:

- Numeric key. UInt64 . Defined in the `<id>` tag or using PRIMARY KEY keyword.
- Composite key. Set of values of different types. Defined in the tag`<key>` or PRIMARY KEY keyword.

An xml structure can contain either `<id>` or `<key>` . DDL-query must contain single PRIMARY KEY .

### ⚠ Warning

You must not describe key as an attribute.

## Numeric Key

Type: UInt64 .

Configuration example:

```
<id>
    <name>Id</name>
</id>
```

Configuration fields:

- name – The name of the column with keys.

For DDL-query:

```
CREATE DICTIONARY (
    Id UInt64,
    ...
)
PRIMARY KEY Id
...
```

- PRIMARY KEY – The name of the column with keys.

## Composite Key

The key can be a tuple from any types of fields. The layout in this case must be complex\_key\_hashed or complex\_key\_cache .

### Tip

A composite key can consist of a single element. This makes it possible to use a string as the key, for instance.

The key structure is set in the element `<key>`. Key fields are specified in the same format as the dictionary [attributes](#).  
Example:

```
<structure>
  <key>
    <attribute>
      <name>field1</name>
      <type>String</type>
    </attribute>
    <attribute>
      <name>field2</name>
      <type>UInt32</type>
    </attribute>
    ...
  </key>
...

```

or

```
CREATE DICTIONARY (
  field1 String,
  field2 String
  ...
)
PRIMARY KEY field1, field2
...
```

For a query to the `dictGet*` function, a tuple is passed as the key. Example: `dictGetString('dict_name', 'attr_name', tuple('string for field1', num_for_field2))`.

## Attributes

Configuration example:

```
<structure>
  ...
  <attribute>
    <name>Name</name>
    <type>ClickHouseDataType</type>
    <null_value></null_value>
    <expression>rand64()</expression>
    <hierarchical>true</hierarchical>
    <injective>true</injective>
    <is_object_id>true</is_object_id>
  </attribute>
</structure>
```

or

```
CREATE DICTIONARY somename (
  Name ClickHouseDataType DEFAULT '' EXPRESSION rand64() HIERARCHICAL INJECTIVE IS_OBJECT_ID
)
```

Configuration fields:

Tag	Description	Required
name	Column name.	Yes
type	<p>ClickHouse data type. ClickHouse tries to cast value from dictionary to the specified data type. For example, for MySQL, the field might be <code>TEXT</code>, <code>VARCHAR</code>, or <code>BLOB</code> in the MySQL source table, but it can be uploaded as <code>String</code> in ClickHouse. <b>Nullable</b> is not supported.</p>	Yes
null_value	<p>Default value for a non-existing element. In the example, it is an empty string. You cannot use <code>NULL</code> in this field.</p>	Yes
expression	<p><b>Expression</b> that ClickHouse executes on the value. The expression can be a column name in the remote SQL database. Thus, you can use it to create an alias for the remote column.  Default value: no expression.</p>	No
hierarchical	<p>If <code>true</code>, the attribute contains the value of a parent key for the current key. See <a href="#">Hierarchical Dictionaries</a>.</p>	No
	<p>Default value: <code>false</code>.</p>	
injective	<p>Flag that shows whether the <code>id -&gt; attribute</code> image is <b>injective</b>. If <code>true</code>, ClickHouse can automatically place after the <code>GROUP BY</code> clause the requests to dictionaries with injection. Usually it significantly reduces the amount of such requests.  Default value: <code>false</code>.</p>	No
is_object_id	<p>Flag that shows whether the query is executed for a MongoDB document by <code>ObjectId</code>.</p>	No
	<p>Default value: <code>false</code>.</p>	

## See Also

- [Functions for working with external dictionaries](#).

## Hierarchical Dictionaries

ClickHouse supports hierarchical dictionaries with a **numeric key**.

Look at the following hierarchical structure:



This hierarchy can be expressed as the following dictionary table.

region_id	parent_region	region_name
1	0	Russia
2	1	Moscow
3	2	Center
4	0	Great Britain
5	4	London

This table contains a column `parent_region` that contains the key of the nearest parent for the element.

ClickHouse supports the `hierarchical` property for `external dictionary` attributes. This property allows you to configure the hierarchical dictionary similar to described above.

The `dictGetHierarchy` function allows you to get the parent chain of an element.

For our example, the structure of dictionary can be the following:

```

<dictionary>
  <structure>
    <id>
      <name>region_id</name>
    </id>

    <attribute>
      <name>parent_region</name>
      <type>UInt64</type>
      <null_value>0</null_value>
      <hierarchical>true</hierarchical>
    </attribute>

    <attribute>
      <name>region_name</name>
      <type>String</type>
      <null_value></null_value>
    </attribute>
  </structure>
</dictionary>

```

## Internal dictionaries

ClickHouse contains a built-in feature for working with a geobase.

This allows you to:

- Use a region's ID to get its name in the desired language.
- Use a region's ID to get the ID of a city, area, federal district, country, or continent.
- Check whether a region is part of another region.
- Get a chain of parent regions.

All the functions support "translocality," the ability to simultaneously use different perspectives on region ownership. For more information, see the section "Functions for working with Yandex.Metrica dictionaries".

The internal dictionaries are disabled in the default package. To enable them, uncomment the parameters

`path_to_regions_hierarchy_file` 和 `path_to_regions_names_files` 在服务器配置文件中。

地理数据库从文本文件加载。

将 `regions_hierarchy*.txt` 文件放入 `path_to_regions_hierarchy_file` 目录。此配置参数必须包含指向 `regions_hierarchy.txt` 文件（默认区域层次结构）的路径，以及其他文件（`regions_hierarchy_ua.txt`）必须位于同一目录。

将 `regions_names_*.txt` 文件放入 `path_to_regions_names_files` 目录。

您也可以自己创建这些文件。文件格式如下：

`regions_hierarchy*.txt`：TabSeparated（无标题），列数：

- 地区 ID（UInt32）
- 父地区 ID（UInt32）
- 地区类型（UInt8）：1 - 大陆，3 - 国家，4 - 联邦区，5 - 地区，6 - 城市；其他类型没有值
- 人口（UInt32）——可选列

`regions_names_*.txt`：TabSeparated（无标题），列数：

- 地区 ID（UInt32）
- 地区名称（String）——不能包含制表符或换行符，即使已转义。

扁平数组用于在 RAM 中存储。出于这个原因，ID 不应超过一百万。

字典可以在不重启服务器的情况下更新。然而，可用字典的集合不会更新。对于更新，文件修改时间会检查。如果文件已更改，则字典会更新。检查更改的间隔由 `builtin_dictionaries_reload_interval` 参数配置。字典更新（除了首次使用时）不会阻塞查询。在更新期间，查询使用旧版本的字典。如果在更新期间发生错误，该错误将写入服务器日志，且查询继续使用旧版本的字典。

我们建议定期更新字典以与地理数据库同步。在更新期间，生成新文件并将其写入单独的位置。当所有内容都准备就绪后，将它们重命名为由服务器使用的文件名。

还有其他函数可用于处理 OS 标识符和 Yandex.Metrica 搜索引擎，但它们不应使用。

## 操作符

所有的操作符（运算符）都会在查询时依据他们的优先级及其结合顺序在被解析时转换为对应的函数。下面按优先级从高到低列出各组运算符及其对应的函数：

### 下标运算符

`a[N]` – 数组中的第 N 个元素；对应函数 `arrayElement(a, N)`

`a.N` – 元组中第 N 个元素；对应函数 `tupleElement(a, N)`

### 负号

`-a` – 对应函数 `negate(a)`

### 乘号、除号和取余

`a * b` – 对应函数 `multiply(a, b)`

`a / b` – 对应函数 `divide(a, b)`

`a % b` – 对应函数 `modulo(a, b)`

## 加号和减号

`a + b` – 对应函数 `plus(a, b)`

`a - b` – 对应函数 `minus(a, b)`

## 关系运算符

`a = b` – 对应函数 `equals(a, b)`

`a == b` – 对应函数 `equals(a, b)`

`a != b` – 对应函数 `notEquals(a, b)`

`a <> b` – 对应函数 `notEquals(a, b)`

`a <= b` – 对应函数 `lessOrEquals(a, b)`

`a >= b` – 对应函数 `greaterOrEquals(a, b)`

`a < b` – 对应函数 `less(a, b)`

`a > b` – 对应函数 `greater(a, b)`

`a LIKE s` – 对应函数 `like(a, b)`

`a NOT LIKE s` – 对应函数 `notLike(a, b)`

`a BETWEEN b AND c` – 等价于 `a >= b AND a <= c`

## 集合关系运算符

详见此节 **IN 相关操作符**。

`a IN ...` – 对应函数 `in(a, b)`

`a NOT IN ...` – 对应函数 `notin(a, b)`

`a GLOBAL IN ...` – 对应函数 `globalIn(a, b)`

`a GLOBAL NOT IN ...` – 对应函数 `globalNotIn(a, b)`

## 逻辑非

`NOT a` – 对应函数 `not(a)`

## 逻辑与

`a AND b` – 对应函数 `and(a, b)`

## 逻辑或

a OR b – 对应函数 or(a, b)

## 条件运算符

a ? b : c – 对应函数 if(a, b, c)

注意:

条件运算符会先计算表达式b和表达式c的值，再根据表达式a的真假，返回相应的值。如果表达式b和表达式c是 `arrayJoin()` 函数，则不管表达式a是真是假，每行都会被复制展开。

## Operators for Working with Dates and Times

### EXTRACT

```
EXTRACT(part FROM date);
```

Extracts a part from a given date. For example, you can retrieve a month from a given date, or a second from a time.

The `part` parameter specifies which part of the date to retrieve. The following values are available:

- `DAY` — The day of the month. Possible values: 1–31.
- `MONTH` — The number of a month. Possible values: 1–12.
- `YEAR` — The year.
- `SECOND` — The second. Possible values: 0–59.
- `MINUTE` — The minute. Possible values: 0–59.
- `HOUR` — The hour. Possible values: 0–23.

The `part` parameter is case-insensitive.

The `date` parameter specifies the date or the time to process. Either `Date` or `DateTime` type is supported.

Examples:

```
SELECT EXTRACT(DAY FROM toDate('2017-06-15'));
SELECT EXTRACT(MONTH FROM toDate('2017-06-15'));
SELECT EXTRACT(YEAR FROM toDate('2017-06-15'));
```

In the following example we create a table and insert into it a value with the `DateTime` type.

```
CREATE TABLE test.Orders
(
    OrderId UInt64,
    OrderName String,
    OrderDate DateTime
)
ENGINE = Log;
```

```
INSERT INTO test.Orders VALUES (1, 'Jarlsberg Cheese', toDateTime('2008-10-11 13:23:44'));
```

```

SELECT
    toYear(OrderDate) AS OrderYear,
    toMonth(OrderDate) AS OrderMonth,
    toDayOfMonth(OrderDate) AS OrderDay,
    toHour(OrderDate) AS OrderHour,
    toMinute(OrderDate) AS OrderMinute,
    toSecond(OrderDate) AS OrderSecond
FROM test.Orders;

```

OrderYear	OrderMonth	OrderDay	OrderHour	OrderMinute	OrderSecond
2008	10	11	13	23	44

You can see more examples in [tests](#).

## INTERVAL

Creates an [Interval](#)-type value that should be used in arithmetical operations with [Date](#) and [DateTime](#)-type values.

Example:

```

SELECT now() AS current_date_time, current_date_time + INTERVAL 4 DAY + INTERVAL 3 HOUR

```

current_date_time	plus(plus(now(), toIntervalDay(4)), toIntervalHour(3))
2019-10-23 11:16:28	2019-10-27 14:16:28

See Also

- [Interval](#) data type
- [toInterval](#) type conversion functions

## CASE条件表达式

```

CASE [x]
    WHEN a THEN b
    [WHEN ... THEN ...]
    [ELSE c]
END

```

如果指定了 `x`，该表达式会转换为 `transform(x, [a, ...], [b, ...], c)` 函数。否则转换为 `multilf(a, b, ..., c)`

如果该表达式中没有 `ELSE c` 子句，则默认值就是 `NULL`

但 `transform` 函数不支持 `NULL`

## 连接运算符

`s1 || s2` – 对应函数 `concat(s1, s2)`

## 创建 Lambda 函数

`x -> expr` – 对应函数 `lambda(x, expr)`

接下来的这些操作符因为其本身是括号没有优先级：

## 创建数组

[x1, ...] – 对应函数 array(x1, ...)

## 创建元组

(x1, x2, ...) – 对应函数 tuple(x2, x2, ...)

## 结合方式

所有的同级操作符从左到右结合。例如，`1 + 2 + 3` 会转换成 `plus(plus(1, 2), 3)`。所以，有时他们会跟我们预期的不太一样。例如，`SELECT 4 > 2 > 3` 的结果是0。

为了高效，`and` 和 `or` 函数支持任意多参数，一连串的 `AND` 和 `OR` 运算符会转换成其对应的单个函数。

## 判断是否为 NULL

ClickHouse 支持 `IS NULL` 和 `IS NOT NULL`。

### IS NULL

- 对于 `Nullable` 类型的值，`IS NULL` 会返回：
  - 1 值为 `NULL`
  - 0 否则
- 对于其他类型的值，`IS NULL` 总会返回 0

```
:) SELECT x+100 FROM t_null WHERE y IS NULL

SELECT x + 100
FROM t_null
WHEREisNull(y)

└─plus(x, 100)─
    └── 101

1 rows in set. Elapsed: 0.002 sec.
```

### IS NOT NULL

- 对于 `Nullable` 类型的值，`IS NOT NULL` 会返回：
  - 0 值为 `NULL`
  - 1 否则
- 对于其他类型的值，`IS NOT NULL` 总会返回 1

```
:) SELECT * FROM t_null WHERE y IS NOT NULL

SELECT *
FROM t_null
WHERE isNotNull(y)

└─x─y─
    └── 3

1 rows in set. Elapsed: 0.002 sec.
```

## Syntax

There are two types of parsers in the system: the full SQL parser (a recursive descent parser), and the data format parser (a fast stream parser). In all cases except the `INSERT` query, only the full SQL parser is used. The `INSERT` query uses both parsers:

```
INSERT INTO t VALUES (1, 'Hello, world'), (2, 'abc'), (3, 'def')
```

The `INSERT INTO t VALUES` fragment is parsed by the full parser, and the data `(1, 'Hello, world'), (2, 'abc'), (3, 'def')` is parsed by the fast stream parser. You can also turn on the full parser for the data by using the `input_format_values_interpret_expressions` setting. When `input_format_values_interpret_expressions = 1`, ClickHouse first tries to parse values with the fast stream parser. If it fails, ClickHouse tries to use the full parser for the data, treating it like an SQL [expression](#).

Data can have any format. When a query is received, the server calculates no more than `max_query_size` bytes of the request in RAM (by default, 1 MB), and the rest is stream parsed. This means the system doesn't have problems with large `INSERT` queries, like MySQL does.

When using the `Values` format in an `INSERT` query, it may seem that data is parsed the same as expressions in a `SELECT` query, but this is not true. The `Values` format is much more limited.

Next we will cover the full parser. For more information about format parsers, see the [Formats](#) section.

## Spaces

There may be any number of space symbols between syntactical constructions (including the beginning and end of a query). Space symbols include the space, tab, line feed, CR, and form feed.

## Comments

SQL-style and C-style comments are supported. SQL-style comments: from `--` to the end of the line. The space after `--` can be omitted. Comments in C-style: from `/*` to `*/`. These comments can be multiline. Spaces are not required here, either.

## Keywords

Keywords are case-insensitive when they correspond to:

- SQL standard. For example, `SELECT`, `select` and `SeLeCt` are all valid.
- Implementation in some popular DBMS (MySQL or Postgres). For example, `DateTime` is same as `datetime`.

Whether data type name is case-sensitive can be checked in the `system.data_type_families` table.

In contrast to standard SQL all other keywords (including functions names) are case-sensitive.

Keywords are not reserved (they are just parsed as keywords in the corresponding context). If you use [identifiers](#) the same as the keywords, enclose them into quotes. For example, the query `SELECT "FROM" FROM table_name` is valid if the table `table_name` has column with the name `"FROM"`.

## Identifiers

Identifiers are:

- Cluster, database, table, partition and column names.
- Functions.
- Data types.

- [Expression aliases](#).

Identifiers can be quoted or non-quoted. It is recommended to use non-quoted identifiers.

Non-quoted identifiers must match the regex `^[a-zA-Z_][0-9a-zA-Z_]*$` and can not be equal to [keywords](#). Examples: `x`, `_1`, `X_y_Z123_`.

If you want to use identifiers the same as keywords or you want to use other symbols in identifiers, quote it using double quotes or backticks, for example, `"id"`, ``id``.

## Literals

There are: numeric, string, compound and `NULL` literals.

### Numeric

A numeric literal tries to be parsed:

- First as a 64-bit signed number, using the [strtoull](#) function.
- If unsuccessful, as a 64-bit unsigned number, using the [strtoll](#) function.
- If unsuccessful, as a floating-point number using the [strtod](#) function.
- Otherwise, an error is returned.

The corresponding value will have the smallest type that the value fits in. For example, `1` is parsed as `UInt8`, but `256` is parsed as `UInt16`. For more information, see [Data types](#).

Examples: `1`, `18446744073709551615`, `0xDEADBEEF`, `01`, `0.1`, `1e100`, `-1e-100`, `inf`, `nan`.

### String

Only string literals in single quotes are supported. The enclosed characters can be backslash-escaped. The following escape sequences have a corresponding special value: `\b`, `\f`, `\r`, `\n`, `\t`, `\0`, `\a`, `\v`, `\xHH`. In all other cases, escape sequences in the format `\c`, where `c` is any character, are converted to `c`. This means that you can use the sequences `\`` and `\\"`. The value will have the [String](#) type.

The minimum set of characters that you need to escape in string literals: `'` and `\`. Single quote can be escaped with the single quote, literals `'It\'s'` and `'It"s'` are equal.

### Compound

Constructions are supported for arrays: `[1, 2, 3]` and tuples: `(1, 'Hello, world!', 2)`.. Actually, these are not literals, but expressions with the array creation operator and the tuple creation operator, respectively. An array must consist of at least one item, and a tuple must have at least two items. Tuples have a special purpose for use in the `IN` clause of a `SELECT` query. Tuples can be obtained as the result of a query, but they can't be saved to a database (with the exception of [Memory](#) tables).

### NULL

Indicates that the value is missing.

In order to store `NULL` in a table field, it must be of the [Nullable](#) type.

Depending on the data format (input or output), `NULL` may have a different representation. For more information, see the documentation for [data formats](#).

There are many nuances to processing `NULL`. For example, if at least one of the arguments of a comparison operation is `NULL`, the result of this operation will also be `NULL`. The same is true for multiplication, addition, and other operations.

For more information, read the documentation for each operation.

In queries, you can check `NULL` using the **IS NULL** and **IS NOT NULL** operators and the related functions `isNull` and `isNotNull`.

## Functions

Functions are written like an identifier with a list of arguments (possibly empty) in brackets. In contrast to standard SQL, the brackets are required, even for an empty arguments list. Example: `now()`. There are regular and aggregate functions (see the section "Aggregate functions"). Some aggregate functions can contain two lists of arguments in brackets.

Example: `quantile(0.9)(x)`. These aggregate functions are called "parametric" functions, and the arguments in the first list are called "parameters". The syntax of aggregate functions without parameters is the same as for regular functions.

## Operators

Operators are converted to their corresponding functions during query parsing, taking their priority and associativity into account. For example, the expression `1 + 2 * 3 + 4` is transformed to `plus(plus(1, multiply(2, 3)), 4)`.

## Data Types and Database Table Engines

Data types and table engines in the `CREATE` query are written the same way as identifiers or functions. In other words, they may or may not contain an arguments list in brackets. For more information, see the sections "Data types," "Table engines," and "CREATE".

## Expression Aliases

An alias is a user-defined name for an expression in a query.

```
expr AS alias
```

- `AS` — The keyword for defining aliases. You can define the alias for a table name or a column name in a `SELECT` clause without using the `AS` keyword.

For example, `SELECT table_name_alias.column_name FROM table_name table_name_alias`.

In the **CAST** function, the `AS` keyword has another meaning. See the description of the function.

- `expr` — Any expression supported by ClickHouse.

For example, `SELECT column_name * 2 AS double FROM some_table`.

- `alias` — Name for `expr`. Aliases should comply with the **identifiers** syntax.

For example, `SELECT "table t".column_name FROM table_name AS "table t"`.

## Notes on Usage

Aliases are global for a query or subquery and you can define an alias in any part of a query for any expression. For example, `SELECT (1 AS n) + 2, n`.

Aliases are not visible in subqueries and between subqueries. For example, while executing the query `SELECT (SELECT sum(b.a) + num FROM b) - a.a AS num FROM a` ClickHouse generates the exception `Unknown identifier: num`.

If an alias is defined for the result columns in the `SELECT` clause of a subquery, these columns are visible in the outer query. For example, `SELECT n + m FROM (SELECT 1 AS n, 2 AS m)`.

Be careful with aliases that are the same as column or table names. Let's consider the following example:

```
CREATE TABLE t
(
    a Int,
    b Int
)
ENGINE = TinyLog()
```

```
SELECT
    argMax(a, b),
    sum(b) AS b
FROM t
```

```
Received exception from server (version 18.14.17):
Code: 184. DB::Exception: Received from localhost:9000, 127.0.0.1. DB::Exception: Aggregate function sum(b)
is found inside another aggregate function in query.
```

In this example, we declared table `t` with column `b`. Then, when selecting data, we defined the `sum(b)` AS `b` alias. As aliases are global, ClickHouse substituted the literal `b` in the expression `argMax(a, b)` with the expression `sum(b)`. This substitution caused the exception.

## Asterisk

In a `SELECT` query, an asterisk can replace the expression. For more information, see the section "SELECT".

## Expressions

An expression is a function, identifier, literal, application of an operator, expression in brackets, subquery, or asterisk. It can also contain an alias. A list of expressions is one or more expressions separated by commas. Functions and operators, in turn, can have expressions as arguments.

## ClickHouse Guides

Detailed step-by-step instructions that will help you solve various tasks using ClickHouse.

- [Applying a CatBoost Model in ClickHouse](#)

## Applying a Catboost Model in ClickHouse

[CatBoost](#) is a free and open-source gradient boosting library developed at [Yandex](#) for machine learning.

With this instruction, you will learn to apply pre-trained models in ClickHouse by running model inference from SQL.

To apply a CatBoost model in ClickHouse:

1. [Create a Table](#).
2. [Insert the Data to the Table](#).
3. [Integrate CatBoost into ClickHouse](#) (Optional step).
4. [Run the Model Inference from SQL](#).

For more information about training CatBoost models, see [Training and applying models](#).

## Prerequisites

If you don't have the Docker yet, install it.

### Note

Docker is a software platform that allows you to create containers that isolate a CatBoost and ClickHouse installation from the rest of the system.

Before applying a CatBoost model:

1. Pull the Docker image from the registry:

```
$ docker pull yandex/tutorial-catboost-clickhouse
```

This Docker image contains everything you need to run CatBoost and ClickHouse: code, runtime, libraries, environment variables, and configuration files.

2. Make sure the Docker image has been successfully pulled:

```
$ docker image ls
REPOSITORY           TAG      IMAGE ID      CREATED        SIZE
yandex/tutorial-catboost-clickhouse    latest   622e4d17945b  22 hours ago  1.37GB
```

3. Start a Docker container based on this image:

```
$ docker run -it -p 8888:8888 yandex/tutorial-catboost-clickhouse
```

## 1. Create a Table

To create a ClickHouse table for the train sample:

1. Start ClickHouse console client in interactive mode:

```
$ clickhouse client
```

### Note

The ClickHouse server is already running inside the Docker container.

2. Create the table using the command:

```
:) CREATE TABLE amazon_train
(
    date Date MATERIALIZED today(),
    ACTION UInt8,
    RESOURCE UInt32,
    MGR_ID UInt32,
    ROLE_ROLLUP_1 UInt32,
    ROLE_ROLLUP_2 UInt32,
    ROLE_DEPTNAME UInt32,
    ROLE_TITLE UInt32,
    ROLE_FAMILY_DESC UInt32,
    ROLE_FAMILY UInt32,
    ROLE_CODE UInt32
)
ENGINE = MergeTree ORDER BY date
```

3. Exit from ClickHouse console client:

```
:) exit
```

## 2. Insert the Data to the Table

To insert the data:

1. Run the following command:

```
$ clickhouse client --host 127.0.0.1 --query 'INSERT INTO amazon_train FORMAT CSVWithNames' < ~/amazon/train.csv
```

2. Start ClickHouse console client in interactive mode:

```
$ clickhouse client
```

3. Make sure the data has been uploaded:

```
:) SELECT count() FROM amazon_train  
  
SELECT count()  
FROM amazon_train  
  
+-count()-+  
| 65538 |  
+-----+
```

## 3. Integrate CatBoost into ClickHouse



### Note

Optional step. The Docker image contains everything you need to run CatBoost and ClickHouse.

To integrate CatBoost into ClickHouse:

1. Build the evaluation library.

The fastest way to evaluate a CatBoost model is compile `libcatboostmodel.<so|dll|dylib>` library. For more information about how to build the library, see [CatBoost documentation](#).

2. Create a new directory anywhere and with any name, for example, `data` and put the created library in it. The Docker image already contains the library `data/libcatboostmodel.so`.

3. Create a new directory for config model anywhere and with any name, for example, `models`.

4. Create a model configuration file with any name, for example, `models/amazon_model.xml`.

5. Describe the model configuration:

```
<models>  
  <model>  
    <!-- Model type. Now catboost only. -->  
    <type>catboost</type>  
    <!-- Model name. -->  
    <name>amazon</name>  
    <!-- Path to trained model. -->  
    <path>/home/catboost/tutorial/catboost_model.bin</path>  
    <!-- Update interval. -->  
    <lifetime>0</lifetime>  
  </model>  
</models>
```

6. Add the path to CatBoost and the model configuration to the ClickHouse configuration:

```
<!-- File etc/clickhouse-server/config.d/models_config.xml. -->
<catboost_dynamic_library_path>/home/catboost/data/libcatboostmodel.so</catboost_dynamic_library_path>
<models_config>/home/catboost/models/*_model.xml</models_config>
```

## 4. Run the Model Inference from SQL

For test model run the ClickHouse client \$ clickhouse client .

Let's make sure that the model is working:

```
:) SELECT
    modelEvaluate( 'amazon',
        RESOURCE,
        MGR_ID,
        ROLE_ROLLUP_1,
        ROLE_ROLLUP_2,
        ROLE_DEPTNAME,
        ROLE_TITLE,
        ROLE_FAMILY_DESC,
        ROLE_FAMILY,
        ROLE_CODE) > 0 AS prediction,
    ACTION AS target
FROM amazon_train
LIMIT 10
```



### Note

Function `modelEvaluate` returns tuple with per-class raw predictions for multiclass models.

Let's predict probability:

```
:) SELECT
    modelEvaluate( 'amazon',
        RESOURCE,
        MGR_ID,
        ROLE_ROLLUP_1,
        ROLE_ROLLUP_2,
        ROLE_DEPTNAME,
        ROLE_TITLE,
        ROLE_FAMILY_DESC,
        ROLE_FAMILY,
        ROLE_CODE) AS prediction,
    1. / (1 + exp(-prediction)) AS probability,
    ACTION AS target
FROM amazon_train
LIMIT 10
```



### Note

More info about `exp()` function.

Let's calculate LogLoss on the sample:

```

:) SELECT -avg(tg * log(prob) + (1 - tg) * log(1 - prob)) AS logloss
FROM
(
  SELECT
    modelEvaluate('amazon',
      RESOURCE,
      MGR_ID,
      ROLE_ROLLUP_1,
      ROLE_ROLLUP_2,
      ROLE_DEPTNAME,
      ROLE_TITLE,
      ROLE_FAMILY_DESC,
      ROLE_FAMILY,
      ROLE_CODE) AS prediction,
      1. / (1. + exp(-prediction)) AS prob,
      ACTION AS tg
  FROM amazon_train
)

```

### Note

More info about `avg()` and `log()` functions.

## Operations

## Requirements

### CPU

For installation from prebuilt deb packages, use a CPU with x86\_64 architecture and support for SSE 4.2 instructions. To run ClickHouse with processors that do not support SSE 4.2 or have AArch64 or PowerPC64LE architecture, you should build ClickHouse from sources.

ClickHouse implements parallel data processing and uses all the hardware resources available. When choosing a processor, take into account that ClickHouse works more efficiently at configurations with a large number of cores but a lower clock rate than at configurations with fewer cores and a higher clock rate. For example, 16 cores with 2600 MHz is preferable to 8 cores with 3600 MHz.

Use of Turbo Boost and hyper-threading technologies is recommended. It significantly improves performance with a typical load.

### RAM

We recommend to use a minimum of 4GB of RAM in order to perform non-trivial queries. The ClickHouse server can run with a much smaller amount of RAM, but it requires memory for processing queries.

The required volume of RAM depends on:

- The complexity of queries.
- The amount of data that is processed in queries.

To calculate the required volume of RAM, you should estimate the size of temporary data for `GROUP BY`, `DISTINCT`, `JOIN` and other operations you use.

ClickHouse can use external memory for temporary data. See [GROUP BY in External Memory](#) for details.

## Swap File

Disable the swap file for production environments.

## Storage Subsystem

You need to have 2GB of free disk space to install ClickHouse.

The volume of storage required for your data should be calculated separately. Assessment should include:

- Estimation of the data volume.

You can take a sample of the data and get the average size of a row from it. Then multiply the value by the number of rows you plan to store.

- The data compression coefficient.

To estimate the data compression coefficient, load a sample of your data into ClickHouse and compare the actual size of the data with the size of the table stored. For example, clickstream data is usually compressed by 6-10 times.

To calculate the final volume of data to be stored, apply the compression coefficient to the estimated data volume. If you plan to store data in several replicas, then multiply the estimated volume by the number of replicas.

## Network

If possible, use networks of 10G or higher class.

The network bandwidth is critical for processing distributed queries with a large amount of intermediate data. In addition, network speed affects replication processes.

## Software

ClickHouse is developed for the Linux family of operating systems. The recommended Linux distribution is Ubuntu. The `tzdata` package should be installed in the system.

ClickHouse can also work in other operating system families. See details in the [Getting started](#) section of the documentation.

## 监控

可以监控到：

- 硬件资源的利用率。
- ClickHouse 服务的指标。

## 硬件资源利用率

ClickHouse 本身不会去监控硬件资源的状态。

强烈推荐监控以下监控项：

- 处理器上的负载和温度。

可以使用 `dmesg`, `turbostat` 或者其他工具。

- 磁盘存储，RAM和网络的使用率。

## ClickHouse 服务的指标。

ClickHouse服务本身具有用于自我状态监视指标。

要跟踪服务器事件，请观察服务器日志。请参阅配置文件的[logger] (server\_settings/settings.md#server\_settings-logger) 部分。

ClickHouse 收集的指标项：

- 服务用于计算的资源占用的各种指标。
- 关于查询处理的常见统计信息。

可以在 `system.metrics` , `system.events` 以及`system.asynchronous_metrics` 等系统表查看所有的指标项。

可以配置ClickHouse 往 Graphite 导入指标。参考 [Graphite section](#) 配置文件。在配置指标导出之前，需要参考[Graphite官方教程](#)搭建服务。

此外，您可以通过HTTP API 监视服务器可用性。将HTTP GET请求发送到 `/ping`。如果服务器可用，它将以 `200 OK` 响应。

要监视服务器集群的配置中，应设置`max_replica_delay_for_distributed_queries`参数并使用HTTP资源 `/replicas_status`。如果副本可用，并且不延迟在其他副本之后，则对 `/replicas_status` 的请求将返回 `200 OK`。如果副本滞后，请求将返回 `503 HTTP_SERVICE_UNAVAILABLE`，包括有关待办事项大小的信息。

## Troubleshooting

- [Installation](#)
- [Connecting to the server](#)
- [Query processing](#)
- [Efficiency of query processing](#)

### Installation

#### You Cannot Get Deb Packages from ClickHouse Repository With apt-get

- Check firewall settings.
- If you cannot access the repository for any reason, download packages as described in the [Getting started](#) article and install them manually using the `sudo dpkg -i <packages>` command. You will also need the `tzdata` package.

### Connecting to the Server

Possible issues:

- The server is not running.
- Unexpected or wrong configuration parameters.

#### Server Is Not Running

Check if server is running

Command:

```
$ sudo service clickhouse-server status
```

If the server is not running, start it with the command:

```
$ sudo service clickhouse-server start
```

## Check logs

The main log of `clickhouse-server` is in `/var/log/clickhouse-server/clickhouse-server.log` by default.

If the server started successfully, you should see the strings:

- <Information> Application: starting up. — Server started.
- <Information> Application: Ready for connections. — Server is running and ready for connections.

If `clickhouse-server start` failed with a configuration error, you should see the `<Error>` string with an error description. For example:

```
2019.01.11 15:23:25.549505 [ 45 ] {} <Error> ExternalDictionaries: Failed reloading 'event2id' external dictionary: Poco::Exception. Code: 1000, e.code() = 111, e.displayText() = Connection refused, e.what() = Connection refused
```

If you don't see an error at the end of the file, look through the entire file starting from the string:

```
<Information> Application: starting up.
```

If you try to start a second instance of `clickhouse-server` on the server, you see the following log:

```
2019.01.11 15:25:11.151730 [ 1 ] {} <Information> : Starting ClickHouse 19.1.0 with revision 54413
2019.01.11 15:25:11.154578 [ 1 ] {} <Information> Application: starting up
2019.01.11 15:25:11.156361 [ 1 ] {} <Information> StatusFile: Status file ./status already exists - unclean restart. Contents:
PID: 8510
Started at: 2019-01-11 15:24:23
Revision: 54413

2019.01.11 15:25:11.156673 [ 1 ] {} <Error> Application: DB::Exception: Cannot lock file ./status. Another server instance in same directory is already running.
2019.01.11 15:25:11.156682 [ 1 ] {} <Information> Application: shutting down
2019.01.11 15:25:11.156686 [ 1 ] {} <Debug> Application: Uninitializing subsystem: Logging Subsystem
2019.01.11 15:25:11.156716 [ 2 ] {} <Information> BaseDaemon: Stop SignalListener thread
```

## See system.d logs

If you don't find any useful information in `clickhouse-server` logs or there aren't any logs, you can view `system.d` logs using the command:

```
$ sudo journalctl -u clickhouse-server
```

## Start `clickhouse-server` in interactive mode

```
$ sudo -u clickhouse /usr/bin/clickhouse-server --config-file /etc/clickhouse-server/config.xml
```

This command starts the server as an interactive app with standard parameters of the autostart script. In this mode `clickhouse-server` prints all the event messages in the console.

## Configuration Parameters

Check:

- Docker settings.

If you run ClickHouse in Docker in an IPv6 network, make sure that `network=host` is set.

- Endpoint settings.

Check `listen_host` and `tcp_port` settings.

ClickHouse server accepts localhost connections only by default.

- HTTP protocol settings.

Check protocol settings for the HTTP API.

- Secure connection settings.

Check:

- The `tcp_port_secure` setting.
- Settings for [SSL certificates](#).

Use proper parameters while connecting. For example, use the `port_secure` parameter with `clickhouse_client`.

- User settings.

You might be using the wrong user name or password.

## Query Processing

If ClickHouse is not able to process the query, it sends an error description to the client. In the `clickhouse-client` you get a description of the error in the console. If you are using the HTTP interface, ClickHouse sends the error description in the response body. For example:

```
$ curl 'http://localhost:8123/' --data-binary "SELECT a"
Code: 47, e.displayText() = DB::Exception: Unknown identifier: a. Note that there are no tables (FROM clause) in your query, context: required_names: 'a' source_tables: table_aliases: private_aliases: column_aliases: public_columns: 'a' masked_columns: array_join_columns: source_columns: , e.what() = DB::Exception
```

If you start `clickhouse-client` with the `stack-trace` parameter, ClickHouse returns the server stack trace with the description of an error.

You might see a message about a broken connection. In this case, you can repeat the query. If the connection breaks every time you perform the query, check the server logs for errors.

## Efficiency of Query Processing

If you see that ClickHouse is working too slowly, you need to profile the load on the server resources and network for your queries.

You can use the `clickhouse-benchmark` utility to profile queries. It shows the number of queries processed per second, the number of rows processed per second, and percentiles of query processing times.

## Usage Recommendations

### CPU

The SSE 4.2 instruction set must be supported. Modern processors (since 2008) support it.

When choosing a processor, prefer a large number of cores and slightly slower clock rate over fewer cores and a higher clock rate. For example, 16 cores with 2600 MHz is better than 8 cores with 3600 MHz.

## Hyper-threading

Don't disable hyper-threading. It helps for some queries, but not for others.

## Turbo Boost

Turbo Boost is highly recommended. It significantly improves performance with a typical load. You can use `turbostat` to view the CPU's actual clock rate under a load.

## CPU Scaling Governor

Always use the `performance` scaling governor. The `on-demand` scaling governor works much worse with constantly high demand.

```
echo 'performance' | sudo tee /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor
```

## CPU Limitations

Processors can overheat. Use `dmesg` to see if the CPU's clock rate was limited due to overheating. The restriction can also be set externally at the datacenter level. You can use `turbostat` to monitor it under a load.

## RAM

For small amounts of data (up to  $\sim$ 200 GB compressed), it is best to use as much memory as the volume of data. For large amounts of data and when processing interactive (online) queries, you should use a reasonable amount of RAM (128 GB or more) so the hot data subset will fit in the cache of pages. Even for data volumes of  $\sim$ 50 TB per server, using 128 GB of RAM significantly improves query performance compared to 64 GB.

## Swap File

Always disable the swap file. The only reason for not doing this is if you are using ClickHouse on your personal laptop.

## Huge Pages

Always disable transparent huge pages. It interferes with memory allocators, which leads to significant performance degradation.

```
echo 'never' | sudo tee /sys/kernel/mm/transparent_hugepage/enabled
```

Use `perf top` to watch the time spent in the kernel for memory management. Permanent huge pages also do not need to be allocated.

## Storage Subsystem

If your budget allows you to use SSD, use SSD. If not, use HDD. SATA HDDs 7200 RPM will do.

Give preference to a lot of servers with local hard drives over a smaller number of servers with attached disk shelves. But for storing archives with rare queries, shelves will work.

## RAID

When using HDD, you can combine their RAID-10, RAID-5, RAID-6 or RAID-50. For Linux, software RAID is better (with

`mdadm` ). We don't recommend using LVM. When creating RAID-10, select the `far` layout. If your budget allows, choose RAID-10.

If you have more than 4 disks, use RAID-6 (preferred) or RAID-50, instead of RAID-5. When using RAID-5, RAID-6 or RAID-50, always increase `stripe_cache_size`, since the default value is usually not the best choice.

```
echo 4096 | sudo tee /sys/block/md2/md/stripe_cache_size
```

Calculate the exact number from the number of devices and the block size, using the formula:  
$$2 * \text{num\_devices} * \text{chunk\_size\_in\_bytes} / 4096$$
.

A block size of 1025 KB is sufficient for all RAID configurations. Never set the block size too small or too large.

You can use RAID-0 on SSD. Regardless of RAID use, always use replication for data security.

Enable NCQ with a long queue. For HDD, choose the CFQ scheduler, and for SSD, choose noop. Don't reduce the 'readahead' setting. For HDD, enable the write cache.

## File System

Ext4 is the most reliable option. Set the mount options `noatime, nobarrier` . XFS is also suitable, but it hasn't been as thoroughly tested with ClickHouse. Most other file systems should also work fine. File systems with delayed allocation work better.

## Linux Kernel

Don't use an outdated Linux kernel.

## Network

If you are using IPv6, increase the size of the route cache. The Linux kernel prior to 3.2 had a multitude of problems with IPv6 implementation.

Use at least a 10 GB network, if possible. 1 Gb will also work, but it will be much worse for patching replicas with tens of terabytes of data, or for processing distributed queries with a large amount of intermediate data.

## ZooKeeper

You are probably already using ZooKeeper for other purposes. You can use the same installation of ZooKeeper, if it isn't already overloaded.

It's best to use a fresh version of ZooKeeper – 3.4.9 or later. The version in stable Linux distributions may be outdated.

You should never use manually written scripts to transfer data between different ZooKeeper clusters, because the result will be incorrect for sequential nodes. Never use the "zkcopy" utility for the same reason:  
<https://github.com/ksprojects/zkcopy/issues/15>

If you want to divide an existing ZooKeeper cluster into two, the correct way is to increase the number of its replicas and then reconfigure it as two independent clusters.

Do not run ZooKeeper on the same servers as ClickHouse. Because ZooKeeper is very sensitive for latency and ClickHouse may utilize all available system resources.

With the default settings, ZooKeeper is a time bomb:

The ZooKeeper server won't delete files from old snapshots and logs when using the default configuration (see

autopurge), and this is the responsibility of the operator.

This bomb must be defused.

The ZooKeeper (3.5.1) configuration below is used in the Yandex.Metrica production environment as of May 20, 2017:

zoo.cfg:

```
## http://hadoop.apache.org/zookeeper/docs/current/zookeeperAdmin.html

## The number of milliseconds of each tick
tickTime=2000
## The number of ticks that the initial
## synchronization phase can take
initLimit=30000
## The number of ticks that can pass between
## sending a request and getting an acknowledgement
syncLimit=10

maxClientCnxns=2000

maxSessionTimeout=60000000
## the directory where the snapshot is stored.
dataDir=/opt/zookeeper/{{ cluster['name'] }}/data
## Place the dataLogDir to a separate physical disc for better performance
dataLogDir=/opt/zookeeper/{{ cluster['name'] }}/logs

autpurge.snapRetainCount=10
autpurge.purgeInterval=1

## To avoid seeks ZooKeeper allocates space in the transaction log file in
## blocks of preAllocSize kilobytes. The default block size is 64M. One reason
## for changing the size of the blocks is to reduce the block size if snapshots
## are taken more often. (Also, see snapCount).
preAllocSize=131072

## Clients can submit requests faster than ZooKeeper can process them,
## especially if there are a lot of clients. To prevent ZooKeeper from running
## out of memory due to queued requests, ZooKeeper will throttle clients so that
## there is no more than globalOutstandingLimit outstanding requests in the
## system. The default limit is 1,000. ZooKeeper logs transactions to a
## transaction log. After snapCount transactions are written to a log file a
## snapshot is started and a new transaction log file is started. The default
## snapCount is 10,000.
snapCount=3000000

## If this option is defined, requests will be logged to a trace file named
## traceFile.year.month.day.
##traceFile=

## Leader accepts client connections. Default value is "yes". The leader machine
## coordinates updates. For higher update throughput at the slight expense of
## read throughput the leader can be configured to not accept clients and focus
## on coordination.
leaderServes=yes

standaloneEnabled=false
dynamicConfigFile=/etc/zookeeper-{{ cluster['name'] }}/conf/zoo.cfg.dynamic
```

Java version:

```
Java(TM) SE Runtime Environment (build 1.8.0_25-b17)
Java HotSpot(TM) 64-Bit Server VM (build 25.25-b02, mixed mode)
```

JVM parameters:

```

NAME=zookeeper-{{ cluster['name'] }}
ZOOCFGDIR=/etc/$NAME/conf

## TODO this is really ugly
## How to find out, which jars are needed?
## seems, that log4j requires the log4j.properties file to be in the classpath
CLASSPATH="$ZOOCFGDIR:/usr/build/classes:/usr/build/lib/*.jar:/usr/share/zookeeper/zookeeper-3.5.1-
metrika.jar:/usr/share/zookeeper/slf4j-log4j12-1.7.5.jar:/usr/share/zookeeper/slf4j-api-
1.7.5.jar:/usr/share/zookeeper/servlet-api-2.5-20081211.jar:/usr/share/zookeeper/netty-
3.7.0.Final.jar:/usr/share/zookeeper/log4j-1.2.16.jar:/usr/share/zookeeper/jline-
2.11.jar:/usr/share/zookeeper/jetty-util-6.1.26.jar:/usr/share/zookeeper/jetty-
6.1.26.jar:/usr/share/zookeeper/javacc.jar:/usr/share/zookeeper/jackson-mapper-asl-
1.9.11.jar:/usr/share/zookeeper/jackson-core-asl-1.9.11.jar:/usr/share/zookeeper/commons-cli-
1.2.jar:/usr/src/java/lib/*.jar:/usr/etc/zookeeper"

ZOOCFG="$ZOOCFGDIR/zoo.cfg"
ZOO_LOG_DIR=/var/log/$NAME
USER=zookeeper
GROUP=zookeeper
PIDDIR=/var/run/$NAME
PIDFILE=$PIDDIR/$NAME.pid
SCRIPTNAME=/etc/init.d/$NAME
JAVA=/usr/bin/java
ZOMAIN="org.apache.zookeeper.server.quorum.QuorumPeerMain"
ZOO_LOG4J_PROP="INFO,ROLLINGFILE"
JMXLOCALONLY=false
JAVA_OPTS="-Xms{{ cluster.get('xms','128M') }} \
-Xmx{{ cluster.get('xmx','1G') }} \
-Xloggc:/var/log/$NAME/zookeeper-gc.log \
-XX:+UseGCLogFileRotation \
-XX:NumberOfGCLogFiles=16 \
-XX:GCLogFileSize=16M \
-verbose:gc \
-XX:+PrintGCTimeStamps \
-XX:+PrintGCDateStamps \
-XX:+PrintGCDetails \
-XX:+PrintTenuringDistribution \
-XX:+PrintGCApplicationStoppedTime \
-XX:+PrintGCApplicationConcurrentTime \
-XX:+PrintSafepointStatistics \
-XX:+UseParNewGC \
-XX:+UseConcMarkSweepGC \
-XX:+CMSParallelRemarkEnabled"

```

Salt init:

```

description "zookeeper-{{ cluster['name'] }} centralized coordination service"

start on runlevel [2345]
stop on runlevel [!2345]

respawn

limit nofile 8192 8192

pre-start script
  [ -r "/etc/zookeeper-{{ cluster['name'] }}/conf/environment" ] || exit 0
  . /etc/zookeeper-{{ cluster['name'] }}/conf/environment
  [ -d $ZOO_LOG_DIR ] || mkdir -p $ZOO_LOG_DIR
  chown $USER:$GROUP $ZOO_LOG_DIR
end script

script
  . /etc/zookeeper-{{ cluster['name'] }}/conf/environment
  [ -r /etc/default/zookeeper ] && . /etc/default/zookeeper
  if [ -z "$JMXDISABLE" ]; then
    JAVA_OPTS="$JAVA_OPTS -Dcom.sun.management.jmxremote -
Dcom.sun.management.jmxremote.local.only=$JMXLOCALONLY"
  fi
  exec start-stop-daemon --start -c $USER --exec $JAVA --name zookeeper-{{ cluster['name'] }} \
  -- -cp $CLASSPATH $JAVA_OPTS -Dzookeeper.log.dir=${ZOO_LOG_DIR} \
  -Dzookeeper.root.logger=${ZOO_LOG4J_PROP} $ZOOMAIN $ZOOCFG
end script

```

## ClickHouse Update

If ClickHouse was installed from deb packages, execute the following commands on the server:

```

$ sudo apt-get update
$ sudo apt-get install clickhouse-client clickhouse-server
$ sudo service clickhouse-server restart

```

If you installed ClickHouse using something other than the recommended deb packages, use the appropriate update method.

ClickHouse does not support a distributed update. The operation should be performed consecutively on each separate server. Do not update all the servers on a cluster simultaneously, or the cluster will be unavailable for some time.

## Access Rights

Users and access rights are set up in the user config. This is usually `users.xml`.

Users are recorded in the `users` section. Here is a fragment of the `users.xml` file:

```

<!-- Users and ACL. -->
<users>
    <!-- If the user name is not specified, the 'default' user is used. -->
    <default>
        <!-- Password could be specified in plaintext or in SHA256 (in hex format).

            If you want to specify password in plaintext (not recommended), place it in 'password' element.
            Example: <password>qwerty</password>.
            Password could be empty.

            If you want to specify SHA256, place it in 'password_sha256_hex' element.
            Example:
<password_sha256_hex>65e84be33532fb784c48129675f9eff3a682b27168c0ea744b2cf58ee02337c5</password_sha256_hex>

            How to generate decent password:
            Execute: PASSWORD=$(base64 < /dev/urandom | head -c8); echo "$PASSWORD"; echo -n "$PASSWORD" | sha256sum | tr -d '-'
            In first line will be password and in second - corresponding SHA256.
        -->
        <password></password>

        <!-- A list of networks that access is allowed from.
            Each list item has one of the following forms:
            <ip> The IP address or subnet mask. For example: 198.51.100.0/24 or 2001:DB8::/32.
            <host> Host name. For example: example01. A DNS query is made for verification, and all addresses obtained are compared with the address of the customer.
            <host-regexp> Regular expression for host names. For example, ^example\d\d-\d\d-\d\.\yandex\.ru$.
            To check it, a DNS PTR request is made for the client's address and a regular expression is applied to the result.
            Then another DNS query is made for the result of the PTR query, and all received address are compared to the client address.
            We strongly recommend that the regex ends with \.yandex\.ru$.

            If you are installing ClickHouse yourself, specify here:
            <networks>
                <ip>::/0</ip>
            </networks>
        -->
        <networks incl="networks" />

        <!-- Settings profile for the user. -->
        <profile>default</profile>

        <!-- Quota for the user. -->
        <quota>default</quota>
    </default>

    <!-- For requests from the Yandex.Metrica user interface via the API for data on specific counters. -->
    <web>
        <password></password>
        <networks incl="networks" />
        <profile>web</profile>
        <quota>default</quota>
        <allow_databases>
            <database>test</database>
        </allow_databases>
    </web>

```

You can see a declaration from two users: default and web . We added the web user separately.

The default user is chosen in cases when the username is not passed. The default user is also used for distributed query processing, if the configuration of the server or cluster doesn't specify the user and password (see the section on the [Distributed engine](#)).

The user that is used for exchanging information between servers combined in a cluster must not have substantial restrictions or quotas – otherwise, distributed queries will fail.

The password is specified in clear text (not recommended) or in SHA-256. The hash isn't salted. In this regard, you should

not consider these passwords as providing security against potential malicious attacks. Rather, they are necessary for protection from employees.

A list of networks is specified that access is allowed from. In this example, the list of networks for both users is loaded from a separate file (`/etc/metrika.xml`) containing the `networks` substitution. Here is a fragment of it:

```
<yandex>
  ...
  <networks>
    <ip>::/64</ip>
    <ip>203.0.113.0/24</ip>
    <ip>2001:DB8::/32</ip>
  ...
</networks>
</yandex>
```

You could define this list of networks directly in `users.xml`, or in a file in the `users.d` directory (for more information, see the section "[Configuration files](#)").

The config includes comments explaining how to open access from everywhere.

For use in production, only specify `ip` elements (IP addresses and their masks), since using `host` and `host_regex` might cause extra latency.

Next the user settings profile is specified (see the section "[Settings profiles](#)"). You can specify the default profile, `default`. The profile can have any name. You can specify the same profile for different users. The most important thing you can write in the settings profile is `readonly=1`, which ensures read-only access. Then specify the quota to be used (see the section "[Quotas](#)"). You can specify the default quota: `default`. It is set in the config by default to only count resource usage, without restricting it. The quota can have any name. You can specify the same quota for different users – in this case, resource usage is calculated for each user individually.

In the optional `<allow_databases>` section, you can also specify a list of databases that the user can access. By default, all databases are available to the user. You can specify the `default` database. In this case, the user will receive access to the database by default.

Access to the `system` database is always allowed (since this database is used for processing queries).

The user can get a list of all databases and tables in them by using `SHOW` queries or system tables, even if access to individual databases isn't allowed.

Database access is not related to the `readonly` setting. You can't grant full access to one database and `readonly` access to another one.

## Data Backup

While `replication` provides protection from hardware failures, it does not protect against human errors: accidental deletion of data, deletion of the wrong table or a table on the wrong cluster, and software bugs that result in incorrect data processing or data corruption. In many cases mistakes like these will affect all replicas. ClickHouse has built-in safeguards to prevent some types of mistakes — for example, by default `you can't just drop tables with a MergeTree-like engine containing more than 50 Gb of data`. However, these safeguards don't cover all possible cases and can be circumvented.

In order to effectively mitigate possible human errors, you should carefully prepare a strategy for backing up and restoring your data in advance.

Each company has different resources available and business requirements, so there's no universal solution for ClickHouse backups and restores that will fit every situation. What works for one gigabyte of data likely won't work for tens

of petabytes. There are a variety of possible approaches with their own pros and cons, which will be discussed below. It is a good idea to use several approaches instead of just one in order to compensate for their various shortcomings.

### Note

Keep in mind that if you backed something up and never tried to restore it, chances are that restore will not work properly when you actually need it (or at least it will take longer than business can tolerate). So whatever backup approach you choose, make sure to automate the restore process as well, and practice it on a spare ClickHouse cluster regularly.

## Duplicating Source Data Somewhere Else

Often data that is ingested into ClickHouse is delivered through some sort of persistent queue, such as [Apache Kafka](#). In this case it is possible to configure an additional set of subscribers that will read the same data stream while it is being written to ClickHouse and store it in cold storage somewhere. Most companies already have some default recommended cold storage, which could be an object store or a distributed filesystem like [HDFS](#).

## Filesystem Snapshots

Some local filesystems provide snapshot functionality (for example, [ZFS](#)), but they might not be the best choice for serving live queries. A possible solution is to create additional replicas with this kind of filesystem and exclude them from the [Distributed](#) tables that are used for `SELECT` queries. Snapshots on such replicas will be out of reach of any queries that modify data. As a bonus, these replicas might have special hardware configurations with more disks attached per server, which would be cost-effective.

## clickhouse-copier

[clickhouse-copier](#) is a versatile tool that was initially created to re-shard petabyte-sized tables. It can also be used for backup and restore purposes because it reliably copies data between ClickHouse tables and clusters.

For smaller volumes of data, a simple `INSERT INTO ... SELECT ...` to remote tables might work as well.

## Manipulations with Parts

ClickHouse allows using the `ALTER TABLE ... FREEZE PARTITION ...` query to create a local copy of table partitions. This is implemented using hardlinks to the `/var/lib/clickhouse/shadow/` folder, so it usually does not consume extra disk space for old data. The created copies of files are not handled by ClickHouse server, so you can just leave them there: you will have a simple backup that doesn't require any additional external system, but it will still be prone to hardware issues. For this reason, it's better to remotely copy them to another location and then remove the local copies. Distributed filesystems and object stores are still a good options for this, but normal attached file servers with a large enough capacity might work as well (in this case the transfer will occur via the network filesystem or maybe [rsync](#)).

For more information about queries related to partition manipulations, see the [ALTER documentation](#).

A third-party tool is available to automate this approach: [clickhouse-backup](#).

## Configuration Files

The main server config file is `config.xml`. It resides in the `/etc/clickhouse-server/` directory.

Individual settings can be overridden in the `*.xml` and `*.conf` files in the `conf.d` and `config.d` directories next to the config file.

The `replace` or `remove` attributes can be specified for the elements of these config files.

If neither is specified, it combines the contents of elements recursively, replacing values of duplicate children.

If `replace` is specified, it replaces the entire element with the specified one.

If `remove` is specified, it deletes the element.

The config can also define "substitutions". If an element has the `incl` attribute, the corresponding substitution from the file will be used as the value. By default, the path to the file with substitutions is `/etc/metrika.xml`. This can be changed in the `include_from` element in the server config. The substitution values are specified in `/yandex/substitution_name` elements in this file. If a substitution specified in `incl` does not exist, it is recorded in the log. To prevent ClickHouse from logging missing substitutions, specify the `optional="true"` attribute (for example, settings for `macros server_settings/settings.md`).

Substitutions can also be performed from ZooKeeper. To do this, specify the attribute `from_zk = "/path/to/node"`. The element value is replaced with the contents of the node at `/path/to/node` in ZooKeeper. You can also put an entire XML subtree on the ZooKeeper node and it will be fully inserted into the source element.

The `config.xml` file can specify a separate config with user settings, profiles, and quotas. The relative path to this config is set in the 'users\_config' element. By default, it is `users.xml`. If `users_config` is omitted, the user settings, profiles, and quotas are specified directly in `config.xml`.

In addition, `users_config` may have overrides in files from the `users_config.d` directory (for example, `users.d`) and substitutions. For example, you can have separate config file for each user like this:

```
$ cat /etc/clickhouse-server/users.d/alice.xml
<yandex>
  <users>
    <alice>
      <profile>analytics</profile>
      <networks>
        <ip>::/0</ip>
      </networks>
      <password_sha256_hex>...</password_sha256_hex>
      <quota>analytics</quota>
    </alice>
  </users>
</yandex>
```

For each config file, the server also generates `file-preprocessed.xml` files when starting. These files contain all the completed substitutions and overrides, and they are intended for informational use. If ZooKeeper substitutions were used in the config files but ZooKeeper is not available on the server start, the server loads the configuration from the preprocessed file.

The server tracks changes in config files, as well as files and ZooKeeper nodes that were used when performing substitutions and overrides, and reloads the settings for users and clusters on the fly. This means that you can modify the cluster, users, and their settings without restarting the server.

## Quotas

Quotas allow you to limit resource usage over a period of time, or simply track the use of resources. Quotas are set up in the user config. This is usually '`users.xml`'.

The system also has a feature for limiting the complexity of a single query. See the section "Restrictions on query complexity").

In contrast to query complexity restrictions, quotas:

- Place restrictions on a set of queries that can be run over a period of time, instead of limiting a single query.
- Account for resources spent on all remote servers for distributed query processing.

Let's look at the section of the 'users.xml' file that defines quotas.

```
<!-- Quotas -->
<quotas>
  <!-- Quota name. -->
  <default>
    <!-- Restrictions for a time period. You can set many intervals with different restrictions. -->
    <interval>
      <!-- Length of the interval. -->
      <duration>3600</duration>

      <!-- Unlimited. Just collect data for the specified time interval. -->
      <queries>0</queries>
      <errors>0</errors>
      <result_rows>0</result_rows>
      <read_rows>0</read_rows>
      <execution_time>0</execution_time>
    </interval>
  </default>
```

By default, the quota just tracks resource consumption for each hour, without limiting usage. The resource consumption calculated for each interval is output to the server log after each request.

```
<statbox>
  <!-- Restrictions for a time period. You can set many intervals with different restrictions. -->
  <interval>
    <!-- Length of the interval. -->
    <duration>3600</duration>

    <queries>1000</queries>
    <errors>100</errors>
    <result_rows>1000000000</result_rows>
    <read_rows>100000000000</read_rows>
    <execution_time>900</execution_time>
  </interval>

  <interval>
    <duration>86400</duration>

    <queries>10000</queries>
    <errors>1000</errors>
    <result_rows>50000000000</result_rows>
    <read_rows>500000000000</read_rows>
    <execution_time>7200</execution_time>
  </interval>
</statbox>
```

For the 'statbox' quota, restrictions are set for every hour and for every 24 hours (86,400 seconds). The time interval is counted starting from an implementation-defined fixed moment in time. In other words, the 24-hour interval doesn't necessarily begin at midnight.

When the interval ends, all collected values are cleared. For the next hour, the quota calculation starts over.

Here are the amounts that can be restricted:

queries – The total number of requests.

errors – The number of queries that threw an exception.

result\_rows – The total number of rows given as the result.

read\_rows – The total number of source rows read from tables for running the query, on all remote servers.

execution\_time – The total query execution time, in seconds (wall time).

If the limit is exceeded for at least one time interval, an exception is thrown with a text about which restriction was

exceeded, for which interval, and when the new interval begins (when queries can be sent again).

Quotas can use the "quota key" feature in order to report on resources for multiple keys independently. Here is an example of this:

```
<!-- For the global reports designer. -->
<web_global>
    <!-- keyed - The quota_key "key" is passed in the query parameter,
        and the quota is tracked separately for each key value.
        For example, you can pass a Yandex.Metrica username as the key,
        so the quota will be counted separately for each username.
        Using keys makes sense only if quota_key is transmitted by the program, not by a user.

        You can also write <keyed_by_ip /> so the IP address is used as the quota key.
        (But keep in mind that users can change the IPv6 address fairly easily.)
    -->
    <keyed />
```

The quota is assigned to users in the 'users' section of the config. See the section "Access rights".

For distributed query processing, the accumulated amounts are stored on the requestor server. So if the user goes to another server, the quota there will "start over".

When the server is restarted, quotas are reset.

## System tables

System tables are used for implementing part of the system's functionality, and for providing access to information about how the system is working. You can't delete a system table (but you can perform DETACH). System tables don't have files with data on the disk or files with metadata. The server creates all the system tables when it starts. System tables are read-only. They are located in the 'system' database.

### system.asynchronous\_metrics

Contains metrics that are calculated periodically in the background. For example, the amount of RAM in use.

Columns:

- metric ([String](#)) — Metric name.
- value ([Float64](#)) — Metric value.

Example

```
SELECT * FROM system.asynchronous_metrics LIMIT 10
```

metric	value
jemalloc.background_thread.run_interval	0
jemalloc.background_thread.num_runs	0
jemalloc.background_thread.num_threads	0
jemalloc.retained	422551552
jemalloc.mapped	1682989056
jemalloc.resident	1656446976
jemalloc.metadata_thp	0
jemalloc.metadata	10226856
UncompressedCacheCells	0
MarkCacheFiles	0

See Also

- [Monitoring](#) — Base concepts of ClickHouse monitoring.
- [system.metrics](#) — Contains instantly calculated metrics.
- [system.events](#) — Contains a number of events that have occurred.
- [system.metric\\_log](#) — Contains a history of metrics values from tables `system.metrics` и `system.events`.

## system.clusters

Contains information about clusters available in the config file and the servers in them.

Columns:

- `cluster` (String) — The cluster name.
- `shard_num` (UInt32) — The shard number in the cluster, starting from 1.
- `shard_weight` (UInt32) — The relative weight of the shard when writing data.
- `replica_num` (UInt32) — The replica number in the shard, starting from 1.
- `host_name` (String) — The host name, as specified in the config.
- `host_address` (String) — The host IP address obtained from DNS.
- `port` (UInt16) — The port to use for connecting to the server.
- `user` (String) — The name of the user for connecting to the server.
- `errors_count` (UInt32) - number of times this host failed to reach replica.
- `estimated_recovery_time` (UInt32) - seconds left until replica error count is zeroed and it is considered to be back to normal.

Please note that `errors_count` is updated once per query to the cluster, but `estimated_recovery_time` is recalculated on-demand. So there could be a case of non-zero `errors_count` and zero `estimated_recovery_time`, that next query will zero `errors_count` and try to use replica as if it has no errors.

See also

- [Table engine Distributed](#)
- [distributed\\_replica\\_error\\_cap setting](#)
- [distributed\\_replica\\_error\\_half\\_life setting](#)

## system.columns

Contains information about columns in all the tables.

You can use this table to get information similar to the [DESCRIBE TABLE](#) query, but for multiple tables at once.

The `system.columns` table contains the following columns (the column type is shown in brackets):

- `database` (String) — Database name.
- `table` (String) — Table name.
- `name` (String) — Column name.
- `type` (String) — Column type.
- `default_kind` (String) — Expression type (DEFAULT , MATERIALIZED , ALIAS ) for the default value, or an empty string if it is not defined.
- `default_expression` (String) — Expression for the default value, or an empty string if it is not defined.

- `data_compressed_bytes` (UInt64) — The size of compressed data, in bytes.
- `data_uncompressed_bytes` (UInt64) — The size of decompressed data, in bytes.
- `marks_bytes` (UInt64) — The size of marks, in bytes.
- `comment` (String) — Comment on the column, or an empty string if it is not defined.
- `is_in_partition_key` (UInt8) — Flag that indicates whether the column is in the partition expression.
- `is_in_sorting_key` (UInt8) — Flag that indicates whether the column is in the sorting key expression.
- `is_in_primary_key` (UInt8) — Flag that indicates whether the column is in the primary key expression.
- `is_in_sampling_key` (UInt8) — Flag that indicates whether the column is in the sampling key expression.

## system.contributors

Contains information about contributors. All contributors in random order. The order is random at query execution time.

Columns:

- `name` (String) — Contributor (author) name from git log.

Example

```
SELECT * FROM system.contributors LIMIT 10
```

name
Olga Khvostikova
Max Petrov
LiuYangkuan
svladykin
zamulla
Šimon Podlipský
BayoNet
Ilya Khomutov
Amy Krishnevsky
Loud_Scream

To find out yourself in the table, use a query:

```
SELECT * FROM system.contributors WHERE name='Olga Khvostikova'
```

name
Olga Khvostikova

## system.databases

This table contains a single String column called 'name' – the name of a database. Each database that the server knows about has a corresponding entry in the table. This system table is used for implementing the `SHOW DATABASES` query.

## system.detached\_parts

Contains information about detached parts of **MergeTree** tables. The `reason` column specifies why the part was detached. For user-detached parts, the reason is empty. Such parts can be attached with **ALTER TABLE ATTACH PARTITION|PART** command. For the description of other columns, see [system.parts](#). If part name is invalid, values of some columns may be `NULL`. Such parts can be deleted with **ALTER TABLE DROP DETACHED PART**.

## system.dictionaries

Contains information about external dictionaries.

Columns:

- `name` (`String`) — Dictionary name.
- `type` (`String`) — Dictionary type: Flat, Hashed, Cache.
- `origin` (`String`) — Path to the configuration file that describes the dictionary.
- `attribute.names` (`Array(String)`) — Array of attribute names provided by the dictionary.
- `attribute.types` (`Array(String)`) — Corresponding array of attribute types that are provided by the dictionary.
- `has_hierarchy` (`UInt8`) — Whether the dictionary is hierarchical.
- `bytes_allocated` (`UInt64`) — The amount of RAM the dictionary uses.
- `hit_rate` (`Float64`) — For cache dictionaries, the percentage of uses for which the value was in the cache.
- `element_count` (`UInt64`) — The number of items stored in the dictionary.
- `load_factor` (`Float64`) — The percentage filled in the dictionary (for a hashed dictionary, the percentage filled in the hash table).
- `creation_time` (`DateTime`) — The time when the dictionary was created or last successfully reloaded.
- `last_exception` (`String`) — Text of the error that occurs when creating or reloading the dictionary if the dictionary couldn't be created.
- `source` (`String`) — Text describing the data source for the dictionary.

Note that the amount of memory used by the dictionary is not proportional to the number of items stored in it. So for flat and cached dictionaries, all the memory cells are pre-assigned, regardless of how full the dictionary actually is.

## system.events

Contains information about the number of events that have occurred in the system. For example, in the table, you can find how many `SELECT` queries were processed since the ClickHouse server started.

Columns:

- `event` (`String`) — Event name.
- `value` (`UInt64`) — Number of events occurred.
- `description` (`String`) — Event description.

Example

```
SELECT * FROM system.events LIMIT 5
```

event	value	description
Query	12   Number of queries to be interpreted and potentially executed. Does not include queries that failed to parse or were rejected due to AST size limits, quota limits or limits on the number of simultaneously running queries. May include internal queries initiated by ClickHouse itself. Does not count subqueries.	
SelectQuery	8   Same as Query, but only for SELECT queries.	
FileOpen	73   Number of files opened.	
ReadBufferFromFileDescriptorRead	155   Number of reads (read/pread) from a file descriptor. Does not include sockets.	
ReadBufferFromFileDescriptorReadBytes	9931   Number of bytes read from file descriptors. If the file is compressed, this will show the compressed data size.	

## See Also

- [system.asynchronous\\_metrics](#) — Contains periodically calculated metrics.
- [system.metrics](#) — Contains instantly calculated metrics.
- [system.metric\\_log](#) — Contains a history of metrics values from tables `system.metrics` и `system.events`.
- [Monitoring](#) — Base concepts of ClickHouse monitoring.

## system.functions

Contains information about normal and aggregate functions.

Columns:

- `name` ( String ) – The name of the function.
- `is_aggregate` ( UInt8 ) — Whether the function is aggregate.

## system.graphite\_retentions

Contains information about parameters `graphite_rollup` which are used in tables with [\\*GraphiteMergeTree](#) engines.

Columns:

- `config_name` ( String ) - `graphite_rollup` parameter name.
- `regexp` ( String ) - A pattern for the metric name.
- `function` ( String ) - The name of the aggregating function.
- `age` ( UInt64 ) - The minimum age of the data in seconds.
- `precision` ( UInt64 ) - How precisely to define the age of the data in seconds.
- `priority` ( UInt16 ) - Pattern priority.
- `is_default` ( UInt8 ) - Whether the pattern is the default.
- `Tables.database` ( Array(String) ) - Array of names of database tables that use the `config_name` parameter.
- `Tables.table` ( Array(String) ) - Array of table names that use the `config_name` parameter.

## system.merges

Contains information about merges and part mutations currently in process for tables in the MergeTree family.

Columns:

- `database` (`String`) — The name of the database the table is in.
- `table` (`String`) — Table name.
- `elapsed` (`Float64`) — The time elapsed (in seconds) since the merge started.
- `progress` (`Float64`) — The percentage of completed work from 0 to 1.
- `num_parts` (`UInt64`) — The number of pieces to be merged.
- `result_part_name` (`String`) — The name of the part that will be formed as the result of merging.
- `is_mutation` (`UInt8`) - 1 if this process is a part mutation.
- `total_size_bytes_compressed` (`UInt64`) — The total size of the compressed data in the merged chunks.
- `total_size_marks` (`UInt64`) — The total number of marks in the merged parts.
- `bytes_read_uncompressed` (`UInt64`) — Number of bytes read, uncompressed.
- `rows_read` (`UInt64`) — Number of rows read.
- `bytes_written_uncompressed` (`UInt64`) — Number of bytes written, uncompressed.
- `rows_written` (`UInt64`) — Number of rows written.

## system.metrics

Contains metrics which can be calculated instantly, or have a current value. For example, the number of simultaneously processed queries or the current replica delay. This table is always up to date.

Columns:

- `metric` (`String`) — Metric name.
- `value` (`Int64`) — Metric value.
- `description` (`String`) — Metric description.

The list of supported metrics you can find in the [dbms/src/Common/CurrentMetrics.cpp](#) source file of ClickHouse.

### Example

```
SELECT * FROM system.metrics LIMIT 10
```

metric	value	description
Query	1	Number of executing queries
Merge	0	Number of executing background merges
PartMutation	0	Number of mutations (ALTER DELETE/UPDATE)
ReplicatedFetch	0	Number of data parts being fetched from replicas
ReplicatedSend	0	Number of data parts being sent to replicas
ReplicatedChecks	0	Number of data parts checking for consistency
BackgroundPoolTask	0	Number of active tasks in BackgroundProcessingPool (merges, mutations, fetches, or replication queue bookkeeping)
BackgroundSchedulePoolTask	0	Number of active tasks in BackgroundSchedulePool. This pool is used for periodic ReplicatedMergeTree tasks, like cleaning old data parts, altering data parts, replica re-initialization, etc.
DiskSpaceReservedForMerge	0	Disk space reserved for currently running background merges. It is slightly more than the total size of currently merging parts.
DistributedSend	0	Number of connections to remote servers sending data that was INSERTed into Distributed tables. Both synchronous and asynchronous mode.

## See Also

- [system.asynchronous\\_metrics](#) — Contains periodically calculated metrics.
- [system.events](#) — Contains a number of events that occurred.
- [system.metric\\_log](#) — Contains a history of metrics values from tables `system.metrics` и `system.events`.
- [Monitoring](#) — Base concepts of ClickHouse monitoring.

## system.metric\_log

Contains history of metrics values from tables `system.metrics` and `system.events`, periodically flushed to disk. To turn on metrics history collection on `system.metric_log`, create `/etc/clickhouse-server/config.d/metric_log.xml` with following content:

```
<yandex>
  <metric_log>
    <database>system</database>
    <table>metric_log</table>
    <flush_interval_milliseconds>7500</flush_interval_milliseconds>
    <collect_interval_milliseconds>1000</collect_interval_milliseconds>
  </metric_log>
</yandex>
```

## Example

```
SELECT * FROM system.metric_log LIMIT 1 FORMAT Vertical;
```

```

Row 1:
_____
event_date: 2020-02-18
event_time: 2020-02-18 07:15:33
milliseconds: 554
ProfileEvent_Query: 0
ProfileEvent_SelectQuery: 0
ProfileEvent_InsertQuery: 0
ProfileEvent_FileOpen: 0
ProfileEvent_Seek: 0
ProfileEvent_ReadBufferFromFileDescriptorRead: 1
ProfileEvent_ReadBufferFromFileDescriptorReadFailed: 0
ProfileEvent_ReadBufferFromFileDescriptorReadBytes: 0
ProfileEvent_WriteBufferFromFileDescriptorWrite: 1
ProfileEvent_WriteBufferFromFileDescriptorWriteFailed: 0
ProfileEvent_WriteBufferFromFileDescriptorWriteBytes: 56
...
CurrentMetric_Query: 0
CurrentMetric_Merge: 0
CurrentMetric_PartMutation: 0
CurrentMetric_ReplicatedFetch: 0
CurrentMetric_ReplicatedSend: 0
CurrentMetric_ReplicatedChecks: 0
...

```

## See also

- [system.asynchronous\\_metrics](#) — Contains periodically calculated metrics.
- [system.events](#) — Contains a number of events that occurred.
- [system.metrics](#) — Contains instantly calculated metrics.
- [Monitoring](#) — Base concepts of ClickHouse monitoring.

## system.numbers

This table contains a single UInt64 column named 'number' that contains almost all the natural numbers starting from zero. You can use this table for tests, or if you need to do a brute force search. Reads from this table are not parallelized.

## system.numbers\_mt

The same as 'system.numbers' but reads are parallelized. The numbers can be returned in any order. Used for tests.

## system.one

This table contains a single row with a single 'dummy' UInt8 column containing the value 0. This table is used if a SELECT query doesn't specify the FROM clause. This is similar to the DUAL table found in other DBMSs.

## system.parts

Contains information about parts of [MergeTree](#) tables.

Each row describes one data part.

Columns:

- `partition` (String) – The partition name. To learn what a partition is, see the description of the [ALTER](#) query.

Formats:

- `YYYYMM` for automatic partitioning by month.

- `any_string` when partitioning manually.
- `name` ( `String` ) – Name of the data part.
- `active` ( `UInt8` ) – Flag that indicates whether the data part is active. If a data part is active, it's used in a table. Otherwise, it's deleted. Inactive data parts remain after merging.
- `marks` ( `UInt64` ) – The number of marks. To get the approximate number of rows in a data part, multiply `marks` by the index granularity (usually 8192) (this hint doesn't work for adaptive granularity).
- `rows` ( `UInt64` ) – The number of rows.
- `bytes_on_disk` ( `UInt64` ) – Total size of all the data part files in bytes.
- `data_compressed_bytes` ( `UInt64` ) – Total size of compressed data in the data part. All the auxiliary files (for example, files with marks) are not included.
- `data_uncompressed_bytes` ( `UInt64` ) – Total size of uncompressed data in the data part. All the auxiliary files (for example, files with marks) are not included.
- `marks_bytes` ( `UInt64` ) – The size of the file with marks.
- `modification_time` ( `DateTime` ) – The time the directory with the data part was modified. This usually corresponds to the time of data part creation.|
- `remove_time` ( `DateTime` ) – The time when the data part became inactive.
- `refcount` ( `UInt32` ) – The number of places where the data part is used. A value greater than 2 indicates that the data part is used in queries or merges.
- `min_date` ( `Date` ) – The minimum value of the date key in the data part.
- `max_date` ( `Date` ) – The maximum value of the date key in the data part.
- `min_time` ( `DateTime` ) – The minimum value of the date and time key in the data part.
- `max_time` ( `DateTime` ) – The maximum value of the date and time key in the data part.
- `partition_id` ( `String` ) – ID of the partition.
- `min_block_number` ( `UInt64` ) – The minimum number of data parts that make up the current part after merging.
- `max_block_number` ( `UInt64` ) – The maximum number of data parts that make up the current part after merging.
- `level` ( `UInt32` ) – Depth of the merge tree. Zero means that the current part was created by `insert` rather than by merging other parts.
- `data_version` ( `UInt64` ) – Number that is used to determine which mutations should be applied to the data part (mutations with a version higher than `data_version` ).
- `primary_key_bytes_in_memory` ( `UInt64` ) – The amount of memory (in bytes) used by primary key values.
- `primary_key_bytes_in_memory_allocated` ( `UInt64` ) – The amount of memory (in bytes) reserved for primary key values.
- `is_frozen` ( `UInt8` ) – Flag that shows that a partition data backup exists. 1, the backup exists. 0, the backup doesn't exist. For more details, see [FREEZE PARTITION](#)
- `database` ( `String` ) – Name of the database.
- `table` ( `String` ) – Name of the table.
- `engine` ( `String` ) – Name of the table engine without parameters.
- `path` ( `String` ) – Absolute path to the folder with data part files.
- `disk` ( `String` ) – Name of a disk that stores the data part.
- `hash_of_all_files` ( `String` ) – [sipHash128](#) of compressed files.
- `hash_of_uncompressed_files` ( `String` ) – [sipHash128](#) of uncompressed files (files with marks, index file etc.).
- `uncompressed_hash_of_compressed_files` ( `String` ) – [sipHash128](#) of data in the compressed files as if they were uncompressed.

- `bytes` (`UInt64`) – Alias for `bytes_on_disk`.
- `marks_size` (`UInt64`) – Alias for `marks_bytes`.

## system.part\_log

The `system.part_log` table is created only if the [part\\_log](#) server setting is specified.

This table contains information about events that occurred with [data parts](#) in the [MergeTree](#) family tables, such as adding or merging data.

The `system.part_log` table contains the following columns:

- `event_type` (`Enum`) — Type of the event that occurred with the data part. Can have one of the following values:
  - `NEW_PART` — Inserting of a new data part.
  - `MERGE_PARTS` — Merging of data parts.
  - `DOWNLOAD_PART` — Downloading a data part.
  - `REMOVE_PART` — Removing or detaching a data part using [DETACH PARTITION](#).
  - `MUTATE_PART` — Mutating of a data part.
  - `MOVE_PART` — Moving the data part from the one disk to another one.
- `event_date` (`Date`) — Event date.
- `event_time` (`DateTime`) — Event time.
- `duration_ms` (`UInt64`) — Duration.
- `database` (`String`) — Name of the database the data part is in.
- `table` (`String`) — Name of the table the data part is in.
- `part_name` (`String`) — Name of the data part.
- `partition_id` (`String`) — ID of the partition that the data part was inserted to. The column takes the 'all' value if the partitioning is by `tuple()`.
- `rows` (`UInt64`) — The number of rows in the data part.
- `size_in_bytes` (`UInt64`) — Size of the data part in bytes.
- `merged_from` (`Array(String)`) — An array of names of the parts which the current part was made up from (after the merge).
- `bytes_uncompressed` (`UInt64`) — Size of uncompressed bytes.
- `read_rows` (`UInt64`) — The number of rows was read during the merge.
- `read_bytes` (`UInt64`) — The number of bytes was read during the merge.
- `error` (`UInt16`) — The code number of the occurred error.
- `exception` (`String`) — Text message of the occurred error.

The `system.part_log` table is created after the first inserting data to the [MergeTree](#) table.

## system.processes

This system table is used for implementing the `SHOW PROCESSLIST` query.

Columns:

- `user` (`String`) – The user who made the query. Keep in mind that for distributed processing, queries are sent to remote servers under the `default` user. The field contains the username for a specific query, not for a query that this

query initiated.

- `address` (String) – The IP address the request was made from. The same for distributed processing. To track where a distributed query was originally made from, look at `system.processes` on the query requestor server.
- `elapsed` (Float64) – The time in seconds since request execution started.
- `rows_read` (UInt64) – The number of rows read from the table. For distributed processing, on the requestor server, this is the total for all remote servers.
- `bytes_read` (UInt64) – The number of uncompressed bytes read from the table. For distributed processing, on the requestor server, this is the total for all remote servers.
- `total_rows_approx` (UInt64) – The approximation of the total number of rows that should be read. For distributed processing, on the requestor server, this is the total for all remote servers. It can be updated during request processing, when new sources to process become known.
- `memory_usage` (UInt64) – Amount of RAM the request uses. It might not include some types of dedicated memory. See the `max_memory_usage` setting.
- `query` (String) – The query text. For `INSERT`, it doesn't include the data to insert.
- `query_id` (String) – Query ID, if defined.

## `system.text_log`

Contains logging entries. Logging level which goes to this table can be limited with `text_log.level` server setting.

Columns:

- `event_date` (Date) - Date of the entry.
- `event_time` (DateTime) - Time of the entry.
- `microseconds` (UInt32) - Microseconds of the entry.
- `thread_name` (String) — Name of the thread from which the logging was done.
- `thread_id` (UInt64) — OS thread ID.
- `level` (Enum8) - Entry level.
  - 'Fatal' = 1
  - 'Critical' = 2
  - 'Error' = 3
  - 'Warning' = 4
  - 'Notice' = 5
  - 'Information' = 6
  - 'Debug' = 7
  - 'Trace' = 8
- `query_id` (String) - ID of the query.
- `logger_name` (LowCardinality(String)) - Name of the logger (i.e. `DDLWorker`)
- `message` (String) - The message itself.
- `revision` (UInt32) - ClickHouse revision.
- `source_file` (LowCardinality(String)) - Source file from which the logging was done.
- `source_line` (UInt64) - Source line from which the logging was done.

## system.query\_log

Contains information about execution of queries. For each query, you can see processing start time, duration of processing, error messages and other information.

### Note

The table doesn't contain input data for `INSERT` queries.

ClickHouse creates this table only if the `query_log` server parameter is specified. This parameter sets the logging rules, such as the logging interval or the name of the table the queries will be logged in.

To enable query logging, set the `log_queries` parameter to 1. For details, see the [Settings](#) section.

The `system.query_log` table registers two kinds of queries:

1. Initial queries that were run directly by the client.
2. Child queries that were initiated by other queries (for distributed query execution). For these types of queries, information about the parent queries is shown in the `initial_*` columns.

Columns:

- `type` (Enum8) — Type of event that occurred when executing the query. Values:
  - '`QueryStart`' = 1 — Successful start of query execution.
  - '`QueryFinish`' = 2 — Successful end of query execution.
  - '`ExceptionBeforeStart`' = 3 — Exception before the start of query execution.
  - '`ExceptionWhileProcessing`' = 4 — Exception during the query execution.
- `event_date` (Date) — Query starting date.
- `event_time` (DateTime) — Query starting time.
- `query_start_time` (DateTime) — Start time of query execution.
- `query_duration_ms` (UInt64) — Duration of query execution.
- `read_rows` (UInt64) — Number of read rows.
- `read_bytes` (UInt64) — Number of read bytes.
- `written_rows` (UInt64) — For `INSERT` queries, the number of written rows. For other queries, the column value is 0.
- `written_bytes` (UInt64) — For `INSERT` queries, the number of written bytes. For other queries, the column value is 0.
- `result_rows` (UInt64) — Number of rows in the result.
- `result_bytes` (UInt64) — Number of bytes in the result.
- `memory_usage` (UInt64) — Memory consumption by the query.
- `query` (String) — Query string.
- `exception` (String) — Exception message.
- `stack_trace` (String) — Stack trace (a list of methods called before the error occurred). An empty string, if the query is completed successfully.
- `is_initial_query` (UInt8) — Query type. Possible values:
  - 1 — Query was initiated by the client.
  - 0 — Query was initiated by another query for distributed query execution.
- `user` (String) — Name of the user who initiated the current query.

- `query_id` (String) — ID of the query.
- `address` (IPv6) — IP address that was used to make the query.
- `port` (UInt16) — The client port that was used to make the query.
- `initial_user` (String) — Name of the user who ran the initial query (for distributed query execution).
- `initial_query_id` (String) — ID of the initial query (for distributed query execution).
- `initial_address` (IPv6) — IP address that the parent query was launched from.
- `initial_port` (UInt16) — The client port that was used to make the parent query.
- `interface` (UInt8) — Interface that the query was initiated from. Possible values:
  - 1 — TCP.
  - 2 — HTTP.
- `os_user` (String) — OS's username who runs `clickhouse-client`.
- `client_hostname` (String) — Hostname of the client machine where the `clickhouse-client` or another TCP client is run.
- `client_name` (String) — The `clickhouse-client` or another TCP client name.
- `client_revision` (UInt32) — Revision of the `clickhouse-client` or another TCP client.
- `client_version_major` (UInt32) — Major version of the `clickhouse-client` or another TCP client.
- `client_version_minor` (UInt32) — Minor version of the `clickhouse-client` or another TCP client.
- `client_version_patch` (UInt32) — Patch component of the `clickhouse-client` or another TCP client version.
- `http_method` (UInt8) — HTTP method that initiated the query. Possible values:
  - 0 — The query was launched from the TCP interface.
  - 1 — `GET` method was used.
  - 2 — `POST` method was used.
- `http_user_agent` (String) — The `UserAgent` header passed in the HTTP request.
- `quota_key` (String) — The "quota key" specified in the `quotas` setting (see `keyed`).
- `revision` (UInt32) — ClickHouse revision.
- `thread_numbers` (Array(UInt32)) — Number of threads that are participating in query execution.
- `ProfileEvents.Names` (Array(String)) — Counters that measure different metrics. The description of them could be found in the table `system.events`
- `ProfileEvents.Values` (Array(UInt64)) — Values of metrics that are listed in the `ProfileEvents.Names` column.
- `Settings.Names` (Array(String)) — Names of settings that were changed when the client ran the query. To enable logging changes to settings, set the `log_query_settings` parameter to 1.
- `Settings.Values` (Array(String)) — Values of settings that are listed in the `Settings.Names` column.

Each query creates one or two rows in the `query_log` table, depending on the status of the query:

1. If the query execution is successful, two events with types 1 and 2 are created (see the `type` column).
2. If an error occurred during query processing, two events with types 1 and 4 are created.
3. If an error occurred before launching the query, a single event with type 3 is created.

By default, logs are added to the table at intervals of 7.5 seconds. You can set this interval in the `query_log` server setting (see the `flush_interval_milliseconds` parameter). To flush the logs forcibly from the memory buffer into the table, use the `SYSTEM FLUSH LOGS` query.

When the table is deleted manually, it will be automatically created on the fly. Note that all the previous logs will be deleted.

## Note

The storage period for logs is unlimited. Logs aren't automatically deleted from the table. You need to organize the removal of outdated logs yourself.

You can specify an arbitrary partitioning key for the `system.query_log` table in the [query\\_log](#) server setting (see the `partition_by` parameter).

## `system.query_thread_log`

The table contains information about each query execution thread.

ClickHouse creates this table only if the [query\\_thread\\_log](#) server parameter is specified. This parameter sets the logging rules, such as the logging interval or the name of the table the queries will be logged in.

To enable query logging, set the [log\\_query\\_threads](#) parameter to 1. For details, see the [Settings](#) section.

Columns:

- `event_date` (Date) — the date when the thread has finished execution of the query.
- `event_time` (DateTime) — the date and time when the thread has finished execution of the query.
- `query_start_time` (DateTime) — Start time of query execution.
- `query_duration_ms` (UInt64) — Duration of query execution.
- `read_rows` (UInt64) — Number of read rows.
- `read_bytes` (UInt64) — Number of read bytes.
- `written_rows` (UInt64) — For `INSERT` queries, the number of written rows. For other queries, the column value is 0.
- `written_bytes` (UInt64) — For `INSERT` queries, the number of written bytes. For other queries, the column value is 0.
- `memory_usage` (Int64) — The difference between the amount of allocated and freed memory in context of this thread.
- `peak_memory_usage` (Int64) — The maximum difference between the amount of allocated and freed memory in context of this thread.
- `thread_name` (String) — Name of the thread.
- `thread_number` (UInt32) — Internal thread ID.
- `os_thread_id` (Int32) — OS thread ID.
- `master_thread_id` (UInt64) — OS initial ID of initial thread.
- `query` (String) — Query string.
- `is_initial_query` (UInt8) — Query type. Possible values:
  - 1 — Query was initiated by the client.
  - 0 — Query was initiated by another query for distributed query execution.
- `user` (String) — Name of the user who initiated the current query.
- `query_id` (String) — ID of the query.
- `address` (IPv6) — IP address that was used to make the query.
- `port` (UInt16) — The client port that was used to make the query.
- `initial_user` (String) — Name of the user who ran the initial query (for distributed query execution).
- `initial_query_id` (String) — ID of the initial query (for distributed query execution).
- `initial_address` (IPv6) — IP address that the parent query was launched from.

- `initial_port` (UInt16) — The client port that was used to make the parent query.
- `interface` (UInt8) — Interface that the query was initiated from. Possible values:
  - 1 — TCP.
  - 2 — HTTP.
- `os_user` (String) — OS's username who runs `clickhouse-client`.
- `client_hostname` (String) — Hostname of the client machine where the `clickhouse-client` or another TCP client is run.
- `client_name` (String) — The `clickhouse-client` or another TCP client name.
- `client_revision` (UInt32) — Revision of the `clickhouse-client` or another TCP client.
- `client_version_major` (UInt32) — Major version of the `clickhouse-client` or another TCP client.
- `client_version_minor` (UInt32) — Minor version of the `clickhouse-client` or another TCP client.
- `client_version_patch` (UInt32) — Patch component of the `clickhouse-client` or another TCP client version.
- `http_method` (UInt8) — HTTP method that initiated the query. Possible values:
  - 0 — The query was launched from the TCP interface.
  - 1 — GET method was used.
  - 2 — POST method was used.
- `http_user_agent` (String) — The `UserAgent` header passed in the HTTP request.
- `quota_key` (String) — The "quota key" specified in the `quotas` setting (see `keyed`).
- `revision` (UInt32) — ClickHouse revision.
- `ProfileEvents.Names` (Array(String)) — Counters that measure different metrics for this thread. The description of them could be found in the table `system.events`
- `ProfileEvents.Values` (Array(UInt64)) — Values of metrics for this thread that are listed in the `ProfileEvents.Names` column.

By default, logs are added to the table at intervals of 7.5 seconds. You can set this interval in the `query_thread_log` server setting (see the `flush_interval_milliseconds` parameter). To flush the logs forcibly from the memory buffer into the table, use the `SYSTEM FLUSH LOGS` query.

When the table is deleted manually, it will be automatically created on the fly. Note that all the previous logs will be deleted.

#### Note

The storage period for logs is unlimited. Logs aren't automatically deleted from the table. You need to organize the removal of outdated logs yourself.

You can specify an arbitrary partitioning key for the `system.query_thread_log` table in the `query_thread_log` server setting (see the `partition_by` parameter).

## `system.trace_log`

Contains stack traces collected by the sampling query profiler.

ClickHouse creates this table when the `trace_log` server configuration section is set. Also the `query_profiler_real_time_period_ns` and `query_profiler_cpu_time_period_ns` settings should be set.

To analyze logs, use the `addressToLine`, `addressToSymbol` and `demangle` introspection functions.

Columns:

- `event_date` ([Date](#)) — Date of sampling moment.
- `event_time` ([DateTime](#)) — Timestamp of sampling moment.
- `revision` ([UInt32](#)) — ClickHouse server build revision.

When connecting to server by `clickhouse-client`, you see the string similar to Connected to ClickHouse server version 19.18.1 revision 54429.. This field contains the `revision`, but not the `version` of a server.

- `timer_type` ([Enum8](#)) — Timer type:
  - `Real` represents wall-clock time.
  - `CPU` represents CPU time.
- `thread_number` ([UInt32](#)) — Thread identifier.
- `query_id` ([String](#)) — Query identifier that can be used to get details about a query that was running from the [query\\_log](#) system table.
- `trace` ([Array\(UInt64\)](#)) — Stack trace at the moment of sampling. Each element is a virtual memory address inside ClickHouse server process.

## Example

```
SELECT * FROM system.trace_log LIMIT 1 \G
```

Row 1:

```
event_date: 2019-11-15
event_time: 2019-11-15 15:09:38
revision: 54428
timer_type: Real
thread_number: 48
query_id: acc4d61f-5bd1-4a3e-bc91-2180be37c915
trace:
[94222141367858, 94222152240175, 94222152325351, 94222152329944, 94222152330796, 94222151449980, 94222144088167, 942:
```

## system.replicas

Contains information and status for replicated tables residing on the local server. This table can be used for monitoring. The table contains a row for every Replicated\* table.

### Example:

```
SELECT *
FROM system.replicas
WHERE table = 'visits'
FORMAT Vertical
```

Row 1:

```
database:          merge
table:            visits
engine:           ReplicatedCollapsingMergeTree
is_leader:        1
can_become_leader: 1
is_READONLY:      0
is_SESSION_EXPIRED: 0
future_parts:    1
parts_to_check:  0
zookeeper_path: /clickhouse/tables/01-06/visits
replica_name:    example01-06-1.yandex.ru
replica_path:   /clickhouse/tables/01-06/visits/replicas/example01-06-1.yandex.ru
columns_version: 9
queue_size:       1
inserts_in_queue: 0
merges_in_queue:  1
part_mutations_in_queue: 0
queue_oldest_time: 2020-02-20 08:34:30
inserts_oldest_time: 0000-00-00 00:00:00
merges_oldest_time: 2020-02-20 08:34:30
part_mutations_oldest_time: 0000-00-00 00:00:00
oldest_part_to_get: 
oldest_part_to_merge_to: 20200220_20284_20840_7
oldest_part_to_mutate_to: 
log_max_index:      596273
log_pointer:        596274
last_queue_update:  2020-02-20 08:34:32
absolute_delay:     0
total_replicas:    2
active_replicas:   2
```

Columns:

- `database` ( String ) - Database name
- `table` ( String ) - Table name
- `engine` ( String ) - Table engine name
- `is_leader` ( UInt8 ) - Whether the replica is the leader.

Only one replica at a time can be the leader. The leader is responsible for selecting background merges to perform.

Note that writes can be performed to any replica that is available and has a session in ZK, regardless of whether it is a leader.

- `can_become_leader` ( UInt8 ) - Whether the replica can be elected as a leader.
  - `is_READONLY` ( UInt8 ) - Whether the replica is in read-only mode.
- This mode is turned on if the config doesn't have sections with ZooKeeper, if an unknown error occurred when reinitializing sessions in ZooKeeper, and during session reinitialization in ZooKeeper.
- `is_SESSION_EXPIRED` ( UInt8 ) - the session with ZooKeeper has expired. Basically the same as `is_READONLY`.
  - `future_parts` ( UInt32 ) - The number of data parts that will appear as the result of INSERTs or merges that haven't been done yet.
  - `parts_to_check` ( UInt32 ) - The number of data parts in the queue for verification. A part is put in the verification queue if there is suspicion that it might be damaged.
  - `zookeeper_path` ( String ) - Path to table data in ZooKeeper.
  - `replica_name` ( String ) - Replica name in ZooKeeper. Different replicas of the same table have different names.
  - `replica_path` ( String ) - Path to replica data in ZooKeeper. The same as concatenating 'zookeeper\_path/replicas/replica\_path'.
  - `columns_version` ( Int32 ) - Version number of the table structure. Indicates how many times ALTER was performed. If replicas have different versions, it means some replicas haven't made all of the ALTERs yet.

- `queue_size` ( UInt32 ) - Size of the queue for operations waiting to be performed. Operations include inserting blocks of data, merges, and certain other actions. It usually coincides with `future_parts` .
- `inserts_in_queue` ( UInt32 ) - Number of inserts of blocks of data that need to be made. Insertions are usually replicated fairly quickly. If this number is large, it means something is wrong.
- `merges_in_queue` ( UInt32 ) - The number of merges waiting to be made. Sometimes merges are lengthy, so this value may be greater than zero for a long time.
- `part_mutations_in_queue` ( UInt32 ) - The number of mutations waiting to be made.
- `queue_oldest_time` ( DateTime ) - If `queue_size` greater than 0, shows when the oldest operation was added to the queue.
- `inserts_oldest_time` ( DateTime ) - See `queue_oldest_time`
- `merges_oldest_time` ( DateTime ) - See `queue_oldest_time`
- `part_mutations_oldest_time` ( DateTime ) - See `queue_oldest_time`

The next 4 columns have a non-zero value only where there is an active session with ZK.

- `log_max_index` ( UInt64 ) - Maximum entry number in the log of general activity.
- `log_pointer` ( UInt64 ) - Maximum entry number in the log of general activity that the replica copied to its execution queue, plus one. If `log_pointer` is much smaller than `log_max_index` , something is wrong.
- `last_queue_update` ( DateTime ) - When the queue was updated last time.
- `absolute_delay` ( UInt64 ) - How big lag in seconds the current replica has.
- `total_replicas` ( UInt8 ) - The total number of known replicas of this table.
- `active_replicas` ( UInt8 ) - The number of replicas of this table that have a session in ZooKeeper (i.e., the number of functioning replicas).

If you request all the columns, the table may work a bit slowly, since several reads from ZooKeeper are made for each row. If you don't request the last 4 columns (`log_max_index`, `log_pointer`, `total_replicas`, `active_replicas`), the table works quickly.

For example, you can check that everything is working correctly like this:

```

SELECT
    database,
    table,
    is_leader,
    is_READONLY,
    is_SESSION_EXPIRED,
    future_parts,
    parts_to_check,
    columns_version,
    queue_size,
    inserts_in_queue,
    merges_in_queue,
    log_max_index,
    log_pointer,
    total_replicas,
    active_replicas
FROM system.replicas
WHERE
    is_READONLY
    OR is_SESSION_EXPIRED
    OR future_parts > 20
    OR parts_to_check > 10
    OR queue_size > 20
    OR inserts_in_queue > 10
    OR log_max_index - log_pointer > 10
    OR total_replicas < 2
    OR active_replicas < total_replicas
  
```

If this query doesn't return anything, it means that everything is fine.

## system.settings

Contains information about settings that are currently in use. I.e. used for executing the query you are using to read from the system.settings table.

Columns:

- name (String) — Setting name.
- value (String) — Setting value.
- changed (UInt8) — Whether the setting was explicitly defined in the config or explicitly changed.

Example:

```
SELECT *
FROM system.settings
WHERE changed
```

name	value	changed
max_threads	8	1
use_uncompressed_cache	0	1
load_balancing	random	1
max_memory_usage	100000000000	1

## system.table\_engines

Contains description of table engines supported by server and their feature support information.

This table contains the following columns (the column type is shown in brackets):

- name (String) — The name of table engine.
- supports\_settings (UInt8) — Flag that indicates if table engine supports SETTINGS clause.
- supports\_skipping\_indices (UInt8) — Flag that indicates if table engine supports skipping indices.
- supports\_ttl (UInt8) — Flag that indicates if table engine supports TTL.
- supports\_sort\_order (UInt8) — Flag that indicates if table engine supports clauses PARTITION\_BY , PRIMARY\_KEY , ORDER\_BY and SAMPLE\_BY .
- supports\_replication (UInt8) — Flag that indicates if table engine supports data replication.
- supports\_deduplication (UInt8) — Flag that indicates if table engine supports data deduplication.

Example:

```
SELECT *
FROM system.table_engines
WHERE name in ('Kafka', 'MergeTree', 'ReplicatedCollapsingMergeTree')
```

name	supports_settings	supports_skipping_indices	supports_sort_order	suppo
Kafka	0	1	0	0
MergeTree	0	1	1	1
ReplicatedCollapsingMergeTree	0	1	1	1
Join	1	1		

See also

- MergeTree family [query clauses](#)
- Kafka [settings](#)
- Join [settings](#)

## system.tables

Contains metadata of each table that the server knows about. Detached tables are not shown in `system.tables`.

This table contains the following columns (the column type is shown in brackets):

- `database` (String) — The name of the database the table is in.
- `name` (String) — Table name.
- `engine` (String) — Table engine name (without parameters).
- `is_temporary` (UInt8) - Flag that indicates whether the table is temporary.
- `data_path` (String) - Path to the table data in the file system.
- `metadata_path` (String) - Path to the table metadata in the file system.
- `metadata_modification_time` (DateTime) - Time of latest modification of the table metadata.
- `dependencies_database` (Array(String)) - Database dependencies.
- `dependencies_table` (Array(String)) - Table dependencies ([MaterializedView](#) tables based on the current table).
- `create_table_query` (String) - The query that was used to create the table.
- `engine_full` (String) - Parameters of the table engine.
- `partition_key` (String) - The partition key expression specified in the table.
- `sorting_key` (String) - The sorting key expression specified in the table.
- `primary_key` (String) - The primary key expression specified in the table.
- `sampling_key` (String) - The sampling key expression specified in the table.

The `system.tables` table is used in `SHOW TABLES` query implementation.

## system.zookeeper

The table does not exist if ZooKeeper is not configured. Allows reading data from the ZooKeeper cluster defined in the config. The query must have a 'path' equality condition in the WHERE clause. This is the path in ZooKeeper for the children that you want to get data for.

The query `SELECT * FROM system.zookeeper WHERE path = '/clickhouse'` outputs data for all children on the `/clickhouse` node. To output data for all root nodes, write `path = '/'`. If the path specified in 'path' doesn't exist, an exception will be thrown.

Columns:

- `name` (String) — The name of the node.
- `path` (String) — The path to the node.
- `value` (String) — Node value.
- `dataLength` (Int32) — Size of the value.
- `numChildren` (Int32) — Number of descendants.
- `czxid` (Int64) — ID of the transaction that created the node.
- `mzxid` (Int64) — ID of the transaction that last changed the node.
- `pzxid` (Int64) — ID of the transaction that last deleted or added descendants.
- `ctime` (DateTime) — Time of node creation.
- `mtime` (DateTime) — Time of the last modification of the node.
- `version` (Int32) — Node version: the number of times the node was changed.
- `cversion` (Int32) — Number of added or removed descendants.
- `aversion` (Int32) — Number of changes to the ACL.
- `ephemeralOwner` (Int64) — For ephemeral nodes, the ID of the session that owns this node.

Example:

```
SELECT *
FROM system.zookeeper
WHERE path = '/clickhouse/tables/01-08/visits(replicas'
FORMAT Vertical
```

Row 1:

---

name:	example01-08-1.yandex.ru
value:	
czxid:	932998691229
mzxid:	932998691229
ctime:	2015-03-27 16:49:51
mtime:	2015-03-27 16:49:51
version:	0
cversion:	47
aversion:	0
ephemeralOwner:	0
dataLength:	0
numChildren:	7
pzxid:	987021031383
path:	/clickhouse/tables/01-08/visits(replicas

Row 2:

---

name:	example01-08-2.yandex.ru
value:	
czxid:	933002738135
mzxid:	933002738135
ctime:	2015-03-27 16:57:01
mtime:	2015-03-27 16:57:01
version:	0
cversion:	37
aversion:	0
ephemeralOwner:	0
dataLength:	0
numChildren:	7
pzxid:	987021252247
path:	/clickhouse/tables/01-08/visits(replicas

## system.mutations

The table contains information about **mutations** of MergeTree tables and their progress. Each mutation command is represented by a single row. The table has the following columns:

database, table - The name of the database and table to which the mutation was applied.

mutation\_id - The ID of the mutation. For replicated tables these IDs correspond to znode names in the `<table_path_in_zookeeper>/mutations/` directory in ZooKeeper. For unreplicated tables the IDs correspond to file names in the data directory of the table.

command - The mutation command string (the part of the query after `ALTER TABLE [db.]table` ).

create\_time - When this mutation command was submitted for execution.

block\_numbers.partition\_id, block\_numbers.number - A nested column. For mutations of replicated tables, it contains one record for each partition: the partition ID and the block number that was acquired by the mutation (in each partition, only parts that contain blocks with numbers less than the block number acquired by the mutation in that partition will be mutated). In non-replicated tables, block numbers in all partitions form a single sequence. This means that for mutations of non-replicated tables, the column will contain one record with a single block number acquired by the mutation.

parts\_to\_do - The number of data parts that need to be mutated for the mutation to finish.

is\_done - Is the mutation done? Note that even if `parts_to_do = 0` it is possible that a mutation of a replicated table is not done yet because of a long-running `INSERT` that will create a new data part that will need to be mutated.

If there were problems with mutating some parts, the following columns contain additional information:

latest\_failed\_part - The name of the most recent part that could not be mutated.

latest\_fail\_time - The time of the most recent part mutation failure.

latest\_fail\_reason - The exception message that caused the most recent part mutation failure.

## system.disks

Contains information about disks defined in the [server configuration](#).

Columns:

- `name` ([String](#)) — Name of a disk in the server configuration.
- `path` ([String](#)) — Path to the mount point in the file system.
- `free_space` ([UInt64](#)) — Free space on disk in bytes.
- `total_space` ([UInt64](#)) — Disk volume in bytes.
- `keep_free_space` ([UInt64](#)) — Amount of disk space that should stay free on disk in bytes. Defined in the `keep_free_space_bytes` parameter of disk configuration.

## system.storage\_policies

Contains information about storage policies and volumes defined in the [server configuration](#).

Columns:

- `policy_name` ([String](#)) — Name of the storage policy.
- `volume_name` ([String](#)) — Volume name defined in the storage policy.
- `volume_priority` ([UInt64](#)) — Volume order number in the configuration.
- `disks` ([Array\(String\)](#)) — Disk names, defined in the storage policy.

- `max_data_part_size` ([UInt64](#)) — Maximum size of a data part that can be stored on volume disks (0 — no limit).
- `move_factor` ([Float64](#)) — Ratio of free disk space. When the ratio exceeds the value of configuration parameter, ClickHouse start to move data to the next volume in order.

If the storage policy contains more then one volume, then information for each volume is stored in the individual row of the table.

## Sampling Query Profiler

ClickHouse runs sampling profiler that allows to analyze query execution. Using profiler you can find source code routines that used the most frequently during a query execution. You can trace CPU time and wall-clock time spent including idle time.

To use profiler:

- Setup the `trace_log` section of the server configuration.

This section configures the `trace_log` system table containing the results of the profiler functioning. It is configured by default. Remember that data in this table is valid only for running server. After the server restart, ClickHouse doesn't clean up the table and all the stored virtual memory address may become invalid.

- Setup the `query_profiler_cpu_time_period_ns` or `query_profiler_real_time_period_ns` settings. Both settings can be used simultaneously.

These settings allow you to configure profiler timers. As these are the session settings, you can get different sampling frequency for the whole server, individual users or user profiles, for your interactive session, and for each individual query.

Default sampling frequency is one sample per second and both CPU and real timers are enabled. This frequency allows to collect enough information about ClickHouse cluster. At the same time, working with this frequency, profiler doesn't affect ClickHouse server's performance. If you need to profile each individual query try to use higher sampling frequency.

To analyze the `trace_log` system table:

- Install the `clickhouse-common-static-dbg` package. See [Install from DEB Packages](#).
- Allow introspection functions by the `allow_introspection_functions` setting.  
For security reasons introspection functions are disabled by default.
- Use the `addressToLine`, `addressToSymbol` and `demangle` [introspection functions](#) to get function names and their positions in ClickHouse code. To get a profile for some query, you need to aggregate data from the `trace_log` table. You can aggregate data by individual functions or by the whole stack traces.

If you need to visualize `trace_log` info, try [flamegraph](#) and [speedscope](#).

## Example

In this example we:

- Filtering `trace_log` data by a query identifier and current date.
- Aggregating by stack trace.
- Using introspection functions, we will get a report of:
  - Names of symbols and corresponding source code functions.
  - Source code locations of these functions.

```

SELECT
    count(),
    arrayStringConcat(arrayMap(x -> concat(demangle(addressToSymbol(x)), '\n      ', addressToLine(x)),
trace), '\n') AS sym
FROM system.trace_log
WHERE (query_id = 'ebca3574-ad0a-400a-9cbc-dca382f5998c') AND (event_date = today())
GROUP BY trace
ORDER BY count() DESC
LIMIT 10

```

Row 1:

---

```

count(): 6344
sym:     StackTrace::StackTrace(ucontext_t const&
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Common/StackTrace.cpp:208
DB::(anonymous namespace)::writeTraceInfo(DB::TimerType, int, siginfo_t*, void*) [clone .isra.0]
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/I0/BufferBase.h:99

read

DB::ReadBufferFromFileDescriptor::nextImpl()
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/I0/ReadBufferFromFileDescriptor.cpp:56
DB::CompressedReadBufferBase::readCompressedData(unsigned long&, unsigned long&
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/I0/ReadBuffer.h:54
DB::CompressedReadBufferFromFile::nextImpl()
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Compression/CompressedReadBufferFromFile.cpp:22
DB::CompressedReadBufferFromFile::seek(unsigned long, unsigned long)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Compression/CompressedReadBufferFromFile.cpp:63
DB::MergeTreeReaderStream::seekToMark(unsigned long)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeReaderStream.cpp:200
std::function<DB::ReadBuffer*> (std::vector<DB::IDataType::Substream,
std::allocator<DB::IDataType::Substream> > const&),
DB::MergeTreeReader::readData(std::__cxx11::basic_string<char, std::char_traits<char>, std::allocator<char>> const&, DB::IDataType const&, DB::IColumn&, unsigned long, bool, unsigned long, bool):::
{lambda(bool)#1}::operator()(bool) const:{lambda(std::vector<DB::IDataType::Substream,
std::allocator<DB::IDataType::Substream> > const&)#1}>::_M_invoke(std::_Any_data const&,
std::vector<DB::IDataType::Substream, std::allocator<DB::IDataType::Substream> > const&)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeReader.cpp:212
DB::IDataType::deserializeBinaryBulkWithMultipleStreams(DB::IColumn&, unsigned long,
DB::IDataType::DeserializeBinaryBulkSettings&, std::shared_ptr<DB::IDataType::DeserializeBinaryBulkState>&)
const
    /usr/local/include/c++/9.1.0/bits/std_function.h:690
DB::MergeTreeReader::readData(std::__cxx11::basic_string<char, std::char_traits<char>, std::allocator<char>> const&, DB::IDataType const&, DB::IColumn&, unsigned long, bool, unsigned long, bool)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeReader.cpp:232
DB::MergeTreeReader::readRows(unsigned long, bool, unsigned long, DB::Block&)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeReader.cpp:111
DB::MergeTreeRangeReader::DelayedStream::finalize(DB::Block&)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:35
DB::MergeTreeRangeReader::continueReadingChain(DB::MergeTreeRangeReader::ReadResult&)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:219
DB::MergeTreeRangeReader::read(unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange> >&)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:487
DB::MergeTreeBaseSelectBlockInputStream::readFromPartImpl()

/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeBaseSelectBlockInputStream.cpp::

DB::MergeTreeBaseSelectBlockInputStream::readImpl()
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::IBlockInputStream::read()
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ExpressionBlockInputStream::readImpl()
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ExpressionBlockInputStream.cpp:34
DB::IBlockInputStream::read()
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::PartialSortingBlockInputStream::readImpl()
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/PartialSortingBlockInputStream.cpp:13
DB::IBlockInputStream::read()
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::loop(unsigned long)
```

```
/usr/local/include/c++/9.1.0/bits/atomic_base.h:419
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::thread(std::shared_ptr<DB::ThreadGroupStatus>,
unsigned long)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ParallelInputsProcessor.h:215
ThreadFromGlobalPool::ThreadFromGlobalPool<void
(DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*)
(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*, std::shared_ptr<DB::ThreadGroupStatus>,
unsigned long&>(void (DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*&&)
(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*&&,
std::shared_ptr<DB::ThreadGroupStatus>&&, unsigned long&):{lambda()#1}::operator()() const
/usr/local/include/c++/9.1.0/bits/shared_ptr_base.h:729
ThreadPoolImpl<std::thread>::worker(std::_List_iterator<std::thread>)
/usr/local/include/c++/9.1.0/bits/unique_lock.h:69
execute_native_thread_routine
/home/milovidov/ClickHouse/ci/workspace/gcc/gcc-build/x86_64-pc-linux-gnu/libstdc++-
v3/include/bits/unique_ptr.h:81
start_thread
```

\_\_clone

Row 2:

---

```
count(): 3295
sym:      StackTrace::StackTrace(ucontext_t const&)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Common/StackTrace.cpp:208
DB::(anonymous namespace)::writeTraceInfo(DB::TimerType, int, siginfo_t*, void*) [clone .isra.0]
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/IO/BufferBase.h:99
```

\_\_pthread\_cond\_wait

```
std::condition_variable::wait(std::unique_lock<std::mutex>&)
/home/milovidov/ClickHouse/ci/workspace/gcc/gcc-build/x86_64-pc-linux-gnu/libstdc++-
v3/src/c++11/../../../../gcc-9.1.0/libstdc++-v3/src/c++11/condition_variable.cc:55
Poco::Semaphore::wait()
/home/milovidov/ClickHouse/build_gcc9/..../contrib/poco/Foundation/src/Semaphore.cpp:61
DB::UnionBlockInputStream::readImpl()
/usr/local/include/c++/9.1.0/x86_64-pc-linux-gnu/bits/gthr-default.h:748
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::MergeSortingBlockInputStream::readImpl()
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Core/Block.h:90
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ExpressionBlockInputStream::readImpl()
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ExpressionBlockInputStream.cpp:34
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::LimitBlockInputStream::readImpl()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::AsynchronousBlockInputStream::calculate()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
std::function_handler<void ()>, DB::AsynchronousBlockInputStream::next():::
{lambda()#1}>::_M_invoke(std::any_data const&)
/usr/local/include/c++/9.1.0/bits/atomic_base.h:551
ThreadPoolImpl<ThreadFromGlobalPool>::worker(std::_List_iterator<ThreadFromGlobalPool>)
/usr/local/include/c++/9.1.0/x86_64-pc-linux-gnu/bits/gthr-default.h:748
ThreadFromGlobalPool::ThreadFromGlobalPool<ThreadPoolImpl<ThreadFromGlobalPool>::scheduleImpl<void>
(std::function<void ()>, int, std::optional<unsigned long>)::{lambda()#3}>
(ThreadPoolImpl<ThreadFromGlobalPool>::scheduleImpl<void>(std::function<void ()>, int,
std::optional<unsigned long>)::{lambda()#3} &&):{lambda()#1}::operator()() const
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Common/ThreadPool.h:146
ThreadPoolImpl<std::thread>::worker(std::_List_iterator<std::thread>)
/usr/local/include/c++/9.1.0/bits/unique_lock.h:69
execute_native_thread_routine
/home/milovidov/ClickHouse/ci/workspace/gcc/gcc-build/x86_64-pc-linux-gnu/libstdc++-
v3/include/bits/unique_ptr.h:81
start_thread
```

```
_clone
```

```
Row 3:
```

```
count(): 1978
sym:      StackTrace::StackTrace(ucontext_t const&)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Common/StackTrace.cpp:208
DB::(anonymous namespace)::writeTraceInfo(DB::TimerType, int, siginfo_t*, void*) [clone .isra.0]
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/IO/BufferBase.h:99

DB::VolnitskyBase<true, true, DB::StringSearcher<true, true> >::search(unsigned char const*, unsigned long)
const
    /opt/milovidov/ClickHouse/build_gcc9/dbms/programs/clickhouse
DB::MatchImpl<true, false>::vector_constant(DB::PODArray<unsigned char, 4096ul, AllocatorWithHint<false, AllocatorHints::DefaultHint, 67108864ul>, 15ul, 16ul> const&, DB::PODArray<unsigned long, 4096ul, AllocatorWithHint<false, AllocatorHints::DefaultHint, 67108864ul>, 15ul, 16ul> const&, std::__cxx11::basic_string<char, std::char_traits<char>, std::allocator<char>> const&, DB::PODArray<unsigned char, 4096ul, AllocatorWithHint<false, AllocatorHints::DefaultHint, 67108864ul>, 15ul, 16ul>&)
        /opt/milovidov/ClickHouse/build_gcc9/dbms/programs/clickhouse
DB::FunctionsStringSearch<DB::MatchImpl<true, false>, DB::NameLike>::executeImpl(DB::Block&, std::vector<unsigned long, std::allocator<unsigned long>> const&, unsigned long, unsigned long)
    /opt/milovidov/ClickHouse/build_gcc9/dbms/programs/clickhouse
DB::PreparedFunctionImpl::execute(DB::Block&, std::vector<unsigned long, std::allocator<unsigned long>> const&, unsigned long, unsigned long, bool)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Functions/IFunction.cpp:464
DB::ExpressionAction::execute(DB::Block&, bool) const
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:677
DB::ExpressionActions::execute(DB::Block&, bool) const
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Interpreters/ExpressionActions.cpp:739
DB::MergeTreeRangeReader::executePrewhereActionsAndFilterColumns(DB::MergeTreeRangeReader::ReadResult&)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:660
DB::MergeTreeRangeReader::read(unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange>>&)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:546
DB::MergeTreeRangeReader::read(unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange>>&)
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::MergeTreeBaseSelectBlockInputStream::readFromPartImpl()

/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeBaseSelectBlockInputStream.cpp::

DB::MergeTreeBaseSelectBlockInputStream::readImpl()
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::IBlockInputStream::read()
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ExpressionBlockInputStream::readImpl()
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ExpressionBlockInputStream.cpp:34
DB::IBlockInputStream::read()
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::PartialSortingBlockInputStream::readImpl()
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/PartialSortingBlockInputStream.cpp:13
DB::IBlockInputStream::read()
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::loop(unsigned long)
    /usr/local/include/c++/9.1.0/bits/atomic_base.h:419
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::thread(std::shared_ptr<DB::ThreadGroupStatus>)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ParallelInputsProcessor.h:215
ThreadFromGlobalPool::ThreadFromGlobalPool<void
(DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*)
(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*, std::shared_ptr<DB::ThreadGroupStatus>, unsigned long&)(void (DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*&&)
(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*&&, std::shared_ptr<DB::ThreadGroupStatus>&, unsigned long&){lambda(#1)::operator()()} const
    /usr/local/include/c++/9.1.0/bits/shared_ptr_base.h:729
ThreadPoolImpl<std::thread>::worker(std::_List_iterator<std::thread>)
    /usr/local/include/c++/9.1.0/bits/unique_lock.h:69
execute_native_thread_routine
    /home/milovidov/ClickHouse/ci/workspace/gcc/gcc-build/x86_64-nc-linux-gnu/libstdc++-
```

```
/home/milovidov/ClickHouse/CI/wokrSpace/gcc/gcc-build/x86_64-pc-linux-gnu/libstdc++-v3/include/bits/unique_ptr.h:81
start_thread

__clone

Row 4:
_____
count(): 1913
sym:      StackTrace::StackTrace(uncontext_t const&)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Common/StackTrace.cpp:208
DB::(anonymous namespace)::writeTraceInfo(DB::TimerType, int, siginfo_t*, void*) [clone .isra.0]
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/IO/BufferBase.h:99

DB::VolnitskyBase<true, true, DB::StringSearcher<true, true> >::search(unsigned char const*, unsigned long)
const
    /opt/milovidov/ClickHouse/build_gcc9/dbms/programs/clickhouse
DB::MatchImpl<true, false>::vector_constant(DB::PODArray<unsigned char, AllocatorWithHint<false, AllocatorHints::DefaultHint, 67108864ul>, 15ul, 16ul> const&, DB::PODArray<unsigned long, AllocatorWithHint<false, AllocatorHints::DefaultHint, 67108864ul>, 15ul, 16ul> const&, std::__cxx11::basic_string<char, std::char_traits<char>, std::allocator<char>> const&, DB::PODArray<unsigned char, AllocatorWithHint<false, AllocatorHints::DefaultHint, 67108864ul>, 15ul, 16ul>&)
        /opt/milovidov/ClickHouse/build_gcc9/dbms/programs/clickhouse
DB::FunctionsStringSearch<DB::MatchImpl<true, false>, DB::NameLike>::executeImpl(DB::Block&, std::vector<unsigned long, std::allocator<unsigned long>> const&, unsigned long, unsigned long)
    /opt/milovidov/ClickHouse/build_gcc9/dbms/programs/clickhouse
DB::PreparedFunctionImpl::execute(DB::Block&, std::vector<unsigned long, std::allocator<unsigned long>> const&, unsigned long, unsigned long, bool)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Functions/IFunction.cpp:464
DB::ExpressionAction::execute(DB::Block&, bool) const
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:677
DB::ExpressionActions::execute(DB::Block&, bool) const
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Interpreters/ExpressionActions.cpp:739
DB::MergeTreeRangeReader::executePrewhereActionsAndFilterColumns(DB::MergeTreeRangeReader::ReadResult&)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:660
DB::MergeTreeRangeReader::read(unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange>>&)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:546
DB::MergeTreeRangeReader::read(unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange>>&)
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::MergeTreeBaseSelectBlockInputStream::readFromPartImpl()

/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeBaseSelectBlockInputStream.cpp::

DB::MergeTreeBaseSelectBlockInputStream::readImpl()
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::IBlockInputStream::read()
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ExpressionBlockInputStream::readImpl()
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ExpressionBlockInputStream.cpp:34
DB::IBlockInputStream::read()
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::PartialSortingBlockInputStream::readImpl()
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/PartialSortingBlockInputStream.cpp:13
DB::IBlockInputStream::read()
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::loop(unsigned long)
    /usr/local/include/c++/9.1.0/bits/atomic_base.h:419
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::thread(std::shared_ptr<DB::ThreadGroupStatus>)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ParallelInputsProcessor.h:215
ThreadFromGlobalPool::ThreadFromGlobalPool<void
(DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*)
(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*, std::shared_ptr<DB::ThreadGroupStatus>, unsigned long&)(void (DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*&)
(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*&&, std::shared_ptr<DB::ThreadGroupStatus>::operator()() const
    /usr/local/include/c++/9.1.0/bits/shared_ptr_base.h:729
ThreadPoolImpl<std::thread>::worker(std::_List_iterator<std::thread>)
```

```
/usr/local/include/c++/9.1.0/bits/unique_lock.h:69
execute_native_thread_routine
/home/milovidov/ClickHouse/ci/workspace/gcc/gcc-build/x86_64-pc-linux-gnu/libstdc++-
v3/include/bits/unique_ptr.h:81
start_thread

__clone

Row 5:
_____
count(): 1672
sym:      StackTrace::StackTrace(ucontext_t const&
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Common/StackTrace.cpp:208
DB::(anonymous namespace)::writeTraceInfo(DB::TimerType, int, siginfo_t*, void*) [clone .isra.0]
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/IO/BufferBase.h:99

DB::VolnitskyBase<true, true, DB::StringSearcher<true, true> >::search(unsigned char const*, unsigned long)
const
    /opt/milovidov/ClickHouse/build_gcc9/dbms/programs/clickhouse
DB::MatchImpl<true, false>::vector_constant(DB::PODArray<unsigned char, 4096ul, AllocatorWithHint<false,
AllocatorHints::DefaultHint, 67108864ul>, 15ul, 16ul> const&, DB::PODArray<unsigned long, 4096ul,
AllocatorWithHint<false, AllocatorHints::DefaultHint, 67108864ul>, 15ul, 16ul> const&,
std::__cxx11::basic_string<char, std::char_traits<char>, std::allocator<char> > const&,
DB::PODArray<unsigned char, 4096ul, AllocatorWithHint<false, AllocatorHints::DefaultHint, 67108864ul>,
15ul, 16ul>&)
    /opt/milovidov/ClickHouse/build_gcc9/dbms/programs/clickhouse
DB::FunctionsStringSearch<DB::MatchImpl<true, false>, DB::NameLike>::executeImpl(DB::Block&,
std::vector<unsigned long, std::allocator<unsigned long> > const&, unsigned long, unsigned long)
    /opt/milovidov/ClickHouse/build_gcc9/dbms/programs/clickhouse
DB::PreparedFunctionImpl::execute(DB::Block&, std::vector<unsigned long, std::allocator<unsigned long> >
const&, unsigned long, unsigned long, bool)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Functions/IFunction.cpp:464
DB::ExpressionAction::execute(DB::Block&, bool) const
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:677
DB::ExpressionActions::execute(DB::Block&, bool) const
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Interpreters/ExpressionActions.cpp:739
DB::MergeTreeRangeReader::executePrewhereActionsAndFilterColumns(DB::MergeTreeRangeReader::ReadResult&)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:660
DB::MergeTreeRangeReader::read(unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange> >&)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:546
DB::MergeTreeRangeReader::read(unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange> >&)
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::MergeTreeBaseSelectBlockInputStream::readFromPartImpl()

/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeBaseSelectBlockInputStream.cpp::

DB::MergeTreeBaseSelectBlockInputStream::readImpl()
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::IBlockInputStream::read()
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ExpressionBlockInputStream::readImpl()
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ExpressionBlockInputStream.cpp:34
DB::IBlockInputStream::read()
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::PartialSortingBlockInputStream::readImpl()
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/PartialSortingBlockInputStream.cpp:13
DB::IBlockInputStream::read()
    /usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::loop(unsigned long)
    /usr/local/include/c++/9.1.0/bits/atomic_base.h:419
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::thread(std::shared_ptr<DB::ThreadGroupStatus>
unsigned long)
    /home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ParallelInputsProcessor.h:215
ThreadFromGlobalPool::ThreadFromGlobalPool<void
(DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*)
(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*, std::shared_ptr<DB::ThreadGroupStatus>,
unsigned long>(<void (DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*&>
(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*&&,
std::shared_ptr<DB::ThreadGroupStatus>&&, unsigned long)>:{lambda()#1}::operator()() const
```

```
/usr/local/include/c++/9.1.0/bits/shared_ptr_base.h:729
ThreadPoolImpl<std::thread>::worker(std::_List_iterator<std::thread>)
/usr/local/include/c++/9.1.0/bits/unique_lock.h:69
execute_native_thread_routine
/home/milovidov/ClickHouse/ci/workspace/gcc/gcc-build/x86_64-pc-linux-gnu/libstdc++
v3/include/bits/unique_ptr.h:81
start_thread

__clone

Row 6:
_____
count(): 1531
sym:      StackTrace::StackTrace(ucontext_t const&
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Common/StackTrace.cpp:208
DB::(anonymous namespace)::writeTraceInfo(DB::TimerType, int, siginfo_t*, void*) [clone .isra.0]
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/IO/BufferBase.h:99

read

DB::ReadBufferFromFileDescriptor::nextImpl()
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/IO/ReadBufferFromFileDescriptor.cpp:56
DB::CompressedReadBufferBase::readCompressedData(unsigned long&, unsigned long&)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/IO/ReadBuffer.h:54
DB::CompressedReadBufferFromFile::nextImpl()
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Compression/CompressedReadBufferFromFile.cpp:22
void DB::deserializeBinarySSE2<4>(DB::PODArray<unsigned char, 4096ul, AllocatorWithHint<false,
AllocatorHints::DefaultHint, 67108864ul>, 15ul, 16ul>&, DB::PODArray<unsigned long, 4096ul,
AllocatorWithHint<false, AllocatorHints::DefaultHint, 67108864ul>, 15ul, 16ul>&, DB::ReadBuffer&, unsigned
long)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/IO/ReadBuffer.h:53
DB::DataTypeString::deserializeBinaryBulk(DB::IColumn&, DB::ReadBuffer&, unsigned long, double) const
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataTypes/DataTypeString.cpp:202
DB::MergeTreeReader::readData(std::__cxx11::basic_string<char, std::char_traits<char>, std::allocator<char>
> const&, DB::IDataType const&, DB::IColumn&, unsigned long, bool, unsigned long, bool)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeReader.cpp:232
DB::MergeTreeReader::readRows(unsigned long, bool, unsigned long, DB::Block&)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeReader.cpp:111
DB::MergeTreeRangeReader::DelayedStream::finalize(DB::Block&)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:35
DB::MergeTreeRangeReader::startReadingChain(unsigned long, std::vector<DB::MarkRange,
std::allocator<DB::MarkRange> >&)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:219
DB::MergeTreeRangeReader::read(unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange> >&)
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::MergeTreeRangeReader::read(unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange> >&)
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::MergeTreeBaseSelectBlockInputStream::readFromPartImpl()

/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeBaseSelectBlockInputStream.cpp::

DB::MergeTreeBaseSelectBlockInputStream::readImpl()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ExpressionBlockInputStream::readImpl()
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ExpressionBlockInputStream.cpp:34
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::PartialSortingBlockInputStream::readImpl()
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/PartialSortingBlockInputStream.cpp:13
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::loop(unsigned long)
/usr/local/include/c++/9.1.0/bits/atomic_base.h:419
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::thread(std::shared_ptr<DB::ThreadGroupStatus>
unsigned long)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ParallelInputsProcessor.h:215
ThreadFromGlobalPool::ThreadFromGlobalPool<void
(DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*)
(std::shared_ptr<DB::ThreadGroupStatus> unsigned long)
```

```

(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*, std::shared_ptr<DB::ThreadGroupStatus>,
unsigned long&>(void (DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*&&)
(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*&&,
std::shared_ptr<DB::ThreadGroupStatus>&&, unsigned long):{lambda()#1}::operator()() const
/usr/local/include/c++/9.1.0/bits/shared_ptr_base.h:729
ThreadPoolImpl<std::thread>::worker(std::_List_iterator<std::thread>)
/usr/local/include/c++/9.1.0/bits/unique_lock.h:69
execute_native_thread_routine
/home/milovidov/ClickHouse/ci/workspace/gcc/gcc-build/x86_64-pc-linux-gnu/libstdc++-
v3/include/bits/unique_ptr.h:81
start_thread

__clone

Row 7:
_____
count(): 1034
sym:      StackTrace::StackTrace(ucontext_t const&)
/home/milovidov/ClickHouse/build_gcc9/./dbms/src/Common/StackTrace.cpp:208
DB::(anonymous namespace)::writeTraceInfo(DB::TimerType, int, siginfo_t*, void*) [clone .isra.0]
/home/milovidov/ClickHouse/build_gcc9/./dbms/src/IO/BufferBase.h:99

DB::VolnitskyBase<true, true, DB::StringSearcher<true, true> >::search(unsigned char const*, unsigned long)
const
/opt/milovidov/ClickHouse/build_gcc9/dbms/programs/clickhouse
DB::MatchImpl<true, false>::vector_constant(DB::PODArray<unsigned char, 4096ul, AllocatorWithHint<false,
AllocatorHints::DefaultHint, 67108864ul>, 15ul, 16ul> const&, DB::PODArray<unsigned long, 4096ul,
AllocatorWithHint<false, AllocatorHints::DefaultHint, 67108864ul>, 15ul, 16ul> const&,
std::__cxx11::basic_string<char, std::char_traits<char>, std::allocator<char> > const&,
DB::PODArray<unsigned char, 4096ul, AllocatorWithHint<false, AllocatorHints::DefaultHint, 67108864ul>,
15ul, 16ul>&)
/opt/milovidov/ClickHouse/build_gcc9/dbms/programs/clickhouse
DB::FunctionsStringSearch<DB::MatchImpl<true, false>, DB::NameLike>::executeImpl(DB::Block&,
std::vector<unsigned long, std::allocator<unsigned long> > const&, unsigned long, unsigned long)
/opt/milovidov/ClickHouse/build_gcc9/dbms/programs/clickhouse
DB::PreparedFunctionImpl::execute(DB::Block&, std::vector<unsigned long, std::allocator<unsigned long> >
const&, unsigned long, unsigned long, bool)
/home/milovidov/ClickHouse/build_gcc9/./dbms/src/Functions/IFunction.cpp:464
DB::ExpressionAction::execute(DB::Block&, bool) const
/usr/local/include/c++/9.1.0/bits/stl_vector.h:677
DB::ExpressionActions::execute(DB::Block&, bool) const
/home/milovidov/ClickHouse/build_gcc9/./dbms/src/Interpreters/ExpressionActions.cpp:739
DB::MergeTreeRangeReader::executePrewhereActionsAndFilterColumns(DB::MergeTreeRangeReader::ReadResult&)
/home/milovidov/ClickHouse/build_gcc9/./dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:660
DB::MergeTreeRangeReader::read(unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange> >&)
/home/milovidov/ClickHouse/build_gcc9/./dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:546
DB::MergeTreeRangeReader::read(unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange> >&)
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::MergeTreeBaseSelectBlockInputStream::readFromPartImpl()

/home/milovidov/ClickHouse/build_gcc9/./dbms/src/Storages/MergeTree/MergeTreeBaseSelectBlockInputStream.cpp::

DB::MergeTreeBaseSelectBlockInputStream::readImpl()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ExpressionBlockInputStream::readImpl()
/home/milovidov/ClickHouse/build_gcc9/./dbms/src/DataStreams/ExpressionBlockInputStream.cpp:34
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::PartialSortingBlockInputStream::readImpl()
/home/milovidov/ClickHouse/build_gcc9/./dbms/src/DataStreams/PartialSortingBlockInputStream.cpp:13
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::loop(unsigned long)
/usr/local/include/c++/9.1.0/bits/atomic_base.h:419
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::thread(std::shared_ptr<DB::ThreadGroupStatus>
unsigned long)
/home/milovidov/ClickHouse/build_gcc9/./dbms/src/DataStreams/ParallelInputsProcessor.h:215

```

```
ThreadFromGlobalPool::ThreadFromGlobalPool<void
(DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*)
(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*, std::shared_ptr<DB::ThreadGroupStatus>,
unsigned long&>(void (DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*&&)
(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*&&,
std::shared_ptr<DB::ThreadGroupStatus>&&, unsigned long)::operator()() const
/usr/local/include/c++/9.1.0/bits/shared_ptr_base.h:729
ThreadPoolImpl<std::thread>::worker(std::_List_iterator<std::thread>)
/usr/local/include/c++/9.1.0/bits/unique_lock.h:69
execute_native_thread_routine
/home/milovidov/ClickHouse/ci/workspace/gcc/gcc-build/x86_64-pc-linux-gnu/libstdc++-
v3/include/bits/unique_ptr.h:81
start_thread

__clone

Row 8:
_____
count(): 989
sym:      StackTrace::StackTrace(ucontext_t const&)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Common/StackTrace.cpp:208
DB::(anonymous namespace)::writeTraceInfo(DB::TimerType, int, siginfo_t*, void*) [clone .isra.0]
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/IO/BufferBase.h:99

_____
_lll_lock_wait

pthread_mutex_lock

DB::MergeTreeReaderStream::loadMarks()
/usr/local/include/c++/9.1.0/bits/std_mutex.h:103
DB::MergeTreeReaderStream::MergeTreeReaderStream(std::__cxx11::basic_string<char, std::char_traits<char>,
std::allocator<char> > const&, std::__cxx11::basic_string<char, std::char_traits<char>,
std::allocator<char> > const&, unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange> >
const&, DB::MarkCache*, bool, DB::UncompressedCache*, unsigned long, unsigned long, unsigned long,
DB::MergeTreeIndexGranularityInfo const*, std::function<void (DB::ReadBufferFromFileBase::ProfileInfo)>
const&, int)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeReaderStream.cpp:107
std::_Function_handler<void (std::vector<DB::IDataType::Substream, std::allocator<DB::IDataType::Substream> >
const&), DB::MergeTreeReader::addStreams(std::__cxx11::basic_string<char, std::char_traits<char>,
std::allocator<char> > const&, DB::IDataType const&, std::function<void
(DB::ReadBufferFromFileBase::ProfileInfo)> const&, int)::{lambda(std::vector<DB::IDataType::Substream,
std::allocator<DB::IDataType::Substream> > const&)#1}>::_M_invoke(std::_Any_data const&,
std::vector<DB::IDataType::Substream, std::allocator<DB::IDataType::Substream> > const&)
/usr/local/include/c++/9.1.0/bits/unique_ptr.h:147
DB::MergeTreeReader::addStreams(std::__cxx11::basic_string<char, std::char_traits<char>,
std::allocator<char> > const&, DB::IDataType const&, std::function<void
(DB::ReadBufferFromFileBase::ProfileInfo)> const&, int)
/usr/local/include/c++/9.1.0/bits/stl_vector.h:677
DB::MergeTreeReader::MergeTreeReader(std::__cxx11::basic_string<char, std::char_traits<char>,
std::allocator<char> > const&, std::shared_ptr<DB::MergeTreeDataPart const> const&, DB::NamesAndTypesList
const&, DB::UncompressedCache*, DB::MarkCache*, bool, DB::MergeTreeData const&, std::vector<DB::MarkRange,
std::allocator<DB::MarkRange> > const&, unsigned long, unsigned long,
std::map<std::__cxx11::basic_string<char, std::char_traits<char>, std::allocator<char> >, double,
std::less<std::__cxx11::basic_string<char, std::char_traits<char>, std::allocator<char> > >,
std::allocator<std::pair<std::__cxx11::basic_string<char, std::char_traits<char>, std::allocator<char> >
const, double> > const&, std::function<void (DB::ReadBufferFromFileBase::ProfileInfo)> const&, int)
/usr/local/include/c++/9.1.0/bits/stl_list.h:303
DB::MergeTreeThreadSelectBlockInputStream::getNewTask()
/usr/local/include/c++/9.1.0/bits/std_function.h:259
DB::MergeTreeBaseSelectBlockInputStream::readImpl()

/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeBaseSelectBlockInputStream.cpp:1

DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ExpressionBlockInputStream::readImpl()
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ExpressionBlockInputStream.cpp:34
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
```

```
DB::PartialSortingBlockInputStream::readImpl()
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/PartialSortingBlockInputStream.cpp:13
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::loop(unsigned long)
/usr/local/include/c++/9.1.0/bits/atomic_base.h:419
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::thread(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ParallelInputsProcessor.h:215
ThreadFromGlobalPool::ThreadFromGlobalPool<void
(DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*)
(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*, std::shared_ptr<DB::ThreadGroupStatus>, unsigned long&)(void (DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*&&)(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*&&, std::shared_ptr<DB::ThreadGroupStatus>&&, unsigned long&):{lambda()#1}::operator()() const
/usr/local/include/c++/9.1.0/bits/shared_ptr_base.h:729
ThreadPoolImpl<std::thread>::worker(std::_List_iterator<std::thread>)
/usr/local/include/c++/9.1.0/bits/unique_lock.h:69
execute_native_thread_routine
/home/milovidov/ClickHouse/ci/workspace/gcc/gcc-build/x86_64-pc-linux-gnu/libstdc++-v3/include/bits/unique_ptr.h:81
start_thread

__clone
```

Row 9:

```
count(): 779
sym:      StackTrace::StackTrace(ucontext_t const&)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Common/StackTrace.cpp:208
DB::(anonymous namespace)::writeTraceInfo(DB::TimerType, int, siginfo_t*, void*) [clone .isra.0]
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/IO/BufferBase.h:99

void DB::deserializeBinarySSE2<4>(DB::PODArray<unsigned char, 4096ul, AllocatorWithHint<false, AllocatorHints::DefaultHint, 67108864ul>, 15ul, 16ul>&, DB::PODArray<unsigned long, 4096ul, AllocatorWithHint<false, AllocatorHints::DefaultHint, 67108864ul>, 15ul, 16ul>&, DB::ReadBuffer&, unsigned long)
/usr/local/lib/gcc/x86_64-pc-linux-gnu/9.1.0/include/emmintrin.h:727
DB::DataTypeString::deserializeBinaryBulk(DB::IColumn&, DB::ReadBuffer&, unsigned long, double) const
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataTypes/DataTypeString.cpp:202
DB::MergeTreeReader::readData(std::__cxx11::basic_string<char, std::char_traits<char>, std::allocator<char>> const&, DB::IDataType const&, DB::IColumn&, unsigned long, bool, unsigned long, bool)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeReader.cpp:232
DB::MergeTreeReader::readRows(unsigned long, bool, unsigned long, DB::Block&)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeReader.cpp:111
DB::MergeTreeRangeReader::DelayedStream::finalize(DB::Block&)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:35
DB::MergeTreeRangeReader::startReadingChain(unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange> >&)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:219
DB::MergeTreeRangeReader::read(unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange> >&)
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::MergeTreeRangeReader::read(unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange> >&)
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::MergeTreeBaseSelectBlockInputStream::readFromPartImpl()

/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeBaseSelectBlockInputStream.cpp::

DB::MergeTreeBaseSelectBlockInputStream::readImpl()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ExpressionBlockInputStream::readImpl()
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ExpressionBlockInputStream.cpp:34
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::PartialSortingBlockInputStream::readImpl()
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/PartialSortingBlockInputStream.cpp:13
DB::TBlockInputStream::read()
```

```
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::loop(unsigned long)
/usr/local/include/c++/9.1.0/bits/atomic_base.h:419
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::thread(std::shared_ptr<DB::ThreadGroupStatus>,
unsigned long)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ParallelInputsProcessor.h:215
ThreadFromGlobalPool::ThreadFromGlobalPool<void
(DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*)
(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*, std::shared_ptr<DB::ThreadGroupStatus>,
unsigned long&>(void (DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*&&)
(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*&&,
std::shared_ptr<DB::ThreadGroupStatus>&&, unsigned long&):{lambda()#1}::operator()() const
/usr/local/include/c++/9.1.0/bits/shared_ptr_base.h:729
ThreadPoolImpl<std::thread>::worker(std::_List_iterator<std::thread>)
/usr/local/include/c++/9.1.0/bits/unique_lock.h:69
execute_native_thread_routine
/home/milovidov/ClickHouse/ci/workspace/gcc/gcc-build/x86_64-pc-linux-gnu/libstdc++-
v3/include/bits/unique_ptr.h:81
start_thread

__clone
```

Row 10:

```
count(): 666
sym: StackTrace::StackTrace(ucontext_t const&)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Common/StackTrace.cpp:208
DB::(anonymous namespace)::writeTraceInfo(DB::TimerType, int, siginfo_t*, void*) [clone .isra.0]
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/IO/BufferBase.h:99

void DB::deserializeBinarySSE2<4>(DB::PODArray<unsigned char, 4096ul, AllocatorWithHint<false,
AllocatorHints::DefaultHint, 67108864ul>, 15ul, 16ul>&, DB::PODArray<unsigned long, 4096ul,
AllocatorWithHint<false, AllocatorHints::DefaultHint, 67108864ul>, 15ul, 16ul>&, DB::ReadBuffer&, unsigned
long)
/usr/local/lib/gcc/x86_64-pc-linux-gnu/9.1.0/include/emmintrin.h:727
DB::DataTypeString::deserializeBinaryBulk(DB::IColumn&, DB::ReadBuffer&, unsigned long, double) const
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataTypes/DataTypeString.cpp:202
DB::MergeTreeReader::readData(std::__cxx11::basic_string<char, std::char_traits<char>, std::allocator<char>>
const&, DB::IDataType const&, DB::IColumn&, unsigned long, bool, unsigned long, bool)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeReader.cpp:232
DB::MergeTreeReader::readRows(unsigned long, bool, unsigned long, DB::Block&)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeReader.cpp:111
DB::MergeTreeRangeReader::DelayedStream::finalize(DB::Block&)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:35
DB::MergeTreeRangeReader::startReadingChain(unsigned long, std::vector<DB::MarkRange,
std::allocator<DB::MarkRange> &)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeRangeReader.cpp:219
DB::MergeTreeRangeReader::read(unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange> >&)
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::MergeTreeRangeReader::read(unsigned long, std::vector<DB::MarkRange, std::allocator<DB::MarkRange> >&)
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::MergeTreeBaseSelectBlockInputStream::readFromPartImpl()

/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/Storages/MergeTree/MergeTreeBaseSelectBlockInputStream.cpp::

DB::MergeTreeBaseSelectBlockInputStream::readImpl()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ExpressionBlockInputStream::readImpl()
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ExpressionBlockInputStream.cpp:34
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::PartialSortingBlockInputStream::readImpl()
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/PartialSortingBlockInputStream.cpp:13
DB::IBlockInputStream::read()
/usr/local/include/c++/9.1.0/bits/stl_vector.h:108
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::loop(unsigned long)
```

```
/usr/local/include/c++/9.1.0/bits/atomic_base.h:419
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::thread(std::shared_ptr<DB::ThreadGroupStatus>,
unsigned long)
/home/milovidov/ClickHouse/build_gcc9/..../dbms/src/DataStreams/ParallelInputsProcessor.h:215
ThreadFromGlobalPool::ThreadFromGlobalPool<void
(DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*)
(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*, std::shared_ptr<DB::ThreadGroupStatus>,
unsigned long&>(void (DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>::*&&)
(std::shared_ptr<DB::ThreadGroupStatus>, unsigned long),
DB::ParallelInputsProcessor<DB::UnionBlockInputStream::Handler>*&&,
std::shared_ptr<DB::ThreadGroupStatus>&&, unsigned long&):{lambda()#1}::operator()() const
/usr/local/include/c++/9.1.0/bits/shared_ptr_base.h:729
ThreadPoolImpl<std::thread>::worker(std::__List_iterator<std::thread>)
/usr/local/include/c++/9.1.0/bits/unique_lock.h:69
execute_native_thread_routine
/home/milovidov/ClickHouse/ci/workspace/gcc/gcc-build/x86_64-pc-linux-gnu/libstdc++-
v3/include/bits/unique_ptr.h:81
start_thread

__clone
```

## How To Test Your Hardware With ClickHouse

With this instruction you can run basic ClickHouse performance test on any server without installation of ClickHouse packages.

- \1. Go to "commits" page: <https://github.com/ClickHouse/ClickHouse/commits/master>
- \2. Click on the first green check mark or red cross with green "ClickHouse Build Check" and click on the "Details" link near "ClickHouse Build Check".
- \3. Copy the link to "clickhouse" binary for amd64 or aarch64.
- \4. ssh to the server and download it with wget:

```
## For amd64:
wget https://clickhouse-
builds.s3.yandex.net/0/00ba767f5d2a929394ea3be193b1f79074a1c4bc/1578163263_binary/clickhouse
## For aarch64:
wget https://clickhouse-
builds.s3.yandex.net/0/00ba767f5d2a929394ea3be193b1f79074a1c4bc/1578161264_binary/clickhouse
## Then do:
chmod a+x clickhouse
```

- \5. Download configs:

```
wget https://raw.githubusercontent.com/ClickHouse/ClickHouse/master/dbms/programs/server/config.xml
wget https://raw.githubusercontent.com/ClickHouse/ClickHouse/master/dbms/programs/server/users.xml
mkdir config.d
wget https://raw.githubusercontent.com/ClickHouse/ClickHouse/master/dbms/programs/server/config.d/path.xml
-O config.d/path.xml
wget
https://raw.githubusercontent.com/ClickHouse/ClickHouse/master/dbms/programs/server/config.d/log_to_console.xml
-O config.d/log_to_console.xml
```

- \6. Download benchmark files:

```
wget https://raw.githubusercontent.com/ClickHouse/ClickHouse/master/dbms/benchmark/clickhouse/benchmark-
new.sh
chmod a+x benchmark-new.sh
wget https://raw.githubusercontent.com/ClickHouse/ClickHouse/master/dbms/benchmark/clickhouse/queries.sql
```

\7. Download test data:

According to the instruction:

[https://clickhouse.tech/docs/en/getting\\_started/example\\_datasets/metrica/](https://clickhouse.tech/docs/en/getting_started/example_datasets/metrica/)

("hits" table containing 100 million rows)

```
wget https://clickhouse-datasets.s3.yandex.net/hits/partitions/hits_100m_obfuscated_v1.tar.xz
tar xvf hits_100m_obfuscated_v1.tar.xz -C .
mv hits_100m_obfuscated_v1/* .
```

\8. Run the server:

```
./clickhouse server
```

\9. Check the data:

ssh to the server in another terminal

```
./clickhouse client --query "SELECT count() FROM hits_100m_obfuscated"
1000000000
```

\10. Edit the benchmark-new.sh, change "clickhouse-client" to "./clickhouse client" and add "--max\_memory\_usage 1000000000000" parameter.

```
mcedit benchmark-new.sh
```

\11. Run the benchmark:

```
./benchmark-new.sh hits_100m_obfuscated
```

\12. Send the numbers and the info about your hardware configuration to clickhouse-feedback@yandex-team.com

All the results are published here:[https://clickhouse.tech/benchmark\\_hardware.html](https://clickhouse.tech/benchmark_hardware.html)

## Server configuration parameters

This section contains descriptions of server settings that cannot be changed at the session or query level.

These settings are stored in the config.xml file on the ClickHouse server.

Other settings are described in the "Settings" section.

Before studying the settings, read the Configuration files section and note the use of substitutions (the incl and optional attributes).

## Server settings

### builtin\_dictionaries\_reload\_interval

The interval in seconds before reloading built-in dictionaries.

ClickHouse reloads built-in dictionaries every x seconds. This makes it possible to edit dictionaries "on the fly" without restarting the server.

Default value: 3600.

## Example

```
<builtin_dictionaries_reload_interval>3600</builtin_dictionaries_reload_interval>
```

## compression

Data compression settings for **MergeTree**-engine tables.



### Warning

Don't use it if you have just started using ClickHouse.

Configuration template:

```
<compression>
  <case>
    <min_part_size>...</min_part_size>
    <min_part_size_ratio>...</min_part_size_ratio>
    <method>...</method>
  </case>
  ...
</compression>
```

<case> fields:

- `min_part_size` – The minimum size of a data part.
- `min_part_size_ratio` – The ratio of the data part size to the table size.
- `method` – Compression method. Acceptable values: `lz4` or `zstd`.

You can configure multiple `<case>` sections.

Actions when conditions are met:

- If a data part matches a condition set, ClickHouse uses the specified compression method.
- If a data part matches multiple condition sets, ClickHouse uses the first matched condition set.

If no conditions met for a data part, ClickHouse uses the `lz4` compression.

## Example

```
<compression incl="clickhouse_compression">
  <case>
    <min_part_size>10000000000</min_part_size>
    <min_part_size_ratio>0.01</min_part_size_ratio>
    <method>zstd</method>
  </case>
</compression>
```

## default\_database

The default database.

To get a list of databases, use the **SHOW DATABASES** query.

## Example

```
<default_database>default</default_database>
```

## default\_profile

Default settings profile.

Settings profiles are located in the file specified in the parameter `user_config`.

Example

```
<default_profile>default</default_profile>
```

## dictionaries\_config

The path to the config file for external dictionaries.

Path:

- Specify the absolute path or the path relative to the server config file.
- The path can contain wildcards \* and ?.

See also "[External dictionaries](#)".

Example

```
<dictionaries_config>*_dictionary.xml</dictionaries_config>
```

## dictionaries\_lazy\_load

Lazy loading of dictionaries.

If `true`, then each dictionary is created on first use. If dictionary creation failed, the function that was using the dictionary throws an exception.

If `false`, all dictionaries are created when the server starts, and if there is an error, the server shuts down.

The default is `true`.

Example

```
<dictionaries_lazy_load>true</dictionaries_lazy_load>
```

## format\_schema\_path

The path to the directory with the schemes for the input data, such as schemas for the [CapnProto](#) format.

Example

```
<!-- Directory containing schema files for various input formats. -->
<format_schema_path>format_schemas/</format_schema_path>
```

## graphite

Sending data to [Graphite](#).

## Settings:

- host – The Graphite server.
- port – The port on the Graphite server.
- interval – The interval for sending, in seconds.
- timeout – The timeout for sending data, in seconds.
- root\_path – Prefix for keys.
- metrics – Sending data from the `system.metrics` table.
- events – Sending deltas data accumulated for the time period from the `system.events` table.
- events\_cumulative – Sending cumulative data from the `system.events` table.
- asynchronous\_metrics – Sending data from the `system.asynchronous_metrics` table.

You can configure multiple `<graphite>` clauses. For instance, you can use this for sending different data at different intervals.

## Example

```
<graphite>
  <host>localhost</host>
  <port>42000</port>
  <timeout>0.1</timeout>
  <interval>60</interval>
  <root_path>one_min</root_path>
  <metrics>true</metrics>
  <events>true</events>
  <events_cumulative>false</events_cumulative>
  <asynchronous_metrics>true</asynchronous_metrics>
</graphite>
```

## graphite\_rollup

Settings for thinning data for Graphite.

For more details, see [GraphiteMergeTree](#).

## Example

```
<graphite_rollup_example>
  <default>
    <function>max</function>
    <retention>
      <age>0</age>
      <precision>60</precision>
    </retention>
    <retention>
      <age>3600</age>
      <precision>300</precision>
    </retention>
    <retention>
      <age>86400</age>
      <precision>3600</precision>
    </retention>
  </default>
</graphite_rollup_example>
```

## http\_port/https\_port

The port for connecting to the server over HTTP(s).

If `https_port` is specified, `openSSL` must be configured.

If `http_port` is specified, the `openSSL` configuration is ignored even if it is set.

Example

```
<https>0000</https>
```

## http\_server\_default\_response

The page that is shown by default when you access the ClickHouse HTTP(s) server. Default value is "Ok." (with a line feed at the end)

Example

Opens `https://tabix.io/` when accessing `http://localhost: http_port`.

```
<http_server_default_response>
<! [CDATA[<html ng-app="SMI2"><head><base href="http://ui.tabix.io/"></head><body><div ui-view="" class="content-ui"></div><script src="http://loader.tabix.io/master.js"></script></body></html>]]>
</http_server_default_response>
```

## include\_from

The path to the file with substitutions.

For more information, see the section "[Configuration files](#)".

Example

```
<include_from>/etc/metrica.xml</include_from>
```

## interserver\_http\_port

Port for exchanging data between ClickHouse servers.

Example

```
<interserver_http_port>9009</interserver_http_port>
```

## interserver\_http\_host

The host name that can be used by other servers to access this server.

If omitted, it is defined in the same way as the `hostname-f` command.

Useful for breaking away from a specific network interface.

Example

```
<interserver_http_host>example.yandex.ru</interserver_http_host>
```

## interserver\_http\_credentials

The username and password used to authenticate during `replication` with the Replicated\* engines. These credentials are

used only for communication between replicas and are unrelated to credentials for ClickHouse clients. The server is checking these credentials for connecting replicas and use the same credentials when connecting to other replicas. So, these credentials should be set the same for all replicas in a cluster. By default, the authentication is not used.

This section contains the following parameters:

- `user` — username.
- `password` — password.

Example

```
<interserver_http_credentials>
  <user>admin</user>
  <password>222</password>
</interserver_http_credentials>
```

## keep\_alive\_timeout

The number of seconds that ClickHouse waits for incoming requests before closing the connection. Defaults to 3 seconds.

Example

```
<keep_alive_timeout>3</keep_alive_timeout>
```

## listen\_host

Restriction on hosts that requests can come from. If you want the server to answer all of them, specify `::`.

Examples:

```
<listen_host>::1</listen_host>
<listen_host>127.0.0.1</listen_host>
```

## logger

Logging settings.

Keys:

- `level` – Logging level. Acceptable values: `trace` , `debug` , `information` , `warning` , `error` .
- `log` – The log file. Contains all the entries according to `level` .
- `errorlog` – Error log file.
- `size` – Size of the file. Applies to `log` and `errorlog` . Once the file reaches `size` , ClickHouse archives and renames it, and creates a new log file in its place.
- `count` – The number of archived log files that ClickHouse stores.

Example

```
<logger>
  <level>trace</level>
  <log>/var/log/clickhouse-server/clickhouse-server.log</log>
  <errorlog>/var/log/clickhouse-server/clickhouse-server.err.log</errorlog>
  <size>1000M</size>
  <count>10</count>
</logger>
```

Writing to the syslog is also supported. Config example:

```
<logger>
  <use_syslog>1</use_syslog>
  <syslog>
    <address>syslog.remote:10514</address>
    <hostname>myhost.local</hostname>
    <facility>LOG_LOCAL6</facility>
    <format>syslog</format>
  </syslog>
</logger>
```

Keys:

- `use_syslog` — Required setting if you want to write to the syslog.
- `address` — The host[:port] of syslogd. If omitted, the local daemon is used.
- `hostname` — Optional. The name of the host that logs are sent from.
- `facility` — **The syslog facility keyword** in uppercase letters with the "LOG\_" prefix: (LOG\_USER , LOG\_DAEMON , LOG\_LOCAL3 , and so on). Default value: LOG\_USER if address is specified, LOG\_DAEMON otherwise.
- `format` – Message format. Possible values: `bsd` and `syslog`.

## macros

Parameter substitutions for replicated tables.

Can be omitted if replicated tables are not used.

For more information, see the section "[Creating replicated tables](#)".

Example

```
<macros incl="macros" optional="true" />
```

## mark\_cache\_size

Approximate size (in bytes) of the cache of marks used by table engines of the [MergeTree](#) family.

The cache is shared for the server and memory is allocated as needed. The cache size must be at least 5368709120.

Example

```
<mark_cache_size>5368709120</mark_cache_size>
```

## max\_concurrent\_queries

The maximum number of simultaneously processed requests.

Example

```
<max_concurrent_queries>100</max_concurrent_queries>
```

## max\_connections

The maximum number of inbound connections.

## Example

```
<max_connections>4096</max_connections>
```

## max\_open\_files

The maximum number of open files.

By default: maximum .

We recommend using this option in Mac OS X, since the `getrlimit()` function returns an incorrect value.

## Example

```
<max_open_files>262144</max_open_files>
```

## max\_table\_size\_to\_drop

Restriction on deleting tables.

If the size of a [MergeTree](#) table exceeds `max_table_size_to_drop` (in bytes), you can't delete it using a `DROP` query.

If you still need to delete the table without restarting the ClickHouse server, create the `<clickhouse-path>/flags/force_drop_table` file and run the `DROP` query.

Default value: 50 GB.

The value 0 means that you can delete all tables without any restrictions.

## Example

```
<max_table_size_to_drop>0</max_table_size_to_drop>
```

## merge\_tree

Fine tuning for tables in the [MergeTree](#).

For more information, see the `MergeTreeSettings.h` header file.

## Example

```
<merge_tree>
    <max_suspicious_broken_parts>5</max_suspicious_broken_parts>
</merge_tree>
```

## openSSL

SSL client/server configuration.

Support for SSL is provided by the `libpoco` library. The interface is described in the file [SSLManager.h](#)

Keys for server/client settings:

- `privateKeyFile` – The path to the file with the secret key of the PEM certificate. The file may contain a key and certificate at the same time.
- `certificateFile` – The path to the client/server certificate file in PEM format. You can omit it if `privateKeyFile` contains the

certificate.

- caConfig – The path to the file or directory that contains trusted root certificates.
- verificationMode – The method for checking the node's certificates. Details are in the description of the [Context](#) class. Possible values: none , relaxed , strict , once .
- verificationDepth – The maximum length of the verification chain. Verification will fail if the certificate chain length exceeds the set value.
- loadDefaultCAFile – Indicates that built-in CA certificates for OpenSSL will be used. Acceptable values: true , false . |
- cipherList – Supported OpenSSL encryptions. For example: ALL:!ADH:!LOW:!EXP:!MD5:@STRENGTH .
- cacheSessions – Enables or disables caching sessions. Must be used in combination with sessionIdContext . Acceptable values: true , false .
- sessionIdContext – A unique set of random characters that the server appends to each generated identifier. The length of the string must not exceed `SSL_MAX_SSL_SESSION_ID_LENGTH` . This parameter is always recommended, since it helps avoid problems both if the server caches the session and if the client requested caching. Default value: \${application.name} .
- sessionCacheSize – The maximum number of sessions that the server caches. Default value: 1024\*20. 0 – Unlimited sessions.
- sessionTimeout – Time for caching the session on the server.
- extendedVerification – Automatically extended verification of certificates after the session ends. Acceptable values: true , false .
- requireTLSv1 – Require a TLSv1 connection. Acceptable values: true , false .
- requireTLSv1\_1 – Require a TLSv1.1 connection. Acceptable values: true , false .
- requireTLSv1 – Require a TLSv1.2 connection. Acceptable values: true , false .
- fips – Activates OpenSSL FIPS mode. Supported if the library's OpenSSL version supports FIPS.
- privateKeyPassphraseHandler – Class (PrivateKeyPassphraseHandler subclass) that requests the passphrase for accessing the private key. For example: <privateKeyPassphraseHandler> , <name>KeyFileHandler</name> , <options> <password>test</password></options> , </privateKeyPassphraseHandler> .
- invalidCertificateHandler – Class (subclass of CertificateHandler) for verifying invalid certificates. For example: <invalidCertificateHandler> <name>ConsoleCertificateHandler</name> </invalidCertificateHandler> .
- disableProtocols – Protocols that are not allowed to use.
- preferServerCiphers – Preferred server ciphers on the client.

Example of settings:

```

<openSSL>
  <server>
    <!-- openssl req -subj "/CN=localhost" -new -newkey rsa:2048 -days 365 -nodes -x509 -keyout
    /etc/clickhouse-server/server.key -out /etc/clickhouse-server/server.crt -->
    <certificateFile>/etc/clickhouse-server/server.crt</certificateFile>
    <privateKeyFile>/etc/clickhouse-server/server.key</privateKeyFile>
    <!-- openssl dhparam -out /etc/clickhouse-server/dhparam.pem 4096 -->
    <dhParamsFile>/etc/clickhouse-server/dhparam.pem</dhParamsFile>
    <verificationMode>none</verificationMode>
    <loadDefaultCAFile>true</loadDefaultCAFile>
    <cacheSessions>true</cacheSessions>
    <disableProtocols>sslv2,sslv3</disableProtocols>
    <preferServerCiphers>true</preferServerCiphers>
  </server>
  <client>
    <loadDefaultCAFile>true</loadDefaultCAFile>
    <cacheSessions>true</cacheSessions>
    <disableProtocols>sslv2,sslv3</disableProtocols>
    <preferServerCiphers>true</preferServerCiphers>
    <!-- Use for self-signed: <verificationMode>none</verificationMode> -->
    <invalidCertificateHandler>
      <!-- Use for self-signed: <name>AcceptCertificateHandler</name> -->
      <name>RejectCertificateHandler</name>
    </invalidCertificateHandler>
  </client>
</openSSL>

```

## part\_log

Logging events that are associated with [MergeTree](#). For instance, adding or merging data. You can use the log to simulate merge algorithms and compare their characteristics. You can visualize the merge process.

Queries are logged in the [system.part\\_log](#) table, not in a separate file. You can configure the name of this table in the `table` parameter (see below).

Use the following parameters to configure logging:

- `database` – Name of the database.
- `table` – Name of the system table.
- `partition_by` – Sets a [custom partitioning key](#).
- `flush_interval_milliseconds` – Interval for flushing data from the buffer in memory to the table.

### Example

```

<part_log>
  <database>system</database>
  <table>part_log</table>
  <partition_by>toMonday(event_date)</partition_by>
  <flush_interval_milliseconds>7500</flush_interval_milliseconds>
</part_log>

```

## path

The path to the directory containing data.

### Note

The trailing slash is mandatory.

### Example

```
<path>/var/lib/clickhouse/</path>
```

## query\_log

Setting for logging queries received with the `log_queries=1` setting.

Queries are logged in the `system.query_log` table, not in a separate file. You can change the name of the table in the `table` parameter (see below).

Use the following parameters to configure logging:

- `database` – Name of the database.
- `table` – Name of the system table the queries will be logged in.
- `partition_by` – Sets a [custom partitioning key](#) for a table.
- `flush_interval_milliseconds` – Interval for flushing data from the buffer in memory to the table.

If the table doesn't exist, ClickHouse will create it. If the structure of the query log changed when the ClickHouse server was updated, the table with the old structure is renamed, and a new table is created automatically.

### Example

```
<query_log>
  <database>system</database>
  <table>query_log</table>
  <partition_by>toMonday(event_date)</partition_by>
  <flush_interval_milliseconds>7500</flush_interval_milliseconds>
</query_log>
```

## query\_thread\_log

Setting for logging threads of queries received with the `log_query_threads=1` setting.

Queries are logged in the `system.query_thread_log` table, not in a separate file. You can change the name of the table in the `table` parameter (see below).

Use the following parameters to configure logging:

- `database` – Name of the database.
- `table` – Name of the system table the queries will be logged in.
- `partition_by` – Sets a [custom partitioning key](#) for a system table.
- `flush_interval_milliseconds` – Interval for flushing data from the buffer in memory to the table.

If the table doesn't exist, ClickHouse will create it. If the structure of the query thread log changed when the ClickHouse server was updated, the table with the old structure is renamed, and a new table is created automatically.

### Example

```
<query_thread_log>
  <database>system</database>
  <table>query_thread_log</table>
  <partition_by>toMonday(event_date)</partition_by>
  <flush_interval_milliseconds>7500</flush_interval_milliseconds>
</query_thread_log>
```

## trace\_log

Settings for the `trace_log` system table operation.

Parameters:

- `database` — Database for storing a table.
- `table` — Table name.
- `partition_by` — [Custom partitioning key](#) for a system table.
- `flush_interval_milliseconds` — Interval for flushing data from the buffer in memory to the table.

The default server configuration file `config.xml` contains the following settings section:

```
<trace_log>
  <database>system</database>
  <table>trace_log</table>
  <partition_by>toYYYYMM(event_date)</partition_by>
  <flush_interval_milliseconds>7500</flush_interval_milliseconds>
</trace_log>
```

## query\_masking\_rules

Regexp-based rules, which will be applied to queries as well as all log messages before storing them in server logs, `system.query_log`, `system.text_log`, `system.processes` table, and in logs sent to client. That allows preventing sensitive data leakage from SQL queries (like names / emails / personal identifiers / credit card numbers etc) to logs.

Example

```
<query_masking_rules>
  <rule>
    <name>hide SSN</name>
    <regexp>(^|\D)\d{3}-\d{2}-\d{4}($|\D)</regexp>
    <replace>000-00-0000</replace>
  </rule>
</query_masking_rules>
```

Config fields: - `name` - name for the rule (optional) - `regexp` - RE2 compatible regular expression (mandatory) - `replace` - substitution string for sensitive data (optional, by default - six asterisks)

The masking rules are applied on whole query (to prevent leaks of sensitive data from malformed / non parseable queries).

`system.events` table have counter `QueryMaskingRulesMatch` which have overall number of query masking rules matches.

For distributed queries each server have to be configured separately, otherwise subqueries passed to other nodes will be stored without masking.

## remote\_servers

Configuration of clusters used by the [Distributed](#) table engine and by the `cluster` table function.

Example

```
<remote_servers incl="clickhouse_remote_servers" />
```

For the value of the `incl` attribute, see the section "[Configuration files](#)".

See Also

- [skip\\_unavailable\\_shards](#)

## timezone

The server's time zone.

Specified as an IANA identifier for the UTC time zone or geographic location (for example, Africa/Abidjan).

The time zone is necessary for conversions between String and DateTime formats when DateTime fields are output to text format (printed on the screen or in a file), and when getting DateTime from a string. In addition, the time zone is used in functions that work with the time and date if they didn't receive the time zone in the input parameters.

### Example

```
<timezone>Europe/Moscow</timezone>
```

## tcp\_port

Port for communicating with clients over the TCP protocol.

### Example

```
<tcp_port>9000</tcp_port>
```

## tcp\_port\_secure

TCP port for secure communication with clients. Use it with [OpenSSL](#) settings.

### Possible values

Positive integer.

### Default value

```
<tcp_port_secure>9440</tcp_port_secure>
```

## mysql\_port

Port for communicating with clients over MySQL protocol.

### Possible values

Positive integer.

### Example

```
<mysql_port>9004</mysql_port>
```

## tmp\_path

Path to temporary data for processing large queries.

### Note

The trailing slash is mandatory.

## Example

```
<tmp_path>/var/lib/clickhouse/tmp/</tmp_path>
```

## tmp\_policy

Policy from [storage\\_configuration](#) to store temporary files. If not set [tmp\\_path](#) is used, otherwise it is ignored.

### Note

- `move_factor` is ignored
- `keep_free_space_bytes` is ignored
- `max_data_part_size_bytes` is ignored
- you must have exactly one volume in that policy

## uncompressed\_cache\_size

Cache size (in bytes) for uncompressed data used by table engines from the [MergeTree](#).

There is one shared cache for the server. Memory is allocated on demand. The cache is used if the option [use\\_uncompressed\\_cache](#) is enabled.

The uncompressed cache is advantageous for very short queries in individual cases.

## Example

```
<uncompressed_cache_size>8589934592</uncompressed_cache_size>
```

## user\_files\_path

The directory with user files. Used in the table function [file\(\)](#).

## Example

```
<user_files_path>/var/lib/clickhouse/user_files/</user_files_path>
```

## users\_config

Path to the file that contains:

- User configurations.
- Access rights.
- Settings profiles.
- Quota settings.

## Example

```
<users_config>users.xml</users_config>
```

## zookeeper

Contains settings that allow ClickHouse to interact with a [ZooKeeper](#) cluster.

ClickHouse uses ZooKeeper for storing metadata of replicas when using replicated tables. If replicated tables are not used, this section of parameters can be omitted.

This section contains the following parameters:

- `node` — ZooKeeper endpoint. You can set multiple endpoints.

For example:

```
<node index="1">
    <host>example_host</host>
    <port>2181</port>
</node>
```

The ``index`` attribute specifies the node `order` when trying to connect to the ZooKeeper cluster.

- `session_timeout` — Maximum timeout for the client session in milliseconds.
- `root` — The `znode` that is used as the root for znodes used by the ClickHouse server. Optional.
- `identity` — User and password, that can be required by ZooKeeper to give access to requested znodes. Optional.

Example configuration

```
<zookeeper>
    <node>
        <host>example1</host>
        <port>2181</port>
    </node>
    <node>
        <host>example2</host>
        <port>2181</port>
    </node>
    <session_timeout_ms>30000</session_timeout_ms>
    <operation_timeout_ms>10000</operation_timeout_ms>
    <!-- Optional. Chroot suffix. Should exist. -->
    <root>/path/to/zookeeper/node</root>
    <!-- Optional. Zookeeper digest ACL string. -->
    <identity>user:password</identity>
</zookeeper>
```

See Also

- [Replication](#)
- [ZooKeeper Programmer's Guide](#)

## use\_minimalistic\_part\_header\_in\_zookeeper

Storage method for data part headers in ZooKeeper.

This setting only applies to the `MergeTree` family. It can be specified:

- Globally in the `merge_tree` section of the `config.xml` file.

ClickHouse uses the setting for all the tables on the server. You can change the setting at any time. Existing tables change their behavior when the setting changes.

- For each individual table.

When creating a table, specify the corresponding [engine setting](#). The behavior of an existing table with this setting does not change, even if the global setting changes.

Possible values

- 0 — Functionality is turned off.
- 1 — Functionality is turned on.

If `use_minimalistic_part_header_in_zookeeper = 1`, then **replicated** tables store the headers of the data parts compactly using a single `znode`. If the table contains many columns, this storage method significantly reduces the volume of the data stored in Zookeeper.

#### Attention

After applying `use_minimalistic_part_header_in_zookeeper = 1`, you can't downgrade the ClickHouse server to a version that doesn't support this setting. Be careful when upgrading ClickHouse on servers in a cluster. Don't upgrade all the servers at once. It is safer to test new versions of ClickHouse in a test environment, or on just a few servers of a cluster.

Data part headers already stored with this setting can't be restored to their previous (non-compact) representation.

Default value: 0.

### `disable_internal_dns_cache`

Disables the internal DNS cache. Recommended for operating ClickHouse in systems with frequently changing infrastructure such as Kubernetes.

Default value: 0.

### `dns_cache_update_period`

The period of updating IP addresses stored in the ClickHouse internal DNS cache (in seconds). The update is performed asynchronously, in a separate system thread.

Default value: 15.

## Settings

There are multiple ways to make all the settings described below. Settings are configured in layers, so each subsequent layer redefines the previous settings.

Ways to configure settings, in order of priority:

- Settings in the `users.xml` server configuration file.  
Set in the element `<profiles>`.
- Session settings.  
Send `SET setting=value` from the ClickHouse console client in interactive mode. Similarly, you can use ClickHouse sessions in the HTTP protocol. To do this, you need to specify the `session_id` HTTP parameter.
- Query settings.
  - When starting the ClickHouse console client in non-interactive mode, set the startup parameter `--setting=value`.
  - When using the HTTP API, pass CGI parameters (`URL?setting_1=value&setting_2=value...`).

Settings that can only be made in the server config file are not covered in this section.

## Permissions for queries

Queries in ClickHouse can be divided into several types:

1. Read data queries: `SELECT` , `SHOW` , `DESCRIBE` , `EXISTS` .
2. Write data queries: `INSERT` , `OPTIMIZE` .
3. Change settings queries: `SET` , `USE` .
4. **DDL** queries: `CREATE` , `ALTER` , `RENAME` , `ATTACH` , `DETACH` , `DROP` `TRUNCATE` .
5. `KILL QUERY` .

The following settings regulate user permissions by the type of query:

- **readonly** — Restricts permissions for all types of queries except DDL queries.
- **allow\_ddl** — Restricts permissions for DDL queries.

`KILL QUERY` can be performed with any settings.

## readonly

Restricts permissions for read data, write data and change settings queries.

See how the queries are divided into types[above](#).

Possible values:

- 0 — All queries are allowed.
- 1 — Only read data queries are allowed.
- 2 — Read data and change settings queries are allowed.

After setting `readonly = 1` , the user can't change `readonly` and `allow_ddl` settings in the current session.

When using the `GET` method in the[HTTP interface](#), `readonly = 1` is set automatically. To modify data, use the `POST` method.

Setting `readonly = 1` prohibit the user from changing all the settings. There is a way to prohibit the user from changing only specific settings, for details see [constraints on settings](#).

Default value: 0

## allow\_ddl

Allows or denies **DDL** queries.

See how the queries are divided into types[above](#).

Possible values:

- 0 — DDL queries are not allowed.
- 1 — DDL queries are allowed.

You can't execute `SET allow_ddl = 1` if `allow_ddl = 0` for the current session.

Default value: 1

## Restrictions on query complexity

Restrictions on query complexity are part of the settings. They are used in order to provide safer execution from the user interface. Almost all the restrictions only apply to `SELECT`s. For distributed query processing, restrictions are applied on

each server separately.

Restrictions on the "maximum amount of something" can take the value 0, which means "unrestricted". Most restrictions also have an 'overflow\_mode' setting, meaning what to do when the limit is exceeded. It can take one of two values: `throw` or `break`. Restrictions on aggregation (`group_by_overflow_mode`) also have the value `any`.

`throw` – Throw an exception (default).

`break` – Stop executing the query and return the partial result, as if the source data ran out.

`any` (only for `group_by_overflow_mode`) – Continuing aggregation for the keys that got into the set, but don't add new keys to the set.

## readonly

With a value of 0, you can execute any queries. With a value of 1, you can only execute read requests (such as `SELECT` and `SHOW`). Requests for writing and changing settings (`INSERT`, `SET`) are prohibited. With a value of 2, you can process read queries (`SELECT`, `SHOW`) and change settings (`SET`).

After enabling `readonly` mode, you can't disable it in the current session.

When using the `GET` method in the HTTP interface, '`readonly = 1`' is set automatically. In other words, for queries that modify data, you can only use the `POST` method. You can send the query itself either in the `POST` body, or in the URL parameter.

## max\_memory\_usage

The maximum amount of RAM to use for running a query on a single server.

In the default configuration file, the maximum is 10 GB.

The setting doesn't consider the volume of available memory or the total volume of memory on the machine. The restriction applies to a single query within a single server. You can use `SHOW PROCESSLIST` to see the current memory consumption for each query. In addition, the peak memory consumption is tracked for each query and written to the log.

Memory usage is not monitored for the states of certain aggregate functions.

Memory usage is not fully tracked for states of the aggregate functions `min`, `max`, `any`, `anyLast`, `argMin`, `argMax` from `String` and `Array` arguments.

Memory consumption is also restricted by the parameters `max_memory_usage_for_user` and `max_memory_usage_for_all_queries`.

## max\_memory\_usage\_for\_user

The maximum amount of RAM to use for running a user's queries on a single server.

Default values are defined in [Settings.h](#). By default, the amount is not restricted (`max_memory_usage_for_user = 0`).

See also the description of [max\\_memory\\_usage](#).

## max\_memory\_usage\_for\_all\_queries

The maximum amount of RAM to use for running all queries on a single server.

Default values are defined in [Settings.h](#). By default, the amount is not restricted (`max_memory_usage_for_all_queries = 0`).

See also the description of [max\\_memory\\_usage](#).

## max\_rows\_to\_read

The following restrictions can be checked on each block (instead of on each row). That is, the restrictions can be broken a little. When running a query in multiple threads, the following restrictions apply to each thread separately.

Maximum number of rows that can be read from a table when running a query.

## max\_bytes\_to\_read

Maximum number of bytes (uncompressed data) that can be read from a table when running a query.

## read\_overflow\_mode

What to do when the volume of data read exceeds one of the limits: 'throw' or 'break'. By default, throw.

## max\_rows\_to\_group\_by

Maximum number of unique keys received from aggregation. This setting lets you limit memory consumption when aggregating.

## group\_by\_overflow\_mode

What to do when the number of unique keys for aggregation exceeds the limit: 'throw', 'break', or 'any'. By default, throw. Using the 'any' value lets you run an approximation of GROUP BY. The quality of this approximation depends on the statistical nature of the data.

## max\_rows\_to\_sort

Maximum number of rows before sorting. This allows you to limit memory consumption when sorting.

## max\_bytes\_to\_sort

Maximum number of bytes before sorting.

## sort\_overflow\_mode

What to do if the number of rows received before sorting exceeds one of the limits: 'throw' or 'break'. By default, throw.

## max\_result\_rows

Limit on the number of rows in the result. Also checked for subqueries, and on remote servers when running parts of a distributed query.

## max\_result\_bytes

Limit on the number of bytes in the result. The same as the previous setting.

## result\_overflow\_mode

What to do if the volume of the result exceeds one of the limits: 'throw' or 'break'. By default, throw. Using 'break' is similar to using LIMIT.

## **max\_execution\_time**

Maximum query execution time in seconds. At this time, it is not checked for one of the sorting stages, or when merging and finalizing aggregate functions.

## **timeout\_overflow\_mode**

What to do if the query is run longer than 'max\_execution\_time': 'throw' or 'break'. By default, throw.

## **min\_execution\_speed**

Minimal execution speed in rows per second. Checked on every data block when 'timeout\_before\_checking\_execution\_speed' expires. If the execution speed is lower, an exception is thrown.

## **timeout\_before\_checking\_execution\_speed**

Checks that execution speed is not too slow (no less than 'min\_execution\_speed'), after the specified time in seconds has expired.

## **max\_columns\_to\_read**

Maximum number of columns that can be read from a table in a single query. If a query requires reading a greater number of columns, it throws an exception.

## **max\_temporary\_columns**

Maximum number of temporary columns that must be kept in RAM at the same time when running a query, including constant columns. If there are more temporary columns than this, it throws an exception.

## **max\_temporary\_non\_const\_columns**

The same thing as 'max\_temporary\_columns', but without counting constant columns. Note that constant columns are formed fairly often when running a query, but they require approximately zero computing resources.

## **max\_subquery\_depth**

Maximum nesting depth of subqueries. If subqueries are deeper, an exception is thrown. By default, 100.

## **max\_pipeline\_depth**

Maximum pipeline depth. Corresponds to the number of transformations that each data block goes through during query processing. Counted within the limits of a single server. If the pipeline depth is greater, an exception is thrown. By default, 1000.

## **max\_ast\_depth**

Maximum nesting depth of a query syntactic tree. If exceeded, an exception is thrown. At this time, it isn't checked during parsing, but only after parsing the query. That is, a syntactic tree that is too deep can be created during parsing, but the

query will fail. By default, 1000.

## **max\_ast\_elements**

Maximum number of elements in a query syntactic tree. If exceeded, an exception is thrown. In the same way as the previous setting, it is checked only after parsing the query. By default, 50,000.

## **max\_rows\_in\_set**

Maximum number of rows for a data set in the IN clause created from a subquery.

## **max\_bytes\_in\_set**

Maximum number of bytes (uncompressed data) used by a set in the IN clause created from a subquery.

## **set\_overflow\_mode**

What to do when the amount of data exceeds one of the limits: 'throw' or 'break'. By default, throw.

## **max\_rows\_in\_distinct**

Maximum number of different rows when using DISTINCT.

## **max\_bytes\_in\_distinct**

Maximum number of bytes used by a hash table when using DISTINCT.

## **distinct\_overflow\_mode**

What to do when the amount of data exceeds one of the limits: 'throw' or 'break'. By default, throw.

## **max\_rows\_to\_transfer**

Maximum number of rows that can be passed to a remote server or saved in a temporary table when using GLOBAL IN.

## **max\_bytes\_to\_transfer**

Maximum number of bytes (uncompressed data) that can be passed to a remote server or saved in a temporary table when using GLOBAL IN.

## **transfer\_overflow\_mode**

What to do when the amount of data exceeds one of the limits: 'throw' or 'break'. By default, throw.

# **Settings**

## **distributed\_product\_mode**

Changes the behavior of **distributed subqueries**.

ClickHouse applies this setting when the query contains the product of distributed tables, i.e. when the query for a

distributed table contains a non-GLOBAL subquery for the distributed table.

Restrictions:

- Only applied for IN and JOIN subqueries.
- Only if the FROM section uses a distributed table containing more than one shard.
- If the subquery concerns a distributed table containing more than one shard.
- Not used for a table-valued **remote** function.

Possible values:

- `deny` — Default value. Prohibits using these types of subqueries (returns the "Double-distributed in/JION subqueries is denied" exception).
- `local` — Replaces the database and table in the subquery with local ones for the destination server (shard), leaving the normal IN / JOIN.
- `global` — Replaces the IN / JOIN query with GLOBAL IN / GLOBAL JOIN.
- `allow` — Allows the use of these types of subqueries.

## `enable_optimize_predicate_expression`

Turns on predicate pushdown in `SELECT` queries.

Predicate pushdown may significantly reduce network traffic for distributed queries.

Possible values:

- 0 — Disabled.
- 1 — Enabled.

Default value: 1.

### Usage

Consider the following queries:

1. `SELECT count() FROM test_table WHERE date = '2018-10-10'`
2. `SELECT count() FROM (SELECT * FROM test_table) WHERE date = '2018-10-10'`

If `enable_optimize_predicate_expression = 1`, then the execution time of these queries is equal, because ClickHouse applies WHERE to the subquery when processing it.

If `enable_optimize_predicate_expression = 0`, then the execution time of the second query is much longer, because the WHERE clause applies to all the data after the subquery finishes.

## `fallback_to_stale_replicas_for_distributed_queries`

Forces a query to an out-of-date replica if updated data is not available. See [Replication](#).

ClickHouse selects the most relevant from the outdated replicas of the table.

Used when performing `SELECT` from a distributed table that points to replicated tables.

By default, 1 (enabled).

## `force_index_by_date`

Disables query execution if the index can't be used by date.

Works with tables in the MergeTree family.

If `force_index_by_date=1`, ClickHouse checks whether the query has a date key condition that can be used for restricting data ranges. If there is no suitable condition, it throws an exception. However, it does not check whether the condition actually reduces the amount of data to read. For example, the condition `Date != '2000-01-01'` is acceptable even when it matches all the data in the table (i.e., running the query requires a full scan). For more information about ranges of data in MergeTree tables, see [MergeTree](#).

## `force_primary_key`

Disables query execution if indexing by the primary key is not possible.

Works with tables in the MergeTree family.

If `force_primary_key=1`, ClickHouse checks to see if the query has a primary key condition that can be used for restricting data ranges. If there is no suitable condition, it throws an exception. However, it does not check whether the condition actually reduces the amount of data to read. For more information about data ranges in MergeTree tables, see [MergeTree](#).

## `format_schema`

This parameter is useful when you are using formats that require a schema definition, such as [Cap'n Proto](#) or [Protobuf](#). The value depends on the format.

## `fsync_metadata`

Enables or disables `fsync` when writing `.sql` files. Enabled by default.

It makes sense to disable it if the server has millions of tiny tables that are constantly being created and destroyed.

## `enable_http_compression`

Enables or disables data compression in the response to an HTTP request.

For more information, read the [HTTP interface description](#).

Possible values:

- 0 — Disabled.
- 1 — Enabled.

Default value: 0.

## `http_zlib_compression_level`

Sets the level of data compression in the response to an HTTP request if `enable_http_compression = 1`.

Possible values: Numbers from 1 to 9.

Default value: 3.

## `http_native_compression_disable checksumming_on_decompress`

Enables or disables checksum verification when decompressing the HTTP POST data from the client. Used only for ClickHouse native compression format (not used with `gzip` or `deflate` ).

For more information, read the [HTTP interface description](#).

Possible values:

- 0 — Disabled.
- 1 — Enabled.

Default value: 0.

## `send_progress_in_http_headers`

Enables or disables `X-ClickHouse-Progress` HTTP response headers in `clickhouse-server` responses.

For more information, read the [HTTP interface description](#).

Possible values:

- 0 — Disabled.
- 1 — Enabled.

Default value: 0.

## `max_http_get_redirects`

Limits the maximum number of HTTP GET redirect hops for `URL`-engine tables. The setting applies to both types of tables: those created by the [CREATE TABLE](#) query and by the `url` table function.

Possible values:

- Any positive integer number of hops.
- 0 — No hops allowed.

Default value: 0.

## `input_format_allow_errors_num`

Sets the maximum number of acceptable errors when reading from text formats (CSV, TSV, etc.).

The default value is 0.

Always pair it with `input_format_allow_errors_ratio`.

If an error occurred while reading rows but the error counter is still less than `input_format_allow_errors_num`, ClickHouse ignores the row and moves on to the next one.

If both `input_format_allow_errors_num` and `input_format_allow_errors_ratio` are exceeded, ClickHouse throws an exception.

## `input_format_allow_errors_ratio`

Sets the maximum percentage of errors allowed when reading from text formats (CSV, TSV, etc.). The percentage of errors is set as a floating-point number between 0 and 1.

The default value is 0.

Always pair it with `input_format_allow_errors_num`.

If an error occurred while reading rows but the error counter is still less than `input_format_allow_errors_ratio`, ClickHouse ignores the row and moves on to the next one.

If both `input_format_allow_errors_num` and `input_format_allow_errors_ratio` are exceeded, ClickHouse throws an exception.

## `input_format_values_interpret_expressions`

Enables or disables the full SQL parser if the fast stream parser can't parse the data. This setting is used only for the [Values](#) format at the data insertion. For more information about syntax parsing, see the [Syntax](#) section.

Possible values:

- 0 — Disabled.

In this case, you must provide formatted data. See the [Formats](#) section.

- 1 — Enabled.

In this case, you can use an SQL expression as a value, but data insertion is much slower this way. If you insert only formatted data, then ClickHouse behaves as if the setting value is 0.

Default value: 1.

### Example of Use

Insert the [DateTime](#) type value with the different settings.

```
SET input_format_values_interpret_expressions = 0;
INSERT INTO datetime_t VALUES (now())
```

```
Exception on client:
Code: 27. DB::Exception: Cannot parse input: expected ) before: now(): (at row 1)
```

```
SET input_format_values_interpret_expressions = 1;
INSERT INTO datetime_t VALUES (now())
```

```
Ok.
```

The last query is equivalent to the following:

```
SET input_format_values_interpret_expressions = 0;
INSERT INTO datetime_t SELECT now()
```

```
Ok.
```

## `input_format_values_deduce_templates_of_expressions`

Enables or disables template deduction for an SQL expressions in [Values](#) format. It allows to parse and interpret expressions in `Values` much faster if expressions in consecutive rows have the same structure. ClickHouse will try to deduce template of an expression, parse the following rows using this template and evaluate the expression on batch of successfully parsed rows. For the following query:

```
INSERT INTO test VALUES (lower('Hello')), (lower('world')), (lower('INSERT')), (upper('Values')), ...
```

- if `input_format_values_interpret_expressions=1` and `format_values_deduce_templates_of_expressions=0` expressions will be interpreted separately for each row (this is very slow for large number of rows)
- if `input_format_values_interpret_expressions=0` and `format_values_deduce_templates_of_expressions=1` expressions in the first, second and third rows will be parsed using template `lower(String)` and interpreted together, expression in the forth row will be parsed with another template (`upper(String)`)
- if `input_format_values_interpret_expressions=1` and `format_values_deduce_templates_of_expressions=1` - the same as in previous case, but also allows fallback to interpreting expressions separately if it's not possible to deduce template.

Enabled by default.

## `input_format_values_accurate_types_of_literals`

This setting is used only when `input_format_values_deduce_templates_of_expressions = 1`. It can happen, that expressions for some column have the same structure, but contain numeric literals of different types, e.g

```
(..., abs(0), ...),          -- UInt64 literal
(..., abs(3.141592654), ...), -- Float64 literal
(..., abs(-1), ...),         -- Int64 literal
```

When this setting is enabled, ClickHouse will check actual type of literal and will use expression template of the corresponding type. In some cases it may significantly slow down expression evaluation in `Values`. When disabled, ClickHouse may use more general type for some literals (e.g. `Float64` or `Int64` instead of `UInt64` for `42`), but it may cause overflow and precision issues. Enabled by default.

## `input_format_defaults_for_omitted_fields`

When performing `INSERT` queries, replace omitted input column values with default values of the respective columns. This option only applies to `JSONEachRow`, `CSV` and `TabSeparated` formats.

### Note

When this option is enabled, extended table metadata are sent from server to client. It consumes additional computing resources on the server and can reduce performance.

Possible values:

- 0 — Disabled.
- 1 — Enabled.

Default value: 1.

## `input_format_tsv_empty_as_default`

When enabled, replace empty input fields in TSV with default values. For complex default expressions `input_format_defaults_for_omitted_fields` must be enabled too.

Disabled by default.

## `input_format_null_as_default`

Enables or disables using default values if input data contain `NULL`, but data type of corresponding column is not `Nullable(T)` (for text input formats).

## `input_format_skip_unknown_fields`

Enables or disables skipping insertion of extra data.

When writing data, ClickHouse throws an exception if input data contain columns that do not exist in the target table. If skipping is enabled, ClickHouse doesn't insert extra data and doesn't throw an exception.

Supported formats:

- [JSONEachRow](#)
- [CSVWithNames](#)
- [TabSeparatedWithNames](#)
- [TSKV](#)

Possible values:

- 0 — Disabled.
- 1 — Enabled.

Default value: 0.

## `input_format_import_nested_json`

Enables or disables the insertion of JSON data with nested objects.

Supported formats:

- [JSONEachRow](#)

Possible values:

- 0 — Disabled.
- 1 — Enabled.

Default value: 0.

See also:

- [Usage of Nested Structures](#) with the `JSONEachRow` format.

## `input_format_with_names_use_header`

Enables or disables checking the column order when inserting data.

To improve insert performance, we recommend disabling this check if you are sure that the column order of the input data is the same as in the target table.

Supported formats:

- [CSVWithNames](#)
- [TabSeparatedWithNames](#)

Possible values:

- 0 — Disabled.
- 1 — Enabled.

Default value: 1.

## date\_time\_input\_format

Allows to choose a parser of text representation of date and time.

The setting doesn't apply to [date and time functions](#).

Possible values:

- 'best\_effort' — Enables extended parsing.

ClickHouse can parse the basic `YYYY-MM-DD HH:MM:SS` format and all [ISO 8601](#) date and time formats. For example, '`2018-06-08T01:02:03.000Z`'.

- 'basic' — Use basic parser.

ClickHouse can parse only the basic `YYYY-MM-DD HH:MM:SS` format. For example, '`2019-08-20 10:18:56`'.

Default value: 'basic' .

See also:

- [DateTime data type](#).
- [Functions for working with dates and times](#).

## join\_default\_strictness

Sets default strictness for [JOIN clauses](#).

Possible values:

- ALL — If the right table has several matching rows, ClickHouse creates a [Cartesian product](#) from matching rows. This is the normal `JOIN` behavior from standard SQL.
- ANY — If the right table has several matching rows, only the first one found is joined. If the right table has only one matching row, the results of `ANY` and `ALL` are the same.
- ASOF — For joining sequences with an uncertain match.
- Empty string — If `ALL` or `ANY` is not specified in the query, ClickHouse throws an exception.

Default value: ALL .

## join\_any\_take\_last\_row

Changes behavior of join operations with `ANY` strictness.

### Attention

This setting applies only for `JOIN` operations with [Join](#) engine tables.

Possible values:

- 0 — If the right table has more than one matching row, only the first one found is joined.
- 1 — If the right table has more than one matching row, only the last one found is joined.

Default value: 0.

See also:

- [JOIN clause](#)
- [Join table engine](#)
- [join\\_default\\_strictness](#)

## join\_use\_nulls

Sets the type of `JOIN` behavior. When merging tables, empty cells may appear. ClickHouse fills them differently based on this setting.

Possible values:

- 0 — The empty cells are filled with the default value of the corresponding field type.
- 1 — `JOIN` behaves the same way as in standard SQL. The type of the corresponding field is converted to `Nullable`, and empty cells are filled with `NULL`.

Default value: 0.

## join\_any\_take\_last\_row

Changes the behavior of `ANY JOIN`. When disabled, `ANY JOIN` takes the first row found for a key. When enabled, `ANY JOIN` takes the last matched row if there are multiple rows for the same key. The setting is used only in [Join table engine](#).

Possible values:

- 0 — Disabled.
- 1 — Enabled.

Default value: 1.

## max\_block\_size

In ClickHouse, data is processed by blocks (sets of column parts). The internal processing cycles for a single block are efficient enough, but there are noticeable expenditures on each block. The `max_block_size` setting is a recommendation for what size of block (in number of rows) to load from tables. The block size shouldn't be too small, so that the expenditures on each block are still noticeable, but not too large, so that the query with `LIMIT` that is completed after the first block is processed quickly. The goal is to avoid consuming too much memory when extracting a large number of columns in multiple threads, and to preserve at least some cache locality.

Default value: 65,536.

Blocks the size of `max_block_size` are not always loaded from the table. If it is obvious that less data needs to be retrieved, a smaller block is processed.

## preferred\_block\_size\_bytes

Used for the same purpose as `max_block_size`, but it sets the recommended block size in bytes by adapting it to the number of rows in the block. However, the block size cannot be more than `max_block_size` rows. By default: 1,000,000. It only works when reading from MergeTree engines.

## merge\_tree\_min\_rows\_for\_concurrent\_read

If the number of rows to be read from a file of a[MergeTree](#) table exceeds `merge_tree_min_rows_for_concurrent_read` then ClickHouse tries to perform a concurrent reading from this file on several threads.

Possible values:

- Any positive integer.

Default value: 163840.

### `merge_tree_min_bytes_for_concurrent_read`

If the number of bytes to read from one file of a[MergeTree](#)-engine table exceeds `merge_tree_min_bytes_for_concurrent_read`, then ClickHouse tries to concurrently read from this file in several threads.

Possible value:

- Any positive integer.

Default value: 251658240.

### `merge_tree_min_rows_for_seek`

If the distance between two data blocks to be read in one file is less than `merge_tree_min_rows_for_seek` rows, then ClickHouse does not seek through the file, but reads the data sequentially.

Possible values:

- Any positive integer.

Default value: 0.

### `merge_tree_min_bytes_for_seek`

If the distance between two data blocks to be read in one file is less than `merge_tree_min_bytes_for_seek` bytes, then ClickHouse sequentially reads range of file that contains both blocks, thus avoiding extra seek.

Possible values:

- Any positive integer.

Default value: 0.

### `merge_tree_coarse_index_granularity`

When searching data, ClickHouse checks the data marks in the index file. If ClickHouse finds that required keys are in some range, it divides this range into `merge_tree_coarse_index_granularity` subranges and searches the required keys there recursively.

Possible values:

- Any positive even integer.

Default value: 8.

### `merge_tree_max_rows_to_use_cache`

If ClickHouse should read more than `merge_tree_max_rows_to_use_cache` rows in one query, it doesn't use the cache of

uncompressed blocks.

The cache of uncompressed blocks stores data extracted for queries. ClickHouse uses this cache to speed up responses to repeated small queries. This setting protects the cache from trashing by queries that read a large amount of data. The [uncompressed\\_cache\\_size](#) server setting defines the size of the cache of uncompressed blocks.

Possible values:

- Any positive integer.

Default value:  $128 \times 8192$ .

### merge\_tree\_max\_bytes\_to\_use\_cache

If ClickHouse should read more than `merge_tree_max_bytes_to_use_cache` bytes in one query, it doesn't use the cache of uncompressed blocks.

The cache of uncompressed blocks stores data extracted for queries. ClickHouse uses this cache to speed up responses to repeated small queries. This setting protects the cache from trashing by queries that read a large amount of data. The [uncompressed\\_cache\\_size](#) server setting defines the size of the cache of uncompressed blocks.

Possible value:

- Any positive integer.

Default value: 2013265920.

### min\_bytes\_to\_use\_direct\_io

The minimum data volume required for using direct I/O access to the storage disk.

ClickHouse uses this setting when reading data from tables. If the total storage volume of all the data to be read exceeds `min_bytes_to_use_direct_io` bytes, then ClickHouse reads the data from the storage disk with the `O_DIRECT` option.

Possible values:

- 0 — Direct I/O is disabled.
- Positive integer.

Default value: 0.

### log\_queries

Setting up query logging.

Queries sent to ClickHouse with this setup are logged according to the rules in the [query\\_log](#) server configuration parameter.

Example:

```
log_queries=1
```

### log\_query\_threads

Setting up query threads logging.

Queries' threads runned by ClickHouse with this setup are logged according to the rules in the `query_thread_log` server configuration parameter.

Example:

```
log_query_threads=1
```

## max\_insert\_block\_size

The size of blocks to form for insertion into a table. This setting only applies in cases when the server forms the blocks. For example, for an INSERT via the HTTP interface, the server parses the data format and forms blocks of the specified size. But when using clickhouse-client, the client parses the data itself, and the 'max\_insert\_block\_size' setting on the server doesn't affect the size of the inserted blocks. The setting also doesn't have a purpose when using INSERT SELECT, since data is inserted using the same blocks that are formed after SELECT.

Default value: 1,048,576.

The default is slightly more than `max_block_size`. The reason for this is because certain table engines (`*MergeTree`) form a data part on the disk for each inserted block, which is a fairly large entity. Similarly, `*MergeTree` tables sort data during insertion, and a large enough block size allows sorting more data in RAM.

## max\_replica\_delay\_for\_distributed\_queries

Disables lagging replicas for distributed queries. See [Replication](#).

Sets the time in seconds. If a replica lags more than the set value, this replica is not used.

Default value: 300.

Used when performing `SELECT` from a distributed table that points to replicated tables.

## max\_threads

The maximum number of query processing threads, excluding threads for retrieving data from remote servers (see the '`max_distributed_connections`' parameter).

This parameter applies to threads that perform the same stages of the query processing pipeline in parallel. For example, when reading from a table, if it is possible to evaluate expressions with functions, filter with WHERE and pre-aggregate for GROUP BY in parallel using at least '`max_threads`' number of threads, then '`max_threads`' are used.

Default value: the number of physical CPU cores.

If less than one SELECT query is normally run on a server at a time, set this parameter to a value slightly less than the actual number of processor cores.

For queries that are completed quickly because of a LIMIT, you can set a lower '`max_threads`'. For example, if the necessary number of entries are located in every block and `max_threads = 8`, then 8 blocks are retrieved, although it would have been enough to read just one.

The smaller the `max_threads` value, the less memory is consumed.

## max\_insert\_threads

The maximum number of threads to execute the `INSERT SELECT` query.

Possible values:

- 0 (or 1) — `INSERT SELECT` no parallel execution.
- Positive integer. Bigger than 1.

Default value: 0.

Parallel `INSERT SELECT` has effect only if the `SELECT` part is executed in parallel, see `max_threads` setting. Higher values will lead to higher memory usage.

## `max_compress_block_size`

The maximum size of blocks of uncompressed data before compressing for writing to a table. By default, 1,048,576 (1 MiB). If the size is reduced, the compression rate is significantly reduced, the compression and decompression speed increases slightly due to cache locality, and memory consumption is reduced. There usually isn't any reason to change this setting.

Don't confuse blocks for compression (a chunk of memory consisting of bytes) with blocks for query processing (a set of rows from a table).

## `min_compress_block_size`

For `MergeTree`" tables. In order to reduce latency when processing queries, a block is compressed when writing the next mark if its size is at least '`min_compress_block_size`'. By default, 65,536.

The actual size of the block, if the uncompressed data is less than '`max_compress_block_size`', is no less than this value and no less than the volume of data for one mark.

Let's look at an example. Assume that '`index_granularity`' was set to 8192 during table creation.

We are writing a `UInt32`-type column (4 bytes per value). When writing 8192 rows, the total will be 32 KB of data. Since `min_compress_block_size` = 65,536, a compressed block will be formed for every two marks.

We are writing a `URL` column with the `String` type (average size of 60 bytes per value). When writing 8192 rows, the average will be slightly less than 500 KB of data. Since this is more than 65,536, a compressed block will be formed for each mark. In this case, when reading data from the disk in the range of a single mark, extra data won't be decompressed.

There usually isn't any reason to change this setting.

## `max_query_size`

The maximum part of a query that can be taken to RAM for parsing with the SQL parser. The `INSERT` query also contains data for `INSERT` that is processed by a separate stream parser (that consumes O(1) RAM), which is not included in this restriction.

Default value: 256 KiB.

## `interactive_delay`

The interval in microseconds for checking whether request execution has been canceled and sending the progress.

Default value: 100,000 (checks for canceling and sends the progress ten times per second).

## `connect_timeout, receive_timeout, send_timeout`

Timeouts in seconds on the socket used for communicating with the client.

Default value: 10, 300, 300.

### `cancel_http_READONLY_queries_on_client_close`

Cancels HTTP readonly queries (e.g. SELECT) when a client closes the connection without waiting for response.

Default value: 0

### `poll_interval`

Lock in a wait loop for the specified number of seconds.

Default value: 10.

### `max_distributed_connections`

The maximum number of simultaneous connections with remote servers for distributed processing of a single query to a single Distributed table. We recommend setting a value no less than the number of servers in the cluster.

Default value: 1024.

The following parameters are only used when creating Distributed tables (and when launching a server), so there is no reason to change them at runtime.

### `distributed_connections_pool_size`

The maximum number of simultaneous connections with remote servers for distributed processing of all queries to a single Distributed table. We recommend setting a value no less than the number of servers in the cluster.

Default value: 1024.

### `connect_timeout_with_failover_ms`

The timeout in milliseconds for connecting to a remote server for a Distributed table engine, if the 'shard' and 'replica' sections are used in the cluster definition. If unsuccessful, several attempts are made to connect to various replicas.

Default value: 50.

### `connections_with_failover_max_tries`

The maximum number of connection attempts with each replica for the Distributed table engine.

Default value: 3.

### `extremes`

Whether to count extreme values (the minimums and maximums in columns of a query result). Accepts 0 or 1. By default, 0 (disabled). For more information, see the section "Extreme values".

### `use_uncompressed_cache`

Whether to use a cache of uncompressed blocks. Accepts 0 or 1. By default, 0 (disabled). Using the uncompressed cache (only for tables in the MergeTree family) can significantly reduce latency and increase throughput when working with a

large number of short queries. Enable this setting for users who send frequent short requests. Also pay attention to the `uncompressed_cache_size` configuration parameter (only set in the config file) – the size of uncompressed cache blocks. By default, it is 8 GiB. The uncompressed cache is filled in as needed and the least-used data is automatically deleted.

For queries that read at least a somewhat large volume of data (one million rows or more), the uncompressed cache is disabled automatically in order to save space for truly small queries. This means that you can keep the '`use_uncompressed_cache`' setting always set to 1.

## replace\_running\_query

When using the HTTP interface, the '`query_id`' parameter can be passed. This is any string that serves as the query identifier. If a query from the same user with the same '`query_id`' already exists at this time, the behavior depends on the '`replace_running_query`' parameter.

- 0 (default) – Throw an exception (don't allow the query to run if a query with the same '`query_id`' is already running).
- 1 – Cancel the old query and start running the new one.

Yandex.Metrica uses this parameter set to 1 for implementing suggestions for segmentation conditions. After entering the next character, if the old query hasn't finished yet, it should be canceled.

## stream\_flush\_interval\_ms

Works for tables with streaming in the case of a timeout, or when a thread generates `max_insert_block_size` rows.

The default value is 7500.

The smaller the value, the more often data is flushed into the table. Setting the value too low leads to poor performance.

## load\_balancing

Specifies the algorithm of replicas selection that is used for distributed query processing.

ClickHouse supports the following algorithms of choosing replicas:

- `Random` (by default)
- `Nearest hostname`
- `In order`
- `First or random`

### **Random (by default)**

```
load_balancing = random
```

The number of errors is counted for each replica. The query is sent to the replica with the fewest errors, and if there are several of these, to any one of them. Disadvantages: Server proximity is not accounted for; if the replicas have different data, you will also get different data.

### **Nearest Hostname**

```
load_balancing = nearest_hostname
```

The number of errors is counted for each replica. Every 5 minutes, the number of errors is integrally divided by 2. Thus, the number of errors is calculated for a recent time with exponential smoothing. If there is one replica with a minimal number of errors (i.e. errors occurred recently on the other replicas), the query is sent to it. If there are multiple replicas

with the same minimal number of errors, the query is sent to the replica with a host name that is most similar to the server's host name in the config file (for the number of different characters in identical positions, up to the minimum length of both host names).

For instance, `example01-01-1` and `example01-01-2.yandex.ru` are different in one position, while `example01-01-1` and `example01-02-2` differ in two places. This method might seem primitive, but it doesn't require external data about network topology, and it doesn't compare IP addresses, which would be complicated for our IPv6 addresses.

Thus, if there are equivalent replicas, the closest one by name is preferred. We can also assume that when sending a query to the same server, in the absence of failures, a distributed query will also go to the same servers. So even if different data is placed on the replicas, the query will return mostly the same results.

## In Order

```
load_balancing = in_order
```

Replicas with the same number of errors are accessed in the same order as they are specified in configuration. This method is appropriate when you know exactly which replica is preferable.

## First or Random

```
load_balancing = first_or_random
```

This algorithm chooses the first replica in the set or a random replica if the first is unavailable. It's effective in cross-replication topology setups, but useless in other configurations.

The `first_or_random` algorithm solves the problem of the `in_order` algorithm. With `in_order`, if one replica goes down, the next one gets a double load while the remaining replicas handle the usual amount of traffic. When using the `first_or_random` algorithm, load is evenly distributed among replicas that are still available.

## prefer\_localhost\_replica

Enables/disables preferable using the localhost replica when processing distributed queries.

Possible values:

- 1 — ClickHouse always sends a query to the localhost replica if it exists.
- 0 — ClickHouse uses the balancing strategy specified by the `load_balancing` setting.

Default value: 1.

### Warning

Disable this setting if you use `max_parallel_replicas`.

## totals\_mode

How to calculate TOTALS when HAVING is present, as well as when `max_rows_to_group_by` and `group_by_overflow_mode = 'any'` are present. See the section "WITH TOTALS modifier".

## totals\_auto\_threshold

The threshold for `totals_mode = 'auto'`. See the section "WITH TOTALS modifier".

## `max_parallel_replicas`

The maximum number of replicas for each shard when executing a query. For consistency (to get different parts of the same data split), this option only works when the sampling key is set. Replica lag is not controlled.

## `compile`

Enable compilation of queries. By default, 0 (disabled).

Compilation is only used for part of the query-processing pipeline: for the first stage of aggregation (GROUP BY). If this portion of the pipeline was compiled, the query may run faster due to deployment of short cycles and inlining aggregate function calls. The maximum performance improvement (up to four times faster in rare cases) is seen for queries with multiple simple aggregate functions. Typically, the performance gain is insignificant. In very rare cases, it may slow down query execution.

## `min_count_to_compile`

How many times to potentially use a compiled chunk of code before running compilation. By default, 3. For testing, the value can be set to 0: compilation runs synchronously and the query waits for the end of the compilation process before continuing execution. For all other cases, use values starting with 1. Compilation normally takes about 5-10 seconds. If the value is 1 or more, compilation occurs asynchronously in a separate thread. The result will be used as soon as it is ready, including queries that are currently running.

Compiled code is required for each different combination of aggregate functions used in the query and the type of keys in the GROUP BY clause. The results of compilation are saved in the build directory in the form of .so files. There is no restriction on the number of compilation results, since they don't use very much space. Old results will be used after server restarts, except in the case of a server upgrade – in this case, the old results are deleted.

## `output_format_json_quote_64bit_integers`

If the value is true, integers appear in quotes when using JSON\* Int64 and UInt64 formats (for compatibility with most JavaScript implementations); otherwise, integers are output without the quotes.

## `format_csv_delimiter`

The character interpreted as a delimiter in the CSV data. By default, the delimiter is , .

## `input_format_csv_unquoted_null_literal_as_null`

For CSV input format enables or disables parsing of unquoted `NULL` as literal (synonym for `\N` ).

## `output_format_csv_crlf_end_of_line`

Use DOS/Windows style line separator (CRLF) in CSV instead of Unix style (LF).

## `output_format_tsv_crlf_end_of_line`

Use DOS/Windows style line separator (CRLF) in TSV instead of Unix style (LF).

## `insert_quorum`

Enables quorum writes.

- If `insert_quorum < 2`, the quorum writes are disabled.
- If `insert_quorum >= 2`, the quorum writes are enabled.

Default value: 0.

#### Quorum writes

`INSERT` succeeds only when ClickHouse manages to correctly write data to the `insert_quorum` of replicas during the `insert_quorum_timeout`. If for any reason the number of replicas with successful writes does not reach the `insert_quorum`, the write is considered failed and ClickHouse will delete the inserted block from all the replicas where data has already been written.

All the replicas in the quorum are consistent, i.e., they contain data from all previous `INSERT` queries. The `INSERT` sequence is linearized.

When reading the data written from the `insert_quorum`, you can use the [select\\_sequential\\_consistency](#) option.

ClickHouse generates an exception

- If the number of available replicas at the time of the query is less than the `insert_quorum`.
- At an attempt to write data when the previous block has not yet been inserted in the `insert_quorum` of replicas. This situation may occur if the user tries to perform an `INSERT` before the previous one with the `insert_quorum` is completed.

See also:

- [insert\\_quorum\\_timeout](#)
- [select\\_sequential\\_consistency](#)

#### insert\_quorum\_timeout

Quorum write timeout in seconds. If the timeout has passed and no write has taken place yet, ClickHouse will generate an exception and the client must repeat the query to write the same block to the same or any other replica.

Default value: 60 seconds.

See also:

- [insert\\_quorum](#)
- [select\\_sequential\\_consistency](#)

#### select\_sequential\_consistency

Enables or disables sequential consistency for `SELECT` queries:

Possible values:

- 0 — Disabled.
- 1 — Enabled.

Default value: 0.

#### Usage

When sequential consistency is enabled, ClickHouse allows the client to execute the `SELECT` query only for those replicas that contain data from all previous `INSERT` queries executed with `insert_quorum`. If the client refers to a partial

replica, ClickHouse will generate an exception. The SELECT query will not include data that has not yet been written to the quorum of replicas.

See also:

- [insert\\_quorum](#)
- [insert\\_quorum\\_timeout](#)

## max\_network\_bytes

Limits the data volume (in bytes) that is received or transmitted over the network when executing a query. This setting applies to every individual query.

Possible values:

- Positive integer.
- 0 — Data volume control is disabled.

Default value: 0.

## max\_network\_bandwidth

Limits the speed of the data exchange over the network in bytes per second. This setting applies to every query.

Possible values:

- Positive integer.
- 0 — Bandwidth control is disabled.

Default value: 0.

## max\_network\_bandwidth\_for\_user

Limits the speed of the data exchange over the network in bytes per second. This setting applies to all concurrently running queries performed by a single user.

Possible values:

- Positive integer.
- 0 — Control of the data speed is disabled.

Default value: 0.

## max\_network\_bandwidth\_for\_all\_users

Limits the speed that data is exchanged at over the network in bytes per second. This setting applies to all concurrently running queries on the server.

Possible values:

- Positive integer.
- 0 — Control of the data speed is disabled.

Default value: 0.

## `allow_experimental_cross_to_join_conversion`

Enables or disables:

1. Rewriting queries for join from the syntax with commas to the `JOIN ON/USING` syntax. If the setting value is 0, ClickHouse doesn't process queries with syntax that uses commas, and throws an exception.
2. Converting `CROSS JOIN` to `INNER JOIN` if `WHERE` conditions allow it.

Possible values:

- 0 — Disabled.
- 1 — Enabled.

Default value: 1.

See also:

- [Multiple JOIN](#)

## `count_distinct_implementation`

Specifies which of the `uniq*` functions should be used to perform the `COUNT(DISTINCT ...)` construction.

Possible values:

- `uniq`
- `uniqCombined`
- `uniqCombined64`
- `uniqHLL12`
- `uniqExact`

Default value: `uniqExact`.

## `skip_unavailable_shards`

Enables or disables silently skipping of unavailable shards.

Shard is considered unavailable if all its replicas are unavailable. A replica is unavailable in the following cases:

- ClickHouse can't connect to replica for any reason.

When connecting to a replica, ClickHouse performs several attempts. If all these attempts fail, the replica is considered unavailable.

- Replica can't be resolved through DNS.

If replica's hostname can't be resolved through DNS, it can indicate the following situations:

- Replica's host has no DNS record. It can occur in systems with dynamic DNS, for example, [Kubernetes](#), where nodes can be unresolvable during downtime, and this is not an error.
- Configuration error. ClickHouse configuration file contains a wrong hostname.

Possible values:

- 1 — skipping enabled.

If a shard is unavailable, ClickHouse returns a result based on partial data and doesn't report node availability issues.

- 0 — skipping disabled.

If a shard is unavailable, ClickHouse throws an exception.

Default value: 0.

### `optimize_skip_unused_shards`

Enables or disables skipping of unused shards for SELECT queries that has sharding key condition in PREWHERE/WHERE (assumes that the data is distributed by sharding key, otherwise do nothing).

Default value: 0

### `force_optimize_skip_unused_shards`

Enables or disables query execution if `optimize_skip_unused_shards` enabled and skipping of unused shards is not possible. If the skipping is not possible and the setting is enabled exception will be thrown.

Possible values:

- 0 - Disabled (do not throws)
- 1 - Disable query execution only if the table has sharding key
- 2 - Disable query execution regardless sharding key is defined for the table

Default value: 0

### `optimize_throw_if_noop`

Enables or disables throwing an exception if an `OPTIMIZE` query didn't perform a merge.

By default, `OPTIMIZE` returns successfully even if it didn't do anything. This setting lets you differentiate these situations and get the reason in an exception message.

Possible values:

- 1 — Throwing an exception is enabled.
- 0 — Throwing an exception is disabled.

Default value: 0.

### `distributed_replica_error_half_life`

- Type: seconds
- Default value: 60 seconds

Controls how fast errors in distributed tables are zeroed. If a replica is unavailable for some time, accumulates 5 errors, and `distributed_replica_error_half_life` is set to 1 second, then the replica is considered normal 3 seconds after last error.

See also:

- [Table engine Distributed](#)
- [distributed\\_replica\\_error\\_cap](#)

### `distributed_replica_error_cap`

- Type: unsigned int
- Default value: 1000

Error count of each replica is capped at this value, preventing a single replica from accumulating too many errors.

See also:

- [Table engine Distributed](#)
- [distributed\\_replica\\_error\\_half\\_life](#)

### `distributed_directory_monitor_sleep_time_ms`

Base interval for the [Distributed](#) table engine to send data. The actual interval grows exponentially in the event of errors.

Possible values:

- Positive integer number of milliseconds.

Default value: 100 milliseconds.

### `distributed_directory_monitor_max_sleep_time_ms`

Maximum interval for the [Distributed](#) table engine to send data. Limits exponential growth of the interval set in the [distributed\\_directory\\_monitor\\_sleep\\_time\\_ms](#) setting.

Possible values:

- Positive integer number of milliseconds.

Default value: 30000 milliseconds (30 seconds).

### `distributed_directory_monitor_batch_inserts`

Enables/disables sending of inserted data in batches.

When batch sending is enabled, the [Distributed](#) table engine tries to send multiple files of inserted data in one operation instead of sending them separately. Batch sending improves cluster performance by better utilizing server and network resources.

Possible values:

- 1 — Enabled.
- 0 — Disabled.

Default value: 0.

### `os_thread_priority`

Sets the priority ([nice](#)) for threads that execute queries. The OS scheduler considers this priority when choosing the next thread to run on each available CPU core.

#### Warning

To use this setting, you need to set the `CAP_SYS_NICE` capability. The `clickhouse-server` package sets it up during installation. Some virtual environments don't allow you to set the `CAP_SYS_NICE` capability. In this case, `clickhouse-server` shows a message about it at the start.

Possible values:

- You can set values in the range [-20, 19].

Lower values mean higher priority. Threads with low `nice` priority values are executed more frequently than threads with high values. High values are preferable for long running non-interactive queries because it allows them to quickly give up resources in favor of short interactive queries when they arrive.

Default value: 0.

### query\_profiler\_real\_time\_period\_ns

Sets the period for a real clock timer of the [query profiler](#). Real clock timer counts wall-clock time.

Possible values:

- Positive integer number, in nanoseconds.

Recommended values:

```
- 10000000 (100 times a second) nanoseconds and less for single queries.  
- 1000000000 (once a second) for cluster-wide profiling.
```

- 0 for turning off the timer.

Type: [UInt64](#).

Default value: 1000000000 nanoseconds (once a second).

See also:

- System table [trace\\_log](#)

### query\_profiler\_cpu\_time\_period\_ns

Sets the period for a CPU clock timer of the [query profiler](#). This timer counts only CPU time.

Possible values:

- Positive integer number of nanoseconds.

Recommended values:

```
- 10000000 (100 times a second) nanoseconds and more for single queries.  
- 1000000000 (once a second) for cluster-wide profiling.
```

- 0 for turning off the timer.

Type: [UInt64](#).

Default value: 1000000000 nanoseconds.

See also:

- System table [trace\\_log](#)

### allow\_introspection\_functions

Enables or disables [introspections functions](#) for query profiling.

Possible values:

- 1 — Introspection functions enabled.
- 0 — Introspection functions disabled.

Default value: 0.

See Also

- [Sampling Query Profiler](#)
- System table [trace\\_log](#)

### `input_format_parallel_parsing`

- Type: bool
- Default value: True

Enable order-preserving parallel parsing of data formats. Supported only for TSV, TKSV, CSV and JSONEachRow formats.

### `min_chunk_bytes_for_parallel_parsing`

- Type: unsigned int
- Default value: 1 MiB

The minimum chunk size in bytes, which each thread will parse in parallel.

### `output_format_avro_codec`

Sets the compression codec used for output Avro file.

Type: string

Possible values:

- `null` — No compression
- `deflate` — Compress with Deflate (zlib)
- `snappy` — Compress with [Snappy](#)

Default value: `snappy` (if available) or `deflate`.

### `output_format_avro_sync_interval`

Sets minimum data size (in bytes) between synchronization markers for output Avro file.

Type: unsigned int

Possible values: 32 (32 bytes) - 1073741824 (1 GiB)

Default value: 32768 (32 KiB)

### `format_avro_schema_registry_url`

Sets Confluent Schema Registry URL to use with [AvroConfluent](#) format

Type: URL

Default value: Empty

[Original article](#)

## Settings profiles

A settings profile is a collection of settings grouped under the same name. Each ClickHouse user has a profile. To apply all the settings in a profile, set the `profile` setting.

Example:

Install the `web` profile.

```
SET profile = 'web'
```

Settings profiles are declared in the user config file. This is usually `users.xml`.

Example:

```
<!-- Settings profiles -->
<profiles>
    <!-- Default settings -->
    <default>
        <!-- The maximum number of threads when running a single query. -->
        <max_threads>8</max_threads>
    </default>

    <!-- Settings for queries from the user interface -->
    <web>
        <max_rows_to_read>1000000000</max_rows_to_read>
        <max_bytes_to_read>100000000000</max_bytes_to_read>

        <max_rows_to_group_by>1000000</max_rows_to_group_by>
        <group_by_overflow_mode>any</group_by_overflow_mode>

        <max_rows_to_sort>1000000</max_rows_to_sort>
        <max_bytes_to_sort>10000000000</max_bytes_to_sort>

        <max_result_rows>100000</max_result_rows>
        <max_result_bytes>1000000000</max_result_bytes>
        <result_overflow_mode>break</result_overflow_mode>

        <max_execution_time>600</max_execution_time>
        <min_execution_speed>1000000</min_execution_speed>
        <timeout_before_checking_execution_speed>15</timeout_before_checking_execution_speed>

        <max_columns_to_read>25</max_columns_to_read>
        <max_temporary_columns>100</max_temporary_columns>
        <max_temporary_non_const_columns>50</max_temporary_non_const_columns>

        <max_subquery_depth>2</max_subquery_depth>
        <max_pipeline_depth>25</max_pipeline_depth>
        <max_ast_depth>50</max_ast_depth>
        <max_ast_elements>100</max_ast_elements>

        <readonly>1</readonly>
    </web>
</profiles>
```

The example specifies two profiles: `default` and `web`. The `default` profile has a special purpose: it must always be present and is applied when starting the server. In other words, the `default` profile contains default settings. The `web` profile is a regular profile that can be set using the `SET` query or using a URL parameter in an HTTP query.

Settings profiles can inherit from each other. To use inheritance, indicate one or multiple `profile` settings before the other settings that are listed in the profile. In case when one setting is defined in different profiles, the latest defined is used.

## User settings

The `users` section of the `user.xml` configuration file contains user settings.

Structure of the `users` section:

```
<users>
    <!-- If user name was not specified, 'default' user is used. -->
    <user_name>
        <password></password>
        <!-- Or -->
        <password_sha256_hex></password_sha256_hex>

        <networks incl="networks" replace="replace">
        </networks>

        <profile>profile_name</profile>

        <quota>default</quota>

        <databases>
            <database_name>
                <table_name>
                    <filter>expression</filter>
                <table_name>
            </database_name>
        </databases>
    </user_name>
    <!-- Other users settings -->
</users>
```

### `user_name/password`

Password can be specified in plaintext or in SHA256 (hex format).

- To assign a password in plaintext (not recommended), place it in a `password` element.  
For example, `<password>qwert</password>`. The password can be left blank.
- To assign a password using its SHA256 hash, place it in a `password_sha256_hex` element.

For example,

```
<password_sha256_hex>65e84be33532fb784c48129675f9eff3a682b27168c0ea744b2cf58ee02337c5</password_sha256_hex> .
```

Example of how to generate a password from shell:

```
PASSWORD=$(base64 < /dev/urandom | head -c8); echo "$PASSWORD"; echo -n "$PASSWORD" | sha256sum | tr -d '-'
```

The first line of the result is the password. The second line is the corresponding SHA256 hash.

- For compatibility with MySQL clients, password can be specified in double SHA1 hash. Place it in `password_double_sha1_hex` element.

For example, `<password_double_sha1_hex>08b4a0f1de6ad37da17359e592c8d74788a83eb0</password_double_sha1_hex>`.

Example of how to generate a password from shell:

```
PASSWORD=$(base64 < /dev/urandom | head -c8); echo "$PASSWORD"; echo -n "$PASSWORD" | sha1sum | tr -d '-' | xxd -r -p | sha1sum | tr -d '-'
```

The first line of the result is the password. The second line is the corresponding double SHA1 hash.

### `user_name/networks`

List of networks from which the user can connect to the ClickHouse server.

Each element of the list can have one of the following forms:

- `<ip>` — IP address or network mask.

Examples: `213.180.204.3`, `10.0.0.1/8`, `10.0.0.1/255.255.255.0`, `2a02:6b8::3`, `2a02:6b8::3/64`, `2a02:6b8::3/ffff:ffff:ffff:ffff::`.

- `<host>` — Hostname.

Example: `example01.host.ru`.

To check access, a DNS query is performed, and all returned IP addresses are compared to the peer address.

- `<host_regex>` — Regular expression for hostnames.

Example, `^example\d\d-\d\d-\d\.\host\.ru$`

To check access, a [DNS PTR query](#) is performed for the peer address and then the specified regexp is applied. Then, another DNS query is performed for the results of the PTR query and all the received addresses are compared to the peer address. We strongly recommend that regexp ends with \$.

All results of DNS requests are cached until the server restarts.

## Examples

To open access for user from any network, specify:

```
<ip>::/0</ip>
```



### Warning

It's insecure to open access from any network unless you have a firewall properly configured or the server is not directly connected to Internet.

To open access only from localhost, specify:

```
<ip>::1</ip>
<ip>127.0.0.1</ip>
```

## user\_name/profile

You can assign a settings profile for the user. Settings profiles are configured in a separate section of the `users.xml` file. For more information, see [Profiles of Settings](#).

## user\_name/quota

Quotas allow you to track or limit resource usage over a period of time. Quotas are configured in the `quotas` section of the `users.xml` configuration file.

You can assign a quotas set for the user. For a detailed description of quotas configuration, see [Quotas](#).

## user\_name/databases

In this section, you can limit rows that are returned by ClickHouse for `SELECT` queries made by the current user, thus implementing basic row-level security.

### Example

The following configuration forces that user `user1` can only see the rows of `table1` as the result of `SELECT` queries, where the value of the `id` field is 1000.

```

<user1>
  <databases>
    <database_name>
      <table1>
        <filter>id = 1000</filter>
      </table1>
    </database_name>
  </databases>
</user1>

```

The `filter` can be any expression resulting in a `UInt8`-type value. It usually contains comparisons and logical operators. Rows from `database_name.table1` where filter results to 0 are not returned for this user. The filtering is incompatible with `PREWHERE` operations and disables `WHERE → PREWHERE` optimization.

## Constraints on Settings

The constraints on settings can be defined in the `profiles` section of the `user.xml` configuration file and prohibit users from changing some of the settings with the `SET` query. The constraints are defined as following:

```

<profiles>
  <user_name>
    <constraints>
      <setting_name_1>
        <min>lower_boundary</min>
      </setting_name_1>
      <setting_name_2>
        <max>upper_boundary</max>
      </setting_name_2>
      <setting_name_3>
        <min>lower_boundary</min>
        <max>upper_boundary</max>
      </setting_name_3>
      <setting_name_4>
        <readonly/>
      </setting_name_4>
    </constraints>
  </user_name>
</profiles>

```

If user tries to violate the constraints an exception is thrown and the setting isn't actually changed. There are supported three types of constraints: `min` , `max` , `readonly` . The `min` and `max` constraints specify upper and lower boundaries for a numeric setting and can be used in combination. The `readonly` constraint specify that the user cannot change the corresponding setting at all.

Example: Let `users.xml` includes lines:

```

<profiles>
  <default>
    <max_memory_usage>10000000000</max_memory_usage>
    <force_index_by_date>0</force_index_by_date>
    ...
    <constraints>
      <max_memory_usage>
        <min>5000000000</min>
        <max>20000000000</max>
      </max_memory_usage>
      <force_index_by_date>
        <readonly/>
      </force_index_by_date>
    </constraints>
  </default>
</profiles>

```

The following queries all throw exceptions:

```
SET max_memory_usage=200000000001;
SET max_memory_usage=4999999999;
SET force_index_by_date=1;
```

```
Code: 452, e.displayText() = DB::Exception: Setting max_memory_usage should not be greater than 200000000000.
Code: 452, e.displayText() = DB::Exception: Setting max_memory_usage should not be less than 50000000000.
Code: 452, e.displayText() = DB::Exception: Setting force_index_by_date should not be changed.
```

Note: the default profile has a special handling: all the constraints defined for the default profile become the default constraints, so they restrict all the users until they're overriden explicitly for these users.

## ClickHouse Utility

- **clickhouse-local** — Allows running SQL queries on data without stopping the ClickHouse server, similar to howawk does this.
- **clickhouse-copier** — Copies (and reshards) data from one cluster to another cluster.
- **clickhouse-benchmark** — Loads server with the custom queries and settings.

### clickhouse-copier

Copies data from the tables in one cluster to tables in another (or the same) cluster.

You can run multiple `clickhouse-copier` instances on different servers to perform the same job. ZooKeeper is used for syncing the processes.

After starting, `clickhouse-copier` :

- Connects to ZooKeeper and receives:
  - Copying jobs.
  - The state of the copying jobs.
- It performs the jobs.

Each running process chooses the "closest" shard of the source cluster and copies the data into the destination cluster, resharding the data if necessary.

`clickhouse-copier` tracks the changes in ZooKeeper and applies them on the fly.

To reduce network traffic, we recommend running `clickhouse-copier` on the same server where the source data is located.

### Running clickhouse-copier

The utility should be run manually:

```
clickhouse-copier copier --daemon --config zookeeper.xml --task-path /task/path --base-dir /path/to/dir
```

Parameters:

- `daemon` — Starts `clickhouse-copier` in daemon mode.
- `config` — The path to the `zookeeper.xml` file with the parameters for the connection to ZooKeeper.
- `task-path` — The path to the ZooKeeper node. This node is used for syncing `clickhouse-copier` processes and storing

tasks. Tasks are stored in `$task-path/description`.

- `base-dir` — The path to logs and auxiliary files. When it starts, `clickhouse-copier` creates `clickhouse-copier_YYYYMMHHSS_<PID>` subdirectories in `$base-dir`. If this parameter is omitted, the directories are created in the directory where `clickhouse-copier` was launched.

## Format of `zookeeper.xml`

```
<yandex>
  <logger>
    <level>trace</level>
    <size>100M</size>
    <count>3</count>
  </logger>

  <zookeeper>
    <node index="1">
      <host>127.0.0.1</host>
      <port>2181</port>
    </node>
  </zookeeper>
</yandex>
```

## Configuration of copying tasks

```
<yandex>
  <!-- Configuration of clusters as in an ordinary server config -->
  <remote_servers>
    <source_cluster>
      <shard>
        <internal_replication>false</internal_replication>
        <replica>
          <host>127.0.0.1</host>
          <port>9000</port>
        </replica>
      </shard>
      ...
    </source_cluster>

    <destination_cluster>
    ...
  </destination_cluster>
  </remote_servers>

  <!-- How many simultaneously active workers are possible. If you run more workers superfluous workers will sleep. -->
  <max_workers>2</max_workers>

  <!-- Setting used to fetch (pull) data from source cluster tables -->
  <settings_pull>
    <readonly>1</readonly>
  </settings_pull>

  <!-- Setting used to insert (push) data to destination cluster tables -->
  <settings_push>
    <readonly>0</readonly>
  </settings_push>

  <!-- Common setting for fetch (pull) and insert (push) operations. Also, copier process context uses it.
       They are overlaid by <settings_pull/> and <settings_push/> respectively. -->
  <settings>
    <connect_timeout>3</connect_timeout>
    <!-- Sync insert is set forcibly, leave it here just in case. -->
    <insert_distributed_sync>1</insert_distributed_sync>
  </settings>

  <!-- Copying tasks description -->
```

```


--> copying tasks description.
    You could specify several table task in the same task description (in the same ZooKeeper node),
they will be performed
        sequentially.

-->
<tables>
    <!-- A table task, copies one table. -->
    <table_hits>
        <!-- Source cluster name (from <remote_servers/> section) and tables in it that should be
copied -->
        <cluster_pull>source_cluster</cluster_pull>
        <database_pull>test</database_pull>
        <table_pull>hits</table_pull>

        <!-- Destination cluster name and tables in which the data should be inserted -->
        <cluster_push>destination_cluster</cluster_push>
        <database_push>test</database_push>
        <table_push>hits2</table_push>

        <!-- Engine of destination tables.
            If destination tables have not be created, workers create them using columns definition
from source tables and engine
            definition from here.

            NOTE: If the first worker starts insert data and detects that destination partition is not
empty then the partition will
                be dropped and refilled, take it into account if you already have some data in destination
tables. You could directly
                specify partitions that should be copied in <enabled_partitions/>, they should be in
quoted format like partition column of
                system.parts table.

-->
<engine>
ENGINE=ReplicatedMergeTree('/clickhouse/tables/{cluster}/{shard}/hits2', '{replica}')
PARTITION BY toMonday(date)
ORDER BY (CounterID, EventDate)
</engine>

<!-- Sharding key used to insert data to destination cluster -->
<sharding_key>jumpConsistentHash(intHash64(UserID), 2)</sharding_key>

<!-- Optional expression that filter data while pull them from source servers -->
<where_condition>CounterID != 0</where_condition>

<!-- This section specifies partitions that should be copied, other partition will be ignored.
    Partition names should have the same format as
    partition column of system.parts table (i.e. a quoted text).
    Since partition key of source and destination cluster could be different,
    these partition names specify destination partitions.

    NOTE: In spite of this section is optional (if it is not specified, all partitions will be
copied),
        it is strictly recommended to specify them explicitly.
        If you already have some ready partitions on destination cluster they
        will be removed at the start of the copying since they will be interpreted
        as unfinished data from the previous copying!!!
-->
<enabled_partitions>
    <partition>'2018-02-26'</partition>
    <partition>'2018-03-05'</partition>
    ...
</enabled_partitions>
</table_hits>

<!-- Next table to copy. It is not copied until previous table is copying. -->
</table_visits>
...
</table_visits>
...
</tables>
</yandex>

```

`clickhouse-copier` tracks the changes in `/task/path/description` and applies them on the fly. For instance, if you change the value of `max_workers`, the number of processes running tasks will also change.

## clickhouse-local

The `clickhouse-local` program enables you to perform fast processing on local files, without having to deploy and configure the ClickHouse server.

Accepts data that represent tables and queries them using [ClickHouse SQL dialect](#).

`clickhouse-local` uses the same core as ClickHouse server, so it supports most of the features and the same set of formats and table engines.

By default `clickhouse-local` does not have access to data on the same host, but it supports loading server configuration using `--config-file` argument.

### ⚠ Warning

It is not recommended to load production server configuration into `clickhouse-local` because data can be damaged in case of human error.

## Usage

Basic usage:

```
clickhouse-local --structure "table_structure" --input-format "format_of_incoming_data" -q "query"
```

Arguments:

- `-S` , `--structure` — table structure for input data.
- `-if` , `--input-format` — input format, `TSV` by default.
- `-f` , `--file` — path to data, `stdin` by default.
- `-q` `--query` — queries to execute with ; as delimiter.
- `-N` , `--table` — table name where to put output data, `table` by default.
- `-of` , `--format` , `--output-format` — output format, `TSV` by default.
- `--stacktrace` — whether to dump debug output in case of exception.
- `--verbose` — more details on query execution.
- `-s` — disables `stderr` logging.
- `--config-file` — path to configuration file in same format as for ClickHouse server, by default the configuration empty.
- `--help` — arguments references for `clickhouse-local` .

Also there are arguments for each ClickHouse configuration variable which are more commonly used instead of `--config-file` .

## Examples

```
echo -e "1,2\n3,4" | clickhouse-local -S "a Int64, b Int64" -if "CSV" -q "SELECT * FROM table"
Read 2 rows, 32.00 B in 0.000 sec., 5182 rows/sec., 80.97 KiB/sec.
1 2
3 4
```

Previous example is the same as:

```
$ echo -e "1,2\n3,4" | clickhouse-local -q "CREATE TABLE table (a Int64, b Int64) ENGINE = File(CSV, stdin); SELECT a, b FROM table; DROP TABLE table"
Read 2 rows, 32.00 B in 0.000 sec., 4987 rows/sec., 77.93 KiB/sec.
1 2
3 4
```

Now let's output memory user for each Unix user:

```
$ ps aux | tail -n +2 | awk '{ printf("%s\t%s\n", $1, $4) }' | clickhouse-local -S "user String, mem Float64" -q "SELECT user, round(sum(mem), 2) as memTotal FROM table GROUP BY user ORDER BY memTotal DESC FORMAT Pretty"
Read 186 rows, 4.15 KiB in 0.035 sec., 5302 rows/sec., 118.34 KiB/sec.
```

user	memTotal
bayonet	113.5
root	8.8
...	

## clickhouse-benchmark

Connects to a ClickHouse server and repeatedly sends specified queries.

Syntax:

```
$ echo "single query" | clickhouse-benchmark [keys]
```

or

```
$ clickhouse-benchmark [keys] <<< "single query"
```

If you want to send a set of queries, create a text file and place each query on the individual string in this file. For example:

```
SELECT * FROM system.numbers LIMIT 10000000
SELECT 1
```

Then pass this file to a standard input of clickhouse-benchmark .

```
clickhouse-benchmark [keys] < queries_file
```

## Keys

- `-c N` , `--concurrency=N` — Number of queries that `clickhouse-benchmark` sends simultaneously. Default value: 1.
- `-d N` , `--delay=N` — Interval in seconds between intermediate reports (set 0 to disable reports). Default value: 1.
- `-h WORD` , `--host=WORD` — Server host. Default value: localhost . For the **comparison mode** you can use multiple `-h` keys.
- `-p N` , `--port=N` — Server port. Default value: 9000. For the **comparison mode** you can use multiple `-p` keys.
- `-i N` , `--iterations=N` — Total number of queries. Default value: 0.
- `-r` , `--randomize` — Random order of queries execution if there is more then one input query.
- `-s` , `--secure` — Using TLS connection.

- `-t N` , `--timelimit=N` — Time limit in seconds. `clickhouse-benchmark` stops sending queries when the specified time limit is reached. Default value: 0 (time limit disabled).
- `--confidence=N` — Level of confidence for T-test. Possible values: 0 (80%), 1 (90%), 2 (95%), 3 (98%), 4 (99%), 5 (99.5%). Default value: 5. In the **comparison mode** `clickhouse-benchmark` performs the **Independent two-sample Student's t-test** test to determine whether the two distributions aren't different with the selected level of confidence.
- `--cumulative` — Printing cumulative data instead of data per interval.
- `--database=DATABASE_NAME` — ClickHouse database name. Default value: `default`.
- `--json=FILEPATH` — JSON output. When the key is set, `clickhouse-benchmark` outputs a report to the specified JSON-file.
- `--user=USERNAME` — ClickHouse user name. Default value: `default`.
- `--password=PSWD` — ClickHouse user password. Default value: empty string.
- `--stacktrace` — Stack traces output. When the key is set, `clickhouse-benchmark` outputs stack traces of exceptions.
- `--stage=WORD` — Query processing stage at server. ClickHouse stops query processing and returns answer to `clickhouse-benchmark` at the specified stage. Possible values: `complete` , `fetch_columns` , `with_mergeable_state` . Default value: `complete` .
- `--help` — Shows the help message.

If you want to apply some **settings** for queries, pass them as a key `--<session setting name>= SETTING_VALUE` . For example, `--max_memory_usage=1048576` .

## Output

By default, `clickhouse-benchmark` reports for each `--delay` interval.

Example of the report:

```
Queries executed: 10.

localhost:9000, queries 10, QPS: 6.772, RPS: 67904487.440, MiB/s: 518.070, result RPS: 67721584.984, result
MiB/s: 516.675.

0.000%      0.145 sec.
10.000%     0.146 sec.
20.000%     0.146 sec.
30.000%     0.146 sec.
40.000%     0.147 sec.
50.000%     0.148 sec.
60.000%     0.148 sec.
70.000%     0.148 sec.
80.000%     0.149 sec.
90.000%     0.150 sec.
95.000%     0.150 sec.
99.000%     0.150 sec.
99.900%     0.150 sec.
99.990%     0.150 sec.
```

In the report you can find:

- Number of queries in the `Queries executed:` field.
- Status string containing (in order):
  - Endpoint of ClickHouse server.
  - Number of processed queries.
  - QPS: QPS: How many queries server performed per second during a period specified in the`--delay` argument.
  - RPS: How many rows server read per second during a period specified in the`--delay` argument.

- MiB/s: How many mebibytes server read per second during a period specified in the `--delay` argument.
- result RPS: How many rows placed by server to the result of a query per second during a period specified in the `--delay` argument.
- result MiB/s. How many mebibytes placed by server to the result of a query per second during a period specified in the `--delay` argument.
- Percentiles of queries execution time.

## Comparison mode

`clickhouse-benchmark` can compare performances for two running ClickHouse servers.

To use the comparison mode, specify endpoints of both servers by two pairs of `--host`, `--port` keys. Keys matched together by position in arguments list, the first `--host` is matched with the first `--port` and so on. `clickhouse-benchmark` establishes connections to both servers, then sends queries. Each query addressed to a randomly selected server. The results are shown for each server separately.

## Example

```
$ echo "SELECT * FROM system.numbers LIMIT 10000000 OFFSET 10000000" | clickhouse-benchmark -i 10
```

```
Loaded 1 queries.
```

```
Queries executed: 6.
```

```
localhost:9000, queries 6, QPS: 6.153, RPS: 123398340.957, MiB/s: 941.455, result RPS: 61532982.200, result MiB/s: 469.459.
```

```
0.000%      0.159 sec.  
10.000%     0.159 sec.  
20.000%     0.159 sec.  
30.000%     0.160 sec.  
40.000%     0.160 sec.  
50.000%     0.162 sec.  
60.000%     0.164 sec.  
70.000%     0.165 sec.  
80.000%     0.166 sec.  
90.000%     0.166 sec.  
95.000%     0.167 sec.  
99.000%     0.167 sec.  
99.900%     0.167 sec.  
99.990%     0.167 sec.
```

```
Queries executed: 10.
```

```
localhost:9000, queries 10, QPS: 6.082, RPS: 121959604.568, MiB/s: 930.478, result RPS: 60815551.642, result MiB/s: 463.986.
```

```
0.000%      0.159 sec.  
10.000%     0.159 sec.  
20.000%     0.160 sec.  
30.000%     0.163 sec.  
40.000%     0.164 sec.  
50.000%     0.165 sec.  
60.000%     0.166 sec.  
70.000%     0.166 sec.  
80.000%     0.167 sec.  
90.000%     0.167 sec.  
95.000%     0.170 sec.  
99.000%     0.172 sec.  
99.900%     0.172 sec.  
99.990%     0.172 sec.
```

## 常见问题

### 为什么不使用MapReduce之类的产品呢？

我们可以将MapReduce这类的系统称为分布式计算系统，其reduce操作基于分布式排序。其中最常见的开源解决方案是 [Apache Hadoop](#)。Yandex使用他们的内部解决方案YT。

这些系统不适合在线查询，因为它们的延迟高。换句话说，它们不能用作Web接口的后端服务。这些系统对于实时数据更新是没有用的。如果操作的结果和所有中间结果（如果有的话）位于单个服务器的内存中，则分布式排序不是执行reduce操作的最佳方式，但这通常是在线查询的情况。在这种情况下，哈希表是执行reduce操作的最佳方式。优化map-reduce任务的常用方法是使用内存中的哈希表进行预聚合（部分reduce），用户手动执行此优化操作。分布式排序是运行简单map-reduce任务时性能降低的主要原因之一。

大多数MapReduce系统允许您在集群上执行任意代码。但是，声明性查询语言更适合OLAP，以便快速运行实验。例如，Hadoop包含Hive和Pig，Cloudera Impala或Shark（过时）for Spark，以及Spark SQL、Presto和Apache Drill。与专业系统相比，运行此类任务时的性能非常不理想，所以将这些系统用作Web接口的后端服务是不现实的，因为延迟相对较高。

What to do if I have a problem with encodings when using Oracle through ODBC?

If you use Oracle through ODBC driver as a source of external dictionaries, you need to set up correctly value for the `NLS_LANG` variable in the `/etc/default/clickhouse`. For more details see the [Oracle NLS\\_LANG FAQ](#).

## Example

```
NLS_LANG=CHINESE_CHINA.ZHS16GBK
```

# ClickHouse 开发

ClickHose支持Linux, FreeBSD 及 Mac OS X 系统。

## Windows使用指引

如果您的系统是Windows，则需要创建Ubuntu虚拟机。可以安装VirtualBox来构建虚拟机。Ubuntu的下载链接为：  
<https://www.ubuntu.com/#download>。请使用下载好的镜像创建一个虚拟机（请确保虚拟机有至少4GB的内存容量）。在Ubuntu中使用"terminal"程序（gnome-terminal，konsole等）运行命令行终端，或使用快捷键Ctrl+Alt+T。

## 在GitHub上创建源码库

您需要(申请)一个GitHub账户来使用ClickHouse。

如果没有账户，请在<https://github.com>上注册一个。如果没有SSH密钥，请在本地创建密钥并将公钥上传到GitHub上。这有助于你提交更新代码。并且在不同的SSH服务端，你也可以使用相同的SSH密钥。

要创建ClickHouse源码库的分支，请在<https://github.com/ClickHouse/ClickHouse>页面上点击右上角的"fork"按钮。它会在本账户上创建您个人的ClickHouse/ClickHouse分支。

若要参与开发，首先请在ClickHouse的分支中提交您期望的变更，然后创建一个“pull请求”，以便这些变更能够被(ClickHouse/ClickHouse)主库接受。

请先安装 git 来使用git源码库。

请在Ubuntu终端上使用下列的指令来安装 git：

```
sudo apt update  
sudo apt install git
```

在<https://services.github.com/on-demand/downloads/github-git-cheat-sheet.pdf>中找到有关使用Git的简易手册。有关Git的详细手册，请参见：<https://git-scm.com/book/ru/v2>。

## 拷贝源码库到开发机

接下来，请将源码下载到开发机上。这步操作被称为“拷贝源码库”，是因为它在您的开发机上创建了源码库的本地副本。

在终端命令行输入下列指令：

```
git clone --recursive git@github.com:your_github_username/ClickHouse.git  
cd ClickHouse
```

请注意，您需要将`your_github_username`替换成实际使用的账户名！

这个指令将创建一个包含项目副本的 ClickHouse 工作目录。

重要的是，工作目录的路径中不应包含空格，因为这可能会导致运行构建系统时出现问题。

请注意，ClickHouse源码库使用了 submodules。这是对其他库的引用（即项目所依赖的外部库）。即在拷贝源码库时，需要如上述指令中那样指定 `--recursive`。如果在拷贝源码库时没有包含子模块，需要执行使用下列的指令：

```
git submodule init  
git submodule update
```

可以通过 `git submodule status` 来检查子模块的状态。

如果提示下列的错误信息：

```
Permission denied (publickey).  
fatal: Could not read from remote repository.  
  
Please make sure you have the correct access rights  
and the repository exists.
```

这通常表示缺少用于连接GitHub的SSH密钥。这些密钥一般都在 `~/.ssh` 中。要接受SSH密钥，请在GitHub UI的设置页面中上传它们。

您还可以通过https协议来拷贝源码库：

```
git clone https://github.com/ClickHouse/ClickHouse.git
```

但是，这无法将变更提交到服务器上。您仍然可以暂时使用，并后续再添加SSH密钥，用 `git remote` 命令替换源码库的远程地址。

还可以将原始ClickHouse库的地址添加到本地库中，以便从那里获取更新：

```
git remote add upstream git@github.com:ClickHouse/ClickHouse.git
```

命令执行成功后，可以通过执行 `git pull upstream master`，从ClickHouse的主分支中拉去更新。

## Working with submodules

Working with submodules in git could be painful. Next commands will help to manage it:

```
## ! each command accepts --recursive  
## Update remote URLs for submodules. Barely rare case  
git submodule sync  
## Add new submodules  
git submodule init  
## Update existing submodules to the current state  
git submodule update  
## Two last commands could be merged together  
git submodule update --init
```

The next commands would help you to reset all submodules to the initial state (!WARNING! - any changes inside will be deleted):

```
## Synchronizes submodules' remote URL with .gitmodules
git submodule sync --recursive
## Update the registered submodules with initialize not yet initialized
git submodule update --init --recursive
## Reset all changes done after HEAD
git submodule foreach git reset --hard
## Clean files from .gitignore
git submodule foreach git clean -xfd
## Repeat last 4 commands for all submodule
git submodule foreach git submodule sync --recursive
git submodule foreach git submodule update --init --recursive
git submodule foreach git submodule foreach git reset --hard
git submodule foreach git submodule foreach git clean -xfd
```

## 构建系统

ClickHouse使用 CMake 和 Ninja 来构建系统。

CMake - 一个可以生成Ninja文件的元构建系统（构建任务）。 Ninja - 一个轻量级的构建系统，专注于速度，用于执行这些 cmake生成的任务。

在Ubuntu,Debian或者Mint系统上执行 `sudo apt install cmake ninja-build` 来安装ninja。

在CentOS,RedHat系统上执行 `sudo yum install cmake ninja-build`。

如果您曾经使用过Arch或Gentoo，那么也许知道如何安装CMake。

若要在Mac OS X上安装CMake和Ninja，请先安装Homebrew，然后再通过brew安装其他内容：

```
/usr/bin/ruby -e "$(curl -fsSL https://raw.githubusercontent.com/Homebrew/install/master/install)"
brew install cmake ninja
```

接下来，检查CMake的版本：`cmake --version`。如果版本低于3.3，则需要从以下网站安装更新版本：

<https://cmake.org/download/>。

## 可供选择的外部库

ClickHouse使用多个外部库进行构建。大多数外部库不需要单独安装，而是和ClickHouse一起在子模块中构建。可以查看 `contrib` 中罗列的清单。

## C++ 编译器

GCC编译器从版本9开始，以及Clang版本 $\geq 8$ 都可支持构建ClickHouse。

Yandex官方当前使用GCC构建ClickHouse，因为它生成的机器代码性能较好（根据测评，最多可以相差几个百分点）。Clang通常可以更加便捷的开发。我们的持续集成（CI）平台会运行大约十二种构建组合的检查。

在Ubuntu上安装GCC，请执行：`sudo apt install gcc g++`

请使用 `gcc --version` 查看gcc的版本。如果gcc版本低于9，请参考此处的指示：

<https://clickhouse.tech/docs/en/development/build/#install-gcc-9>。

在Mac OS X上安装GCC，请执行：`brew install gcc`

如果您决定使用Clang，还可以同时安装 `libc++` 以及 `lld`，前提是您也熟悉它们。此外，也推荐使用 `ccache`。

## 构建的过程

如果当前已经准备好构建ClickHouse，我们建议您在 ClickHouse 中创建一个单独的目录 build，其中包含所有构建组件：

```
mkdir build  
cd build
```

您也可以有多个不同类型的构建目录（例如，build\_release, build\_debug等等）。

在 build 目录下，通过运行CMake配置构建。在第一次运行之前，请定义用于指定编译器的环境变量（本示例中为gcc 9 编译器）。

```
export CC=gcc-9 CXX=g++-9  
cmake ..
```

CC 变量指代C的编译器（C Compiler的缩写），而 CXX 变量指代要使用哪个C++编译器进行编译。

为了更快的构建，请使用 debug 构建类型-不含优化的构建。为此提供以下的参数 -D CMAKE\_BUILD\_TYPE=Debug：

```
cmake -D CMAKE_BUILD_TYPE=Debug ..
```

您可以通过在 build 目录中运行此命令来更改构建类型。

运行ninja进行构建：

```
ninja clickhouse-server clickhouse-client
```

在此示例中，仅将构建所需的二进制文件。

如果您需要构建所有的二进制文件（utilities和tests），请运行不带参数的ninja：

```
ninja
```

全量构建需要大约30GB的可用磁盘空间或15GB的空间来构建主要的二进制文件。

当构建的机器上有大量内存时，可考虑设置与 -j 参数并行运行的构建任务数量：

```
ninja -j 1 clickhouse-server clickhouse-client
```

在拥有4GB内存的机器上，建议设置成1，在拥有8GB内存的机器上，建议按 -j 2 设置。

如果您收到以下消息：

```
ninja : error : loading'build.ninja' : No such file or directory
```

则表示生成构建配置失败，请检查上述消息。

成功启动构建过程后，您将看到构建进度-已处理任务的数量和任务总数。

在libhdfs2库中生成有关protobuf文件的消息时，可能会显示诸如 libprotobuf WARNING。它们没有影响，可以忽略不计。

成功构建后，会得到一个可执行文件 ClickHouse/<build\_dir>/dbms/programs/clickhouse：

```
ls -l dbms/programs/clickhouse
```

## 运行ClickHouse可执行文件

要以当前的用户身份运行服务，请进入到 ClickHouse/dbms/programs/server/ 目录（在 build 文件夹外）并运行：

```
../../../../build/dbms/programs/clickhouse server
```

在这种情况下，ClickHouse将使用位于当前目录中的配置文件。您可以从任何目录运行 Clickhouse server，并将配置文件 --config-file 的路径指定为命令行参数。

在另外一个终端上连接ClickHouse的clickhouse-client客户端，请进入到 ClickHouse/build/dbms/programs/ 并运行 clickhouse client。

如果您在Mac OS X 或者 FreeBSD上收到 Connection refused 的消息，请尝试指定主机地址为127.0.0.1：

```
clickhouse client --host 127.0.0.1
```

您可以使用自定义构建的ClickHouse二进制文件替换系统中安装的ClickHouse二进制文件的生成版本。为此，请参照官方网站上的说明在计算机上安装ClickHouse。接下来，运行以下命令：

```
sudo service clickhouse-server stop  
sudo cp ClickHouse/build/dbms/programs/clickhouse /usr/bin/  
sudo service clickhouse-server start
```

请注意，clickhouse-client，clickhouse-server和其他服务通常共享 clickhouse 二进制文件的符号链接。

您还可以使用系统上安装的ClickHouse软件包中的配置文件运行自定义构建的ClickHouse二进制文件：

```
sudo service clickhouse-server stop  
sudo -u clickhouse ClickHouse/build/dbms/programs/clickhouse server --config-file /etc/clickhouse-server/config.xml
```

## IDE (集成开发环境)

如果您还不知道使用哪款IDE，我们推荐使用CLion。CLion是一款商业软件，但能够有30天的免费使用时间。它同时也对学生免费。CLion可以在Linux和Mac OS X上使用。

KDevelop和QTCreator是另外两款适合开发ClickHouse的替代IDE。尽管不太稳定，但KDevelop还是作为一款非常便捷的IDE。如果KDevelop在打开项目后不久崩溃，则您应该在打开项目文件列表后立即单击“全部停止”按钮。按此处理后，KDevelop可以正常使用。

作为简易的代码编辑器，您可以使用Sublime Text或Visual Studio Code或Kate（在Linux上都可用）。

值得一提的是CLion会创建自己的 build 路径，它还会自行选择 debug 作为构建类型。对于配置，它使用CLion中定义的CMake版本，而不是您安装的版本。最后，CLion会使用 make 而不是 ninja 去构建任务。这属于正常的现象，请记住这一点，以免造成混淆。

## 编写代码

ClickHouse的架构描述可以在此处查看：<https://clickhouse.tech/docs/en/development/architecture/>

代码风格指引：<https://clickhouse.tech/docs/en/development/style/>

编写测试用例：<https://clickhouse.tech/docs/en/development/tests/>

任务列表：[https://github.com/ClickHouse/ClickHouse/blob/master/dbms/tests/instructions/easy\\_tasks\\_sorted\\_en.md](https://github.com/ClickHouse/ClickHouse/blob/master/dbms/tests/instructions/easy_tasks_sorted_en.md)

# 测试数据

开发ClickHouse通常需要加载现实的数据集，尤其是在性能测试的场景。我们可以从Yandex.Metrica获取一组特别准备的匿名数据。这些数据需要额外使用3GB的空闲磁盘空间。请注意，完成大多数开发任务并不需要此数据。

```
sudo apt install wget xz-utils

wget https://clickhouse-datasets.s3.yandex.net/hits/tsv/hits_v1.tsv.xz
wget https://clickhouse-datasets.s3.yandex.net/visits/tsv/visits_v1.tsv.xz

xz -v -d hits_v1.tsv.xz
xz -v -d visits_v1.tsv.xz

clickhouse-client

CREATE TABLE test.hits ( WatchID UInt64, JavaEnable UInt8, Title String, GoodEvent Int16, EventTime DateTime, EventDate Date, CounterID UInt32, ClientIP UInt32, ClientIP6 FixedString(16), RegionID UInt32, UserID UInt64, CounterClass Int8, OS UInt8, UserAgent UInt8, URL String, Referer String, URLDomain String, RefererDomain String, Refresh UInt8, IsRobot UInt8, RefererCategories Array(UInt16), URLCategories Array(UInt16), URLRegions Array(UInt32), RefererRegions Array(UInt32), ResolutionWidth UInt16, ResolutionHeight UInt16, ResolutionDepth UInt8, FlashMajor UInt8, FlashMinor UInt8, FlashMinor2 String, NetMajor UInt8, NetMinor UInt8, UserAgentMajor UInt16, UserAgentMinor FixedString(2), CookieEnable UInt8, JavascriptEnable UInt8, IsMobile UInt8, MobilePhone UInt8, MobilePhoneModel String, Params String, IPNetworkID UInt32, TraficSourceID Int8, SearchEngineID UInt16, SearchPhrase String, AdvEngineID UInt8, IsArtifical UInt8, WindowClientWidth UInt16, WindowClientHeight UInt16, ClientTimeZone Int16, ClientEventTime DateTime, SilverlightVersion1 UInt8, SilverlightVersion2 UInt8, SilverlightVersion3 UInt32, SilverlightVersion4 UInt16, PageCharset String, CodeVersion UInt32, IsLink UInt8, IsNotBounce UInt8, FUniqID UInt64, HID UInt32, IsOldCounter UInt8, IsEvent UInt8, IsParameter UInt8, DontCountHits UInt8, WithHash UInt8, HitColor FixedString(1), UTCEventTime DateTime, Age UInt8, Sex UInt8, Income UInt8, Interests UInt16, Robotness UInt8, GeneralInterests Array(UInt16), RemoteIP UInt32, RemoteIP6 FixedString(16), WindowName Int32, OpenerName Int32, HistoryLength Int16, BrowserLanguage FixedString(2), BrowserCountry FixedString(2), SocialNetwork String, SocialAction String, HTTPError UInt16, SendTiming Int32, DNSTiming Int32, ConnectTiming Int32, ResponseStartTiming Int32, ResponseEndTiming Int32, FetchTiming Int32, RedirectTiming Int32, DOMInteractiveTiming Int32, DOMContentLoadedTiming Int32, DOMCompleteTiming Int32, LoadEventStartTiming Int32, LoadEventEndTiming Int32, NStoDOMContentLoadedTiming Int32, FirstPaintTiming Int32, RedirectCount Int8, SocialSourceNetworkID UInt8, SocialSourcePage String, ParamPrice Int64, ParamOrderID String, ParamCurrency FixedString(3), ParamCurrencyID UInt16, GoalsReached Array(UInt32), OpenstatServiceName String, OpenstatCampaignID String, OpenstatAdID String, OpenstatSourceID String, UTMSource String, UTMMedium String, UTMCampaign String, UTMContent String, UTMTerm String, FromTag String, HasGCLID UInt8, RefererHash UInt64, URLHash UInt64, CLID UInt32, YCLID UInt64, ShareService String, ShareURL String, ShareTitle String, `ParsedParams.Key1` Array(String), `ParsedParams.Key2` Array(String), `ParsedParams.Key3` Array(String), `ParsedParams.Key4` Array(String), `ParsedParams.Key5` Array(String), `ParsedParams.ValueDouble` Array(Float64), IslandID FixedString(16), RequestNum UInt32, RequestTry UInt8) ENGINE = MergeTree PARTITION BY toYYYYMM(EventDate) SAMPLE BY intHash32(UserID) ORDER BY (CounterID, EventDate, intHash32(UserID), EventTime);

CREATE TABLE test.visits ( CounterID UInt32, StartDate Date, Sign Int8, IsNew UInt8, VisitID UInt64, UserID UInt64, StartTime DateTime, Duration UInt32, UTCStartTime DateTime, PageViews Int32, Hits Int32, IsBounce UInt8, Referer String, StartURL String, RefererDomain String, StartURLDomain String, EndURL String, LinkURL String, IsDownload UInt8, TraficSourceID Int8, SearchEngineID UInt16, SearchPhrase String, AdvEngineID UInt8, PlaceID Int32, RefererCategories Array(UInt16), URLCategories Array(UInt16), URLRegions Array(UInt32), RefererRegions Array(UInt32), IsYandex UInt8, GoalReachesDepth Int32, GoalReachesURL Int32, GoalReachesAny Int32, SocialSourceNetworkID UInt8, SocialSourcePage String, MobilePhoneModel String, ClientEventTime DateTime, RegionID UInt32, ClientIP UInt32, ClientIP6 FixedString(16), RemoteIP UInt32, RemoteIP6 FixedString(16), IPNetworkID UInt32, SilverlightVersion3 UInt32, CodeVersion UInt32, ResolutionWidth UInt16, ResolutionHeight UInt16, UserAgentMajor UInt16, UserAgentMinor UInt16, WindowClientWidth UInt16, WindowClientHeight UInt16, SilverlightVersion2 UInt8, SilverlightVersion4 UInt16, FlashVersion3 UInt16, FlashVersion4 UInt16, ClientTimeZone Int16, OS UInt8, UserAgent UInt8, ResolutionDepth UInt8, FlashMajor UInt8, FlashMinor UInt8, NetMajor UInt8, NetMinor UInt8, MobilePhone UInt8, SilverlightVersion1 UInt8, Age UInt8, Sex UInt8, Income UInt8, JavaEnable UInt8, CookieEnable UInt8, JavascriptEnable UInt8, IsMobile UInt8, BrowserLanguage UInt16, BrowserCountry UInt16, Interests UInt16, Robotness UInt8, GeneralInterests Array(UInt16), Params Array(String), `Goals.ID` Array(UInt32), `Goals.Serial` Array(UInt32), `Goals.EventTime` Array(DateTime), `Goals.Price` Array(Int64), `Goals.OrderID` Array(String), `Goals.CurrencyID` Array(UInt32), WatchIDs Array(UInt64), ParamSumPrice Int64, ParamCurrency FixedString(3), ParamCurrencyID UInt16, ClickLogID UInt64, ClickEventID Int32, ClickGoodEvent Int32, ClickEventTime DateTime, ClickPriorityID Int32, ClickPhraseID Int32, ClickPageID Int32, ClickPlaceID Int32, ClickTypeID Int32, ClickResourceID Int32, ClickCost UInt32, ClickClientIP UInt32, ClickDomainID UInt32, ClickURL String, ClickAttempt UInt8, ClickOrderID UInt32, ClickBannerID UInt32, ClickMarketCategoryID UInt32, ClickMarketPP UInt32, ClickMarketCategoryName String, ClickMarketPPName String.
```

```
ClickAWAPSCampaignName String, ClickPageName String, ClickTargetType UInt16, ClickTargetPhraseID UInt64,
ClickContextType UInt8, ClickSelectType Int8, ClickOptions String, ClickGroupBannerID Int32,
OpenstatServiceName String, OpenstatCampaignID String, OpenstatAdID String, OpenstatSourceID String,
UTMSource String, UTMMedium String, UTMCampaign String, UTMContent String, UTMTerm String, FromTag
String, HasGCLID UInt8, FirstVisit DateTime, PredLastVisit Date, LastVisit Date, TotalVisits UInt32,
`TraficSource.ID` Array(Int8), `TraficSource.SearchEngineID` Array(UInt16), `TraficSource.AdvEngineID` 
Array(UInt8), `TraficSource.PlaceID` Array(UInt16), `TraficSource.SocialSourceNetworkID` Array(UInt8),
`TraficSource.Domain` Array(String), `TraficSource.SearchPhrase` Array(String),
`TraficSource.SocialSourcePage` Array(String), Attendance FixedString(16), CLID UInt32, YCLID UInt64,
NormalizedRefererHash UInt64, SearchPhraseHash UInt64, RefererDomainHash UInt64, NormalizedStartURLHash
UInt64, StartURLDomainHash UInt64, NormalizedEndURLHash UInt64, TopLevelDomain UInt64, URLScheme
UInt64, OpenstatServiceNameHash UInt64, OpenstatCampaignIDHash UInt64, OpenstatAdIDHash UInt64,
OpenstatSourceIDHash UInt64, UTMSourceHash UInt64, UTMMediumHash UInt64, UTMCampaignHash UInt64,
UTMContentHash UInt64, UTMTermHash UInt64, FromHash UInt64, WebVisorEnabled UInt8, WebVisorActivity
UInt32, `ParsedParams.Key1` Array(String), `ParsedParams.Key2` Array(String), `ParsedParams.Key3` 
Array(String), `ParsedParams.Key4` Array(String), `ParsedParams.Key5` Array(String),
`ParsedParams.ValueDouble` Array(Float64), `Market.Type` Array(UInt8), `Market.GoalID` Array(UInt32),
`Market.OrderID` Array(String), `Market.OrderPrice` Array(Int64), `Market.PP` Array(UInt32),
`Market.DirectPlaceID` Array(UInt32), `Market.DirectOrderID` Array(UInt32), `Market.DirectBannerID` 
Array(UInt32), `Market.GoodID` Array(String), `Market.GoodName` Array(String), `Market.GoodQuantity` 
Array(Int32), `Market.GoodPrice` Array(Int64), IslandID FixedString(16)) ENGINE =
CollapsingMergeTree(Sign) PARTITION BY toYYYYMM(StartDate) SAMPLE BY intHash32(UserID) ORDER BY (CounterID,
StartDate, intHash32(UserID), VisitID);
```

```
clickhouse-client --max_insert_block_size 100000 --query "INSERT INTO test.hits FORMAT TSV" < hits_v1.tsv
clickhouse-client --max_insert_block_size 100000 --query "INSERT INTO test.visits FORMAT TSV" <
visits_v1.tsv
```

## 创建拉取请求

进入到GitHub 用户界面中的fork库。如果您已经在某个分支中进行开发，则需要选择该分支。在屏幕中有一个“拉取请求”的按钮。实际上这等价于“创建一个请求以接受对主库的变更”。

即使工作尚未完成，也可以创建拉取请求。在这种情况下，请在标题的开头加上“WIP”（正在进行中），以便后续更改。这对于协同审查和讨论更改以及运行所有可用测试用例很有用。提供有关变更的简短描述很重要，这将在后续用于生成重新发布变更日志。

Yandex成员一旦在您的拉取请求上贴上“可以测试”标签，就会开始测试。一些初始检查项（例如，代码类型）的结果会在几分钟内反馈。构建的检查结果将在半小时内完成。而主要的测试用例集结果将在一小时内报告给您。

系统将分别为您的拉取请求准备ClickHouse二进制版本。若要检索这些构建信息，请在检查列表中单击“ClickHouse构建检查”旁边的“详细信息”链接。在这里，您会找到指向ClickHouse的.deb软件包的直接链接，此外，甚至可以将其部署在生产服务器上（如果您不担心）。

某些构建项很可能在首次构建时失败。这是因为我们同时检查了基于gcc和clang的构建，几乎所有现有的被clang启用的警告（总是带有 -Werror 标志）。在同一页面上，您可以找到所有构建的日志，因此不必以所有可能的方式构建 ClickHouse。

## ClickHouse 架构概述

ClickHouse 是一个真正的列式数据库管理系统 (DBMS)。在 ClickHouse 中，数据始终是按列存储的，包括矢量（向量或列块）执行的过程。只要有可能，操作都是基于矢量进行分派的，而不是单个的值，这被称为“矢量化查询执行”，它有利于降低实际的数据处理开销。

这个想法并不新鲜，其可以追溯到 APL 编程语言及其后代：A+、J、K 和 Q。矢量编程被大量用于科学数据处理中。即使在关系型数据库中，这个想法也不是什么新的东西：比如，矢量编程也被大量用于 Vectorwise 系统中。

通常有两种不同的加速查询处理的方法：矢量化查询执行和运行时代码生成。在后者中，动态地为每一类查询生成代码，消除了间接分派和动态分派。这两种方法中，并没有哪一种严格地比另一种好。运行时代码生成可以更好地将多个操作融合在一起，从而充分利用 CPU 执行单元和流水线。矢量化查询执行不是特别实用，因为它涉及必须写到缓存并读回的临时向

量。如果 L2 缓存容纳不下临时数据，那么这将成为一个问题。但矢量化查询执行更容易利用 CPU 的 SIMD 功能。朋友写的一篇[研究论文](#)表明，将两种方法结合起来是更好的选择。ClickHouse 使用了矢量化查询执行，同时初步提供了有限的运行时动态代码生成。

## 列 ( Columns )

要表示内存中的列（实际上是列块），需使用 `IColumn` 接口。该接口提供了用于实现各种关系操作符的辅助方法。几乎所有的操作都是不可变的：这些操作不会更改原始列，但是会创建一个新的修改后的列。比如，`IColumn::filter` 方法接受过滤字节掩码，用于 `WHERE` 和 `HAVING` 关系操作符中。另外的例子：`IColumn::permute` 方法支持 `ORDER BY` 实现，`IColumn::cut` 方法支持 `LIMIT` 实现等等。

不同的 `IColumn` 实现（`ColumnUInt8`、`ColumnString` 等）负责不同的列内存布局。内存布局通常是一个连续的数组。对于数据类型为整型的列，只是一个连续的数组，比如 `std::vector`。对于 `String` 列和 `Array` 列，则由两个向量组成：其中一个向量连续存储所有的 `String` 或数组元素，另一个存储每一个 `String` 或 `Array` 的起始元素在第一个向量中的偏移。而 `ColumnConst` 则仅在内存中存储一个值，但是看起来像一个列。

### Field

尽管如此，有时候也可能需要处理单个值。表示单个值，可以使用 `Field`。`Field` 是 `UInt64`、`Int64`、`Float64`、`String` 和 `Array` 组成的联合。`IColumn` 拥有 `operator[]` 方法来获取第 `n` 个值成为一个 `Field`，同时也拥有 `insert` 方法将一个 `Field` 追加到一个列的末尾。这些方法并不高效，因为它们需要处理表示单一值的临时 `Field` 对象，但是有更高效的方法比如 `insertFrom` 和 `insertRangeFrom` 等。

`Field` 中并没有足够的关于一个表（table）的特定数据类型的信息。比如，`UInt8`、`UInt16`、`UInt32` 和 `UInt64` 在 `Field` 中均表示为 `UInt64`。

### 抽象漏洞

`IColumn` 具有用于数据的常见关系转换的方法，但这些方法并不能够满足所有需求。比如，`ColumnUInt64` 没有用于计算两列和的方法，`ColumnString` 没有用于进行子串搜索的方法。这些无法计算的例程在 `Icolumn` 之外实现。

列（Columns）上的各种函数可以通过使用 `Icolumn` 的方法来提取 `Field` 值，或根据特定的 `Icolumn` 实现的数据内存布局的知识，以一种通用但不高效的方式实现。为此，函数将会转换为特定的 `IColumn` 类型并直接处理内部表示。比如，`ColumnUInt64` 具有 `getData` 方法，该方法返回一个指向列的内部数组的引用，然后一个单独的例程可以直接读写或填充该数组。实际上，“抽象漏洞（leaky abstractions）”允许我们以更高效的方式来实现各种特定的例程。

### 数据类型

`IDataType` 负责序列化和反序列化：读写二进制或文本形式的列或单个值构成的块。`IDataType` 直接与表的数据类型相对应。比如，有 `DataTypeUInt32`、`DataTypeDateTime`、`DataTypeString` 等数据类型。

`IDataType` 与 `IColumn` 之间的关联并不大。不同的数据类型在内存中能够用相同的 `IColumn` 实现来表示。比如，`DataTypeUInt32` 和 `DataTypeDateTime` 都是用 `ColumnUInt32` 或 `ColumnConstUInt32` 来表示的。另外，相同的数据类型也可以用不同的 `IColumn` 实现来表示。比如，`DataTypeUInt8` 既可以使用 `ColumnUInt8` 来表示，也可以使用过 `ColumnConstUInt8` 来表示。

`IDataType` 仅存储元数据。比如，`DataTypeUInt8` 不存储任何东西（除了 `vptr`）；`DataTypeFixedString` 仅存储 `N`（固定长度字符串的串长度）。

`IDataType` 具有针对各种数据格式的辅助函数。比如如下一些辅助函数：序列化一个值并加上可能的引号；序列化一个值用于 JSON 格式；序列化一个值作为 XML 格式的一部分。辅助函数与数据格式并没有直接的对应。比如，两种不同的数据格式 `Pretty` 和 `TabSeparated` 均可以使用 `IDataType` 接口提供的 `serializeTextEscaped` 这一辅助函数。

## 块 ( Block )

Block 是表示内存中表的子集 ( chunk ) 的容器，是由三元组：( IColumn, IDataType, 列名) 构成的集合。在查询执行期间，数据是按 Block 进行处理的。如果我们有一个 Block，那么就有了数据（在 IColumn 对象中），有了数据的类型信息告诉我们如何处理该列，同时也有了列名（来自表的原始列名，或人为指定的用于临时计算结果的名字）。

当我们遍历一个块中的列进行某些函数计算时，会把结果列加入到块中，但不会更改函数参数中的列，因为操作是不可变的。之后，不需要的列可以从块中删除，但不是修改。这对于消除公共子表达式非常方便。

Block 用于处理数据块。注意，对于相同类型的计算，列名和类型对不同的块保持相同，仅列数据不同。最好把块数据 ( block data ) 和块头 ( block header ) 分离开来，因为小块大小会因复制共享指针和列名而带来很高的临时字符串开销。

## 块流 ( Block Streams )

块流用于处理数据。我们可以使用块流从某个地方读取数据，执行数据转换，或将数据写到某个地方。IBlockInputStream 具有 read 方法，其能够在数据可用时获取下一个块。IBlockOutputStream 具有 write 方法，其能够将块写到某处。

块流负责：

1. 读或写一个表。表仅返回一个流用于读写块。
2. 完成数据格式化。比如，如果你打算将数据以 Pretty 格式输出到终端，你可以创建一个块输出流，将块写入该流中，然后进行格式化。
3. 执行数据转换。假设你现在有 IBlockInputStream 并且打算创建一个过滤流，那么你可以创建一个 FilterBlockInputStream 并用 IBlockInputStream 进行初始化。之后，当你从 FilterBlockInputStream 中拉取块时，会从你的流中提取一个块，对其进行过滤，然后将过滤后的块返回给你。查询执行流水线就是以这种方式表示的。

还有一些更复杂的转换。比如，当你从 AggregatingBlockInputStream 拉取数据时，会从数据源读取全部数据进行聚集，然后将聚集后的数据流返回给你。另一个例子：UnionBlockInputStream 的构造函数接受多个输入源和多个线程，其能够启动多线程从多个输入源并行读取数据。

块流使用“pull”方法来控制流：当你从第一个流中拉取块时，它会接着从嵌套的流中拉取所需的块，然后整个执行流水线开始工作。“pull”和“push”都不是最好的方案，因为控制流不是明确的，这限制了各种功能的实现，比如多个查询同步执行（多个流水线合并到一起）。这个限制可以通过协程或直接运行互相等待的线程来解决。如果控制流明确，那么我们会有更多的可能性：如果我们定位了数据从一个计算单元传递到那些外部的计算单元中其中一个计算单元的逻辑。阅读这篇文章来获取更多的想法。

我们需要注意，查询执行流水线在每一步都会创建临时数据。我们要尽量使块的大小足够小，从而 CPU 缓存能够容纳下临时数据。在这个假设下，与其他计算相比，读写临时数据几乎没有任何开销的。我们也可以考虑一种替代方案：将流水线中的多个操作融合在一起，使流水线尽可能短，并删除大量临时数据。这可能是一个优点，但同时也有缺点。比如，拆分流水线使得中间数据缓存、获取同时运行的类似查询的中间数据以及相似查询的流水线合并等功能很容易实现。

## 格式 ( Formats )

数据格式同块流一起实现。既有仅用于向客户端输出数据的“展示”格式，如 IBlockOutputStream 提供的 Pretty 格式，也有其它输入输出格式，比如 TabSeparated 或 JSONEachRow。

此外还有行流：IRowInputStream 和 IRowOutputStream。它们允许你按行 pull/push 数据，而不是按块。行流只需要简单地面向行格式实现。包装器 BlockInputStreamFromRowInputStream 和 BlockOutputStreamFromRowOutputStream 允许你将面向行的流转换为正常的面向块的流。

## I/O

对于面向字节的输入输出，有 ReadBuffer 和 WriteBuffer 这两个抽象类。它们用来替代 C++ 的 iostream。不用担心：每个成熟的 C++ 项目都会有充分的理由使用某些东西来代替 iostream。

`ReadBuffer` 和 `WriteBuffer` 由一个连续的缓冲区和指向缓冲区中某个位置的一个指针组成。实现中，缓冲区可能拥有内存，也可能不拥有内存。有一个虚方法会使用随后的数据来填充缓冲区（针对 `ReadBuffer`）或刷新缓冲区（针对 `WriteBuffer`），该虚方法很少被调用。

`ReadBuffer` 和 `WriteBuffer` 的实现用于处理文件、文件描述符和网络套接字（socket），也用于实现压缩（`CompressedWriteBuffer` 在写入数据前需要先用一个 `WriteBuffer` 进行初始化并进行压缩）和其它用途。`ConcatReadBuffer`、`LimitReadBuffer` 和 `HashingWriteBuffer` 的用途正如其名字所描述的一样。

`ReadBuffer` 和 `WriteBuffer` 仅处理字节。为了实现格式化输入和输出（比如以十进制格式写一个数字），`ReadHelpers` 和 `WriteHelpers` 头文件中有一些辅助函数可用。

让我们来看一下，当你把一个结果集以 `JSON` 格式写到标准输出（`stdout`）时会发生什么。你已经准备好从 `IBlockInputStream` 获取结果集，然后创建 `WriteBufferFromFileDescriptor(STDOUT_FILENO)` 用于写字节到标准输出，创建 `JSONRowOutputStream` 并用 `WriteBuffer` 初始化，用于将行以 `JSON` 格式写到标准输出，你还可以在其上创建 `BlockOutputStreamFromRowOutputStream`，将其表示为 `IBlockOutputStream`。然后调用 `copyData` 将数据从 `IBlockInputStream` 传输到 `IBlockOutputStream`，一切工作正常。在内部，`JSONRowOutputStream` 会写入 `JSON` 分隔符，并以指向 `IColumn` 的引用和行数作为参数调用 `IDataType::serializeTextJSON` 函数。随后，`IDataType::serializeTextJSON` 将会调用 `WriteHelpers.h` 中的一个方法：比如，`writeText` 用于数值类型，`writeJSONString` 用于 `DataToString`。

## 表 (Tables)

表由 `IStorage` 接口表示。该接口的不同实现对应不同的表引擎。比如 `StorageMergeTree`、`StorageMemory` 等。这些类的实例就是表。

`IStorage` 中最重要的方法是 `read` 和 `write`，除此之外还有 `alter`、`rename` 和 `drop` 等方法。`read` 方法接受如下参数：需要从表中读取的列集，需要执行的 AST 查询，以及所需返回的流的数量。`read` 方法的返回值是一个或多个 `IBlockInputStream` 对象，以及在查询执行期间在一个表引擎内完成的关于数据处理阶段的信息。

在大多数情况下，`read` 方法仅负责从表中读取指定的列，而不会进行进一步的数据处理。进一步的数据处理均由查询解释器完成，不由 `IStorage` 负责。

但是也有值得注意的例外：

- AST 查询被传递给 `read` 方法，表引擎可以使用它来判断是否能够使用索引，从而从表中读取更少的数据。
- 有时候，表引擎能够将数据处理到一个特定阶段。比如，`StorageDistributed` 可以向远程服务器发送查询，要求它们将来自不同的远程服务器能够合并的数据处理到某个阶段，并返回预处理后的数据，然后查询解释器完成后续的数据处理。

表的 `read` 方法能够返回多个 `IBlockInputStream` 对象以允许并行处理数据。多个块输入流能够从一个表中并行读取。然后你可以通过不同的转换对这些流进行装饰（比如表达式求值或过滤），转换过程能够独立计算，并在其上创建一个 `UnionBlockInputStream`，以并行读取多个流。

另外也有 `TableFunction`。`TableFunction` 能够在查询的 `FROM` 字句中返回一个临时的 `IStorage` 以供使用。

要快速了解如何实现自己的表引擎，可以查看一些简单的表引擎，比如 `StorageMemory` 或 `StorageTinyLog`。

作为 `read` 方法的结果，`IStorage` 返回 `QueryProcessingStage` - 关于 storage 里哪部分查询已经被计算的信息。当前我们仅有非常粗粒度的信息。`Storage` 无法告诉我们“对于这个范围的数据，我已经处理完了 WHERE 字句里的这部分表达式”。我们需要在这个地方继续努力。

## 解析器 (Parsers)

查询由一个手写递归下降解析器解析。比如，`ParserSelectQuery` 只是针对查询的不同部分递归地调用下层解析器。解析器创建 `AST`。`AST` 由节点表示，节点是 `IAST` 的实例。

由于历史原因，未使用解析器生成器。

## 解释器 (Interpreters)

解释器负责从 AST 创建查询执行流水线。既有一些简单的解释器，如 `InterpreterExistsQuery` 和 `InterpreterDropQuery`，也有更复杂的解释器，如 `InterpreterSelectQuery`。查询执行流水线由块输入或输出流组成。比如，`SELECT` 查询的解释结果是从 `FROM` 字句的结果集中读取数据的 `IBlockInputStream`；`INSERT` 查询的结果是写入需要插入的数据的 `IBlockOutputStream`；`SELECT INSERT` 查询的解释结果是 `IBlockInputStream`，它在第一次读取时返回一个空结果集，同时将数据从 `SELECT` 复制到 `INSERT`。

`InterpreterSelectQuery` 使用 `ExpressionAnalyzer` 和 `ExpressionActions` 机制来进行查询分析和转换。这是大多数基于规则的查询优化完成的地方。`ExpressionAnalyzer` 非常混乱，应该进行重写：不同的查询转换和优化应该被提取出来并划分成不同的类，从而允许模块化转换或查询。

## 函数 (Functions)

函数既有普通函数，也有聚合函数。对于聚合函数，请看下一节。

普通函数不会改变行数 - 它们的执行看起来就像是独立地处理每一行数据。实际上，函数不会作用于一个单独的行上，而是作用在以 `Block` 为单位的数据上，以实现向量查询执行。

还有一些杂项函数，比如 `blockSize`、`rowNumberInBlock`，以及 `runningAccumulate`，它们对块进行处理，并且不遵从行的独立性。

ClickHouse 具有强类型，因此隐式类型转换不会发生。如果函数不支持某个特定的类型组合，则会抛出异常。但函数可以通过重载以支持许多不同的类型组合。比如，`plus` 函数（用于实现 `+` 运算符）支持任意数字类型的组合：`UInt8 + Float32`，`UInt16 + Int8` 等。同时，一些可变参数的函数能够级接收任意数目的参数，比如 `concat` 函数。

实现函数可能有些不方便，因为函数的实现需要包含所有支持该操作的数据类型和 `IColumn` 类型。比如，`plus` 函数能够利用 C++ 模板针对不同的数字类型组合、常量以及非常量的左值和右值进行代码生成。

这是一个实现动态代码生成的好地方，从而能够避免模板代码膨胀。同样，运行时代码生成也使得实现融合函数成为可能，比如融合“乘-加”，或者在单层循环迭代中进行多重比较。

由于向量查询执行，函数不会“短路”。比如，如果你写 `WHERE f(x) AND g(y)`，两边都会进行计算，即使是对于 `f(x)` 为 0 的行（除非 `f(x)` 是零常量表达式）。但是如果 `f(x)` 的选择条件很高，并且计算 `f(x)` 比计算 `g(y)` 要划算得多，那么最好进行多遍计算：首先计算 `f(x)`，根据计算结果对列数据进行过滤，然后计算 `g(y)`，之后只需对较小数量的数据进行过滤。

## 聚合函数

聚合函数是状态函数。它们将传入的值激活到某个状态，并允许你从该状态获取结果。聚合函数使用 `IAggregateFunction` 接口进行管理。状态可以非常简单（`AggregateFunctionCount` 的状态只是一个单一的 `UInt64` 值），也可以非常复杂（`AggregateFunctionUniqCombined` 的状态是由一个线性数组、一个散列表和一个 `HyperLogLog` 概率数据结构组合而成的）。

为了能够在执行一个基数很大的 `GROUP BY` 查询时处理多个聚合状态，需要在 `Arena`（一个内存池）或任何合适的内存块中分配状态。状态可以有一个非平凡的构造器和析构器：比如，复杂的聚合状态能够自己分配额外的内存。这需要注意状态的创建和销毁并恰当地传递状态的所有权，以跟踪谁将何时销毁状态。

聚合状态可以被序列化和反序列化，以在分布式查询执行期间通过网络传递或者在内存不够的时候将其写到硬盘。聚合状态甚至可以通过 `DataTypeAggregateFunction` 存储到一个表中，以允许数据的增量聚合。

聚合函数状态的序列化数据格式目前尚未版本化。如果只是临时存储聚合状态，这样是可以的。但是我们有 `AggregatingMergeTree` 表引擎用于增量聚合，并且人们已经在生产中使用它。这就是为什么在未来当我们更改任何聚合函数的序列化格式时需要增加向后兼容的支持。

## 服务器 (Server)

服务器实现了多个不同的接口：

- 一个用于任何外部客户端的 HTTP 接口。
- 一个用于本机 ClickHouse 客户端以及在分布式查询执行中跨服务器通信的 TCP 接口。
- 一个用于传输数据以进行拷贝的接口。

在内部，它只是一个没有协程、纤程等的基础多线程服务器。服务器不是为处理高速率的简单查询设计的，而是为处理相对低速率的复杂查询设计的，每一个复杂查询能够对大量的数据进行处理分析。

服务器使用必要的查询执行需要的环境初始化 `Context` 类：可用数据库列表、用户和访问权限、设置、集群、进程列表和查询日志等。这些环境被解释器使用。

我们维护了服务器 TCP 协议的完全向后向前兼容性：旧客户端可以和新服务器通信，新客户端也可以和旧服务器通信。但是我们并不想永久维护它，我们将在大约一年后删除对旧版本的支持。

对于所有的外部应用，我们推荐使用 HTTP 接口，因为该接口很简单，容易使用。TCP 接口与内部数据结构的联系更加紧密：它使用内部格式传递数据块，并使用自定义帧来压缩数据。我们没有发布该协议的 C 库，因为它需要链接大部分的 ClickHouse 代码库，这是不切实际的。

## 分布式查询执行

集群设置中的服务器大多是独立的。你可以在一个集群中的一个或多个服务器上创建一个 `Distributed` 表。`Distributed` 表本身并不存储数据，它只为集群的多个节点上的所有本地表提供一个“视图（view）”。当从 `Distributed` 表中进行 `SELECT` 时，它会重写该查询，根据负载平衡设置来选择远程节点，并将查询发送给节点。`Distributed` 表请求远程服务器处理查询，直到可以合并来自不同服务器的中间结果的阶段。然后它接收中间结果并进行合并。分布式表会尝试将尽可能多的工作分配给远程服务器，并且不会通过网络发送太多的中间数据。

当 `IN` 或 `JOIN` 子句中包含子查询并且每个子查询都使用分布式表时，事情会变得更加复杂。我们有不同的策略来执行这些查询。

分布式查询执行没有全局查询计划。每个节点都有针对自己的工作部分的本地查询计划。我们仅有简单的一次性分布式查询执行：将查询发送给远程节点，然后合并结果。但是对于具有高基数的 `GROUP BY` 或具有大量临时数据的 `JOIN` 这样困难的查询来说，这是不可行的：在这种情况下，我们需要在服务器之间“改组”数据，这需要额外的协调。ClickHouse 不支持这类查询执行，我们需要在这方面进行努力。

## Merge Tree

`MergeTree` 是一系列支持按主键索引的存储引擎。主键可以是一个任意的列或表达式的元组。`MergeTree` 表中的数据存储于“分块”中。每一个分块以主键序存储数据（数据按主键元组的字典序排序）。表的所有列都存储在这些“分块”中分离的 `column.bin` 文件中。`column.bin` 文件由压缩块组成，每一个块通常是 64 KB 到 1 MB 大小的未压缩数据，具体取决于平均值大小。这些块由一个接一个连续放置的列值组成。每一列的列值顺序相同（顺序由主键定义），因此当你按多列进行迭代时，你能够得到相应列的值。

主键本身是“稀疏”的。它并不是索引单一的行，而是索引某个范围内的数据。一个单独的 `primary.idx` 文件具有每个第 N 行的主键值，其中 N 称为 `index_granularity`（通常， $N = 8192$ ）。同时，对于每一列，都有带有标记的 `column.mrk` 文件，该文件记录的是每个第 N 行在数据文件中的偏移量。每个标记是一个 pair：文件中的偏移量到压缩块的起始，以及解压缩块中的偏移量到数据的起始。通常，压缩块根据标记对齐，并且解压缩块中的偏移量为 0。`primary.idx` 的数据始终驻留在内存，同时 `column.mrk` 的数据被缓存。

当我们想要从 `MergeTree` 的一个分块中读取部分内容时，我们会查看 `primary.idx` 数据并查找可能包含所请求数据的范围，然后查看 `column.mrk` 并计算偏移量从而得知从哪里开始读取些范围的数据。由于稀疏性，可能会读取额外的数据。ClickHouse 不适用于高负载的简单点查询，因为对于每一个键，整个 `index_granularity` 范围的行的数据都需要读取，并且对于每一列需要解压缩整个压缩块。我们使索引稀疏，是因为每一个单一的服务器需要在索引没有明显内存消耗的情况下，维护数万亿行的数据。另外，由于主键是稀疏的，导致其不是唯一的：无法在 `INSERT` 时检查一个键在表中是否存在。你可

以在一个表中使用同一个键创建多个行。

当你向 `MergeTree` 中插入一堆数据时，数据按主键排序并形成一个新的分块。为了保证分块的数量相对较少，有后台线程定期选择一些分块并将它们合并成一个有序的分块，这就是 `MergeTree` 的名称来源。当然，合并会导致“写入放大”。所有的分块都是不可变的：它们仅会被创建和删除，不会被修改。当运行 `SELECT` 查询时，`MergeTree` 会保存一个表的快照（分块集合）。合并之后，还会保留旧的分块一段时间，以便发生故障后更容易恢复，因此如果我们发现某些合并后的分块可能已损坏，我们可以将其替换为原分块。

`MergeTree` 不是 LSM 树，因为它不包含“memtable”和“log”：插入的数据直接写入文件系统。这使得它仅适用于批量插入数据，而不适用于非常频繁地一行一行插入 - 大约每秒一次是没问题的，但是每秒一千次就会有问题。我们这样做是为了简单起见，因为我们已经在我们的应用中批量插入数据。

`MergeTree` 表只能有一个（主）索引：没有任何辅助索引。在一个逻辑表下，允许有多个物理表示，比如，可以以多个物理顺序存储数据，或者同时表示预聚合数据和原始数据。

有些 `MergeTree` 引擎会在后台合并期间做一些额外工作，比如 `CollapsingMergeTree` 和 `AggregatingMergeTree`。这可以视为对更新的特殊支持。请记住这些不是真正的更新，因为用户通常无法控制后台合并将会执行的时间，并且 `MergeTree` 中的数据几乎总是存储在多个分块中，而不是完全合并的形式。

## 复制 (Replication)

`ClickHouse` 中的复制是基于表实现的。你可以在同一个服务器上有一些可复制的表和不可复制的表。你也可以以不同的方式进行表的复制，比如一个表进行双因子复制，另一个进行三因子复制。

复制是在 `ReplicatedMergeTree` 存储引擎中实现的。`ZooKeeper` 中的路径被指定为存储引擎的参数。`ZooKeeper` 中所有具有相同路径的表互为副本：它们同步数据并保持一致性。只需创建或删除表，就可以实现动态添加或删除副本。

复制使用异步多主机方案。你可以将数据插入到与 `ZooKeeper` 进行会话的任意副本中，并将数据复制到所有其它副本中。由于 `ClickHouse` 不支持 `UPDATEs`，因此复制是无冲突的。由于没有对插入的仲裁确认，如果一个节点发生故障，刚刚插入的数据可能会丢失。

用于复制的元数据存储在 `ZooKeeper` 中。其中一个复制日志列出了要执行的操作。操作包括：获取分块、合并分块和删除分区等。每一个副本将复制日志复制到其队列中，然后执行队列中的操作。比如，在插入时，在复制日志中创建“获取分块”这一操作，然后每一个副本都会去下载该分块。所有副本之间会协调进行合并以获得相同字节的结果。所有的分块在所有的副本上以相同的方式合并。为实现该目的，其中一个副本被选为领导者，该副本首先进行合并，并把“合并分块”操作写到日志中。

复制是物理的：只有压缩的分块会在节点之间传输，查询则不会。为了降低网络成本（避免网络放大），大多数情况下，会在每一个副本上独立地处理合并。只有在存在显著的合并延迟的情况下，才会通过网络发送大块的合并分块。

另外，每一个副本将其状态作为分块和校验和组成的集合存储在 `ZooKeeper` 中。当本地文件系统中的状态与 `ZooKeeper` 中引用的状态不同时，该副本会通过从其它副本下载缺失和损坏的分块来恢复其一致性。当本地文件系统中出现一些意外或损坏的数据时，`ClickHouse` 不会将其删除，而是将其移动到一个单独的目录下并忘记它。

`ClickHouse` 集群由独立的分片组成，每一个分片由多个副本组成。集群不是弹性的，因此在添加新的分片后，数据不会自动在分片之间重新平衡。相反，集群负载将变得不均衡。该实现为你提供了更多控制，对于相对较小的集群，例如只有数十个节点的集群来说是很好的。但是对于我们在生产中使用的具有数百个节点的集群来说，这种方法成为一个重大缺陷。我们应该实现一个表引擎，使得该引擎能够跨集群扩展数据，同时具有动态复制的区域，这些区域能够在集群之间自动拆分和平衡。

## Browse ClickHouse Source Code

You can use Woboq online code browser available [here](#). It provides code navigation and semantic highlighting, search and indexing. The code snapshot is updated daily.

Also you can browse sources on [GitHub](#) as usual.

If you're interested what IDE to use, we recommend CLion, QT Creator, VS Code and KDevelop (with caveats). You can use any favourite IDE. Vim and Emacs also count.

## 如何构建 ClickHouse 发布包

### 安装 Git 和 Pbuilder

```
sudo apt-get update  
sudo apt-get install git pbuilder debhelper lsb-release fakeroot sudo debian-archive-keyring debian-keyring
```

### 拉取 ClickHouse 源码

```
git clone --recursive https://github.com/ClickHouse/ClickHouse.git  
cd ClickHouse
```

### 运行发布脚本

```
./release
```

## 如何在开发过程中编译 ClickHouse

以下教程是在 Ubuntu Linux 中进行编译的示例。通过适当的更改，它应该可以适用于任何其他的 Linux 发行版。仅支持具有 x86\_64、AArch64。对 Power9 的支持是实验性的。

### 安装 Git 和 CMake 和 Ninja

```
sudo apt-get install git cmake ninja-build
```

Or cmake3 instead of cmake on older systems. 或者在早期版本的系统中用 cmake3 替代 cmake

### 安装 GCC 9

There are several ways to do this.

#### 安装 PPA 包

```
sudo apt-get install software-properties-common  
sudo apt-add-repository ppa:ubuntu-toolchain-r/test  
sudo apt-get update  
sudo apt-get install gcc-9 g++-9
```

#### 源码安装 gcc

请查看 [utils/ci/build-gcc-from-sources.sh](#)

### 使用 GCC 9 来编译

```
export CC=gcc-9  
export CXX=g++-9
```

## 拉取 ClickHouse 源码

```
git clone --recursive git@github.com:ClickHouse/ClickHouse.git
## or: git clone --recursive https://github.com/ClickHouse/ClickHouse.git

cd ClickHouse
```

## 编译 ClickHouse

```
mkdir build
cd build
cmake ..
ninja
cd ..
```

若要创建一个执行文件，执行 `ninja clickhouse`。这个命令会使得 `dbms/programs clickhouse` 文件可执行，您可以使用 `client` 或 `server` 参数运行。

## 在 Mac OS X 中编译 ClickHouse

ClickHouse 支持在 Mac OS X 10.12 版本中编译。若您在用更早的操作系统版本，可以尝试在指令中使用 `Gentoo Prefix` 和 `clang sl`。通过适当的更改，它应该可以适用于任何其他的 Linux 发行版。

## 安装 Homebrew

```
/usr/bin/ruby -e "$(curl -fsSL https://raw.githubusercontent.com/Homebrew/install/master/install)"
```

## 安装编译器，工具库

```
brew install cmake ninja gcc icu4c mariadb-connector-c openssl libtool gettext
```

## 拉取 ClickHouse 源码

```
git clone --recursive git@github.com:ClickHouse/ClickHouse.git
## or: git clone --recursive https://github.com/ClickHouse/ClickHouse.git

cd ClickHouse
```

## 编译 ClickHouse

```
mkdir build
cd build
cmake .. -DCMAKE_CXX_COMPILER=`which g++-8` -DCMAKE_C_COMPILER=`which gcc-8`
ninja
cd ..
```

## 注意事项

若你想运行 `clickhouse-server`，请先确保增加系统的最大文件数配置。

!!! 注意 可能需要用 sudo

为此，请创建以下文件：

/Library/LaunchDaemons/limit.maxfiles.plist:

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plist PUBLIC "-//Apple//DTD PLIST 1.0//EN"
 "http://www.apple.com/DTDs/PropertyList-1.0.dtd">
<plist version="1.0">
<dict>
<key>Label</key>
<string>limit.maxfiles</string>
<key>ProgramArguments</key>
<array>
<string>launchctl</string>
<string>limit</string>
<string>maxfiles</string>
<string>524288</string>
<string>524288</string>
</array>
<key>RunAtLoad</key>
<true/>
<key>ServiceIPC</key>
<false/>
</dict>
</plist>
```

执行以下命令：

```
$ sudo chown root:wheel /Library/LaunchDaemons/limit.maxfiles.plist
```

然后重启。

可以通过 ulimit -n 命令来检查是否生效。

## 如何在Linux中编译Mac OS X ClickHouse

Linux机器也可以编译运行在OS X系统的 clickhouse 二进制包，这可以用于在Linux上跑持续集成测试。如果要在Mac OS X 上直接构建ClickHouse，请参考另外一篇指南：[https://clickhouse.tech/docs/zh/development/build\\_osx/](https://clickhouse.tech/docs/zh/development/build_osx/)

Mac OS X的交叉编译基于以下构建说明，请首先遵循它们。

## Install Clang-8

按照<https://apt.llvm.org/>中的说明进行Ubuntu或Debian安装。例如，安装Bionic的命令如下：

```
sudo echo "deb [trusted=yes] http://apt.llvm.org/bionic/ llvm-toolchain-bionic-8 main" >>
/etc/apt/sources.list
sudo apt-get install clang-8
```

## 安装交叉编译工具集

我们假设安装 cctools 在 \${CCTOOLS} 路径下

```

mkdir ${CCTOOLS}

git clone https://github.com/tpoechtrager/apple-libtapi.git
cd apple-libtapi
INSTALLPREFIX=${CCTOOLS} ./build.sh
./install.sh
cd ..

git clone https://github.com/tpoechtrager/cctools-port.git
cd cctools-port/cctools
./configure --prefix=${CCTOOLS} --with-libtapi=${CCTOOLS} --target=x86_64-apple-darwin
make install

cd ${CCTOOLS}
wget https://github.com/phracker/MacOSX-SDKs/releases/download/10.14-beta4/MacOSX10.14.sdk.tar.xz
tar xJf MacOSX10.14.sdk.tar.xz

```

## 编译 ClickHouse

```

cd ClickHouse
mkdir build-osx
CC=clang-8 CXX=clang++-8 cmake . -Bbuild-osx -DCMAKE_SYSTEM_NAME=Darwin \
-DCMAKE_AR:FILEPATH=${CCTOOLS}/bin/x86_64-apple-darwin-ar \
-DCMAKE_RANLIB:FILEPATH=${CCTOOLS}/bin/x86_64-apple-darwin-ranlib \
-DLINKER_NAME=${CCTOOLS}/bin/x86_64-apple-darwin-ld \
-DSDK_PATH=${CCTOOLS}/MacOSX10.14.sdk
ninja -C build-osx

```

生成的二进制文件将具有Mach-O可执行格式，并且不能在Linux上运行。

## How to Build ClickHouse on Linux for AARCH64 (ARM64) architecture

This is for the case when you have Linux machine and want to use it to build `clickhouse` binary that will run on another Linux machine with AARCH64 CPU architecture. This is intended for continuous integration checks that run on Linux servers.

The cross-build for AARCH64 is based on the [Build instructions](#), follow them first.

## Install Clang-8

Follow the instructions from <https://apt.llvm.org/> for your Ubuntu or Debian setup. For example, in Ubuntu Bionic you can use the following commands:

```

echo "deb [trusted=yes] http://apt.llvm.org/bionic/ llvm-toolchain-bionic-8 main" | sudo tee
/etc/apt/sources.list.d/llvm.list
sudo apt-get update
sudo apt-get install clang-8

```

## Install Cross-Compilation Toolset

```

cd ClickHouse
mkdir -p build-aarch64/cmake/toolchain/linux-aarch64
wget 'https://developer.arm.com/-/media/Files/downloads/gnu-a/8.3-2019.03/binrel/gcc-arm-8.3-2019.03-
x86_64-aarch64-linux-gnu.tar.xz?revision=2e88a73f-d233-4f96-b1f4-d8b36e9bb0b9&la=en' -O gcc-arm-8.3-
2019.03-x86_64-aarch64-linux-gnu.tar.xz
tar xJf gcc-arm-8.3-2019.03-x86_64-aarch64-linux-gnu.tar.xz -C build-aarch64/cmake/toolchain/linux-aarch64
--strip-components=1

```

# Build ClickHouse

```
cd ClickHouse
mkdir build-arm64
CC=clang-8 CXX=clang++-8 cmake . -Bbuild-arm64 -DCMAKE_TOOLCHAIN_FILE=cmake/linux/toolchain-aarch64.cmake
ninja -C build-arm64
```

The resulting binary will run only on Linux with the AARCH64 CPU architecture.

## 如何编写 C++ 代码

### 一般建议

1. 以下是建议，而不是要求。
2. 如果你在修改代码，遵守已有的风格是有意义的。
3. 代码的风格需保持一致。一致的风格有利于阅读代码，并且方便检索代码。
4. 许多规则没有逻辑原因；它们是由既定的做法决定的。

### 格式化

1. 大多数格式化可以用 `clang-format` 自动完成。
2. 缩进是4个空格。配置开发环境，使得 TAB 代表添加四个空格。
3. 左右花括号需在单独的行。

```
inline void readBoolText(bool & x, ReadBuffer & buf)
{
    char tmp = '0';
    readChar(tmp, buf);
    x = tmp != '0';
}
```

4. 若整个方法体仅有一行 描述，则可以放到单独的行上。在花括号周围放置空格（除了行尾的空格）。

```
inline size_t mask() const { return buf_size() - 1; }
inline size_t place(HashValue x) const { return x & mask(); }
```

5. 对于函数。不要在括号周围放置空格。

```
void reinsert(const Value & x)

memcpy(&buf[place_value], &x, sizeof(x));
```

6. 在 `if`，`for`，`while` 和其他表达式中，在开括号前面插入一个空格（与函数声明相反）。

```
for (size_t i = 0; i < rows; i += storage.index_granularity)
```

7. 在二元运算符（`+`，`-`，`*`，`/`，`%`，`...`）和三元运算符 `?:` 周围添加空格。

```
UInt16 year = (s[0] - '0') * 1000 + (s[1] - '0') * 100 + (s[2] - '0') * 10 + (s[3] - '0');
UInt8 month = (s[5] - '0') * 10 + (s[6] - '0');
UInt8 day = (s[8] - '0') * 10 + (s[9] - '0');
```

8. 若有换行，新行应该以运算符开头，并且增加对应的缩进。

```
if (elapsed_ns)
    message << " (" 
        << rows_read_on_server * 1000000000 / elapsed_ns << " rows/s., "
        << bytes_read_on_server * 1000.0 / elapsed_ns << " MB/s.) ";
```

9. 如果需要，可以在一行内使用空格来对齐。

```
dst.ClickLogID      = click.LogID;
dst.ClickEventID    = click.EventID;
dst.ClickGoodEvent  = click.GoodEvent;
```

10. 不要在 `! , ->` 周围加入空格

如有必要，运算符可以包裹到下一行。在这种情况下，它前面的偏移量增加。

11. 不要使用空格来分开一元运算符 (`- , ++ , ! , & , ...`) 和参数。

12. 在逗号后面加一个空格，而不是在之前。同样的规则也适合 `for` 循环中的分号。

13. 不要用空格分开 `[]` 运算符。

14. 在 `template<...>` 表达式中，在 `template` 和 `<` 中加入一个空格，在 `<` 后面或在 `>` 前面都不要有空格。

```
template <typename TKey, typename TValue>
struct AggregatedStatElement
{}
```

15. 在类和结构体中，`public`，`private` 以及 `protected` 同 `class/struct` 无需缩进，其他代码须缩进。

```
template <typename T>
class MultiVersion
{
public:
    /// Version of object for usage. shared_ptr manage lifetime of version.
    using Version = std::shared_ptr<const T>;
    ...
}
```

16. 如果对整个文件使用相同的 `namespace`，并且没有其他重要的东西，则 `namespace` 中不需要偏移量。

17. 在 `if`，`for`，`while` 中包裹的代码块中，若代码是一个单行的 `statement`，那么大括号是可选的。可以将 `statement` 放到一行中。这个规则同样适用于嵌套的 `if`，`for`，`while`，...

但是如果内部 `statement` 包含大括号或 `else`，则外部块应该用大括号括起来。

```
/// Finish write.
for (auto & stream : streams)
    stream.second->finalize();
```

18. 行的某尾不应该包含空格。

19. 源文件应该用 UTF-8 编码。

20. 非ASCII字符可用于字符串文字。

```
<< ", " << (timer.elapsed() / chunks_stats.hits) << " usec(hit.";
```

21 不要在一行中写入多个表达式。

22. 将函数内部的代码段分组，并将它们与不超过一行的空行分开。

23. 将函数，类用一个或两个空行分开。

24. `const` 必须写在类型名称之前。

```
//correct  
const char * pos  
const std::string & s  
//incorrect  
char const * pos
```

25. 声明指针或引用时，`*` 和 `&` 符号两边应该都用空格分隔。

```
//correct  
const char * pos  
//incorrect  
const char* pos  
const char *pos
```

26. 使用模板类型时，使用 `using` 关键字对它们进行别名（最简单的情况除外）。

换句话说，模板参数仅在 `using` 中指定，并且不在代码中重复。

`using` 可以在本地声明，例如在函数内部。

```
//correct  
using FileStreams = std::map<std::string, std::shared_ptr<Stream>>;  
FileStreams streams;  
//incorrect  
std::map<std::string, std::shared_ptr<Stream>> streams;
```

27. 不要在一个语句中声明不同类型的多个变量。

```
//incorrect  
int x, *y;
```

28. 不要使用C风格的类型转换。

```
//incorrect  
std::cerr << (int)c << std::endl;  
//correct  
std::cerr << static_cast<int>(c) << std::endl;
```

29. 在类和结构中，组成员和函数分别在每个可见范围内。

30. 对于小类和结构，没有必要将方法声明与实现分开。

对于任何类或结构中的小方法也是如此。

对于模板化类和结构，不要将方法声明与实现分开（因为否则它们必须在同一个转换单元中定义）

31. 您可以将换行规则定在140个字符，而不是80个字符。

32. 如果不需要 `postfix`，请始终使用前缀增量/减量运算符。

```
for (Names::const_iterator it = column_names.begin(); it != column_names.end(); ++it)
```

## Comments

## 1. 请务必为所有非常重要的代码部分添加注释。

这是非常重要的。 编写注释可能会帮助您意识到代码不是必需的，或者设计错误。

```
/** Part of piece of memory, that can be used.  
 * For example, if internal_buffer is 1MB, and there was only 10 bytes loaded to buffer from file for  
reading,  
 * then working_buffer will have size of only 10 bytes  
 * (working_buffer.end() will point to position right after those 10 bytes available for read).  
 */
```

## 2. 注释可以尽可能详细。

## 3. 在他们描述的代码之前放置注释。 在极少数情况下，注释可以在代码之后，在同一行上。

```
/** Parses and executes the query.  
 */  
void executeQuery(  
    ReadBuffer & istr, /// Where to read the query from (and data for INSERT, if applicable)  
    WriteBuffer & ostr, /// Where to write the result  
    Context & context, /// DB, tables, data types, engines, functions, aggregate functions...  
    BlockInputStreamPtr & query_plan, /// Here could be written the description on how query was executed  
    QueryProcessingStage::Enum stage = QueryProcessingStage::Complete /// Up to which stage process the  
    SELECT query  
)
```

## 4. 注释应该只用英文撰写。

## 5. 如果您正在编写库，请在主头文件中包含解释它的详细注释。

## 6. 请勿添加无效的注释。 特别是，不要留下像这样的空注释：

```
/*  
 * Procedure Name:  
 * Original procedure name:  
 * Author:  
 * Date of creation:  
 * Dates of modification:  
 * Modification authors:  
 * Original file name:  
 * Purpose:  
 * Intent:  
 * Designation:  
 * Classes used:  
 * Constants:  
 * Local variables:  
 * Parameters:  
 * Date of creation:  
 * Purpose:  
 */
```

这个示例来源于 <http://home.tamk.fi/~jaalto/course/coding-style/doc/unmaintainable-code/>。

## 7. 不要在每个文件的开头写入垃圾注释（作者，创建日期...）。

## 8. 单行注释用三个斜杆： `///`，多行注释以 `/**` 开始。 这些注释会当做文档。

注意：您可以使用 Doxygen 从这些注释中生成文档。 但是通常不使用 Doxygen，因为在 IDE 中导航代码更方便。

## 9. 多行注释的开头和结尾不得有空行（关闭多行注释的行除外）。

## 10. 要注释掉代码，请使用基本注释，而不是“记录”注释。

## 11. 在提交之前删除代码的无效注释部分。

12. 不要在注释或代码中使用亵渎语言。

13. 不要使用大写字母。不要使用过多的标点符号。

```
/// WHAT THE FAIL???
```

14. 不要使用注释来制作分隔符。

```
////////////////////////////////////////////////////////////////////////
```

15. 不要在注释中开始讨论。

```
/// Why did you do this stuff?
```

16. 没有必要在块的末尾写一条注释来描述它的含义。

```
/// for
```

## Names

1. 在变量和类成员的名称中使用带下划线的小写字母。

```
size_t max_block_size;
```

2. 对于函数（方法）的名称，请使用以小写字母开头的驼峰标识。

```
std::string getName() const override { return "Memory"; }
```

3. 对于类（结构）的名称，使用以大写字母开头的驼峰标识。接口名称用I前缀。

```
class StorageMemory : public IStorage
```

4. using 的命名方式与类相同，或者以`\_t`命名。

5. 模板类型参数的名称：在简单的情况下，使用 T; T<sub>1</sub> , U; T<sub>1</sub> , T<sub>2</sub>。

对于更复杂的情况，要么遵循类名规则，要么添加前缀 T。

```
template <typename TKey, typename TValue>
struct AggregatedStatElement
```

6. 模板常量参数的名称：遵循变量名称的规则，或者在简单的情况下使用 N。

```
template <bool without_www>
struct ExtractDomain
```

7. 对于抽象类型（接口），用 I 前缀。

```
class IBlockInputStream
```

8. 如果在本地使用变量，则可以使用短名称。

在所有其他情况下，请使用能描述含义的名称。

```
bool info_successfully_loaded = false;
```

9. `define` 和全局常量的名称使用带下划线的 `ALL_CAPS`。

```
##define MAX_SRC_TABLE_NAMES_TO_STORE 1000
```

10. 文件名应使用与其内容相同的样式。

如果文件包含单个类，则以与该类名称相同的方式命名该文件。

如果文件包含单个函数，则以与函数名称相同的方式命名文件。

11. 如果名称包含缩写，则：

- 对于变量名，缩写应使用小写字母 `mysql_connection`（不是 `mySQL_connection`）。
- 对于类和函数的名称，请将大写字母保留在缩写 `MySQLConnection`（不是 `MySqlConnection`）。

12. 仅用于初始化类成员的构造方法参数的命名方式应与类成员相同，但最后使用下划线。

```
FileQueueProcessor(  
    const std::string & path_,  
    const std::string & prefix_,  
    std::shared_ptr<FileHandler> handler_)  
: path(path_),  
prefix(prefix_),  
handler(handler_),  
log(&Logger::get("FileQueueProcessor"))  
{  
}
```

如果构造函数体中未使用该参数，则可以省略下划线后缀。

13. 局部变量和类成员的名称没有区别（不需要前缀）。

```
timer (not m_timer)
```

14. 对于 `enum` 中的常量，请使用带大写字母的驼峰标识。`ALL_CAPS` 也可以接受。如果 `enum` 是非本地的，请使用 `enum class`。

```
enum class CompressionMethod  
{  
    QuickLZ = 0,  
    LZ4      = 1,  
};
```

15. 所有名字必须是英文。不允许音译俄语单词。

```
not Stroka
```

16. 缩写须是众所周知的（当您可以在维基百科或搜索引擎中轻松找到缩写的含义时）。

```
`AST`, `SQL`.  
Not `NVDH` (some random letters)
```

如果缩短版本是常用的，则可以接受不完整的单词。

如果注释中旁边包含全名，您也可以使用缩写。

17. C++ 源码文件名称必须为 `.cpp` 拓展名。头文件必须为 `.h` 拓展名。

## 如何编写代码

### 1. 内存管理。

手动内存释放 (`delete`) 只能在库代码中使用。

在库代码中，`delete` 运算符只能在析构函数中使用。

在应用程序代码中，内存必须由拥有它的对象释放。

示例：

- 最简单的方法是将对象放在堆栈上，或使其成为另一个类的成员。
- 对于大量小对象，请使用容器。
- 对于自动释放少量在堆中的对象，可以用 `shared_ptr/unique_ptr`。

### 2. 资源管理。

使用 `RAII` 以及查看以上说明。

### 3. 错误处理。

在大多数情况下，您只需要抛出一个异常，而不需要捕获它（因为 `RAII`）。

在离线数据处理应用程序中，通常可以接受不捕获异常。

在处理用户请求的服务器中，通常足以捕获连接处理程序顶层的异常。

在线程函数中，你应该在 `join` 之后捕获并保留所有异常以在主线程中重新抛出它们。

```
/// If there weren't any calculations yet, calculate the first block synchronously
if (!started)
{
    calculate();
    started = true;
}
else /// If calculations are already in progress, wait for the result
pool.wait();

if (exception)
    exception->rethrow();
```

不处理就不要隐藏异常。永远不要盲目地把所有异常都记录到日志中。

```
//Not correct
catch (...) {}
```

如果您需要忽略某些异常，请仅针对特定异常执行此操作并重新抛出其余异常。

```
catch (const DB::Exception & e)
{
    if (e.code() == ErrorCode::UNKNOWN_AGGREGATE_FUNCTION)
        return nullptr;
    else
        throw;
}
```

当使用具有返回码或 `errno` 的函数时，请始终检查结果并在出现错误时抛出异常。

```
if (0 != close(fd))
    throwErrorFromErrno("Cannot close file " + file_name, ErrorCode::CANNOT_CLOSE_FILE);
```

不要使用断言。

#### 4. 异常类型。

不需要在应用程序代码中使用复杂的异常层次结构。 系统管理员应该可以理解异常文本。

#### 5. 从析构函数中抛出异常。

不建议这样做，但允许这样做。

按照以下选项：

- 创建一个函数（`done()` 或 `finalize()`），它将提前完成所有可能导致异常的工作。如果调用了该函数，则稍后在析构函数中应该没有异常。
- 过于复杂的任务（例如通过网络发送消息）可以放在单独的方法中，类用户必须在销毁之前调用它们。
- 如果析构函数中存在异常，则最好记录它而不是隐藏它（如果 logger 可用）。
- 在简单的应用程序中，依赖于 `std::terminate`（对于C++ 11中默认情况下为 `noexcept` 的情况）来处理异常是可以接受的。

#### 6. 匿名代码块。

您可以在单个函数内创建单独的代码块，以使某些变量成为局部变量，以便在退出块时调用析构函数。

```
Block block = data.in->read();

{
    std::lock_guard<std::mutex> lock(mutex);
    data.ready = true;
    data.block = block;
}

ready_any.set();
```

#### 7. 多线程。

在离线数据处理程序中：

- 尝试在单个CPU核心上获得最佳性能。然后，您可以根据需要并行化代码。

在服务端应用中：

- 使用线程池来处理请求。此时，我们还没有任何需要用户空间上下文切换的任务。

Fork不用于并行化。

#### 8. 同步线程。

通常可以使不同的线程使用不同的存储单元（甚至更好：不同的缓存线），并且不使用任何线程同步（除了 `joinAll`）。

如果需要同步，在大多数情况下，在 `lock_guard` 下使用互斥量就足够了。

在其他情况下，使用系统同步原语。不要使用忙等待。

仅在最简单的情况下才应使用原子操作。

除非是您的主要专业领域，否则不要尝试实施无锁数据结构。

#### 9. 指针和引用。

大部分情况下，请用引用。

## 10. 常量。

使用 `const` 引用，指向常量的指针，`const_iterator` 和 `const` 指针。

将 `const` 视为默认值，仅在必要时使用非 `const`。

当按值传递变量时，使用 `const` 通常没有意义。

## 11. 无符号。

必要时使用 `unsigned`。

## 12. 数值类型。

使用 `UInt8`，`UInt16`，`UInt32`，`UInt64`，`Int8`，`Int16`，`Int32`，以及 `Int64`，`size_t`，`ssize_t` 还有 `ptrdiff_t`。

不要使用这些类型：`signed / unsigned long`，`long long`，`short`，`signed / unsigned char`，`char`。

## 13. 参数传递。

通过引用传递复杂类型（包括 `std::string`）。

如果函数中传递堆中创建的对象，则使参数类型为 `shared_ptr` 或者 `unique_ptr`。

## 14. 返回值

大部分情况下使用 `return`。不要使用 `[return std::move(res)].strike`。

如果函数在堆上分配对象并返回它，请使用 `shared_ptr` 或 `unique_ptr`。

在极少数情况下，您可能需要通过参数返回值。在这种情况下，参数应该是引用传递的。

```
using AggregateFunctionPtr = std::shared_ptr<IAggregateFunction>;  
  
/** Allows creating an aggregate function by its name.  
 */  
class AggregateFunctionFactory  
{  
public:  
    AggregateFunctionFactory();  
    AggregateFunctionPtr get(const String & name, const DataTypes & argument_types) const;
```

## 15. 命名空间。

没有必要为应用程序代码使用单独的 `namespace`。

小型库也不需要这个。

对于中大型库，须将所有代码放在 `namespace` 中。

在库的 `.h` 文件中，您可以使用 `namespace detail` 来隐藏应用程序代码不需要的实现细节。

在 `.cpp` 文件中，您可以使用 `static` 或匿名命名空间来隐藏符号。

同样 `namespace` 可用于 `enum` 以防止相应的名称落入外部 `namespace`（但最好使用 `enum class`）。

## 16. 延迟初始化。

如果初始化需要参数，那么通常不应该编写默认构造函数。

如果稍后您需要延迟初始化，则可以添加将创建无效对象的默认构造函数。或者，对于少量对象，您可以使用 `shared_ptr` / `unique_ptr`。

```
Loader(DB::Connection * connection_, const std::string & query, size_t max_block_size_);  
/// For deferred initialization  
Loader() {}
```

## 17. 虚函数。

如果该类不是用于多态使用，则不需要将函数设置为虚拟。这也适用于析构函数。

## 18. 编码。

在所有情况下使用 UTF-8 编码。使用 `std::string` 和 `char*`。不要使用 `std::wstring` 和 `wchar_t`。

## 19. 日志。

请参阅代码中的示例。

在提交之前，删除所有无意义和调试日志记录，以及任何其他类型的调试输出。

应该避免循环记录日志，即使在 Trace 级别也是如此。

日志必须在任何日志记录级别都可读。

在大多数情况下，只应在应用程序代码中使用日志记录。

日志消息必须用英文写成。

对于系统管理员来说，日志最好是可以理解的。

不要在日志中使用亵渎语言。

在日志中使用UTF-8编码。在极少数情况下，您可以在日志中使用非ASCII字符。

## 20. 输入-输出。

不要使用 `iostreams` 在对应用程序性能至关重要的内部循环中（并且永远不要使用 `stringstream`）。

使用 DB/IO 库替代。

## 21. 日期和时间。

参考 `DateLUT` 库。

## 22. 引入头文件。

一直用 `#pragma once` 而不是其他宏。

## 23. using 语法

`using namespace` 不会被使用。您可以使用特定的 `using`。但是在类或函数中使它成为局部的。

## 24. 不要使用 trailing return type 为必要的功能。

```
[auto f() -> void;]{.strike}
```

## 25. 声明和初始化变量。

```
//right way
std::string s = "Hello";
std::string s{"Hello"};

//wrong way
auto s = std::string{"Hello"};
```

26. 对于虚函数，在基类中编写 `virtual`，但在后代类中写 `override` 而不是 `virtual`。

## 没有用到的 C++ 特性。

1. 不使用虚拟继承。
2. 不使用 C++03 中的异常标准。

## 平台

1. 我们为特定平台编写代码。

但在其他条件相同的情况下，首选跨平台或可移植代码。

2. 语言：C++17.
3. 编译器：gcc。此时（2017年12月），代码使用7.2版编译。（它也可以使用 clang 4 编译）

使用标准库 (`libstdc++` 或 `libc++`)。

4. 操作系统：Linux Ubuntu，不比 Precise 早。
5. 代码是为x86\_64 CPU架构编写的。

CPU指令集是我们服务器中支持的最小集合。目前，它是SSE 4.2。

6. 使用 `-Wall -Wextra -Werror` 编译参数。
7. 对所有库使用静态链接，除了那些难以静态连接的库（参见 `ldd` 命令的输出）。
8. 使用发布的设置来开发和调试代码。

## 工具

1. KDevelop 是一个好的 IDE.
2. 调试可以使用 `gdb`，`valgrind (memcheck)`，`strace`，`-fsanitize=...`，或 `tcmalloc_minimal_debug` .
3. 对于性能分析，使用 `Linux Perf`，`valgrind (callgrind)`，或者 `strace -cf`。
4. 源代码用 Git 作版本控制。
5. 使用 CMake 构建。
6. 程序的发布使用 `deb` 安装包。
7. 提交到 master 分支的代码不能破坏编译。

虽然只有选定的修订被认为是可行的。

8. 尽可能经常地进行提交，即使代码只是部分准备好了。
- 目的明确的功能，使用分支。

如果 master 分支中的代码尚不可构建，请在 push 之前将其从构建中排除。您需要在几天内完成或删除它。

9. 对于不重要的更改，请使用分支并在服务器上发布它们。

10. 未使用的代码将从 repo 中删除。

## 库

1. 使用C++ 14标准库（允许实验性功能），以及 boost 和 Poco 框架。

2. 如有必要，您可以使用 OS 包中提供的任何已知库。

如果有一个好的解决方案已经可用，那就使用它，即使这意味着你必须安装另一个库。

（但要准备从代码中删除不好的库）

3. 如果软件包没有您需要的软件包或者有过时的版本或错误的编译类型，则可以安装不在软件包中的库。

4. 如果库很小并且没有自己的复杂构建系统，请将源文件放在 contrib 文件夹中。

5. 始终优先考虑已经使用的库。

## 一般建议

1. 尽可能精简代码。

2. 尝试用最简单的方式实现。

3. 在你知道代码是如何工作以及内部循环如何运作之前，不要编写代码。

4. 在最简单的情况下，使用 using 而不是类或结构。

5. 如果可能，不要编写复制构造函数，赋值运算符，析构函数（虚拟函数除外，如果类包含至少一个虚函数），移动构造函数或移动赋值运算符。换句话说，编译器生成的函数必须正常工作。您可以使用 default。

6. 鼓励简化代码。尽可能减小代码的大小。

## 其他建议

1. 从 stddef.h 明确指定 std:: 的类型。

不推荐。换句话说，我们建议写 size\_t 而不是 std::size\_t，因为它更短。

也接受添加 std::。

2. 为标准C库中的函数明确指定 std::

不推荐。换句话说，写 memcpy 而不是 std::memcpy。

原因是有些类似的非标准功能，例如 memmem。我们偶尔会使用这些功能。namespace std 中不存在这些函数。

如果你到处都写 std::memcpy 而不是 memcpy，那么没有 std:: 的 memmem 会显得很奇怪。

不过，如果您愿意，仍然可以使用 std::。

3. 当标准C++库中提供相同的函数时，使用C中的函数。

如果它更高效，这是可以接受的。

例如，使用 memcpy 而不是 std::copy 来复制大块内存。

## 4. 函数的多行参数。

允许以下任何包装样式：

```
function(  
    T1 x1,  
    T2 x2)  
  
function(  
    size_t left, size_t right,  
    const & RangesInDataParts ranges,  
    size_t limit)  
  
function(size_t left, size_t right,  
        const & RangesInDataParts ranges,  
        size_t limit)  
  
function(  
    size_t left,  
    size_t right,  
    const & RangesInDataParts ranges,  
    size_t limit)
```

# ClickHouse 测试

## 功能性测试

功能性测试是最简便使用的。绝大部分 ClickHouse 的功能可以通过功能性测试来测试，任何代码的更改都必须通过该测试。

每个功能测试会向正在运行的 ClickHouse 服务器发送一个或多个查询，并将结果与预期结果进行比较。

测试用例在 `dbms/src/tests/queries` 目录中。这里有两个子目录：`stateless` 和 `stateful` 目录。无状态的测试无需预加载测试数据集 - 通常是在测试运行期间动态创建小量的数据集。有状态测试需要来自 Yandex.Metrica 的预加载测试数据，而不向一般公众提供。我们倾向于仅使用“无状态”测试并避免添加新的“有状态”测试。

每个测试用例可以是两种类型之一：`.sql` 和 `.sh`。`.sql` 测试文件是用于管理 `clickhouse-client --multิquery --testmode` 的简单 SQL 脚本。`.sh` 测试文件是一个可以自己运行的脚本。

要运行所有测试，请使用 `dbms/tests/clickhouse-test` 工具，用 `--help` 可以获取所有的选项列表。您可以简单地运行所有测试或运行测试名称中的子字符串过滤的测试子集：`./clickhouse-test substring`。

调用功能测试最简单的方法是将 `clickhouse-client` 复制到 `/usr/bin/`，运行 `clickhouse-server`，然后从自己的目录运行 `./clickhouse-test`。

要添加新测试，请在 `dbms/src/tests/queries/0_stateless` 目录内添加新的 `.sql` 或 `.sh` 文件，手动检查，然后按以下方式生成 `.reference` 文件：`clickhouse-client -n --testmode < 00000_test.sql > 00000_test.reference` or `./00000_test.sh > ./00000_test.reference`。

测试应该只使用（创建，删除等）`test` 数据库中的表，这些表假定是事先创建的；测试也可以使用临时表。

如果要在功能测试中使用分布式查询，可以利用 `remote` 表函数和 `127.0.0.{1..2}` 地址为服务器查询自身；或者您可以在服务器配置文件中使用预定义的测试集群，例如 `test_shard_localhost`。

有些测试在名称中标有 `zookeeper` , `shard` 或 `long`。 `zookeeper` 用于使用ZooKeeper的测试; `shard` 用于需要服务器监听 `127.0.0.*` 的测试。 `long` 适用于运行时间稍长一秒的测试。

## 已知的bug

如果我们知道一些可以通过功能测试轻松复制的错误，我们将准备好的功能测试放在 `dbms/src/tests/queries/bugs` 目录中。当修复错误时，这些测试将被移动到 `dbms/src/tests/queries/0_stateless` 目录中。

## 集成测试

集成测试允许在集群配置中测试 ClickHouse，并与其他服务器（如MySQL，Postgres，MongoDB）进行 ClickHouse 交互。它们可用于模拟网络拆分，数据包丢弃等。这些测试在Docker 下运行，并使用各种软件创建多个容器。

参考 `dbms/tests/integration/README.md` 文档关于如何使用集成测试。

请注意，ClickHouse 与第三方驱动程序的集成未经过测试。此外，我们目前还没有与 JDBC 和ODBC 驱动程序进行集成测试。

## 单元测试

当您想要测试整个 ClickHouse，而不是单个独立的库或类时，单元测试非常有用。您可以使用 `ENABLE_TESTS` CMake 选项启用或禁用测试构建。单元测试（和其他测试程序）位于代码中的 `tests` 子目录中。要运行单元测试，请键入 `ninja test`。有些测试使用 `gtest`，但有些只是在测试失败时返回非零状态码。

如果代码已经被功能测试覆盖（并且功能测试通常使用起来要简单得多），则不一定要进行单元测试。

## 性能测试

性能测试允许测量和比较综合查询中 ClickHouse 的某些独立部分的性能。测试位于 `dbms/tests/performance` 目录中。每个测试都由 `.xml` 文件表示，并附有测试用例的描述。使用 `clickhouse performance-test` 工具（嵌入在 `clickhouse` 二进制文件中）运行测试。请参阅 `--help` 以进行调用。

每个测试在循环中运行一个或多个查询（可能带有参数组合），并具有一些停止条件（如“最大执行速度不会在三秒内更改”）并测量一些有关查询性能的指标（如“最大执行速度”）。某些测试可以包含预加载的测试数据集的前提条件。

如果要在某些情况下提高 ClickHouse 的性能，并且如果可以在简单查询上观察到改进，则强烈建议编写性能测试。在测试过程中使用 `perf top` 或其他 perf 工具总是有意义的。

性能测试不是基于每个提交运行的。不收集性能测试结果，我们手动比较它们。

## 测试工具和脚本

`tests` 目录中的一些程序不是准备测试，而是测试工具。例如，对于 `Lexer`，有一个工具 `dbms/src/Parsers/tests/lexer` 标准输出。您可以使用这些工具作为代码示例以及探索和手动测试。

您还可以将一对文件 `.sh` 和 `.reference` 与工具放在一些预定义的输入上运行它 - 然后可以将脚本结果与 `.reference` 文件进行比较。这些测试不是自动化的。

## 杂项测试

有一些外部字典的测试位于 `dbms/tests/external_dictionaries`，机器学习模型在 `dbms/tests/external_models` 目录。这些测试未更新，必须转移到集成测试。

对于分布式数据的插入，有单独的测试。此测试在单独的服务器上运行 ClickHouse 集群并模拟各种故障情况：网络拆分，

数据包丢弃（ClickHouse 节点之间，ClickHouse 和 ZooKeeper 之间，ClickHouse 服务器和客户端之间等），进行 `kill -9`，`kill -STOP` 和 `kill -CONT` 等操作，类似 Jepsen。然后，测试检查是否已写入所有已确认的插入，并且所有已拒绝的插入都未写入。

在 ClickHouse 开源之前，分布式测试是由单独的团队编写的，但该团队不再使用 ClickHouse，测试是在 Java 中意外编写的。由于这些原因，必须重写分布式测试并将其移至集成测试。

## 手动测试

当您开发了新的功能，做手动测试也是合理的。可以按照以下步骤来进行：

编译 ClickHouse。在命令行中运行 ClickHouse：进入 `dbms/src/programs/clickhouse-server` 目录并运行 `./clickhouse-server`。它会默认使用当前目录的配置文件 (`config.xml`，`users.xml` 以及在 `config.d` 和 `users.d` 目录的文件)。可以使用 `dbms/src/programs/clickhouse-client/clickhouse-client` 来连接数据库。

或者，您可以安装 ClickHouse 软件包：从 Yandex 存储库中获得稳定版本，或者您可以在 ClickHouse 源根目录中使用 `./release` 构建自己的软件包。然后使用 `sudo service clickhouse-server start` 启动服务器（或停止服务器）。在 `/etc/clickhouse-server/clickhouse-server.log` 中查找日志。

当您的系统上已经安装了 ClickHouse 时，您可以构建一个新的 `clickhouse` 二进制文件并替换现有的二进制文件：

```
sudo service clickhouse-server stop
sudo cp ./clickhouse /usr/bin/
sudo service clickhouse-server start
```

您也可以停止 `clickhouse-server` 并使用相同的配置运行您自己的服务器，日志打印到终端：

```
sudo service clickhouse-server stop
sudo -u clickhouse /usr/bin/clickhouse server --config-file /etc/clickhouse-server/config.xml
```

使用 `gdb` 的一个示例：

```
sudo -u clickhouse gdb --args /usr/bin/clickhouse server --config-file /etc/clickhouse-server/config.xml
```

如果 `clickhouse-server` 已经运行并且您不想停止它，您可以更改 `config.xml` 中的端口号（或在 `config.d` 目录中的文件中覆盖它们），配置适当的数据路径，然后运行它。

`clickhouse` 二进制文件几乎没有依赖关系，适用于各种 Linux 发行版。要快速地测试服务器上的更改，您可以简单地将新建的 `clickhouse` 二进制文件 `scp` 到其他服务器，然后按照上面的示例运行它。

## 测试环境

在将版本发布为稳定之前，我们将其部署在测试环境中。测试环境是一个处理[Yandex.Metrica]（<https://metrica.yandex.com/>）总数据的 1/39 部分大小的集群。我们与 Yandex.Metrica 团队公用我们的测试环境。ClickHouse 在现有数据的基础上无需停机即可升级。我们首先看到数据处理成功而不会实时滞后，复制继续工作，并且 Yandex.Metrica 团队无法看到问题。首先的检查可以通过以下方式完成：

```
SELECT hostName() AS h, any(version()), any(uptime()), max(UTCEventTime), count() FROM remote('example01-01-{1..3}t', merge, hits) WHERE EventDate >= today() - 2 GROUP BY h ORDER BY h;
```

在某些情况下，我们还部署到 Yandex 的合作团队的测试环境：市场，云等。此外，我们还有一些用于开发目的的硬件服务器。

## 负载测试

部署到测试环境后，我们使用生产群集中的查询运行负载测试。这是手动完成的。

确保在生产集群中开启了 `query_log` 选项。

收集一天或更多的查询日志：

```
clickhouse-client --query="SELECT DISTINCT query FROM system.query_log WHERE event_date = today() AND query LIKE '%ym:%' AND query NOT LIKE '%system.query_log%' AND type = 2 AND is_initial_query" > queries.tsv
```

这是一个复杂的例子。`type = 2` 将过滤成功执行的查询。`query LIKE '%ym : %'` 用于从 Yandex.Metrica 中选择相关查询。`is_initial_query` 是仅选择由客户端发起的查询，而不是由 ClickHouse 本身（作为分布式查询处理的一部分）。

`scp` 这份日志到测试机器，并运行以下操作：

```
clickhouse benchmark --concurrency 16 < queries.tsv
```

(可能你需要指定运行的用户 `--user`)

然后离开它一晚或周末休息一下。

你要检查下 `clickhouse-server` 是否崩溃，内存占用是否合理，性能也不会随着时间的推移而降低。

由于查询和环境的高度可变性，不会记录精确的查询执行时序并且不进行比较。

## 编译测试

构建测试允许检查构建在各种替代配置和某些外部系统上是否被破坏。测试位于 `ci` 目录。它们从 Docker，Vagrant 中的源代码运行构建，有时在 Docker 中运行 `qemu-user-static`。这些测试正在开发中，测试运行不是自动化的。

动机：

通常我们会在 ClickHouse 构建的单个版本上发布并运行所有测试。但是有一些未经过彻底测试的替代构建版本。例子：

- 在 FreeBSD 中的构建；
- 在 Debian 中使用系统包中的库进行构建；
- 使用库的共享链接构建；
- 在 AArch64 平台进行构建。

例如，使用系统包构建是不好的做法，因为我们无法保证系统具有的确切版本的软件包。但 Debian 维护者确实需要这样做。出于这个原因，我们至少必须支持这种构建。另一个例子：共享链接是一个常见的麻烦来源，但是对于一些爱好者来说需要它。

虽然我们无法对所有构建版本运行所有测试，但我们想要检查至少不会破坏各种构建变体。为此，我们使用构建测试。

## 测试协议兼容性

当我们扩展 ClickHouse 网络协议时，我们手动测试旧的 `clickhouse-client` 与新的 `clickhouse-server` 和新的 `clickhouse-client` 一起使用旧的 `clickhouse-server` (只需从相应的包中运行二进制文件)

## 来自编译器的提示

ClickHouse 主要的代码 (位于 `dbms` 目录中) 使用 `-Wall -Wextra -Werror` 构建，并带有一些其他已启用的警告。虽然没有为第三方库启用这些选项。

Clang 有更多有用的警告 - 您可以使用 `-Weverything` 查找它们并选择默认构建的东西。

对于生产构建，使用 `gcc`（它仍然生成比 `clang` 稍高效的代码）。对于开发来说，`clang` 通常更方便使用。您可以使用调试模式在自己的机器上构建（以节省笔记本电脑的电量），但请注意，由于更好的控制流程和过程分析，编译器使用 `-O3` 会生成更多警告。当使用 `clang` 构建时，使用 `libc++` 而不是 `libstdc++`，并且在使用调试模式构建时，使用调试版本的 `libc++`，它允许在运行时捕获更多错误。

## Sanitizers

Address sanitizer. 我们在每个提交的基础上在 ASan 下运行功能和集成测试。

Valgrind (Memcheck). 我们在 Valgrind 过夜进行功能测试。这需要几个小时。目前在 `re2` 库中有一个已知的误报，请参阅[文章](#)。

Thread sanitizer. 我们在 TSan 下进行功能测试。`ClickHouse` 必须通过所有测试。在 TSan 下运行不是自动化的，只是偶尔执行。

Memory sanitizer. 目前我们不使用 MSan。

Undefined behaviour sanitizer. 我们仍然不会在每次提交的基础上使用 UBSan。有一些地方需要解决。

Debug allocator. 您可以使用 `DEBUG_TC_MALLOC` CMake 选项启用 `tcmalloc` 的调试版本。我们在每次提交的基础上使用调试分配器运行测试。

更多请参阅 `dbms/tests/instructions/sanitizers.txt`。

## 模糊测试

我们使用简单的模糊测试来生成随机SQL查询并检查服务器是否正常，使用 Address sanitizer 执行模糊测试。你可以在 `00746_sql_fuzzy.pl` 找到它。测试应连续进行（过夜和更长时间）。

截至2018年12月，我们仍然不使用库代码的孤立模糊测试。

## 安全审计

Yandex Cloud 部门的人员从安全角度对 `ClickHouse` 功能进行了一些基本概述。

## 静态分析

我们偶尔使用静态分析。我们已经评估过 `clang-tidy`，`Coverity`，`cppcheck`，`PVS-Studio`，`tscancode`。您将在 `dbms/tests/instructions/` 目录中找到使用说明。你也可以阅读[俄文文章](#)。

如果您使用 `CLion` 作为 IDE，您可以开箱即用一些 `clang-tidy` 检查。

## 其他强化

默认情况下使用 `FORTIFY_SOURCE`。它几乎没用，但在极少数情况下仍然有意义，我们不会禁用它。

## 代码风格

代码风格在[这里](#) 有说明。

要检查一些常见的样式冲突，您可以使用 `utils/check-style` 脚本。

为了强制你的代码的正确风格，你可以使用 `clang-format` 文件。`.clang-format` 位于源代码根目录，它主要与我们的实际代码风格对应。但不建议将 `clang-format` 应用于现有文件，因为它会使格式变得更糟。您可以使用 `clang-format-diff` 工具，您可以在 `clang` 源代码库中找到

或者，您可以尝试 `unrustify` 工具来格式化您的代码。配置文件在源代码的根目录中的 `unrustify.cfg`。它比 `clang-format` 经过更少的测试。

CLion 有自己的代码格式化程序，必须调整为我们的代码风格。

## Metrica B2B 测试

每个 ClickHouse 版本都经过 Yandex Metrica 和 AppMetrica 引擎的测试。测试和稳定版本的 ClickHouse 部署在虚拟机上，并使用处理输入数据固定样本的度量引擎的小副本运行。将度量引擎的两个实例的结果一起进行比较

这些测试是由单独的团队自动完成的。由于移动部件的数量很多，大部分时间的测试都是完全无关的，很难弄清楚。很可能这些测试对我们来说是负值。然而，这些测试被证明是有用的大约一个或两个倍的数百。

## 测试覆盖率

截至2018年7月，我们不会跟踪测试复盖率。

## 自动化测试

我们使用 Yandex 内部 CI 和名为"沙箱"的作业自动化系统运行测试。我们还继续使用 Jenkins（可在Yandex内部使用）。

构建作业和测试在沙箱中按每次提交的基础上运行。结果包和测试结果发布在 GitHub 上，可以通过直接链接下载，结果会被永久存储。当您在 GitHub 上发送拉取请求时，我们将其标记为"可以测试"，我们的 CI 系统将为您构建 ClickHouse 包（发布，调试，地址消除等）。

由于时间和计算能力的限制，我们不使用 Travis CI。

在 Jenkins，我们运行字典测试，指标B2B测试。我们使用 Jenkins 来准备和发布版本。Jenkins是一种传统的技术，所有的工作将被转移到沙箱中。

## 使用的三方库

Library	License
base64	<a href="#">BSD 2-Clause License</a>
boost	<a href="#">Boost Software License 1.0</a>
brotli	<a href="#">MIT</a>
capnproto	<a href="#">MIT</a>
cctz	<a href="#">Apache License 2.0</a>
double-conversion	<a href="#">BSD 3-Clause License</a>
FastMemcpy	<a href="#">MIT</a>
googletest	<a href="#">BSD 3-Clause License</a>
hyperscan	<a href="#">BSD 3-Clause License</a>
libbtrie	<a href="#">BSD 2-Clause License</a>
libcxxabi	<a href="#">BSD + MIT</a>

Library	License
libdivide	Zlib License
libgsasl	LGPL v2.1
libhdfs3	Apache License 2.0
libmetrohash	Apache License 2.0
libpcg-random	Apache License 2.0
libressl	OpenSSL License
librdkafka	BSD 2-Clause License
libwidechar_width	CC0 1.0 Universal
llvm	BSD 3-Clause License
lz4	BSD 2-Clause License
mariadb-connector-c	LGPL v2.1
murmurhash	Public Domain
pdqsort	Zlib License
poco	Boost Software License - Version 1.0
protobuf	BSD 3-Clause License
re2	BSD 3-Clause License
UnixODBC	LGPL v2.1
zlib-ng	Zlib License
zstd	BSD 3-Clause License

## 规划

### Q1 2020

- 更精确的用户资源池，可以在用户之间合理分配集群资源
- 细粒度的授权管理
- 与外部认证服务集成

## ClickHouse release v20.1.6.30, 2020-03-05

### BUG FIX

- Fix data incompatibility when compressed with T64 codec. [#9039 \(abyss7\)](#)
- Fix order of ranges while reading from MergeTree table in one thread. Fixes [#8964](#). [#9050 \(CurtizJ\)](#)
- Fix possible segfault in MergeTreeRangeReader , while executing PREWHERE . Fixes [#9064](#). [#9106 \(CurtizJ\)](#)
- Fix `reinterpretAsFixedString` to return `FixedString` instead of `String` . [#9052 \(oandrew\)](#)
- Fix `joinGet` with nullable return types. Fixes [#8919](#) [#9014 \(amosbird\)](#)
- Fix fuzz test and incorrect behaviour of bitTestAll/bitTestAny functions. [#9143 \(alexey-milovidov\)](#)
- Fix the behaviour of match and extract functions when haystack has zero bytes. The behaviour was wrong when haystack was constant. Fixes [#9160](#) [#9163 \(alexey-milovidov\)](#)
- Fixed execution of inversed predicates when non-strictly monotonic functional index is used. Fixes [#9034](#) [#9223 \(Akazz\)](#)
- Allow to rewrite CROSS to INNER JOIN if there's [NOT] LIKE operator in WHERE section. Fixes [#9191](#) [#9229 \(4ertus2\)](#)
- Allow first column(s) in a table with Log engine be an alias. [#9231 \(abyss7\)](#)
- Allow comma join with IN() inside. Fixes [#7314](#). [#9251 \(4ertus2\)](#)
- Improve ALTER MODIFY/ADD queries logic. Now you cannot ADD column without type, MODIFY default expression doesn't change type of column and MODIFY type doesn't loose default expression value. Fixes [#8669](#). [#9227 \(alesapin\)](#)
- Fix mutations finalization, when already done mutation can have status `is_done=0`. [#9217 \(alesapin\)](#)
- Support "Processors" pipeline for system.numbers and system.numbers\_mt. This also fixes the bug when `max_execution_time` is not respected. [#7796 \(KochetovNicolai\)](#)
- Fix wrong counting of `DictCacheKeysRequestedFound` metric. [#9411 \(nikitamikhaylov\)](#)
- Added a check for storage policy in ATTACH PARTITION FROM , REPLACE PARTITION , MOVE TO TABLE which otherwise could make data of part inaccessible after restart and prevent ClickHouse to start. [#9383 \(excitoon\)](#)
- Fixed UBSan report in `MergeTreeIndexSet` . This fixes [#9250](#) [#9365 \(alexey-milovidov\)](#)
- Fix possible datarace in BlockIO. [#9356 \(KochetovNicolai\)](#)
- Support for UInt64 numbers that don't fit in Int64 in JSON-related functions. Update SIMDJSON to master. This fixes [#9209](#) [#9344 \(alexey-milovidov\)](#)
- Fix the issue when the amount of free space is not calculated correctly if the data directory is mounted to a separate device. For default disk calculate the free space from data subdirectory. This fixes [#7441](#) [#9257 \(millb\)](#)
- Fix the issue when TLS connections may fail with the message OpenSSL SSL\_read: error:14094438:SSL routines:ssl3\_read\_bytes:tlsv1 alert internal error and SSL Exception: error:2400006E:random number generator::error retrieving entropy. Update OpenSSL to upstream master. [#8956 \(alexey-milovidov\)](#)
- When executing CREATE query, fold constant expressions in storage engine arguments. Replace empty database name with current database. Fixes [#6508](#), [#3492](#). Also fix check for local address in ClickHouseDictionarySource. [#9262 \(tabplubix\)](#)
- Fix segfault in StorageMerge , which can happen when reading from StorageFile. [#9387 \(tabplubix\)](#)
- Prevent losing data in Kafka in rare cases when exception happens after reading suffix but before commit. Fixes [#9378](#). Related: [#7175](#) [#9507 \(filimonov\)](#)
- Fix bug leading to server termination when trying to use / drop Kafka table created with wrong parameters. Fixes [#9494](#). Incorporates [#9507](#). [#9513 \(filimonov\)](#)

## NEW FEATURE

- Add `deduplicate_blocks_in_dependent_materialized_views` option to control the behaviour of idempotent inserts into tables with materialized views. This new feature was added to the bugfix release by a special request from Altinity. [#9070 \(urykhy\)](#)

## ClickHouse release v20.1.2.4, 2020-01-22

### Backward Incompatible Change

- Make the setting `merge_tree_uniform_read_distribution` obsolete. The server still recognizes this setting but it has no effect. [#8308 \(alexey-milovidov\)](#)
- Changed return type of the function `greatCircleDistance` to `Float32` because now the result of calculation is `Float32`. [#7993 \(alexey-milovidov\)](#)
- Now it's expected that query parameters are represented in "escaped" format. For example, to pass string `a<tab>b` you have to write `a\<tab>b` or `a<tab>b` and respectively, `a%5Ctb` or `a%5C%09b` in URL. This is needed to add the possibility to pass NULL as `\N`. This fixes [#7488](#). [#8517 \(alexey-milovidov\)](#)
- Enable `use_minimalistic_part_header_in_zookeeper` setting for `ReplicatedMergeTree` by default. This will significantly reduce amount of data stored in ZooKeeper. This setting is supported since version 19.1 and we already use it in production in multiple services without any issues for more than half a year. Disable this setting if you have a chance to downgrade to versions older than 19.1. [#6850 \(alexey-milovidov\)](#)
- Data skipping indices are production ready and enabled by default. The settings `allow_experimental_data_skipping_indices`, `allow_experimental_cross_to_join_conversion` and `allow_experimental_multiple_joins_emulation` are now obsolete and do nothing. [#7974 \(alexey-milovidov\)](#)
- Add new ANY JOIN logic for `StorageJoin` consistent with `JOIN` operation. To upgrade without changes in behaviour you need add `SETTINGS any_join_distinct_right_table_keys = 1` to Engine Join tables metadata or recreate these tables after upgrade. [#8400 \(Artem Zuikov\)](#)
- Require server to be restarted to apply the changes in logging configuration. This is a temporary workaround to avoid the bug where the server logs to a deleted log file (see [#8696](#)). [#8707 \(Alexander Kuzmenkov\)](#)

### New Feature

- Added information about part paths to `system.merges`. [#8043 \(Vladimir Chebotarev\)](#)
- Add ability to execute `SYSTEM RELOAD DICTIONARY` query in `ON CLUSTER` mode. [#8288 \(Guillaume Tassery\)](#)
- Add ability to execute `CREATE DICTIONARY` queries in `ON CLUSTER` mode. [#8163 \(alesapin\)](#)
- Now user's profile in `users.xml` can inherit multiple profiles. [#8343 \(Mikhail f. Shiryaev\)](#)
- Added `system.stack_trace` table that allows to look at stack traces of all server threads. This is useful for developers to introspect server state. This fixes [#7576](#). [#8344 \(alexey-milovidov\)](#)
- Add `DateTime64` datatype with configurable sub-second precision. [#7170 \(Vasily Nemkov\)](#)
- Add table function `clusterAllReplicas` which allows to query all the nodes in the cluster. [#8493 \(kiran sunkari\)](#)
- Add aggregate function `categoricallInformationValue` which calculates the information value of a discrete feature. [#8117 \(hczi\)](#)
- Speed up parsing of data files in `CSV`, `TSV` and `JSONEachRow` format by doing it in parallel. [#7780 \(Alexander Kuzmenkov\)](#)
- Add function `bankerRound` which performs banker's rounding. [#8112 \(hczi\)](#)
- Support more languages in embedded dictionary for region names: 'ru', 'en', 'ua', 'uk', 'by', 'kz', 'tr', 'de', 'uz', 'lv', 'lt', 'et', 'pt', 'he', 'vi'. [#8189 \(alexey-milovidov\)](#)
- Improvements in consistency of ANY JOIN logic. Now `t1 ANY LEFT JOIN t2` equals `t2 ANY RIGHT JOIN t1`. [#7665 \(Artem Zuikov\)](#)

- Add setting `any_join_distinct_right_table_keys` which enables old behaviour for ANY INNER JOIN . #7665 (Artem Zuikov)
- Add new SEMI and ANTI JOIN . Old ANY INNER JOIN behaviour now available as SEMI LEFT JOIN . #7665 (Artem Zuikov)
- Added Distributed format for File engine and file table function which allows to read from .bin files generated by asynchronous inserts into Distributed table. #8535 (Nikolai Kochetov)
- Add optional reset column argument for runningAccumulate which allows to reset aggregation results for each new key value. #8326 (Sergey Kononenko)
- Add ability to use ClickHouse as Prometheus endpoint. #7900 (vdimir)
- Add section `<remote_url_allow_hosts>` in config.xml which restricts allowed hosts for remote table engines and table functions URL , S3 , HDFS . #7154 (Mikhail Korotov)
- Added function greatCircleAngle which calculates the distance on a sphere in degrees. #8105 (alexey-milovidov)
- Changed Earth radius to be consistent with H3 library. #8105 (alexey-milovidov)
- Added JSONCompactEachRow and JSONCompactEachRowWithNamesAndTypes formats for input and output. #7841 (Mikhail Korotov)
- Added feature for file-related table engines and table functions (File , S3 , URL , HDFS ) which allows to read and write gzip files based on additional engine parameter or file extension. #7840 (Andrey Bodrov)
- Added the randomASCII(length) function, generating a string with a random set of ASCII printable characters. #8401 (BayoNet)
- Added function JSONExtractArrayRaw which returns an array on unparsed json array elements from JSON string. #8081 (Oleg Matrokhin)
- Add arrayZip function which allows to combine multiple arrays of equal lengths into one array of tuples #8149 (Winter Zhang)
- Add ability to move data between disks according to configured TTL -expressions for \*MergeTree table engines family. #8140 (Vladimir Chebotarev)
- Added new aggregate function avgWeighted which allows to calculate weighted average. #7898 (Andrey Bodrov)
- Now parallel parsing is enabled by default for TSV , TSKV , CSV and JSONEachRow formats. #7894 (Nikita Mikhaylov )
- Add several geo functions from H3 library: h3GetResolution , h3EdgeAngle , h3EdgeLength , h3IsValid and h3kRing . #8034 (Konstantin Malanchev)
- Added support for brotli (br) compression in file-related storages and table functions. This fixes #8156. #8526 (alexey-milovidov)
- Add groupBit\* functions for the SimpleAggregationFunction type. #8485 (Guillaume Tassery)

## Bug Fix

- Fix rename of tables with Distributed engine. Fixes issue #7868. #8306 (tavplubix)
- Now dictionaries support EXPRESSION for attributes in arbitrary string in non-ClickHouse SQL dialect. #8098 (alesapin)
- Fix broken INSERT SELECT FROM mysql(...) query. This fixes #8070 and #7960. #8234 (tavplubix)
- Fix error "Mismatch column sizes" when inserting default Tuple from JSONEachRow . This fixes #5653. #8606 (tavplubix)
- Now an exception will be thrown in case of using WITH TIES alongside LIMIT BY . Also add ability to use TOP with LIMIT BY . This fixes #7472. #7637 (Nikita Mikhaylov)
- Fix unintended dependency from fresh glibc version in clickhouse-odbc-bridge binary. #8046 (Amos Bird)
- Fix bug in check function of \*MergeTree engines family. Now it doesn't fail in case when we have equal amount of

rows in last granule and last mark (non-final). #8047 (alesapin)

- Fix insert into `Enum*` columns after `ALTER` query, when underlying numeric type is equal to table specified type. This fixes #7836. #7908 (Anton Popov)
- Allowed non-constant negative "size" argument for function `substring`. It was not allowed by mistake. This fixes #4832. #7703 (alexey-milovidov)
- Fix parsing bug when wrong number of arguments passed to (O|J)DBC table engine. #7709 (alesapin)
- Using command name of the running clickhouse process when sending logs to syslog. In previous versions, empty string was used instead of command name. #8460 (Michael Nacharov)
- Fix check of allowed hosts for `localhost`. This PR fixes the solution provided in #8241. #8342 (Vitaly Baranov)
- Fix rare crash in `argMin` and `argMax` functions for long string arguments, when result is used in `runningAccumulate` function. This fixes #8325 #8341 (dinosaur)
- Fix memory overcommit for tables with `Buffer` engine. #8345 (Azat Khuzhin)
- Fixed potential bug in functions that can take `NULL` as one of the arguments and return non-`NULL`. #8196 (alexey-milovidov)
- Better metrics calculations in thread pool for background processes for `MergeTree` table engines. #8194 (Vladimir Chebotarev)
- Fix function `IN` inside `WHERE` statement when row-level table filter is present. Fixes #6687 #8357 (Ivan)
- Now an exception is thrown if the integral value is not parsed completely for settings values #7678 (Mikhail Korotov)
- Fix exception when aggregate function is used in query to distributed table with more than two local shards #8164 (小路)
- Now bloom filter can handle zero length arrays and doesn't perform redundant calculations. #8242 (achimbab)
- Fixed checking if a client host is allowed by matching the client host to `host_regexp` specified in `users.xml`. #8241 (Vitaly Baranov)
- Relax ambiguous column check that leads to false positives in multiple `JOIN ON` section. #8385 (Artem Zuikov)
- Fixed possible server crash (`std::terminate`) when the server cannot send or write data in `JSON` or `XML` format with values of `String` data type (that require `UTF-8` validation) or when compressing result data with `Brotli` algorithm or in some other rare cases. This fixes #7603 #8384 (alexey-milovidov)
- Fix race condition in `StorageDistributedDirectoryMonitor` found by CI. This fixes #8364. #8383 (Nikolai Kochetov)
- Now background merges in \*`MergeTree` table engines family preserve storage policy volume order more accurately. #8549 (Vladimir Chebotarev)
- Now table engine `Kafka` works properly with `Native` format. This fixes #6731 #7337 #8003. #8016 (filimonov)
- Fixed formats with headers (like `CSVWithNames`) which were throwing exception about EOF for table engine `Kafka`. #8016 (filimonov)
- Fixed a bug with making set from subquery in right part of `IN` section. This fixes #5767 and #2542. #7755 (Nikita Mikhaylov)
- Fix possible crash while reading from storage File . #7756 (Nikolai Kochetov)
- Fixed reading of the files in `Parquet` format containing columns of type `list` . #8334 (maxulan)
- Fix error `Not found column` for distributed queries with `PREWHERE` condition dependent on sampling key if `max_parallel_replicas > 1` . #7913 (Nikolai Kochetov)
- Fix error `Not found column` if query used `PREWHERE` dependent on table's alias and the result set was empty because of primary key condition. #7911 (Nikolai Kochetov)
- Fixed return type for functions `rand` and `randConstant` in case of `Nullable` argument. Now functions always return `UInt32` and never `Nullable(UInt32)` . #8204 (Nikolai Kochetov)

- Disabled predicate push-down for `WITH FILL` expression. This fixes #7784. #7789 (Winter Zhang)
- Fixed incorrect `count()` result for `SummingMergeTree` when `FINAL` section is used. #3280 #7786 (Nikita Mikhaylov)
- Fix possible incorrect result for constant functions from remote servers. It happened for queries with functions like `version()`, `uptime()`, etc. which returns different constant values for different servers. This fixes #7666. #7689 (Nikolai Kochetov)
- Fix complicated bug in push-down predicate optimization which leads to wrong results. This fixes a lot of issues on push-down predicate optimization. #8503 (Winter Zhang)
- Fix crash in `CREATE TABLE .. AS dictionary` query. #8508 (Azat Khuzhin)
- Several improvements ClickHouse grammar in `.g4` file. #8294 (taiyang-li)
- Fix bug that leads to crashes in `JOIN`s with tables with engine `Join`. This fixes #7556 #8254 #7915 #8100. #8298 (Artem Zuikov)
- Fix redundant dictionaries reload on `CREATE DATABASE`. #7916 (Azat Khuzhin)
- Limit maximum number of streams for read from `StorageFile` and `StorageHDFS`. Fixes <https://github.com/ClickHouse/ClickHouse/issues/7650>. #7981 (alesapin)
- Fix bug in `ALTER ... MODIFY ... CODEC` query, when user specify both default expression and codec. Fixes #8593. #8614 (alesapin)
- Fix error in background merge of columns with `SimpleAggregateFunction(LowCardinality)` type. #8613 (Nikolai Kochetov)
- Fixed type check in function `toDateTime64`. #8375 (Vasily Nemkov)
- Now server do not crash on `LEFT` or `FULL JOIN` with and `Join` engine and unsupported `join_use_nulls` settings. #8479 (Artem Zuikov)
- Now `DROP DICTIONARY IF EXISTS db.dict` query doesn't throw exception if `db` doesn't exist. #8185 (Vitaly Baranov)
- Fix possible crashes in table functions (`file`, `mysql`, `remote`) caused by usage of reference to removed `IStorage` object. Fix incorrect parsing of columns specified at insertion into table function. #7762 (tavplubix)
- Ensure network be up before starting `clickhouse-server`. This fixes #7507. #8570 (Zhichang Yu)
- Fix timeouts handling for secure connections, so queries doesn't hang indefinitely. This fixes #8126. #8128 (alexey-milovidov)
- Fix `clickhouse-copier`'s redundant contention between concurrent workers. #7816 (Ding Xiang Fei)
- Now mutations doesn't skip attached parts, even if their mutation version were larger than current mutation version. #7812 (Zhichang Yu) #8250 (alesapin)
- Ignore redundant copies of `*MergeTree` data parts after move to another disk and server restart. #7810 (Vladimir Chebotarev)
- Fix crash in `FULL JOIN` with `LowCardinality` in `JOIN` key. #8252 (Artem Zuikov)
- Forbidden to use column name more than once in insert query like `INSERT INTO tbl (x, y, x)`. This fixes #5465, #7681. #7685 (alesapin)
- Added fallback for detection the number of physical CPU cores for unknown CPUs (using the number of logical CPU cores). This fixes #5239. #7726 (alexey-milovidov)
- Fix `There's no column` error for materialized and alias columns. #8210 (Artem Zuikov)
- Fixed sever crash when `EXISTS` query was used without `TABLE` or `DICTIONARY` qualifier. Just like `EXISTS t`. This fixes #8172. This bug was introduced in version 19.17. #8213 (alexey-milovidov)
- Fix rare bug with error "Sizes of columns doesn't match" that might appear when using `SimpleAggregateFunction` column. #7790 (Boris Granveaud)
- Fix bug where user with empty `allow_databases` got access to all databases (and same for `allow_dictionaries`). #7793 (DeifyTheGod)

- Fix client crash when server already disconnected from client.[#8071 \(Azat Khuzhin\)](#)
- Fix ORDER BY behaviour in case of sorting by primary key prefix and non primary key suffix.[#7759 \(Anton Popov\)](#)
- Check if qualified column present in the table. This fixes[#6836](#). [#7758 \(Artem Zuikov\)](#)
- Fixed behavior with ALTER MOVE ran immediately after merge finish moves superpart of specified. Fixes[#8103](#).  
[#8104 \(Vladimir Chebotarev\)](#)
- Fix possible server crash while using UNION with different number of columns. Fixes[#7279](#). [#7929 \(Nikolai Kochetov\)](#)
- Fix size of result substring for function substr with negative size.[#8589 \(Nikolai Kochetov\)](#)
- Now server does not execute part mutation in MergeTree if there are not enough free threads in background pool.  
[#8588 \(tavplubix\)](#)
- Fix a minor typo on formatting UNION ALL AST. [#7999 \(litao91\)](#)
- Fixed incorrect bloom filter results for negative numbers. This fixes[#8317](#). [#8566 \(Winter Zhang\)](#)
- Fixed potential buffer overflow in decompress. Malicious user can pass fabricated compressed data that will cause read after buffer. This issue was found by Eldar Zaitov from Yandex information security team. [#8404 \(alexey-milovidov\)](#)
- Fix incorrect result because of integers overflow in arrayIntersect . [#7777 \(Nikolai Kochetov\)](#)
- Now OPTIMIZE TABLE query will not wait for offline replicas to perform the operation.[#8314 \(javi santana\)](#)
- Fixed ALTER TTL parser for Replicated\*MergeTree tables. [#8318 \(Vladimir Chebotarev\)](#)
- Fix communication between server and client, so server read temporary tables info after query failure.[#8084 \(Azat Khuzhin\)](#)
- Fix bitmapAnd function error when intersecting an aggregated bitmap and a scalar bitmap.[#8082 \(Yue Huang\)](#)
- Refine the definition of ZXid according to the ZooKeeper Programmer's Guide which fixes bug in clickhouse-cluster-copier . [#8088 \(Ding Xiang Fei\)](#)
- odbc table function now respects external\_table\_functions\_use\_nulls setting. [#7506 \(Vasily Nemkov\)](#)
- Fixed bug that lead to a rare data race.[#8143 \(Alexander Kazakov\)](#)
- Now SYSTEM RELOAD DICTIONARY reloads a dictionary completely, ignoring update\_field . This fixes [#7440](#). [#8037 \(Vitaly Baranov\)](#)
- Add ability to check if dictionary exists in create query.[#8032 \(alesapin\)](#)
- Fix Float\* parsing in Values format. This fixes [#7817](#). [#7870 \(tavplubix\)](#)
- Fix crash when we cannot reserve space in some background operations of \*MergeTree table engines family. [#7873 \(Vladimir Chebotarev\)](#)
- Fix crash of merge operation when table contains SimpleAggregateFunction(LowCardinality) column. This fixes [#8515](#).  
[#8522 \(Azat Khuzhin\)](#)
- Restore support of all ICU locales and add the ability to apply collations for constant expressions. Also add language name to system.collations table. [#8051 \(alesapin\)](#)
- Fix bug when external dictionaries with zero minimal lifetime (LIFETIME(MIN 0 MAX N) , LIFETIME(N) ) don't update in background. [#7983 \(alesapin\)](#)
- Fix crash when external dictionary with ClickHouse source has subquery in query.[#8351 \(Nikolai Kochetov\)](#)
- Fix incorrect parsing of file extension in table with engineURL . This fixes [#8157](#). [#8419 \(Andrey Bodrov\)](#)
- Fix CHECK TABLE query for \*MergeTree tables without key. Fixes [#7543](#). [#7979 \(alesapin\)](#)
- Fixed conversion of Float64 to MySQL type. [#8079 \(Yuriy Baranov\)](#)
- Now if table was not completely dropped because of server crash, server will try to restore and load it[#8176 \(tavplubix\)](#)

- Fixed crash in table function `file` while inserting into file that doesn't exist. Now in this case file would be created and then insert would be processed. #8177 (Olga Khvostikova)
- Fix rare deadlock which can happen when `trace_log` is in enabled. #7838 (filimonov)
- Add ability to work with different types besides Date in RangeHashed external dictionary created from DDL query. Fixes 7899. #8275 (alesapin)
- Fixes crash when `now64()` is called with result of another function. #8270 (Vasily Nemkov)
- Fixed bug with detecting client IP for connections through mysql wire protocol. #7743 (Dmitry Muzyka)
- Fix empty array handling in `arraySplit` function. This fixes #7708. #7747 (hczi)
- Fixed the issue when `pid-file` of another running clickhouse-server may be deleted. #8487 (Weiqing Xu)
- Fix dictionary reload if it has `invalidate_query`, which stopped updates and some exception on previous update tries. #8029 (alesapin)
- Fixed error in function `arrayReduce` that may lead to "double free" and error in aggregate function combinator `Resample` that may lead to memory leak. Added aggregate function `aggThrow`. This function can be used for testing purposes. #8446 (alexey-milovidov)

## Improvement

- Improved logging when working with S3 table engine. #8251 (Grigory Pervakov)
- Printed help message when no arguments are passed when calling `clickhouse-local`. This fixes #5335. #8230 (Andrey Nagorny)
- Add setting `mutations_sync` which allows to wait ALTER UPDATE/DELETE queries synchronously. #8237 (alesapin)
- Allow to set up relative `user_files_path` in `config.xml` (in the way similar to `format_schema_path`). #7632 (hczi)
- Add exception for illegal types for conversion functions with `-OrZero` postfix. #7880 (Andrey Konyaev)
- Simplify format of the header of data sending to a shard in a distributed query #8044 (Vitaly Baranov)
- Live View table engine refactoring. #8519 (vzakaznikov)
- Add additional checks for external dictionaries created from DDL-queries. #8127 (alesapin)
- Fix error Column ... already exists while using FINAL and SAMPLE together, e.g. `select count()` from table final sample 1/2 . Fixes #5186. #7907 (Nikolai Kochetov)
- Now table the first argument of `joinGet` function can be table identifier. #7707 (Amos Bird)
- Allow using `MaterializedView` with subqueries above `Kafka` tables. #8197 (filimonov)
- Now background moves between disks run in the separate thread pool. #7670 (Vladimir Chebotarev)
- SYSTEM RELOAD DICTIONARY now executes synchronously. #8240 (Vitaly Baranov)
- Stack traces now display physical addresses (offsets in object file) instead of virtual memory addresses (where the object file was loaded). That allows the use of `addr2line` when binary is position independent and ASLR is active. This fixes #8360. #8387 (alexey-milovidov)
- Support new syntax for row-level security filters: `<table name='table_name'>...</table>` . Fixes #5779. #8381 (Ivan)
- Now `cityHash` function can work with `Decimal` and `UUID` types. Fixes #5184. #7693 (Mikhail Korotov)
- Removed fixed index granularity (it was 1024) from system logs because it's obsolete after implementation of adaptive granularity. #7698 (alexey-milovidov)
- Enabled MySQL compatibility server when ClickHouse is compiled without SSL. #7852 (Yuriy Baranov)
- Now server checksums distributed batches, which gives more verbose errors in case of corrupted data in batch. #7914 (Azat Khuzhin)
- Support `DROP DATABASE` , `DETACH TABLE` , `DROP TABLE` and `ATTACH TABLE` for MySQL database engine. #8202 (Winter Zhang)

- Add authentication in S3 table function and table engine. #7623 (Vladimir Chebotarev)
- Added check for extra parts of MergeTree at different disks, in order to not allow to miss data parts at undefined disks. #8118 (Vladimir Chebotarev)
- Enable SSL support for Mac client and server. #8297 (Ivan)
- Now ClickHouse can work as MySQL federated server (see <https://dev.mysql.com/doc/refman/5.7/en/federated-create-server.html>). #7717 (Maxim Fedotov)
- clickhouse-client now only enable bracketed-paste when multiquery is on and multiline is off. This fixes (#7757) [<https://github.com/ClickHouse/ClickHouse/issues/7757>]. #7761 (Amos Bird)
- Support Array(Decimal) in if function. #7721 (Artem Zuikov)
- Support Decimals in arrayDifference , arrayCumSum and arrayCumSumNegative functions. #7724 (Artem Zuikov)
- Added lifetime column to system.dictionaries table. #6820 #7727 (kekekekule)
- Improved check for existing parts on different disks for \*MergeTree table engines. Addresses #7660. #8440 (Vladimir Chebotarev)
- Integration with AWS SDK for S3 interactions which allows to use all S3 features out of the box. #8011 (Pavel Kovalenko)
- Added support for subqueries in Live View tables. #7792 (vzakaznikov)
- Check for using Date or DateTime column from TTL expressions was removed. #7920 (Vladimir Chebotarev)
- Information about disk was added to system.detached\_parts table. #7833 (Vladimir Chebotarev)
- Now settings max\_(table|partition)\_size\_to\_drop can be changed without a restart. #7779 (Grigory Pervakov)
- Slightly better usability of error messages. Ask user not to remove the lines below Stack trace: . #7897 (alexey-milovidov)
- Better reading messages from Kafka engine in various formats after #7935. #8035 (Ivan)
- Better compatibility with MySQL clients which don't support sha2\_password auth plugin. #8036 (Yuriy Baranov)
- Support more column types in MySQL compatibility server. #7975 (Yuriy Baranov)
- Implement ORDER BY optimization for Merge , Buffer and Materialized View storages with underlying MergeTree tables. #8130 (Anton Popov)
- Now we always use POSIX implementation of getrandom to have better compatibility with old kernels (< 3.17). #7940 (Amos Bird)
- Better check for valid destination in a move TTL rule. #8410 (Vladimir Chebotarev)
- Better checks for broken insert batches for Distributed table engine. #7933 (Azat Khuzhin)
- Add column with array of parts name which mutations must process in future to system.mutations table. #8179 (alesapin)
- Parallel merge sort optimization for processors. #8552 (Nikolai Kochetov)
- The settings mark\_cache\_min\_lifetime is now obsolete and does nothing. In previous versions, mark cache can grow in memory larger than mark\_cache\_size to accomodate data within mark\_cache\_min\_lifetime seconds. That was leading to confusion and higher memory usage than expected, that is especially bad on memory constrained systems. If you will see performance degradation after installing this release, you should increase the mark\_cache\_size . #8484 (alexey-milovidov)
- Preparation to use tid everywhere. This is needed for #7477. #8276 (alexey-milovidov)

## Performance Improvement

- Performance optimizations in processors pipeline. #7988 (Nikolai Kochetov)
- Non-blocking updates of expired keys in cache dictionaries (with permission to read old ones) #8303 (Nikita

## Mikhaylov)

- Compile ClickHouse without `-fno-omit-frame-pointer` globally to spare one more register. #8097 (Amos Bird)
- Speedup `greatCircleDistance` function and add performance tests for it. #7307 (Olga Khvostikova)
- Improved performance of function `roundDown`. #8465 (alexey-milovidov)
- Improved performance of `max`, `min`, `argMin`, `argMax` for `DateTime64` data type. #8199 (Vasily Nemkov)
- Improved performance of sorting without a limit or with big limit and external sorting. #8545 (alexey-milovidov)
- Improved performance of formatting floating point numbers up to 6 times. #8542 (alexey-milovidov)
- Improved performance of modulo function. #7750 (Amos Bird)
- Optimized `ORDER BY` and merging with single column key. #8335 (alexey-milovidov)
- Better implementation for `arrayReduce`, `-Array` and `-State` combinators. #7710 (Amos Bird)
- Now `PREWHERE` should be optimized to be at least as efficient as `WHERE`. #7769 (Amos Bird)
- Improve the way `round` and `roundBankers` handling negative numbers. #8229 (hcz)
- Improved decoding performance of `DoubleDelta` and `Gorilla` codecs by roughly 30-40%. This fixes #7082, #8019 (Vasily Nemkov)
- Improved performance of `base64` related functions. #8444 (alexey-milovidov)
- Added a function `geoDistance`. It is similar to `greatCircleDistance` but uses approximation to WGS-84 ellipsoid model. The performance of both functions are near the same. #8086 (alexey-milovidov)
- Faster `min` and `max` aggregation functions for `Decimal` data type. #8144 (Artem Zuikov)
- Vectorize processing `arrayReduce`. #7608 (Amos Bird)
- `if` chains are now optimized as `multilf`. #8355 (kamalov-ruslan)
- Fix performance regression of `Kafka` table engine introduced in 19.15. This fixes #7261, #7935 (filimonov)
- Removed "pie" code generation that `gcc` from Debian packages occasionally brings by default. #8483 (alexey-milovidov)
- Parallel parsing data formats #6553 (Nikita Mikhaylov)
- Enable optimized parser of `Values` with expressions by default (`input_format_values_deduce_templates_of_expressions=1`). #8231 (tavplubix)

## Build/Testing/Packaging Improvement

- Build fixes for `ARM` and in minimal mode. #8304 (proller)
- Add coverage file flush for `clickhouse-server` when `std::atexit` is not called. Also slightly improved logging in stateless tests with coverage. #8267 (alesapin)
- Update LLVM library in contrib. Avoid using LLVM from OS packages. #8258 (alexey-milovidov)
- Make bundled `curl` build fully quiet. #8232 #8203 (Pavel Kovalenko)
- Fix some `MemorySanitizer` warnings. #8235 (Alexander Kuzmenkov)
- Use `add_warning` and `no_warning` macros in `CMakeLists.txt`. #8604 (ivan)
- Add support of Minio S3 Compatible object (<https://min.io/>) for better integration tests. #7863 #7875 (Pavel Kovalenko)
- Imported `libc` headers to contrib. It allows to make builds more consistent across various systems (only for `x86_64-linux-gnu`). #5773 (alexey-milovidov)
- Remove `-fPIC` from some libraries. #8464 (alexey-milovidov)
- Clean `CMakeLists.txt` for `curl`. See <https://github.com/ClickHouse/ClickHouse/pull/8011#issuecomment-569478910> #8459 (alexey-milovidov)
- Silent warnings in `CapNProto` library. #8220 (alexey-milovidov)

- Add performance tests for short string optimized hash tables.[#7679](#) ([Amos Bird](#))
- Now ClickHouse will build on AArch64 even if MADV\_FREE is not available. This fixes [#8027](#). [#8243](#) ([Amos Bird](#))
- Update zlib-ng to fix memory sanitizer problems.[#7182](#) [#8206](#) ([Alexander Kuzmenkov](#))
- Enable internal MySQL library on non-Linux system, because usage of OS packages is very fragile and usually doesn't work at all. This fixes [#5765](#). [#8426](#) ([alexey-milovidov](#))
- Fixed build on some systems after enabling libc++. This supersedes [#8374](#). [#8380](#) ([alexey-milovidov](#))
- Make Field methods more type-safe to find more errors.[#7386](#) [#8209](#) ([Alexander Kuzmenkov](#))
- Added missing files to the libc-headers submodule. [#8507](#) ([alexey-milovidov](#))
- Fix wrong JSON quoting in performance test output.[#8497](#) ([Nikolai Kochetov](#))
- Now stack trace is displayed for std::exception and Poco::Exception . In previous versions it was available only for DB::Exception . This improves diagnostics.[#8501](#) ([alexey-milovidov](#))
- Porting clock\_gettime and clock\_nanosleep for fresh glibc versions. [#8054](#) ([Amos Bird](#))
- Enable part\_log in example config for developers. [#8609](#) ([alexey-milovidov](#))
- Fix async nature of reload in 01036\_no\_superfluous\_dict\_reload\_on\_create\_database\*. [#8111](#) ([Azat Khuzhin](#))
- Fixed codec performance tests. [#8615](#) ([Vasily Nemkov](#))
- Add install scripts for .tgz build and documentation for them. [#8612](#) [#8591](#) ([alesapin](#))
- Removed old ZSTD test (it was created in year 2016 to reproduce the bug that pre 1.0 version of ZSTD has had). This fixes [#8618](#). [#8619](#) ([alexey-milovidov](#))
- Fixed build on Mac OS Catalina. [#8600](#) ([meo](#))
- Increased number of rows in codec performance tests to make results noticeable.[#8574](#) ([Vasily Nemkov](#))
- In debug builds, treat LOGICAL\_ERROR exceptions as assertion failures, so that they are easier to notice.[#8475](#) ([Alexander Kuzmenkov](#))
- Make formats-related performance test more deterministic. [#8477](#) ([alexey-milovidov](#))
- Update lz4 to fix a MemorySanitizer failure. [#8181](#) ([Alexander Kuzmenkov](#))
- Suppress a known MemorySanitizer false positive in exception handling.[#8182](#) ([Alexander Kuzmenkov](#))
- Update gcc and g++ to version 9 in build/docker/build.sh [#7766](#) ([TLightSky](#))
- Add performance test case to test that PREWHERE is worse than WHERE . [#7768](#) ([Amos Bird](#))
- Progress towards fixing one flaky test. [#8621](#) ([alexey-milovidov](#))
- Avoid MemorySanitizer report for data from libunwind . [#8539](#) ([alexey-milovidov](#))
- Updated libc++ to the latest version. [#8324](#) ([alexey-milovidov](#))
- Build ICU library from sources. This fixes [#6460](#). [#8219](#) ([alexey-milovidov](#))
- Switched from libressl to openssl . ClickHouse should support TLS 1.3 and SNI after this change. This fixes [#8171](#). [#8218](#) ([alexey-milovidov](#))
- Fixed UBSan report when using chacha20\_poly1305 from SSL (happens on connect to https://yandex.ru/).[#8214](#) ([alexey-milovidov](#))
- Fix mode of default password file for .deb linux distros. [#8075](#) ([proller](#))
- Improved expression for getting clickhouse-server PID in clickhouse-test . [#8063](#) ([Alexander Kazakov](#))
- Updated contrib/gtest to v1.10.0. [#8587](#) ([Alexander Burmak](#))
- Fixed ThreadSanitizer report in base64 library. Also updated this library to the latest version, but it doesn't matter. This fixes [#8397](#). [#8403](#) ([alexey-milovidov](#))
- Fix 00600\_replace\_running\_query for processors. [#8272](#) ([Nikolai Kochetov](#))

- Remove support for `tcmalloc` to make `CMakeLists.txt` simpler. #8310 (alexey-milovidov)
- Release gcc builds now use `libc++` instead of `libstdc++`. Recently `libc++` was used only with clang. This will improve consistency of build configurations and portability. #8311 (alexey-milovidov)
- Enable ICU library for build with MemorySanitizer. #8222 (alexey-milovidov)
- Suppress warnings from `CapNProto` library. #8224 (alexey-milovidov)
- Removed special cases of code for `tcmalloc`, because it's no longer supported. #8225 (alexey-milovidov)
- In CI coverage task, kill the server gracefully to allow it to save the coverage report. This fixes incomplete coverage reports we've been seeing lately. #8142 (alesapin)
- Performance tests for all codecs against `Float64` and `UInt64` values. #8349 (Vasily Nemkov)
- `termcap` is very much deprecated and lead to various problems (f.g. missing "up" cap and echoing `^J` instead of multi line). Favor `terminfo` or bundled `ncurses`. #7737 (Amos Bird)
- Fix `test_storage_s3` integration test. #7734 (Nikolai Kochetov)
- Support `StorageFile(<format>, null)` to insert block into given format file without actually write to disk. This is required for performance tests. #8455 (Amos Bird)
- Added argument `--print-time` to functional tests which prints execution time per test. #8001 (Nikolai Kochetov)
- Added asserts to `KeyCondition` while evaluating RPN. This will fix warning from gcc-9. #8279 (alexey-milovidov)
- Dump cmake options in CI builds. #8273 (Alexander Kuzmenkov)
- Don't generate debug info for some fat libraries. #8271 (alexey-milovidov)
- Make `log_to_console.xml` always log to stderr, regardless of is it interactive or not. #8395 (Alexander Kuzmenkov)
- Removed some unused features from `clickhouse-performance-test` tool. #8555 (alexey-milovidov)
- Now we will also search for `lld-X` with corresponding `clang-X` version. #8092 (alesapin)
- Parquet build improvement. #8421 (maxulan)
- More GCC warnings #8221 (kreuzerkrieg)
- Package for Arch Linux now allows to run ClickHouse server, and not only client. #8534 (Vladimir Chebotarev)
- Fix test with processors. Tiny performance fixes. #7672 (Nikolai Kochetov)
- Update contrib/protobuf. #8256 (Matvey V. Kornilov)
- In preparation of switching to c++20 as a new year celebration. "May the C++ force be with ClickHouse." #8447 (Amos Bird)

## Experimental Feature

- Added experimental setting `min_bytes_to_use_mmap_io`. It allows to read big files without copying data from kernel to userspace. The setting is disabled by default. Recommended threshold is about 64 MB, because mmap/munmap is slow. #8520 (alexey-milovidov)
- Reworked quotas as a part of access control system. Added new table `system.quotas`, new functions `currentQuota`, `currentQuotaKey`, new SQL syntax `CREATE QUOTA`, `ALTER QUOTA`, `DROP QUOTA`, `SHOW QUOTA`. #7257 (Vitaly Baranov)
- Allow skipping unknown settings with warnings instead of throwing exceptions. #7653 (Vitaly Baranov)
- Reworked row policies as a part of access control system. Added new table `system.row_policies`, new function `currentRowPolicies()`, new SQL syntax `CREATE POLICY`, `ALTER POLICY`, `DROP POLICY`, `SHOW CREATE POLICY`, `SHOW POLICIES`. #7808 (Vitaly Baranov)

## Security Fix

- Fixed the possibility of reading directories structure in tables with `File` table engine. This fixes #8536. #8537 (alexey-

milovidov)

## ClickHouse release v19.17

### ClickHouse release v19.17.6.36, 2019-12-27

#### BUG FIX

- Fixed potential buffer overflow in decompress. Malicious user can pass fabricated compressed data that could cause read after buffer. This issue was found by Eldar Zaitov from Yandex information security team. #8404 (alexey-milovidov)
- Fixed possible server crash (std::terminate) when the server cannot send or write data in JSON or XML format with values of String data type (that require UTF-8 validation) or when compressing result data with Brotli algorithm or in some other rare cases. #8384 (alexey-milovidov)
- Fixed dictionaries with source from a clickhouse VIEW, now reading such dictionaries doesn't cause the error There is no query. #8351 (Nikolai Kochetov)
- Fixed checking if a client host is allowed by host\_regex specified in users.xml. #8241, #8342 (Vitaly Baranov)
- RENAME TABLE for a distributed table now renames the folder containing inserted data before sending to shards. This fixes an issue with successive renames tableA->tableB, tableC->tableA. #8306 (tavplubix)
- range\_hashed external dictionaries created by DDL queries now allow ranges of arbitrary numeric types. #8275 (alesapin)
- Fixed INSERT INTO table SELECT ... FROM mysql(...) table function. #8234 (tavplubix)
- Fixed segfault in INSERT INTO TABLE FUNCTION file() while inserting into a file which doesn't exist. Now in this case file would be created and then insert would be processed. #8177 (Olga Khvostikova)
- Fixed bitmapAnd error when intersecting an aggregated bitmap and a scalar bitmap. #8082 (Yue Huang)
- Fixed segfault when EXISTS query was used without TABLE or DICTIONARY qualifier, just like EXISTS t. #8213 (alexey-milovidov)
- Fixed return type for functions rand and randConstant in case of nullable argument. Now functions always return UInt32 and never Nullable(UInt32). #8204 (Nikolai Kochetov)
- Fixed DROP DICTIONARY IF EXISTS db.dict, now it doesn't throw exception if db doesn't exist. #8185 (Vitaly Baranov)
- If a table wasn't completely dropped because of server crash, the server will try to restore and load it. #8176 (tavplubix)
- Fixed a trivial count query for a distributed table if there are more than two shard local table. #8164 (小路)
- Fixed bug that lead to a data race in DB::BlockStreamProfileInfo::calculateRowsBeforeLimit(). #8143 (Alexander Kazakov)
- Fixed ALTER table MOVE part executed immediately after merging the specified part, which could cause moving a part which the specified part merged into. Now it correctly moves the specified part. #8104 (Vladimir Chebotarev)
- Expressions for dictionaries can be specified as strings now. This is useful for calculation of attributes while extracting data from non-ClickHouse sources because it allows to use non-ClickHouse syntax for those expressions. #8098 (alesapin)
- Fixed a very rare race in clickhouse-copier because of an overflow in ZXid. #8088 (Ding Xiang Fei)
- Fixed the bug when after the query failed (due to "Too many simultaneous queries" for example) it would not read external tables info, and the next request would interpret this info as the beginning of the next query causing an error like Unknown packet from client. #8084 (Azat Khuzhin)
- Avoid null dereference after "Unknown packet X from server". #8071 (Azat Khuzhin)
- Restore support of all ICU locales, add the ability to apply collations for constant expressions and add language name to system.collations table. #8051 (alesapin)

- Number of streams for read from `StorageFile` and `StorageHDFS` is now limited, to avoid exceeding the memory limit. [#7981 \(alesapin\)](#)
- Fixed `CHECK TABLE` query for `*MergeTree` tables without key. [#7979 \(alesapin\)](#)
- Removed the mutation number from a part name in case there were no mutations. This removing improved the compatibility with older versions. [#8250 \(alesapin\)](#)
- Fixed the bug that mutations are skipped for some attached parts due to their `data_version` are larger than the table mutation version. [#7812 \(Zhichang Yu\)](#)
- Allow starting the server with redundant copies of parts after moving them to another device [#7810 \(Vladimir Chebotarev\)](#)
- Fixed the error "Sizes of columns doesn't match" that might appear when using aggregate function columns [#7790 \(Boris Granveaud\)](#)
- Now an exception will be thrown in case of using `WITH TIES` alongside `LIMIT BY`. And now it's possible to use `TOP` with `LIMIT BY`. [#7637 \(Nikita Mikhaylov\)](#)
- Fix dictionary reload if it has `invalidate_query`, which stopped updates and some exception on previous update tries. [#8029 \(alesapin\)](#)

## ClickHouse release v19.17.4.11, 2019-11-22

### BACKWARD INCOMPATIBLE CHANGE

- Using column instead of AST to store scalar subquery results for better performance. Setting `enable_scalar_subquery_optimization` was added in 19.17 and it was enabled by default. It leads to errors like [this](#) during upgrade to 19.17.2 or 19.17.3 from previous versions. This setting was disabled by default in 19.17.4, to make possible upgrading from 19.16 and older versions without errors. [#7392 \(Amos Bird\)](#)

### NEW FEATURE

- Add the ability to create dictionaries with DDL queries. [#7360 \(alesapin\)](#)
- Make `bloom_filter` type of index supporting `LowCardinality` and `Nullable` [#7363 #7561 \(Nikolai Kochetov\)](#)
- Add function `isValidJSON` to check that passed string is a valid json. [#5910 #7293 \(Vdimir\)](#)
- Implement `arrayCompact` function [#7328 \(Memo\)](#)
- Created function `hex` for Decimal numbers. It works like `hex(reinterpretAsString())`, but doesn't delete last zero bytes. [#7355 \(Mikhail Korotov\)](#)
- Add `arrayFill` and `arrayReverseFill` functions, which replace elements by other elements in front/back of them in the array. [#7380 \(hczi\)](#)
- Add `CRC32IEEE()` / `CRC64()` support [#7480 \(Azat Khuzhin\)](#)
- Implement `char` function similar to one in `mysql` [#7486 \(sundyli\)](#)
- Add `bitmapTransform` function. It transforms an array of values in a bitmap to another array of values, the result is a new bitmap [#7598 \(Zhichang Yu\)](#)
- Implemented `javaHashUTF16LE()` function [#7651 \(achimbab\)](#)
- Add `_shard_num` virtual column for the Distributed engine [#7624 \(Azat Khuzhin\)](#)

### EXPERIMENTAL FEATURE

- Support for processors (new query execution pipeline) in `MergeTree`. [#7181 \(Nikolai Kochetov\)](#)

### BUG FIX

- Fix incorrect float parsing in `Values` [#7817 #7870 \(tavplubix\)](#)
- Fix rare deadlock which can happen when `trace_log` is enabled. [#7838 \(filimonov\)](#)

- Prevent message duplication when producing Kafka table has any MVs selecting from it #7265 (Ivan)
- Support for `Array(LowCardinality(Nullable(String)))` in `IN`. Resolves #7364 #7366 (achimbab)
- Add handling of `SQL_TINYINT` and `SQL_BIGINT`, and fix handling of `SQL_FLOAT` data source types in ODBC Bridge. #7491 (Denis Glazachev)
- Fix aggregation (`avg` and quantiles) over empty decimal columns #7431 (Andrey Konyaev)
- Fix `INSERT` into Distributed with `MATERIALIZED` columns #7377 (Azat Khuzhin)
- Make `MOVE PARTITION` work if some parts of partition are already on destination disk or volume #7434 (Vladimir Chebotarev)
- Fixed bug with hardlinks failing to be created during mutations in `ReplicatedMergeTree` in multi-disk configurations. #7558 (Vladimir Chebotarev)
- Fixed a bug with a mutation on a MergeTree when whole part remains unchanged and best space is being found on another disk #7602 (Vladimir Chebotarev)
- Fixed bug with `keep_free_space_ratio` not being read from disks configuration #7645 (Vladimir Chebotarev)
- Fix bug with table contains only `Tuple` columns or columns with complex paths. Fixes 7541. #7545 (alesapin)
- Do not account memory for Buffer engine in `max_memory_usage` limit #7552 (Azat Khuzhin)
- Fix final mark usage in `MergeTree` tables ordered by `tuple()`. In rare cases it could lead to `Can't adjust last granule` error while select. #7639 (Anton Popov)
- Fix bug in mutations that have predicate with actions that require context (for example functions for json), which may lead to crashes or strange exceptions. #7664 (alesapin)
- Fix mismatch of database and table names escaping in `data/` and `shadow/` directories #7575 (Alexander Burmak)
- Support duplicated keys in `RIGHT|FULL JOINs`, e.g. `ON t.x = u.x AND t.x = u.y`. Fix crash in this case. #7586 (Artem Zuikov)
- Fix `Not found column <expression> in block` when joining on expression with `RIGHT` or `FULL JOIN`. #7641 (Artem Zuikov)
- One more attempt to fix infinite loop in `PrettySpace` format #7591 (Olga Khvostikova)
- Fix bug in `concat` function when all arguments were `FixedString` of the same size. #7635 (alesapin)
- Fixed exception in case of using 1 argument while defining S3, URL and HDFS storages. #7618 (Vladimir Chebotarev)
- Fix scope of the `InterpreterSelectQuery` for views with query #7601 (Azat Khuzhin)

## IMPROVEMENT

- `Nullable` columns recognized and NULL-values handled correctly by ODBC-bridge #7402 (Vasily Nemkov)
- Write current batch for distributed send atomically #7600 (Azat Khuzhin)
- Throw an exception if we cannot detect table for column name in query. #7358 (Artem Zuikov)
- Add `merge_max_block_size` setting to `MergeTreeSettings` #7412 (Artem Zuikov)
- Queries with `HAVING` and without `GROUP BY` assume group by constant. So, `SELECT 1 HAVING 1` now returns a result. #7496 (Amos Bird)
- Support parsing `(X,)` as tuple similar to python. #7501, #7562 (Amos Bird)
- Make `range` function behaviors almost like pythonic one. #7518 (sundyli)
- Add `constraints` columns to table `system.settings` #7553 (Vitaly Baranov)
- Better Null format for tcp handler, so that it's possible to use `select ignore(<expression>)` from table format Null for perf measure via clickhouse-client #7606 (Amos Bird)
- Queries like `CREATE TABLE ... AS (SELECT (1, 2))` are parsed correctly #7542 (hcz)

## PERFORMANCE IMPROVEMENT

- The performance of aggregation over short string keys is improved. #6243 (Alexander Kuzmenkov, Amos Bird)
- Run another pass of syntax/expression analysis to get potential optimizations after constant predicates are folded. #7497 (Amos Bird)
- Use storage meta info to evaluate trivial `SELECT count()` FROM table; #7510 (Amos Bird, alexey-milovidov)
- Vectorize processing `arrayReduce` similar to Aggregator `addBatch`. #7608 (Amos Bird)
- Minor improvements in performance of Kafka consumption #7475 (ivan)

#### BUILD/TESTING/PACKAGING IMPROVEMENT

- Add support for cross-compiling to the CPU architecture AARCH64. Refactor packager script. #7370 #7539 (ivan)
- Unpack darwin-x86\_64 and linux-aarch64 toolchains into mounted Docker volume when building packages #7534 (ivan)
- Update Docker Image for Binary Packager #7474 (ivan)
- Fixed compile errors on MacOS Catalina #7585 (Ernest Poletaev)
- Some refactoring in query analysis logic: split complex class into several simple ones. #7454 (Artem Zuikov)
- Fix build without submodules #7295 (proller)
- Better `add_globs` in CMake files #7418 (Amos Bird)
- Remove hardcoded paths in `unwind` target #7460 (Konstantin Podshumok)
- Allow to use mysql format without ssl #7524 (proller)

#### OTHER

- Added ANTLR4 grammar for ClickHouse SQL dialect #7595 #7596 (alexey-milovidov)

## ClickHouse release v19.16

CLICKHOUSE RELEASE V19.16.14.65, 2020-03-05

- Fix distributed subqueries incompatibility with older CH versions. Fixes #7851 (tabplibix)
- When executing `CREATE` query, fold constant expressions in storage engine arguments. Replace empty database name with current database. Fixes #6508, #3492. Also fix check for local address in `ClickHouseDictionarySource`. #9262 (tabplibix)
- Now background merges in `*MergeTree` table engines family preserve storage policy volume order more accurately. #8549 (Vladimir Chebotarev)
- Prevent losing data in `Kafka` in rare cases when exception happens after reading suffix but before commit. Fixes #9378. Related: #7175 #9507 (filimonov)
- Fix bug leading to server termination when trying to use / drop `Kafka` table created with wrong parameters. Fixes #9494. Incorporates #9507. #9513 (filimonov)
- Allow using `MaterializedView` with subqueries above `Kafka` tables. #8197 (filimonov)

#### NEW FEATURE

- Add `deduplicate_blocks_in_dependent_materialized_views` option to control the behaviour of idempotent inserts into tables with materialized views. This new feature was added to the bugfix release by a special request from Altinity. #9070 (urykhy)

## ClickHouse release v19.16.2.2, 2019-10-30

BACKWARD INCOMPATIBLE CHANGE

- Add missing arity validation for `count/counlf`. #7095 #7298 (Vdimir)

- Remove legacy `asterisk_left_columns_only` setting (it was disabled by default). #7335 (Artem Zuikov)
- Format strings for Template data format are now specified in files. #7118 (tavplubix)

#### NEW FEATURE

- Introduce `uniqCombined64()` to calculate cardinality greater than `UINT_MAX`. #7213, #7222 (Azat Khuzhin)
- Support Bloom filter indexes on Array columns. #6984 (achimbab)
- Add a function `getMacro(name)` that returns String with the value of corresponding `<macros>` from server configuration. #7240 (alexey-milovidov)
- Set two configuration options for a dictionary based on an HTTP source: `credentials` and `http-headers`. #7092 (Guillaume Tassery)
- Add a new `ProfileEvent Merge` that counts the number of launched background merges. #7093 (Mikhail Korotov)
- Add `fullHostName` function that returns a fully qualified domain name. #7263 #7291 (sundyli)
- Add functions `arraySplit` and `arrayReverseSplit` which split an array by "cut off" conditions. They are useful in time sequence handling. #7294 (hczi)
- Add new functions that return the Array of all matched indices in `multiMatch` family of functions. #7299 (Danila Kutenin )
- Add a new database engine `Lazy` that is optimized for storing a large number of small -Log tables. #7171 (Nikita Vasilev)
- Add aggregate functions `groupBitmapAnd`, `-Or`, `-Xor` for bitmap columns. #7109 (Zhichang Yu)
- Add aggregate function combinator `-OrNull` and `-OrDefault`, which return null or default values when there is nothing to aggregate. #7331 (hczi)
- Introduce `CustomSeparated` data format that supports custom escaping and delimiter rules. #7118 (tavplubix)
- Support Redis as source of external dictionary. #4361 #6962 (comunodi, Anton Popov)

#### BUG FIX

- Fix wrong query result if it has `WHERE IN (SELECT ...)` section and `optimize_read_in_order` is used. #7371 (Anton Popov)
- Disabled MariaDB authentication plugin, which depends on files outside of project. #7140 (Yuriy Baranov)
- Fix exception `Cannot convert column ... because it is constant but values of constants are different in source and result` which could rarely happen when functions `now()`, `today()`, `yesterday()`, `randConstant()` are used. #7156 (Nikolai Kochetov)
- Fixed issue of using HTTP keep alive timeout instead of TCP keep alive timeout. #7351 (Vasily Nemkov)
- Fixed a segmentation fault in `groupBitmapOr` (issue #7109). #7289 (Zhichang Yu)
- For materialized views the commit for Kafka is called after all data were written. #7175 (Ivan)
- Fixed wrong `duration_ms` value in `system.part_log` table. It was ten times off. #7172 (Vladimir Chebotarev)
- A quick fix to resolve crash in LIVE VIEW table and re-enabling all LIVE VIEW tests. #7201 (vzakaznikov)
- Serialize NULL values correctly in min/max indexes of MergeTree parts. #7234 (Alexander Kuzmenkov)
- Don't put virtual columns to .sql metadata when table is created as `CREATE TABLE AS`. #7183 (Ivan)
- Fix segmentation fault in `ATTACH PART` query. #7185 (alesapin)
- Fix wrong result for some queries given by the optimization of empty IN subqueries and empty INNER/RIGHT JOIN. #7284 (Nikolai Kochetov)
- Fixing AddressSanitizer error in the LIVE VIEW `getHeader()` method. #7271 (vzakaznikov)

#### IMPROVEMENT

- Add a message in case of `queue_wait_max_ms` wait takes place. #7390 (Azat Khuzhin)

- Made setting `s3_min_upload_part_size` table-level. #7059 (Vladimir Chebotarev)
- Check TTL in StorageFactory. #7304 (sundyli)
- Squash left-hand blocks in partial merge join (optimization). #7122 (Artem Zuikov)
- Do not allow non-deterministic functions in mutations of Replicated table engines, because this can introduce inconsistencies between replicas. #7247 (Alexander Kazakov)
- Disable memory tracker while converting exception stack trace to string. It can prevent the loss of error messages of type `Memory limit exceeded` on server, which caused the `Attempt to read after eof` exception on client. #7264 (Nikolai Kochetov)
- Miscellaneous format improvements. Resolves #6033, #2633, #6611, #6742 #7215 (tavplubix)
- ClickHouse ignores values on the right side of IN operator that are not convertible to the left side type. Make it work properly for compound types -- Array and Tuple. #7283 (Alexander Kuzmenkov)
- Support missing inequalities for ASOF JOIN. It's possible to join less-or-equal variant and strict greater and less variants for ASOF column in ON syntax. #7282 (Artem Zuikov)
- Optimize partial merge join. #7070 (Artem Zuikov)
- Do not use more than 98K of memory in uniqCombined functions. #7236, #7270 (Azat Khuzhin)
- Flush parts of right-hand joining table on disk in PartialMergeJoin (if there is not enough memory). Load data back when needed. #7186 (Artem Zuikov)

#### PERFORMANCE IMPROVEMENT

- Speed up joinGet with const arguments by avoiding data duplication. #7359 (Amos Bird)
- Return early if the subquery is empty. #7007 (小路)
- Optimize parsing of SQL expression in Values. #6781 (tavplubix)

#### BUILD/TESTING/PACKAGING IMPROVEMENT

- Disable some contribs for cross-compilation to Mac OS. #7101 (Ivan)
- Add missing linking with PocoXML for clickhouse\_common\_io. #7200 (Azat Khuzhin)
- Accept multiple test filter arguments in clickhouse-test. #7226 (Alexander Kuzmenkov)
- Enable musl and jemalloc for ARM. #7300 (Amos Bird)
- Added `--client-option` parameter to `clickhouse-test` to pass additional parameters to client. #7277 (Nikolai Kochetov)
- Preserve existing configs on rpm package upgrade. #7103 (filimonov)
- Fix errors detected by PVS. #7153 (Artem Zuikov)
- Fix build for Darwin. #7149 (Ivan)
- glibc 2.29 compatibility. #7142 (Amos Bird)
- Make sure dh\_clean does not touch potential source files. #7205 (Amos Bird)
- Attempt to avoid conflict when updating from altinity rpm - it has config file packaged separately in clickhouse-server-common. #7073 (filimonov)
- Optimize some header files for faster rebuilds. #7212, #7231 (Alexander Kuzmenkov)
- Add performance tests for Date and DateTime. #7332 (Vasily Nemkov)
- Fix some tests that contained non-deterministic mutations. #7132 (Alexander Kazakov)
- Add build with MemorySanitizer to CI. #7066 (Alexander Kuzmenkov)
- Avoid use of uninitialized values in MetricsTransmitter. #7158 (Azat Khuzhin)
- Fix some issues in Fields found by MemorySanitizer. #7135, #7179 (Alexander Kuzmenkov), #7376 (Amos Bird)

- Fix undefined behavior in murmurhash32. #7388 (Amos Bird)
- Fix undefined behavior in StoragesInfoStream. #7384 (tavplubix)
- Fixed constant expressions folding for external database engines (MySQL, ODBC, JDBC). In previous versions it wasn't working for multiple constant expressions and was not working at all for Date, DateTime and UUID. This fixes #7245 #7252 (alexey-milovidov)
- Fixing ThreadSanitizer data race error in the LIVE VIEW when accessing no\_users\_thread variable. #7353 (vzakaznikov)
- Get rid of malloc symbols in libcommon #7134, #7065 (Amos Bird)
- Add global flag ENABLE\_LIBRARIES for disabling all libraries. #7063 (proller)

#### CODE CLEANUP

- Generalize configuration repository to prepare for DDL for Dictionaries. #7155 (alesapin)
- Parser for dictionaries DDL without any semantic. #7209 (alesapin)
- Split ParserCreateQuery into different smaller parsers. #7253 (alesapin)
- Small refactoring and renaming near external dictionaries. #7111 (alesapin)
- Refactor some code to prepare for role-based access control. #7235 (Vitaly Baranov)
- Some improvements in DatabaseOrdinary code. #7086 (Nikita Vasilev)
- Do not use iterators in find() and emplace() methods of hash tables. #7026 (Alexander Kuzmenkov)
- Fix getMultipleValuesFromConfig in case when parameter root is not empty. #7374 (Mikhail Korotov)
- Remove some copy-paste (TemporaryFile and TemporaryFileStream) #7166 (Artem Zuikov)
- Improved code readability a little bit (MergeTreeData::getActiveContainingPart). #7361 (Vladimir Chebotarev)
- Wait for all scheduled jobs, which are using local objects, if ThreadPool::schedule(...) throws an exception. Rename ThreadPool::schedule(...) to ThreadPool::scheduleOrThrowOnError(...) and fix comments to make obvious that it may throw. #7350 (tavplubix)

## ClickHouse release 19.15

### ClickHouse release 19.15.4.10, 2019-10-31

#### BUG FIX

- Added handling of SQL\_TINYINT and SQL\_BIGINT, and fix handling of SQL\_FLOAT data source types in ODBC Bridge. #7491 (Denis Glazachev)
- Allowed to have some parts on destination disk or volume in MOVE PARTITION. #7434 (Vladimir Chebotarev)
- Fixed NULL-values in nullable columns through ODBC-bridge. #7402 (Vasily Nemkov)
- Fixed INSERT into Distributed non local node with MATERIALIZED columns. #7377 (Azat Khuzhin)
- Fixed function getMultipleValuesFromConfig. #7374 (Mikhail Korotov)
- Fixed issue of using HTTP keep alive timeout instead of TCP keep alive timeout. #7351 (Vasily Nemkov)
- Wait for all jobs to finish on exception (fixes rare segfaults). #7350 (tavplubix)
- Don't push to MVs when inserting into Kafka table. #7265 (Ivan)
- Disable memory tracker for exception stack. #7264 (Nikolai Kochetov)
- Fixed bad code in transforming query for external database. #7252 (alexey-milovidov)
- Avoid use of uninitialized values in MetricsTransmitter. #7158 (Azat Khuzhin)
- Added example config with macros for tests (alexey-milovidov)

## ClickHouse release 19.15.3.6, 2019-10-09

### BUG FIX

- Fixed bad\_variant in hashed dictionary. ([alesapin](#))
- Fixed up bug with segmentation fault in ATTACH PART query. ([alesapin](#))
- Fixed time calculation in MergeTreeData . ([Vladimir Chebotarev](#))
- Commit to Kafka explicitly after the writing is finalized. [#7175](#) ([Ivan](#))
- Serialize NULL values correctly in min/max indexes of MergeTree parts. [#7234](#) ([Alexander Kuzmenkov](#))

## ClickHouse release 19.15.2.2, 2019-10-01

### NEW FEATURE

- Tiered storage: support to use multiple storage volumes for tables with MergeTree engine. It's possible to store fresh data on SSD and automatically move old data to HDD. ([example](#)). [#4918](#) ([lgr](#)) [#6489](#) ([alesapin](#))
- Add table function `input` for reading incoming data in `INSERT SELECT` query. [#5450](#) ([palasonic1](#)) [#6832](#) ([Anton Popov](#))
- Add a `sparse_hashed` dictionary layout, that is functionally equivalent to the `hashed` layout, but is more memory efficient. It uses about twice as less memory at the cost of slower value retrieval. [#6894](#) ([Azat Khuzhin](#))
- Implement ability to define list of users for access to dictionaries. Only current connected database using. [#6907](#) ([Guillaume Tassery](#))
- Add `LIMIT` option to `SHOW` query. [#6944](#) ([Philipp Malkovsky](#))
- Add `bitmapSubsetLimit(bitmap, range_start, limit)` function, that returns subset of the smallest `limit` values in set that is no smaller than `range_start`. [#6957](#) ([Zhichang Yu](#))
- Add `bitmapMin` and `bitmapMax` functions. [#6970](#) ([Zhichang Yu](#))
- Add function `repeat` related to [issue-6648](#) [#6999](#) ([flynn](#))

### EXPERIMENTAL FEATURE

- Implement (in memory) Merge Join variant that does not change current pipeline. Result is partially sorted by merge key. Set `partial_merge_join = 1` to use this feature. The Merge Join is still in development. [#6940](#) ([Artem Zuikov](#))
- Add S3 engine and table function. It is still in development (no authentication support yet). [#5596](#) ([Vladimir Chebotarev](#))

### IMPROVEMENT

- Every message read from Kafka is inserted atomically. This resolves almost all known issues with Kafka engine. [#6950](#) ([Ivan](#))
- Improvements for failover of Distributed queries. Shorten recovery time, also it is now configurable and can be seen in `system.clusters` . [#6399](#) ([Vasily Nemkov](#))
- Support numeric values for Enums directly in `IN` section. [#6766](#) [#6941](#) ([dimarub2000](#))
- Support (optional, disabled by default) redirects on URL storage. [#6914](#) ([maqroll](#))
- Add information message when client with an older version connects to a server. [#6893](#) ([Philipp Malkovsky](#))
- Remove maximum backoff sleep time limit for sending data in Distributed tables. [#6895](#) ([Azat Khuzhin](#))
- Add ability to send profile events (counters) with cumulative values to graphite. It can be enabled under `<events_cumulative>` in `server config.xml` . [#6969](#) ([Azat Khuzhin](#))
- Add automatically cast type `T` to `LowCardinality(T)` while inserting data in column of type `LowCardinality(T)` in Native format via HTTP. [#6891](#) ([Nikolai Kochetov](#))
- Add ability to use function `hex` without using `reinterpretAsString` for `Float32` , `Float64` . [#7024](#) ([Mikhail Korotov](#))

## BUILD/TESTING/PACKAGING IMPROVEMENT

- Add gdb-index to clickhouse binary with debug info. It will speed up startup time of gdb . #6947 (alesapin)
- Speed up deb packaging with patched dpkg-deb which uses pigz . #6960 (alesapin)
- Set enable\_fuzzing = 1 to enable libfuzzer instrumentation of all the project code.#7042 (kyprizel)
- Add split build smoke test in CI.#7061 (alesapin)
- Add build with MemorySanitizer to CI.#7066 (Alexander Kuzmenkov)
- Replace libsparseshash with sparseshash-c11 #6965 (Azat Khuzhin)

## BUG FIX

- Fixed performance degradation of index analysis on complex keys on large tables. This fixes #6924.#7075 (alexey-milovidov)
- Fix logical error causing segfaults when selecting from Kafka empty topic.#6909 (Ivan)
- Fix too early MySQL connection close in MySQLBlockInputStream.cpp . #6882 (Clément Rodriguez)
- Returned support for very old Linux kernels (fix#6841) #6853 (alexey-milovidov)
- Fix possible data loss in insert select query in case of empty block in input stream. #6834 #6862#6911 (Nikolai Kochetov)
- Fix for function ArrayEnumerateUniqRanked with empty arrays in params#6928 (proller)
- Fix complex queries with array joins and global subqueries.#6934 (Ivan)
- Fix Unknown identifier error in ORDER BY and GROUP BY with multiple JOINs#7022 (Artem Zuikov)
- Fixed MSan warning while executing function with LowCardinality argument. #7062 (Nikolai Kochetov)

## BACKWARD INCOMPATIBLE CHANGE

- Changed serialization format of bitmap *aggregate function states to improve performance. Serialized states of bitmap* from previous versions cannot be read. #6908 (Zhichang Yu)

## ClickHouse release 19.14

### ClickHouse release 19.14.7.15, 2019-10-02

## BUG FIX

- This release also contains all bug fixes from 19.11.12.69.
- Fixed compatibility for distributed queries between 19.14 and earlier versions. This fixes#7068. #7069 (alexey-milovidov)

### ClickHouse release 19.14.6.12, 2019-09-19

## BUG FIX

- Fix for function ArrayEnumerateUniqRanked with empty arrays in params.#6928 (proller)
- Fixed subquery name in queries with ARRAY JOIN and GLOBAL IN subquery with alias. Use subquery alias for external table name if it is specified. #6934 (Ivan)

## BUILD/TESTING/PACKAGING IMPROVEMENT

- Fix flapping test 00715\_fetch\_merged\_or\_mutated\_part\_zookeeper by rewriting it to a shell scripts because it needs to wait for mutations to apply. #6977 (Alexander Kazakov)
- Fixed UBSan and MemSan failure in function groupUniqArray with emtpy array argument. It was caused by placing of empty PaddedPODArray into hash table zero cell because constructor for zero cell value was not called.#6937 (Amos)

## ClickHouse release 19.14.3.3, 2019-09-10

## NEW FEATURE

- WITH FILL modifier for ORDER BY . (continuation of #5069) #6610 (Anton Popov)
- WITH TIES modifier for LIMIT . (continuation of #5069) #6610 (Anton Popov)
- Parse unquoted NULL literal as NULL (if setting format\_csv\_unquoted\_null\_literal\_as\_null=1 ). Initialize null fields with default values if data type of this field is not nullable (if setting input\_format\_null\_as\_default=1 ). #5990 #6055 (tavplubix)
- Support for wildcards in paths of table functions file and hdfs . If the path contains wildcards, the table will be readonly. Example of usage: select \* from hdfs('hdfs://hdfs1:9000/some\_dir/another\_dir/\*file{0..9}{0..9}') and select \* from file('some\_dir/{some\_file,another\_file,yet\_another}.tsv', 'TSV', 'value UInt32') . #6092 (Olga Khvostikova)
- New system.metric\_log table which stores values of system.events and system.metrics with specified time interval. #6363 #6467 (Nikita Mikhaylov) #6530 (alexey-milovidov)
- Allow to write ClickHouse text logs to system.text\_log table. #6037 #6103 (Nikita Mikhaylov) #6164 (alexey-milovidov)
- Show private symbols in stack traces (this is done via parsing symbol tables of ELF files). Added information about file and line number in stack traces if debug info is present. Speedup symbol name lookup with indexing symbols present in program. Added new SQL functions for introspection: demangle and addressToLine . Renamed function symbolizeAddress to addressToSymbol for consistency. Function addressToSymbol will return mangled name for performance reasons and you have to apply demangle . Added setting allow\_introspection\_functions which is turned off by default. #6201 (alexey-milovidov)
- Table function values (the name is case-insensitive). It allows to read from VALUES list proposed in #5984. Example: SELECT \* FROM VALUES('a UInt64, s String', (1, 'one'), (2, 'two'), (3, 'three')) . #6217. #6209 (dimarub2000)
- Added an ability to alter storage settings. Syntax: ALTER TABLE <table> MODIFY SETTING <setting> = <value> . #6366 #6669 #6685 (alesapin)
- Support for removing of detached parts. Syntax: ALTER TABLE <table\_name> DROP DETACHED PART '<part\_id>' . #6158 (tavplubix)
- Table constraints. Allows to add constraint to table definition which will be checked at insert. #5273 (Gleb Novikov) #6652 (alexey-milovidov)
- Support for cascaded materialized views. #6324 (Amos Bird)
- Turn on query profiler by default to sample every query execution thread once a second. #6283 (alexey-milovidov)
- Input format ORC . #6454 #6703 (akonyaev90)
- Added two new functions: sigmoid and tanh (that are useful for machine learning applications). #6254 (alexey-milovidov)
- Function hasToken(haystack, token) , hasTokenCaseInsensitive(haystack, token) to check if given token is in haystack. Token is a maximal length substring between two non alphanumeric ASCII characters (or boundaries of haystack). Token must be a constant string. Supported by tokenbf\_v1 index specialization. #6596, #6662 (Vasily Nemkov)
- New function neighbor(value, offset[, default\_value]) . Allows to reach prev/next value within column in a block of data. #5925 (Alex Krash) 6685365ab8c5b74f9650492c88a012596eb1b0c6 341e2e4587a18065c2da1ca888c73389f48ce36c Alexey Milovidov
- Created a function currentUser() , returning login of authorized user. Added alias user() for compatibility with MySQL. #6470 (Alex Krash)
- New aggregate functions quantilesExactInclusive and quantilesExactExclusive which were proposed in #5885. #6477 (dimarub2000)
- Function bitmapRange(bitmap, range\_begin, range\_end) which returns new set with specified range (not include the range\_end ). #6314 (Zhichang Yu)

- Function `geohashesInBox(longitude_min, latitude_min, longitude_max, latitude_max, precision)` which creates array of precision-long strings of geohash-boxes covering provided area. #6127 (Vasily Nemkov)
- Implement support for INSERT query with Kafka tables. #6012 (Ivan)
- Added support for `_partition` and `_timestamp` virtual columns to Kafka engine. #6400 (Ivan)
- Possibility to remove sensitive data from `query_log`, server logs, process list with regexp-based rules. #5710 (filimonov )

#### EXPERIMENTAL FEATURE

- Input and output data format `Template`. It allows to specify custom format string for input and output. #4354 #6727 (tavplubix)
- Implementation of `LIVE VIEW` tables that were originally proposed in #2898, prepared in #3925, and then updated in #5541. See #5541 for detailed description. #5541 (vzakaznikov) #6425 (Nikolai Kochetov) #6656 (vzakaznikov) Note that `LIVE VIEW` feature may be removed in next versions.

#### BUG FIX

- This release also contains all bug fixes from 19.13 and 19.11.
- Fix segmentation fault when the table has skip indices and vertical merge happens. #6723 (alesapin)
- Fix per-column TTL with non-trivial column defaults. Previously in case of force TTL merge with `OPTIMIZE ... FINAL` query, expired values was replaced by type defaults instead of user-specified column defaults. #6796 (Anton Popov)
- Fix Kafka messages duplication problem on normal server restart. #6597 (Ivan)
- Fixed infinite loop when reading Kafka messages. Do not pause/resume consumer on subscription at all - otherwise it may get paused indefinitely in some scenarios. #6354 (Ivan)
- Fix `Key` expression contains comparison between convertible types exception in `bitmapContains` function. #6136 #6146 #6156 (dimarub2000)
- Fix segfault with enabled `optimize_skip_unused_shards` and missing sharding key. #6384 (Anton Popov)
- Fixed wrong code in mutations that may lead to memory corruption. Fixed segfault with read of address `0x14c0` that may happed due to concurrent `DROP TABLE` and `SELECT` from `system.parts` or `system.parts_columns`. Fixed race condition in preparation of mutation queries. Fixed deadlock caused by `OPTIMIZE` of Replicated tables and concurrent modification operations like `ALTERs`. #6514 (alexey-milovidov)
- Removed extra verbose logging in MySQL interface #6389 (alexey-milovidov)
- Return the ability to parse boolean settings from 'true' and 'false' in the configuration file. #6278 (alesapin)
- Fix crash in `quantile` and `median` function over `Nullable(Decimal128)`. #6378 (Artem Zuikov)
- Fixed possible incomplete result returned by `SELECT` query with `WHERE` condition on primary key contained conversion to `Float` type. It was caused by incorrect checking of monotonicity in `toFloat` function. #6248 #6374 (dimarub2000)
- Check `max_expanded_ast_elements` setting for mutations. Clear mutations after `TRUNCATE TABLE`. #6205 (Winter Zhang)
- Fix JOIN results for key columns when used with `join_use_nulls`. Attach Nulls instead of columns defaults. #6249 (Artem Zuikov)
- Fix for skip indices with vertical merge and alter. Fix for Bad size of marks file exception. #6594 #6713 (alesapin)
- Fix rare crash in `ALTER MODIFY COLUMN` and vertical merge when one of merged/altered parts is empty (0 rows) #6746 #6780 (alesapin)
- Fixed bug in conversion of `LowCardinality` types in `AggregateFunctionFactory`. This fixes #6257. #6281 (Nikolai Kochetov )
- Fix wrong behavior and possible segfaults in `topK` and `topKWeighted` aggregated functions. #6404 (Anton Popov)

- Fixed unsafe code around `getIdentifier` function. #6401 #6409 (alexey-milovidov)
- Fixed bug in MySQL wire protocol (is used while connecting to ClickHouse from MySQL client). Caused by heap buffer overflow in `PacketPayloadWriteBuffer`. #6212 (Yuriy Baranov)
- Fixed memory leak in `bitmapSubsetInRange` function. #6819 (Zhichang Yu)
- Fix rare bug when mutation executed after granularity change. #6816 (alesapin)
- Allow protobuf message with all fields by default. #6132 (Vitaly Baranov)
- Resolve a bug with `nullIf` function when we send a `NULL` argument on the second argument. #6446 (Guillaume Tassery)
- Fix rare bug with wrong memory allocation/deallocation in complex key cache dictionaries with string fields which leads to infinite memory consumption (looks like memory leak). Bug reproduces when string size was a power of two starting from eight (8, 16, 32, etc). #6447 (alesapin)
- Fixed Gorilla encoding on small sequences which caused exception `Cannot write after end of buffer`. #6398 #6444 (Vasily Nemkov)
- Allow to use not nullable types in JOINs with `join_use_nulls` enabled. #6705 (Artem Zuikov)
- Disable `Poco::AbstractConfiguration` substitutions in query in `clickhouse-client`. #6706 (alexey-milovidov)
- Avoid deadlock in `REPLACE PARTITION`. #6677 (alexey-milovidov)
- Using `arrayReduce` for constant arguments may lead to segfault. #6242 #6326 (alexey-milovidov)
- Fix inconsistent parts which can appear if replica was restored after `DROP PARTITION`. #6522 #6523 (tavplubix)
- Fixed hang in `JSONExtractRaw` function. #6195 #6198 (alexey-milovidov)
- Fix bug with incorrect skip indices serialization and aggregation with adaptive granularity. #6594. #6748 (alesapin)
- Fix `WITH ROLLUP` and `WITH CUBE` modifiers of `GROUP BY` with two-level aggregation. #6225 (Anton Popov)
- Fix bug with writing secondary indices marks with adaptive granularity. #6126 (alesapin)
- Fix initialization order while server startup. Since `StorageMergeTree::background_task_handle` is initialized in `startup()` the `MergeTreeBlockOutputStream::write()` may try to use it before initialization. Just check if it is initialized. #6080 (Ivan)
- Clearing the data buffer from the previous read operation that was completed with an error. #6026 (Nikolay)
- Fix bug with enabling adaptive granularity when creating a new replica for Replicated\*MergeTree table. #6394 #6452 (alesapin)
- Fixed possible crash during server startup in case of exception happened in `libunwind` during exception at access to uninitialized `ThreadStatus` structure. #6456 (Nikita Mikhaylov)
- Fix crash in `yandexConsistentHash` function. Found by fuzz test. #6304 #6305 (alexey-milovidov)
- Fixed the possibility of hanging queries when server is overloaded and global thread pool becomes near full. This have higher chance to happen on clusters with large number of shards (hundreds), because distributed queries allocate a thread per connection to each shard. For example, this issue may reproduce if a cluster of 330 shards is processing 30 concurrent distributed queries. This issue affects all versions starting from 19.2. #6301 (alexey-milovidov)
- Fixed logic of `arrayEnumerateUniqRanked` function. #6423 (alexey-milovidov)
- Fix segfault when decoding symbol table. #6603 (Amos Bird)
- Fixed irrelevant exception in cast of `LowCardinality(Nullable)` to not-nullable column in case if it doesn't contain Nulls (e.g. in query like `SELECT CAST(CAST('Hello' AS LowCardinality(Nullable(String))) AS String)`). #6094 #6119 (Nikolai Kochetov)
- Removed extra quoting of description in `system.settings` table. #6696 #6699 (alexey-milovidov)
- Avoid possible deadlock in `TRUNCATE` of Replicated table. #6695 (alexey-milovidov)
- Fix reading in order of sorting key. #6189 (Anton Popov)

- Fix `ALTER TABLE ... UPDATE` query for tables with `enable_mixed_granularity_parts=1`. #6543 (alesapin)
- Fix bug opened by #4405 (since 19.4.0). Reproduces in queries to Distributed tables over MergeTree tables when we doesn't query any columns (`SELECT 1`). #6236 (alesapin)
- Fixed overflow in integer division of signed type to unsigned type. The behaviour was exactly as in C or C++ language (integer promotion rules) that may be surprising. Please note that the overflow is still possible when dividing large signed number to large unsigned number or vice-versa (but that case is less usual). The issue existed in all server versions. #6214 #6233 (alexey-milovidov)
- Limit maximum sleep time for throttling when `max_execution_speed` or `max_execution_speed_bytes` is set. Fixed false errors like Estimated query execution time (inf seconds) is too long . #5547 #6232 (alexey-milovidov)
- Fixed issues about using `MATERIALIZED` columns and aliases in `MaterializedView` . #448 #3484 #3450 #2878 #2285 #3796 (Amos Bird) #6316 (alexey-milovidov)
- Fix `FormatFactory` behaviour for input streams which are not implemented as processor. #6495 (Nikolai Kochetov)
- Fixed typo. #6631 (Alex Ryndin)
- Typo in the error message ( is -> are ).#6839 (Denis Zhuravlev)
- Fixed error while parsing of columns list from string if type contained a comma (this issue was relevant forFile , URL , HDFS storages) #6217. #6209 (dimarub2000)

## SECURITY FIX

- This release also contains all bug security fixes from 19.13 and 19.11.
- Fixed the possibility of a fabricated query to cause server crash due to stack overflow in SQL parser. Fixed the possibility of stack overflow in Merge and Distributed tables, materialized views and conditions for row-level security that involve subqueries. #6433 (alexey-milovidov)

## IMPROVEMENT

- Correct implementation of ternary logic for `AND/OR` . #6048 (Alexander Kazakov)
- Now values and rows with expired TTL will be removed after `OPTIMIZE ... FINAL` query from old parts without TTL infos or with outdated TTL infos, e.g. after `ALTER ... MODIFY TTL` query. Added queries `SYSTEM STOP/START TTL MERGES` to disallow/allow assign merges with TTL and filter expired values in all merges#6274 (Anton Popov)
- Possibility to change the location of ClickHouse history file for client using`CICKHOUSE_HISTORY_FILE` env. #6840 (filimonov)
- Remove `dry_run` flag from `InterpreterSelectQuery` . ... #6375 (Nikolai Kochetov)
- Support ASOF JOIN with `ON` section. #6211 (Artem Zuikov)
- Better support of skip indexes for mutations and replication. Support for `MATERIALIZE/CLEAR INDEX ... IN PARTITION` query. `UPDATE x = x` recalculates all indices that use column `x` . #5053 (Nikita Vasilev)
- Allow to `ATTACH` live views (for example, at the server startup) regardless to `allow_experimental_live_view` setting. #6754 (alexey-milovidov)
- For stack traces gathered by query profiler, do not include stack frames generated by the query profiler itself#6250 (alexey-milovidov)
- Now table functions `values` , `file` , `url` , `hdfs` have support for ALIAS columns. #6255 (alexey-milovidov)
- Throw an exception if `config.d` file doesn't have the corresponding root element as the config file.#6123 (dimarub2000 )
- Print extra info in exception message for `no space left on device` . #6182, #6252 #6352 (tavplubix)
- When determining shards of a `Distributed` table to be covered by a read query (for `optimize_skip_unused_shards = 1`) ClickHouse now checks conditions from both `prewhere` and `where` clauses of select statement. #6521 (Alexander Kazakov)

- Enabled SIMDJSON for machines without AVX2 but with SSE 4.2 and PCLMUL instruction set.[#6285](#) [#6320](#) ([alexey-milovidov](#))
- ClickHouse can work on filesystems without O\_DIRECT support (such as ZFS and Btrfs) without additional tuning. [#4449](#) [#6730](#) ([alexey-milovidov](#))
- Support push down predicate for final subquery. [#6120](#) ([TCeason](#)) [#6162](#) ([alexey-milovidov](#))
- Better JOIN ON keys extraction [#6131](#) ([Artem Zuikov](#))
- Updated SIMDJSON . [#6285](#). [#6306](#) ([alexey-milovidov](#))
- Optimize selecting of smallest column for SELECT count() query. [#6344](#) ([Amos Bird](#))
- Added strict parameter in windowFunnel() . When the strict is set, the windowFunnel() applies conditions only for the unique values. [#6548](#) ([achimbab](#))
- Safer interface of mysqlxx::Pool . [#6150](#) ([avasiliev](#))
- Options line size when executing with --help option now corresponds with terminal size. [#6590](#) ([dimarub2000](#))
- Disable "read in order" optimization for aggregation without keys. [#6599](#) ([Anton Popov](#))
- HTTP status code for INCORRECT\_DATA and TYPE\_MISMATCH error codes was changed from default 500 Internal Server Error to 400 Bad Request . [#6271](#) ([Alexander Rodin](#))
- Move Join object from ExpressionAction into AnalyzedJoin . ExpressionAnalyzer and ExpressionAction do not know about Join class anymore. Its logic is hidden by AnalyzedJoin iface. [#6801](#) ([Artem Zuikov](#))
- Fixed possible deadlock of distributed queries when one of shards is localhost but the query is sent via network connection. [#6759](#) ([alexey-milovidov](#))
- Changed semantic of multiple tables RENAME to avoid possible deadlocks. [#6757](#). [#6756](#) ([alexey-milovidov](#))
- Rewritten MySQL compatibility server to prevent loading full packet payload in memory. Decreased memory consumption for each connection to approximately 2 \* DBMS\_DEFAULT\_BUFFER\_SIZE (read/write buffers). [#5811](#) ([Yuriy Baranov](#))
- Move AST alias interpreting logic out of parser that doesn't have to know anything about query semantics [#6108](#) ([Artem Zuikov](#))
- Slightly more safe parsing of NamesAndTypesList . [#6408](#). [#6410](#) ([alexey-milovidov](#))
- clickhouse-copier : Allow use where\_condition from config with partition\_key alias in query for checking partition existence (Earlier it was used only in reading data queries). [#6577](#) ([proller](#))
- Added optional message argument in throwIf . ([#5772](#)) [#6329](#) ([Vdimir](#))
- Server exception got while sending insertion data is now being processed in client as well [#5891](#) [#6711](#) ([dimarub2000](#))
- Added a metric DistributedFilesToInsert that shows the total number of files in filesystem that are selected to send to remote servers by Distributed tables. The number is summed across all shards. [#6600](#) ([alexey-milovidov](#))
- Move most of JOINS prepare logic from ExpressionAction/ExpressionAnalyzer to AnalyzedJoin . [#6785](#) ([Artem Zuikov](#))
- Fix TSan warning 'lock-order-inversion'. [#6740](#) ([Vasily Nemkov](#))
- Better information messages about lack of Linux capabilities. Logging fatal errors with "fatal" level, that will make it easier to find in system.text\_log . [#6441](#) ([alexey-milovidov](#))
- When enable dumping temporary data to the disk to restrict memory usage during GROUP BY , ORDER BY , it didn't check the free disk space. The fix add a new setting min\_free\_disk\_space , when the free disk space is smaller then the threshold, the query will stop and throw ErrorCode::NOT\_ENOUGH\_SPACE . [#6678](#) ([Weiqing Xu](#)) [#6691](#) ([alexey-milovidov](#))
- Removed recursive rwlock by thread. It makes no sense, because threads are reused between queries. SELECT query may acquire a lock in one thread, hold a lock from another thread and exit from first thread. In the same time, first thread can be reused by DROP query. This will lead to false "Attempt to acquire exclusive lock recursively"

- messages. #6771 (alexey-milovidov)
- Split `ExpressionAnalyzer.appendJoin()` . Prepare a place in `ExpressionAnalyzer` for `MergeJoin` . #6524 (Artem Zuikov)
  - Added `mysql_native_password` authentication plugin to MySQL compatibility server. #6194 (Yuriy Baranov)
  - Less number of `clock_gettime` calls; fixed ABI compatibility between debug/release in `Allocator` (insignificant issue). #6197 (alexey-milovidov)
  - Move `collectUsedColumns` from `ExpressionAnalyzer` to `SyntaxAnalyzer` . `SyntaxAnalyzer` makes `required_source_columns` itself now. #6416 (Artem Zuikov)
  - Add setting `joined_subquery_requires_alias` to require aliases for subselects and table functions in `FROM` that more than one table is present (i.e. queries with `JOINs`). #6733 (Artem Zuikov)
  - Extract `GetAggregatesVisitor` class from `ExpressionAnalyzer` . #6458 (Artem Zuikov)
  - `system.query_log` : change data type of type column to `Enum` . #6265 (Nikita Mikhaylov)
  - Static linking of `sha256_password` authentication plugin. #6512 (Yuriy Baranov)
  - Avoid extra dependency for the setting `compile` to work. In previous versions, the user may get error like `cannot open crt.o` , unable to find library -lc etc. #6309 (alexey-milovidov)
  - More validation of the input that may come from malicious replica. #6303 (alexey-milovidov)
  - Now `clickhouse-obfuscator` file is available in `clickhouse-client` package. In previous versions it was available as `clickhouse obfuscator` (with whitespace). #5816 #6609 (dimarub2000)
  - Fixed deadlock when we have at least two queries that read at least two tables in different order and another query that performs DDL operation on one of tables. Fixed another very rare deadlock. #6764 (alexey-milovidov)
  - Added `os_thread_ids` column to `system.processes` and `system.query_log` for better debugging possibilities. #6763 (alexey-milovidov)
  - A workaround for PHP `mysqlnd` extension bugs which occur when `sha256_password` is used as a default authentication plugin (described in #6031). #6113 (Yuriy Baranov)
  - Remove unneeded place with changed nullability columns. #6693 (Artem Zuikov)
  - Set default value of `queue_max_wait_ms` to zero, because current value (five seconds) makes no sense. There are rare circumstances when this settings has any use. Added settings `replace_running_query_max_wait_ms` , `kafka_max_wait_ms` and `connection_pool_max_wait_ms` for disambiguation. #6692 (alexey-milovidov)
  - Extract `SelectQueryExpressionAnalyzer` from `ExpressionAnalyzer` . Keep the last one for non-select queries. #6499 (Artem Zuikov)
  - Removed duplicating input and output formats. #6239 (Nikolai Kochetov)
  - Allow user to override `poll_interval` and `idle_connection_timeout` settings on connection. #6230 (alexey-milovidov)
  - `MergeTree` now has an additional option `ttl_only_drop_parts` (disabled by default) to avoid partial pruning of parts, so that they dropped completely when all the rows in a part are expired. #6191 (Sergi Vladyskin)
  - Type checks for set index functions. Throw exception if function got a wrong type. This fixes fuzz test with UBSan. #6511 (Nikita Vasilev)

## PERFORMANCE IMPROVEMENT

- Optimize queries with `ORDER BY` expressions clause, where expressions have coinciding prefix with sorting key in `MergeTree` tables. This optimization is controlled by `optimize_read_in_order` setting. #6054 #6629 (Anton Popov)
- Allow to use multiple threads during parts loading and removal. #6372 #6074 #6438 (alexey-milovidov)
- Implemented batch variant of updating aggregate function states. It may lead to performance benefits #6435 (alexey-milovidov)
- Using `FastOps` library for functions `exp` , `log` , `sigmoid` , `tanh` . `FastOps` is a fast vector math library from Michael Parakhin (Yandex CTO). Improved performance of `exp` and `log` functions more than 6 times. The functions `exp` and

`log` from `Float32` argument will return `Float32` (in previous versions they always return `Float64`). Now `exp(nan)` may return `inf`. The result of `exp` and `log` functions may be not the nearest machine representable number to the true answer. #6254 (alexey-milovidov) Using Danila Kutenin variant to make fastops working#6317 (alexey-milovidov)

- Disable consecutive key optimization for `UInt8/16` . #6298 #6701 (akuzm)
- Improved performance of `simdjson` library by getting rid of dynamic allocation in `ParsedJson::Iterator` . #6479 (Vitaly Baranov)
- Pre-fault pages when allocating memory with `mmap()` . #6667 (akuzm)
- Fix performance bug in `Decimal` comparison. #6380 (Artem Zuikov)

#### BUILD/TESTING/PACKAGING IMPROVEMENT

- Remove Compiler (runtime template instantiation) because we've win over it's performance.#6646 (alexey-milovidov)
- Added performance test to show degradation of performance in gcc-9 in more isolated way#6302 (alexey-milovidov)
- Added table function `numbers_mt` , which is multithreaded version of `numbers` . Updated performance tests with hash functions. #6554 (Nikolai Kochetov)
- Comparison mode in `clickhouse-benchmark` #6220 #6343 (dimarub2000)
- Best effort for printing stack traces. Also added `SIGPROF` as a debugging signal to print stack trace of a running thread. #6529 (alexey-milovidov)
- Every function in its own file, part 10.#6321 (alexey-milovidov)
- Remove doubled const `TABLE_IS_READ_ONLY` . #6566 (filimonov)
- Formatting changes for `StringHashMap` PR #5417. #6700 (akuzm)
- Better subquery for join creation in `ExpressionAnalyzer` . #6824 (Artem Zuikov)
- Remove a redundant condition (found by PVS Studio).#6775 (akuzm)
- Separate the hash table interface for `ReverselIndex` . #6672 (akuzm)
- Refactoring of settings. #6689 (alesapin)
- Add comments for `set` index functions. #6319 (Nikita Vasilev)
- Increase OOM score in debug version on Linux.#6152 (akuzm)
- HDFS HA now work in debug build.#6650 (Weiqing Xu)
- Added a test to `transform_query_for_external_database` . #6388 (alexey-milovidov)
- Add test for multiple materialized views for Kafka table.#6509 (ivan)
- Make a better build scheme. #6500 (ivan)
- Fixed `test_external_dictionaries` integration in case it was executed under non root user.#6507 (Nikolai Kochetov)
- The bug reproduces when total size of written packets exceeds `DBMS_DEFAULT_BUFFER_SIZE` . #6204 (Yuriy Baranov)
- Added a test for `RENAME` table race condition #6752 (alexey-milovidov)
- Avoid data race on Settings in `KILL QUERY` . #6753 (alexey-milovidov)
- Add integration test for handling errors by a cache dictionary.#6755 (Vitaly Baranov)
- Disable parsing of ELF object files on Mac OS, because it makes no sense#6578 (alexey-milovidov)
- Attempt to make changelog generator better.#6327 (alexey-milovidov)
- Adding `-Wshadow` switch to the GCC.#6325 (kreuzerkrieg)
- Removed obsolete code for `mimalloc` support. #6715 (alexey-milovidov)
- `zlib-ng` determines x86 capabilities and saves this info to global variables. This is done in `defalteinit` call, which may be made by different threads simultaneously. To avoid multithreaded writes, do it on library startup. #6141 (akuzm)

- Regression test for a bug which in join which was fixed in #5192. #6147 (Bakhtiyor Ruziev)
- Fixed MSan report. #6144 (alexey-milovidov)
- Fix flapping TTL test. #6782 (Anton Popov)
- Fixed false data race in `MergeTreeDataPart::is_frozen` field. #6583 (alexey-milovidov)
- Fixed timeouts in fuzz test. In previous version, it managed to find false hangup in query `SELECT * FROM numbers_mt(gccMurmurHash(""))`. #6582 (alexey-milovidov)
- Added debug checks to `static_cast` of columns. #6581 (alexey-milovidov)
- Support for Oracle Linux in official RPM packages. #6356 #6585 (alexey-milovidov)
- Changed json perftests from `once` to `loop` type. #6536 (Nikolai Kochetov)
- `odbc-bridge.cpp` defines `main()` so it should not be included in `clickhouse-lib`. #6538 (Orivej Desh)
- Test for crash in `FULL|RIGHT JOIN` with nulls in right table's keys. #6362 (Artem Zuikov)
- Added a test for the limit on expansion of aliases just in case. #6442 (alexey-milovidov)
- Switched from `boost::filesystem` to `std::filesystem` where appropriate. #6253 #6385 (alexey-milovidov)
- Added RPM packages to website. #6251 (alexey-milovidov)
- Add a test for fixed `Unknown identifier` exception in `IN` section. #6708 (Artem Zuikov)
- Simplify `shared_ptr_helper` because people facing difficulties understanding it. #6675 (alexey-milovidov)
- Added performance tests for fixed Gorilla and DoubleDelta codec. #6179 (Vasily Nemkov)
- Split the integration test `test_dictionaries` into 4 separate tests. #6776 (Vitaly Baranov)
- Fix PVS-Studio warning in `PipelineExecutor`. #6777 (Nikolai Kochetov)
- Allow to use `library` dictionary source with ASan. #6482 (alexey-milovidov)
- Added option to generate changelog from a list of PRs. #6350 (alexey-milovidov)
- Lock the `TinyLog` storage when reading. #6226 (akuzm)
- Check for broken symlinks in CI. #6634 (alexey-milovidov)
- Increase timeout for "stack overflow" test because it may take a long time in debug build. #6637 (alexey-milovidov)
- Added a check for double whitespaces. #6643 (alexey-milovidov)
- Fix `new/delete` memory tracking when build with sanitizers. Tracking is not clear. It only prevents memory limit exceptions in tests. #6450 (Artem Zuikov)
- Enable back the check of undefined symbols while linking. #6453 (Ivan)
- Avoid rebuilding `hyperscan` every day. #6307 (alexey-milovidov)
- Fixed UBSan report in `ProtobufWriter`. #6163 (alexey-milovidov)
- Don't allow to use query profiler with sanitizers because it is not compatible. #6769 (alexey-milovidov)
- Add test for reloading a dictionary after fail by timer. #6114 (Vitaly Baranov)
- Fix inconsistency in `PipelineExecutor::prepareProcessor` argument type. #6494 (Nikolai Kochetov)
- Added a test for bad URIs. #6493 (alexey-milovidov)
- Added more checks to `CAST` function. This should get more information about segmentation fault in fuzzy test. #6346 (Nikolai Kochetov)
- Added gcc-9 support to `docker/builder` container that builds image locally. #6333 (Gleb Novikov)
- Test for primary key with `LowCardinality(String)`. #5044 #6219 (dimarub2000)
- Fixed tests affected by slow stack traces printing. #6315 (alexey-milovidov)
- Add a test case for crash in `groupUniqArray` fixed in #6029. #4402 #6129 (akuzm)

- Fixed indices mutations tests. #6645 (Nikita Vasilev)
- In performance test, do not read query log for queries we didn't run. #6427 (akuzm)
- Materialized view now could be created with any low cardinality types regardless to the setting about suspicious low cardinality types. #6428 (Olga Khvostikova)
- Updated tests for `send_logs_level` setting. #6207 (Nikolai Kochetov)
- Fix build under gcc-8.2. #6196 (Max Akhmedov)
- Fix build with internal libc++. #6724 (Ivan)
- Fix shared build with `rdkafka` library #6101 (Ivan)
- Fixes for Mac OS build (incomplete). #6390 (alexey-milovidov) #6429 (alex-zaitsev)
- Fix "splitted" build. #6618 (alexey-milovidov)
- Other build fixes: #6186 (Amos Bird) #6486 #6348 (vxider) #6744 (Ivan) #6016 #6421 #6491 (proller)

#### BACKWARD INCOMPATIBLE CHANGE

- Removed rarely used table function `catBoostPool` and storage `CatBoostPool`. If you have used this table function, please write email to `clickhouse-feedback@yandex-team.com`. Note that CatBoost integration remains and will be supported. #6279 (alexey-milovidov)
- Disable `ANY RIGHT JOIN` and `ANY FULL JOIN` by default. Set `any_join_distinct_right_table_keys` setting to enable them. #5126 #6351 (Artem Zuikov)

### ClickHouse release 19.13

#### ClickHouse release 19.13.6.51, 2019-10-02

##### BUG FIX

- This release also contains all bug fixes from 19.11.12.69.

#### ClickHouse release 19.13.5.44, 2019-09-20

##### BUG FIX

- This release also contains all bug fixes from 19.14.6.12.
- Fixed possible inconsistent state of table while executing `DROP` query for replicated table while zookeeper is not accessible. #6045 #6413 (Nikita Mikhaylov)
- Fix for data race in `StorageMerge`#6717 (alexey-milovidov)
- Fix bug introduced in query profiler which leads to endless recv from socket.#6386 (alesapin)
- Fix excessive CPU usage while executing `JSONExtractRaw` function over a boolean value. #6208 (Vitaly Baranov)
- Fixes the regression while pushing to materialized view.#6415 (Ivan)
- Table function `url` had the vulnerability allowed the attacker to inject arbitrary HTTP headers in the request. This issue was found by Nikita Tikhomirov. #6466 (alexey-milovidov)
- Fix useless `AST` check in `Set index`.#6510 #6651 (Nikita Vasilev)
- Fixed parsing of `AggregateFunction` values embedded in query.#6575 #6773 (Zhichang Yu)
- Fixed wrong behaviour of `trim` functions family. #6647 (alexey-milovidov)

#### ClickHouse release 19.13.4.32, 2019-09-10

##### BUG FIX

- This release also contains all bug security fixes from 19.11.9.52 and 19.11.10.54.

- Fixed data race in `system.parts` table and `ALTER` query. #6245 #6513 (alexey-milovidov)
- Fixed mismatched header in streams happened in case of reading from empty distributed table with sample and prewhere. #6167 (Lixiang Qian) #6823 (Nikolai Kochetov)
- Fixed crash when using `IN` clause with a subquery with a tuple. #6125 #6550 (tavplubix)
- Fix case with same column names in `GLOBAL JOIN ON` section. #6181 (Artem Zuikov)
- Fix crash when casting types to `Decimal` that do not support it. Throw exception instead. #6297 (Artem Zuikov)
- Fixed crash in `extractAll()` function. #6644 (Artem Zuikov)
- Query transformation for `MySQL`, `ODBC`, `JDBC` table functions now works properly for `SELECT WHERE` queries with multiple `AND` expressions. #6381 #6676 (dimarub2000)
- Added previous declaration checks for MySQL 8 integration. #6569 (Rafael David Tinoco)

#### SECURITY FIX

- Fix two vulnerabilities in codecs in decompression phase (malicious user can fabricate compressed data that will lead to buffer overflow in decompression). #6670 (Artem Zuikov)

### ClickHouse release 19.13.3.26, 2019-08-22

#### BUG FIX

- Fix `ALTER TABLE ... UPDATE` query for tables with `enable_mixed_granularity_parts=1`. #6543 (alesapin)
- Fix NPE when using `IN` clause with a subquery with a tuple. #6125 #6550 (tavplubix)
- Fixed an issue that if a stale replica becomes alive, it may still have data parts that were removed by `DROP PARTITION`. #6522 #6523 (tavplubix)
- Fixed issue with parsing CSV #6426 #6559 (tavplubix)
- Fixed data race in `system.parts` table and `ALTER` query. This fixes #6245. #6513 (alexey-milovidov)
- Fixed wrong code in mutations that may lead to memory corruption. Fixed segfault with read of address `0x14c0` that may happen due to concurrent `DROP TABLE` and `SELECT` from `system.parts` or `system.parts_columns`. Fixed race condition in preparation of mutation queries. Fixed deadlock caused by `OPTIMIZE` of Replicated tables and concurrent modification operations like `ALTER`s. #6514 (alexey-milovidov)
- Fixed possible data loss after `ALTER DELETE` query on table with skipping index. #6224 #6282 (Nikita Vasilev)

#### SECURITY FIX

- If the attacker has write access to ZooKeeper and is able to run custom server available from the network where ClickHouse run, it can create custom-built malicious server that will act as ClickHouse replica and register it in ZooKeeper. When another replica will fetch data part from malicious replica, it can force clickhouse-server to write to arbitrary path on filesystem. Found by Eldar Zaitov, information security team at Yandex. #6247 (alexey-milovidov)

### ClickHouse release 19.13.2.19, 2019-08-14

#### NEW FEATURE

- Sampling profiler on query level. Example. #4247 (laplab) #6124 (alexey-milovidov) #6250 #6283 #6386
- Allow to specify a list of columns with `COLUMNS('regexp')` expression that works like a more sophisticated variant of `*` asterisk. #5951 (mfridental), (alexey-milovidov)
- `CREATE TABLE AS table_function()` is now possible #6057 (dimarub2000)
- Adam optimizer for stochastic gradient descent is used by default in `stochasticLinearRegression()` and `stochasticLogisticRegression()` aggregate functions, because it shows good quality without almost any tuning. #6000 (Quid37)
- Added functions for working with the custom week number #5212 (Andy Yang)

- RENAME queries now work with all storages. #5953 ([Ivan](#))
- Now client receive logs from server with any desired level by setting `send_logs_level` regardless to the log level specified in server settings. #5964 ([Nikita Mikhaylov](#))

#### BACKWARD INCOMPATIBLE CHANGE

- The setting `input_format_defaults_for_omitted_fields` is enabled by default. Inserts in Distributed tables need this setting to be the same on cluster (you need to set it before rolling update). It enables calculation of complex default expressions for omitted fields in `JSONEachRow` and `CSV*` formats. It should be the expected behavior but may lead to negligible performance difference. #6043 ([Artem Zuikov](#)), #5625 ([akuzm](#))

#### EXPERIMENTAL FEATURES

- New query processing pipeline. Use `experimental_use_processors=1` option to enable it. Use for your own trouble. #4914 ([Nikolai Kochetov](#))

#### BUG FIX

- Kafka integration has been fixed in this version.
- Fixed DoubleDelta encoding of `Int64` for large DoubleDelta values, improved DoubleDelta encoding for random data for `Int32`. #5998 ([Vasily Nemkov](#))
- Fixed overestimation of `max_rows_to_read` if the setting `merge_tree_uniform_read_distribution` is set to 0. #6019 ([alexey-milovidov](#))

#### IMPROVEMENT

- Throws an exception if `config.d` file doesn't have the corresponding root element as the config file #6123 ([dimarub2000](#))

#### PERFORMANCE IMPROVEMENT

- Optimize `count()`. Now it uses the smallest column (if possible). #6028 ([Amos Bird](#))

#### BUILD/TESTING/PACKAGING IMPROVEMENT

- Report memory usage in performance tests. #5899 ([akuzm](#))
- Fix build with external `libcxx` #6010 ([Ivan](#))
- Fix shared build with `rdkafka` library #6101 ([Ivan](#))

## ClickHouse release 19.11

### ClickHouse release 19.11.13.74, 2019-11-01

#### BUG FIX

- Fixed rare crash in `ALTER MODIFY COLUMN` and vertical merge when one of merged/altered parts is empty (0 rows). #6780 ([alesapin](#))
- Manual update of `SIMDJSON`. This fixes possible flooding of stderr files with bogus json diagnostic messages #7548 ([Alexander Kazakov](#))
- Fixed bug with `mrk` file extension for mutations ([alesapin](#))

### ClickHouse release 19.11.12.69, 2019-10-02

#### BUG FIX

- Fixed performance degradation of index analysis on complex keys on large tables. This fixes #6924. #7075 ([alexey-milovidov](#))

- Avoid rare SIGSEGV while sending data in tables with Distributed engine (Failed to send batch: file with index XXXXX is absent ). [#7032](#) ([Azat Khuzhin](#))
- Fix Unknown identifier with multiple joins. This fixes [#5254](#). [#7022](#) ([Artem Zuikov](#))

## **ClickHouse release 19.11.11.57, 2019-09-13**

- Fix logical error causing segfaults when selecting from Kafka empty topic. [#6902](#) [#6909](#) ([Ivan](#))
- Fix for function `ArrayEnumerateUniqRanked` with empty arrays in params. [#6928](#) ([proller](#))

## **ClickHouse release 19.11.10.54, 2019-09-10**

### **BUG FIX**

- Do store offsets for Kafka messages manually to be able to commit them all at once for all partitions. Fixes potential duplication in "one consumer - many partitions" scenario. [#6872](#) ([Ivan](#))

## **ClickHouse release 19.11.9.52, 2019-09-6**

- Improve error handling in cache dictionaries. [#6737](#) ([Vitaly Baranov](#))
- Fixed bug in function `arrayEnumerateUniqRanked` . [#6779](#) ([proller](#))
- Fix `JSONExtract` function while extracting a `Tuple` from JSON. [#6718](#) ([Vitaly Baranov](#))
- Fixed possible data loss after `ALTER DELETE` query on table with skipping index. [#6224](#) [#6282](#) ([Nikita Vasilev](#))
- Fixed performance test. [#6392](#) ([alexey-milovidov](#))
- Parquet: Fix reading boolean columns. [#6579](#) ([alexey-milovidov](#))
- Fixed wrong behaviour of `nullif` function for constant arguments. [#6518](#) ([Guillaume Tassery](#)) [#6580](#) ([alexey-milovidov](#))
- Fix Kafka messages duplication problem on normal server restart. [#6597](#) ([Ivan](#))
- Fixed an issue when long `ALTER UPDATE` or `ALTER DELETE` may prevent regular merges to run. Prevent mutations from executing if there is no enough free threads available. [#6502](#) [#6617](#) ([tavplubix](#))
- Fixed error with processing "timezone" in server configuration file. [#6709](#) ([alexey-milovidov](#))
- Fix kafka tests. [#6805](#) ([Ivan](#))

### **SECURITY FIX**

- If the attacker has write access to ZooKeeper and is able to run custom server available from the network where ClickHouse runs, it can create custom-built malicious server that will act as ClickHouse replica and register it in ZooKeeper. When another replica will fetch data part from malicious replica, it can force clickhouse-server to write to arbitrary path on filesystem. Found by Eldar Zaitov, information security team at Yandex. [#6247](#) ([alexey-milovidov](#))

## **ClickHouse release 19.11.8.46, 2019-08-22**

### **BUG FIX**

- Fix `ALTER TABLE ... UPDATE` query for tables with `enable_mixed_granularity_parts=1` . [#6543](#) ([alesapin](#))
- Fix NPE when using IN clause with a subquery with a tuple. [#6125](#) [#6550](#) ([tavplubix](#))
- Fixed an issue that if a stale replica becomes alive, it may still have data parts that were removed by `DROP PARTITION`. [#6522](#) [#6523](#) ([tavplubix](#))
- Fixed issue with parsing CSV [#6426](#) [#6559](#) ([tavplubix](#))
- Fixed data race in `system.parts` table and `ALTER` query. This fixes [#6245](#). [#6513](#) ([alexey-milovidov](#))
- Fixed wrong code in mutations that may lead to memory corruption. Fixed segfault with read of address 0x14c0 that may happen due to concurrent `DROP TABLE` and `SELECT` from `system.parts` or `system.parts_columns` . Fixed race condition in preparation of mutation queries. Fixed deadlock caused by `OPTIMIZE` of Replicated tables and concurrent

modification operations like ALTERs. #6514 (alexey-milovidov)

## ClickHouse release 19.11.7.40, 2019-08-14

### BUG FIX

- Kafka integration has been fixed in this version.
- Fix segfault when using `arrayReduce` for constant arguments. #6326 (alexey-milovidov)
- Fixed `toFloat()` monotonicity. #6374 (dimarub2000)
- Fix segfault with enabled `optimize_skip_unused_shards` and missing sharding key. #6384 (CurtizJ)
- Fixed logic of `arrayEnumerateUniqRanked` function. #6423 (alexey-milovidov)
- Removed extra verbose logging from MySQL handler. #6389 (alexey-milovidov)
- Fix wrong behavior and possible segfaults in `topK` and `topKWeighted` aggregated functions. #6404 (CurtizJ)
- Do not expose virtual columns in `system.columns` table. This is required for backward compatibility. #6406 (alexey-milovidov)
- Fix bug with memory allocation for string fields in complex key cache dictionary. #6447 (alesapin)
- Fix bug with enabling adaptive granularity when creating new replica for `Replicated*MergeTree` table. #6452 (alesapin)
- Fix infinite loop when reading Kafka messages. #6354 (abyss7)
- Fixed the possibility of a fabricated query to cause server crash due to stack overflow in SQL parser and possibility of stack overflow in `Merge` and `Distributed` tables #6433 (alexey-milovidov)
- Fixed Gorilla encoding error on small sequences. #6444 (Enmk)

### IMPROVEMENT

- Allow user to override `poll_interval` and `idle_connection_timeout` settings on connection. #6230 (alexey-milovidov)

## ClickHouse release 19.11.5.28, 2019-08-05

### BUG FIX

- Fixed the possibility of hanging queries when server is overloaded. #6301 (alexey-milovidov)
- Fix FPE in `yandexConsistentHash` function. This fixes #6304. #6126 (alexey-milovidov)
- Fixed bug in conversion of `LowCardinality` types in `AggregateFunctionFactory`. This fixes #6257. #6281 (Nikolai Kochetov )
- Fix parsing of `bool` settings from `true` and `false` strings in configuration files. #6278 (alesapin)
- Fix rare bug with incompatible stream headers in queries to `Distributed` table over `MergeTree` table when part of `WHERE` moves to `PREWHERE`. #6236 (alesapin)
- Fixed overflow in integer division of signed type to unsigned type. This fixes #6214. #6233 (alexey-milovidov)

### BACKWARD INCOMPATIBLE CHANGE

- Kafka still broken.

## ClickHouse release 19.11.4.24, 2019-08-01

### BUG FIX

- Fix bug with writing secondary indices marks with adaptive granularity. #6126 (alesapin)
- Fix `WITH ROLLUP` and `WITH CUBE` modifiers of `GROUP BY` with two-level aggregation. #6225 (Anton Popov)
- Fixed hang in `JSONExtractRaw` function. Fixed #6195 #6198 (alexey-milovidov)
- Fix segfault in `ExternalLoader::reloadOutdated()`. #6082 (Vitaly Baranov)

- Fixed the case when server may close listening sockets but not shutdown and continue serving remaining queries. You may end up with two running clickhouse-server processes. Sometimes, the server may return an error `bad_function_call` for remaining queries. [#6231 \(alexey-milovidov\)](#)
- Fixed useless and incorrect condition on update field for initial loading of external dictionaries via ODBC, MySQL, ClickHouse and HTTP. This fixes [#6069 #6083 \(alexey-milovidov\)](#)
- Fixed irrelevant exception in cast of `LowCardinality(Nullable)` to not-`Nullable` column in case if it doesn't contain Nulls (e.g. in query like `SELECT CAST(CAST('Hello' AS LowCardinality(Nullable(String))) AS String)`) . [#6094 #6119 \(Nikolai Kochetov\)](#)
- Fix non-deterministic result of "uniq" aggregate function in extreme rare cases. The bug was present in all ClickHouse versions. [#6058 \(alexey-milovidov\)](#)
- Segfault when we set a little bit too high CIDR on the function `IPv6CIDRToRange` . [#6068 \(Guillaume Tassery\)](#)
- Fixed small memory leak when server throw many exceptions from many different contexts. [#6144 \(alexey-milovidov\)](#)
- Fix the situation when consumer got paused before subscription and not resumed afterwards. [#6075 \(Ivan\)](#) Note that Kafka is broken in this version.
- Clearing the Kafka data buffer from the previous read operation that was completed with an error. [#6026 \(Nikolay\)](#) Note that Kafka is broken in this version.
- Since `StorageMergeTree::background_task_handle` is initialized in `startup()` the `MergeTreeBlockOutputStream::write()` may try to use it before initialization. Just check if it is initialized. [#6080 \(Ivan\)](#)

#### BUILD/TESTING/PACKAGING IMPROVEMENT

- Added official `rpm` packages. [#5740 \(proller\) \(alesapin\)](#)
- Add an ability to build `.rpm` and `.tgz` packages with `packager` script. [#5769 \(alesapin\)](#)
- Fixes for "Arcadia" build system. [#6223 \(proller\)](#)

#### BACKWARD INCOMPATIBLE CHANGE

- Kafka is broken in this version.

### ClickHouse release 19.11.3.11, 2019-07-18

#### NEW FEATURE

- Added support for prepared statements. [#5331 \(Alexander\) #5630 \(alexey-milovidov\)](#)
- `DoubleDelta` and `Gorilla` column codecs [#5600 \(Vasily Nemkov\)](#)
- Added `os_thread_priority` setting that allows to control the "nice" value of query processing threads that is used by OS to adjust dynamic scheduling priority. It requires `CAP_SYS_NICE` capabilities to work. This implements [#5858 #5909 \(alexey-milovidov\)](#)
- Implement `_topic` , `_offset` , `_key` columns for Kafka engine [#5382 \(Ivan\)](#) Note that Kafka is broken in this version.
- Add aggregate function combinator `-Resample` [#5590 \(hc2\)](#)
- Aggregate functions `groupArrayMovingSum(win_size)(x)` and `groupArrayMovingAvg(win_size)(x)` , which calculate moving sum/avg with or without window-size limitation. [#5595 \(inv2004\)](#)
- Add synonym `arrayFlatten <-> flatten` [#5764 \(hc2\)](#)
- Integrate H3 function `geoToH3` from Uber. [#4724 \(Remen Ivan\) #5805 \(alexey-milovidov\)](#)

#### BUG FIX

- Implement DNS cache with asynchronous update. Separate thread resolves all hosts and updates DNS cache with period (setting `dns_cache_update_period` ). It should help, when ip of hosts changes frequently. [#5857 \(Anton Popov\)](#)
- Fix segfault in `Delta` codec which affects columns with values less than 32 bits size. The bug led to random memory

corruption. #5786 (alesapin)

- Fix segfault in TTL merge with non-physical columns in block. #5819 (Anton Popov)
- Fix rare bug in checking of part with LowCardinality column. Previously checkDataPart always fails for part with LowCardinality column. #5832 (alesapin)
- Avoid hanging connections when server thread pool is full. It is important for connections from remote table function or connections to a shard without replicas when there is long connection timeout. This fixes #5878 #5881 (alexey-milovidov)
- Support for constant arguments to evalMLModel function. This fixes #5817 #5820 (alexey-milovidov)
- Fixed the issue when ClickHouse determines default time zone as UCT instead of UTC . This fixes #5804. #5828 (alexey-milovidov)
- Fixed buffer underflow in visitParamExtractRaw . This fixes #5901 #5902 (alexey-milovidov)
- Now distributed DROP/ALTER/TRUNCATE/OPTIMIZE ON CLUSTER queries will be executed directly on leader replica. #5757 (alesapin)
- Fix coalesce for ColumnConst with ColumnNullable + related changes. #5755 (Artem Zuikov)
- Fix the ReadBufferFromKafkaConsumer so that it keeps reading new messages after commit() even if it was stalled before #5852 (ivan)
- Fix FULL and RIGHT JOIN results when joining on Nullable keys in right table. #5859 (Artem Zuikov)
- Possible fix of infinite sleeping of low-priority queries. #5842 (alexey-milovidov)
- Fix race condition, which cause that some queries may not appear in query\_log after SYSTEM FLUSH LOGS query. #5456 #5685 (Anton Popov)
- Fixed heap-use-after-free ASan warning in ClusterCopier caused by watch which try to use already removed copier object. #5871 (Nikolai Kochetov)
- Fixed wrong StringRef pointer returned by some implementations of IColumn::deserializeAndInsertFromArena . This bug affected only unit-tests. #5973 (Nikolai Kochetov)
- Prevent source and intermediate array join columns of masking same name columns. #5941 (Artem Zuikov)
- Fix insert and select query to MySQL engine with MySQL style identifier quoting. #5704 (Winter Zhang)
- Now CHECK TABLE query can work with MergeTree engine family. It returns check status and message if any for each part (or file in case of simpler engines). Also, fix bug in fetch of a broken part. #5865 (alesapin)
- Fix SPLIT\_SHARED\_LIBRARIES runtime #5793 (Danila Kutenin)
- Fixed time zone initialization when /etc/localtime is a relative symlink like ./usr/share/zoneinfo/Europe/Moscow #5922 (alexey-milovidov)
- clickhouse-copier: Fix use-after free on shutdown #5752 (proller)
- Updated simdjson . Fixed the issue that some invalid JSONs with zero bytes successfully parse #5938 (alexey-milovidov)
- Fix shutdown of SystemLogs #5802 (Anton Popov)
- Fix hanging when condition in invalidate\_query depends on a dictionary. #6011 (Vitaly Baranov)

## IMPROVEMENT

- Allow unresolvable addresses in cluster configuration. They will be considered unavailable and tried to resolve at every connection attempt. This is especially useful for Kubernetes. This fixes #5714 #5924 (alexey-milovidov)
- Close idle TCP connections (with one hour timeout by default). This is especially important for large clusters with multiple distributed tables on every server, because every server can possibly keep a connection pool to every other server, and after peak query concurrency, connections will stall. This fixes #5879 #5880 (alexey-milovidov)
- Better quality of topK function. Changed the SavingSpace set behavior to remove the last element if the new element

have a bigger weight. #5833 #5850 (Guillaume Tassery)

- URL functions to work with domains now can work for incomplete URLs without scheme#5725 (alesapin)
- Checksums added to the system.parts\_columns table. #5874 (Nikita Mikhaylov)
- Added `Enum` data type as a synonym for `Enum8` or `Enum16` . #5886 (dimarub2000)
- Full bit transpose variant for `T64` codec. Could lead to better compression with `zstd` . #5742 (Artem Zuikov)
- Condition on `startsWith` function now can uses primary key. This fixes#5310 and #5882 #5919 (dimarub2000)
- Allow to use `clickhouse-copier` with cross-replication cluster topology by permitting empty database name.#5745 (nvartolomei)
- Use `UTC` as default timezone on a system without `tzdata` (e.g. bare Docker container). Before this patch, error message `Could not determine local time zone` was printed and server or client refused to start.#5827 (alexey-milovidov)
- Returned back support for floating point argument in function `quantileTiming` for backward compatibility. #5911 (alexey-milovidov)
- Show which table is missing column in error messages.#5768 (ivan)
- Disallow run query with same `query_id` by various users#5430 (proller)
- More robust code for sending metrics to Graphite. It will work even during long multiple `RENAME TABLE` operation. #5875 (alexey-milovidov)
- More informative error messages will be displayed when ThreadPool cannot schedule a task for execution. This fixes #5305 #5801 (alexey-milovidov)
- Inverting ngramSearch to be more intuitive#5807 (Danila Kutenin)
- Add user parsing in HDFS engine builder#5946 (akonyaev90)
- Update default value of `max_ast_elements` parameter #5933 (Artem Konovalov)
- Added a notion of obsolete settings. The obsolete setting `allow_experimental_low_cardinality_type` can be used with no effect. 0f15c01c6802f7ce1a1494c12c846be8c98944cd Alexey Milovidov

## PERFORMANCE IMPROVEMENT

- Increase number of streams to SELECT from Merge table for more uniform distribution of threads. Added setting `max_streams_multiplier_for_merge_tables` . This fixes #5797 #5915 (alexey-milovidov)

## BUILD/TESTING/PACKAGING IMPROVEMENT

- Add a backward compatibility test for client-server interaction with different versions of clickhouse.#5868 (alesapin)
- Test coverage information in every commit and pull request.#5896 (alesapin)
- Cooperate with address sanitizer to support our custom allocators (`Arena` and `ArenaWithFreeLists` ) for better debugging of "use-after-free" errors. #5728 (akuzm)
- Switch to **LLVM libunwind implementation** for C++ exception handling and for stack traces printing#4828 (Nikita Lapkov)
- Add two more warnings from -Weverything#5923 (alexey-milovidov)
- Allow to build ClickHouse with Memory Sanitizer. #3949 (alexey-milovidov)
- Fixed ubsan report about `bitTest` function in fuzz test. #5943 (alexey-milovidov)
- Docker: added possibility to init a ClickHouse instance which requires authentication.#5727 (Korviakov Andrey)
- Update librdkafka to version 1.1.0 #5872 (ivan)
- Add global timeout for integration tests and disable some of them in tests code.#5741 (alesapin)
- Fix some ThreadSanitizer failures. #5854 (akuzm)
- The `--no-undefined` option forces the linker to check all external names for existence while linking. It's very useful to

track real dependencies between libraries in the split build mode. #5855 (Ivan)

- Added performance test for #5797 #5914 (alexey-milovidov)
- Fixed compatibility with gcc-7. #5840 (alexey-milovidov)
- Added support for gcc-9. This fixes #5717 #5774 (alexey-milovidov)
- Fixed error when libunwind can be linked incorrectly. #5948 (alexey-milovidov)
- Fixed a few warnings found by PVS-Studio. #5921 (alexey-milovidov)
- Added initial support for clang-tidy static analyzer. #5806 (alexey-milovidov)
- Convert BSD/Linux endian macros( 'be64toh' and 'htobe64') to the Mac OS X equivalents #5785 (Fu Chen)
- Improved integration tests guide. #5796 (Vladimir Chebotarev)
- Fixing build at macosx + gcc9 #5822 (filimonov)
- Fix a hard-to-spot typo: aggreAGte -> aggregate. #5753 (akuzm)
- Fix freebsd build #5760 (proller)
- Add link to experimental YouTube channel to website #5845 (Ivan Blinkov)
- CMake: add option for coverage flags: WITH\_COVERAGE #5776 (proller)
- Fix initial size of some inline PODArray's. #5787 (akuzm)
- clickhouse-server.postinst: fix os detection for centos 6 #5788 (proller)
- Added Arch linux package generation. #5719 (Vladimir Chebotarev)
- Split Common/config.h by libs (dbms) #5715 (proller)
- Fixes for "Arcadia" build platform #5795 (proller)
- Fixes for unconventional build (gcc9, no submodules) #5792 (proller)
- Require explicit type in unalignedStore because it was proven to be bug-prone #5791 (akuzm)
- Fixes MacOS build #5830 (filimonov)
- Performance test concerning the new JIT feature with bigger dataset, as requested here #5263 #5887 (Guillaume Tassery)
- Run stateful tests in stress test 12693e568722f11e19859742f56428455501fd2a (alesapin)

#### BACKWARD INCOMPATIBLE CHANGE

- Kafka is broken in this version.
- Enable adaptive\_index\_granularity = 10MB by default for new MergeTree tables. If you created new MergeTree tables on version 19.11+, downgrade to versions prior to 19.6 will be impossible. #5628 (alesapin)
- Removed obsolete undocumented embedded dictionaries that were used by Yandex.Metrica. The functions OSIn , SEIn , OSToRoot , SEToRoot , OSHierarchy , SEHierarchy are no longer available. If you are using these functions, write email to clickhouse-feedback@yandex-team.com. Note: at the last moment we decided to keep these functions for a while. #5780 (alexey-milovidov)

## ClickHouse release 19.10

### ClickHouse release 19.10.1.5, 2019-07-12

#### NEW FEATURE

- Add new column codec: T64 . Made for (U)IntX/EnumX/Data(Time)/DecimalX columns. It should be good for columns with constant or small range values. Codec itself allows enlarge or shrink data type without re-compression. #5557 (Artem Zuikov)

- Add database engine MySQL that allow to view all the tables in remote MySQL server #5599 (Winter Zhang)
- bitmapContains implementation. It's 2x faster than bitmapHasAny if the second bitmap contains one element. #5535 (Zhichang Yu)
- Support for crc32 function (with behaviour exactly as in MySQL or PHP). Do not use it if you need a hash function. #5661 (Remen Ivan)
- Implemented SYSTEM START/STOP DISTRIBUTED SENDS queries to control asynchronous inserts into Distributed tables. #4935 (Winter Zhang)

#### BUG FIX

- Ignore query execution limits and max parts size for merge limits while executing mutations #5659 (Anton Popov)
- Fix bug which may lead to deduplication of normal blocks (extremely rare) and insertion of duplicate blocks (more often). #5549 (alesapin)
- Fix of function arrayEnumerateUniqRanked for arguments with empty arrays #5559 (proller)
- Don't subscribe to Kafka topics without intent to poll any messages. #5698 (ivan)
- Make setting join\_use\_nulls get no effect for types that cannot be inside Nullable #5700 (Olga Khvostikova)
- Fixed Incorrect size of index granularity errors #5720 (coraxster)
- Fix Float to Decimal convert overflow #5607 (coraxster)
- Flush buffer when WriteBufferFromHDFS 's destructor is called. This fixes writing into HDFS. #5684 (Xindong Peng)

#### IMPROVEMENT

- Treat empty cells in CSV as default values when the setting input\_format\_defaults\_for\_omitted\_fields is enabled. #5625 (akuzm)
- Non-blocking loading of external dictionaries. #5567 (Vitaly Baranov)
- Network timeouts can be dynamically changed for already established connections according to the settings. #4558 (Konstantin Podshumok)
- Using "public\_suffix\_list" for functions firstSignificantSubdomain, cutToFirstSignificantSubdomain. It's using a perfect hash table generated by gperf with a list generated from the file: [https://publicsuffix.org/list/public\\_suffix\\_list.dat](https://publicsuffix.org/list/public_suffix_list.dat). (for example, now we recognize the domain ac.uk as non-significant). #5030 (Guillaume Tassery)
- Adopted IPv6 data type in system tables; unified client info columns in system.processes and system.query\_log #5640 (alexey-milovidov)
- Using sessions for connections with MySQL compatibility protocol. #5476#5646 (Yuriy Baranov)
- Support more ALTER queries ON CLUSTER. #5593 #5613 (sundyli)
- Support <logger> section in clickhouse-local config file. #5540 (proller)
- Allow run query with remote table function in clickhouse-local #5627 (proller)

#### PERFORMANCE IMPROVEMENT

- Add the possibility to write the final mark at the end of MergeTree columns. It allows to avoid useless reads for keys that are out of table data range. It is enabled only if adaptive index granularity is in use. #5624 (alesapin)
- Improved performance of MergeTree tables on very slow filesystems by reducing number of stat syscalls. #5648 (alexey-milovidov)
- Fixed performance degradation in reading from MergeTree tables that was introduced in version 19.6. Fixes #5631. #5633 (alexey-milovidov)

#### BUILD/TESTING/PACKAGING IMPROVEMENT

- Implemented TestKeeper as an implementation of ZooKeeper interface used for testing #5643 (alexey-milovidov)

(levushkin aleksej)

- From now on `.sql` tests can be run isolated by server, in parallel, with random database. It allows to run them faster, add new tests with custom server configurations, and be sure that different tests doesn't affect each other. #5554 (Ivan)
- Remove `<name>` and `<metrics>` from performance tests #5672 (Olga Khvostikova)
- Fixed "select\_format" performance test for Pretty formats #5642 (alexey-milovidov)

## ClickHouse release 19.9

### ClickHouse release 19.9.3.31, 2019-07-05

#### BUG FIX

- Fix segfault in Delta codec which affects columns with values less than 32 bits size. The bug led to random memory corruption. #5786 (alesapin)
- Fix rare bug in checking of part with LowCardinality column. #5832 (alesapin)
- Fix segfault in TTL merge with non-physical columns in block. #5819 (Anton Popov)
- Fix potential infinite sleeping of low-priority queries. #5842 (alexey-milovidov)
- Fix how ClickHouse determines default time zone as UCT instead of UTC. #5828 (alexey-milovidov)
- Fix bug about executing distributed DROP/ALTER/TRUNCATE/OPTIMIZE ON CLUSTER queries on follower replica before leader replica. Now they will be executed directly on leader replica. #5757 (alesapin)
- Fix race condition, which cause that some queries may not appear in query\_log instantly after SYSTEM FLUSH LOGS query. #5685 (Anton Popov)
- Added missing support for constant arguments to evalMLModel function. #5820 (alexey-milovidov)

### ClickHouse release 19.9.2.4, 2019-06-24

#### NEW FEATURE

- Print information about frozen parts in system.parts table. #5471 (proller)
- Ask client password on clickhouse-client start on tty if not set in arguments #5092 (proller)
- Implement dictGet and dictGetOrDefault functions for Decimal types. #5394 (Artem Zuiakov)

#### IMPROVEMENT

- Debian init: Add service stop timeout #5522 (proller)
- Add setting forbidden by default to create table with suspicious types for LowCardinality #5448 (Olga Khvostikova)
- Regression functions return model weights when not used as State in function evalMLMethod . #5411 (Quid37)
- Rename and improve regression methods. #5492 (Quid37)
- Clearer interfaces of string searchers. #5586 (Danila Kutenin)

#### BUG FIX

- Fix potential data loss in Kafka #5445 (Ivan)
- Fix potential infinite loop in PrettySpace format when called with zero columns #5560 (Olga Khvostikova)
- Fixed UInt32 overflow bug in linear models. Allow eval ML model for non-const model argument. #5516 (Nikolai Kochetov)
- ALTER TABLE ... DROP INDEX IF EXISTS ... should not raise an exception if provided index does not exist #5524 (Gleb Novikov)
- Fix segfault with bitmapHasAny in scalar subquery #5528 (Zhichang Yu)

- Fixed error when replication connection pool doesn't retry to resolve host, even when DNS cache was dropped #5534 ([alesapin](#))
- Fixed ALTER ... MODIFY TTL on ReplicatedMergeTree. #5539 ([Anton Popov](#))
- Fix INSERT into Distributed table with MATERIALIZED column #5429 ([Azat Khuzhin](#))
- Fix bad alloc when truncate Join storage #5437 ([TCeason](#))
- In recent versions of package tzdata some of files are symlinks now. The current mechanism for detecting default timezone gets broken and gives wrong names for some timezones. Now at least we force the timezone name to the contents of TZ if provided. #5443 ([Ivan](#))
- Fix some extremely rare cases with MultiVolnitsky searcher when the constant needles in sum are at least 16KB long. The algorithm missed or overwrote the previous results which can lead to the incorrect result of multiSearchAny . #5588 ([Danila Kutenin](#))
- Fix the issue when settings for ExternalData requests couldn't use ClickHouse settings. Also, for now, settings date\_time\_input\_format and low\_cardinality\_allow\_in\_native\_format cannot be used because of the ambiguity of names (in external data it can be interpreted as table format and in the query it can be a setting). #5455 ([Danila Kutenin](#))
- Fix bug when parts were removed only from FS without dropping them from Zookeeper. #5520 ([alesapin](#))
- Remove debug logging from MySQL protocol #5478 ([alexey-milovidov](#))
- Skip ZNONODE during DDL query processing #5489 ([Azat Khuzhin](#))
- Fix mix UNION ALL result column type. There were cases with inconsistent data and column types of resulting columns. #5503 ([Artem Zuikov](#))
- Throw an exception on wrong integers in dictGetT functions instead of crash. #5446 ([Artem Zuikov](#))
- Fix wrong element\_count and load\_factor for hashed dictionary in system.dictionaries table. #5440 ([Azat Khuzhin](#))

#### BUILD/TESTING/PACKAGING IMPROVEMENT

- Fixed build without Brotli HTTP compression support (ENABLE\_BROTLI=OFF cmake variable). #5521 ([Anton Yuzhaninov](#))
- Include roaring.h as roaring/roaring.h #5523 ([Orivej Desh](#))
- Fix gcc9 warnings in hyperscan (#line directive is evil!) #5546 ([Danila Kutenin](#))
- Fix all warnings when compiling with gcc-9. Fix some contrib issues. Fix gcc9 ICE and submit it to bugzilla #5498 ([Danila Kutenin](#))
- Fixed linking with lld #5477 ([alexey-milovidov](#))
- Remove unused specializations in dictionaries #5452 ([Artem Zuikov](#))
- Improvement performance tests for formatting and parsing tables for different types of files #5497 ([Olga Khvostikova](#))
- Fixes for parallel test run #5506 ([proller](#))
- Docker: use configs from clickhouse-test #5531 ([proller](#))
- Fix compile for FreeBSD #5447 ([proller](#))
- Upgrade boost to 1.70 #5570 ([proller](#))
- Fix build clickhouse as submodule #5574 ([proller](#))
- Improve JSONExtract performance tests #5444 ([Vitaly Baranov](#))

## ClickHouse release 19.8

**ClickHouse release 19.8.3.8, 2019-06-11**

#### NEW FEATURES

- Added functions to work with JSON #4686 (hc) #5124. (Vitaly Baranov)
- Add a function basename, with a similar behaviour to a basename function, which exists in a lot of languages (os.path.basename in python, basename in PHP, etc...). Work with both an UNIX-like path or a Windows path #5136 (Guillaume Tassery)
- Added LIMIT n, m BY or LIMIT m OFFSET n BY syntax to set offset of n for LIMIT BY clause. #5138 (Anton Popov)
- Added new data type SimpleAggregateFunction , which allows to have columns with light aggregation in an AggregatingMergeTree . This can only be used with simple functions like any , anyLast , sum , min , max . #4629 (Boris Granveaud)
- Added support for non-constant arguments in function ngramDistance #5198 (Danila Kutenin)
- Added functions skewPop , skewSamp , kurtPop and kurtSamp to compute for sequence skewness, sample skewness, kurtosis and sample kurtosis respectively. #5200 (hc)
- Support rename operation for MaterializeView storage. #5209 (Guillaume Tassery)
- Added server which allows connecting to ClickHouse using MySQL client. #4715 (Yuriy Baranov)
- Add toDecimal\*OrZero and toDecimal\*OrNull functions. #5291 (Artem Zuikov)
- Support Decimal types in functions: quantile , quantiles , median , quantileExactWeighted , quantilesExactWeighted , medianExactWeighted. #5304 (Artem Zuikov)
- Added toValidUTF8 function, which replaces all invalid UTF-8 characters by replacement character ♦ (U+FFFD). #5322 (Danila Kutenin)
- Added format function. Formatting constant pattern (simplified Python format pattern) with the strings listed in the arguments. #5330 (Danila Kutenin)
- Added system.detached\_parts table containing information about detached parts of MergeTree tables. #5353 (akuzm)
- Added ngramSearch function to calculate the non-symmetric difference between needle and haystack. #5418#5422 (Danila Kutenin)
- Implementation of basic machine learning methods (stochastic linear regression and logistic regression) using aggregate functions interface. Has different strategies for updating model weights (simple gradient descent, momentum method, Nesterov method). Also supports mini-batches of custom size. #4943 (Quid37)
- Implementation of geohashEncode and geohashDecode functions. #5003 (Vasily Nemkov)
- Added aggregate function timeSeriesGroupSum , which can aggregate different time series that sample timestamp not alignment. It will use linear interpolation between two sample timestamp and then sum time-series together. Added aggregate function timeSeriesGroupRateSum , which calculates the rate of time-series and then sum rates together. #4542 (Yangkuan Liu)
- Added functions IPv4CIDRtoIPv4Range and IPv6CIDRtoIPv6Range to calculate the lower and higher bounds for an IP in the subnet using a CIDR. #5095 (Guillaume Tassery)
- Add a X-ClickHouse-Summary header when we send a query using HTTP with enabled setting send\_progress\_in\_http\_headers . Return the usual information of X-ClickHouse-Progress, with additional information like how many rows and bytes were inserted in the query. #5116 (Guillaume Tassery)

## IMPROVEMENTS

- Added max\_parts\_in\_total setting for MergeTree family of tables (default: 100 000) that prevents unsafe specification of partition key #5166. #5171 (alexey-milovidov)
- clickhouse-obfuscator : derive seed for individual columns by combining initial seed with column name, not column position. This is intended to transform datasets with multiple related tables, so that tables will remain JOINable after transformation. #5178 (alexey-milovidov)
- Added functions JSONExtractRaw , JSONExtractKeyAndValues . Renamed functions jsonExtract<type> to JSONExtract<type> . When something goes wrong these functions return the correspondent values, not NULL .

Modified function `JSONExtract`, now it gets the return type from its last parameter and doesn't inject nullables.

Implemented fallback to RapidJSON in case AVX2 instructions are not available. Simdjson library updated to a new version. #5235 (Vitaly Baranov)

- Now `if` and `multilf` functions don't rely on the condition's `Nullable`, but rely on the branches for sql compatibility. #5238 (Jian Wu)
  - In predicate now generates `Null` result from `Null` input like the `Equal` function. #5152 (Jian Wu)
- Check the time limit every (`flush_interval / poll_timeout`) number of rows from Kafka. This allows to break the reading from Kafka consumer more frequently and to check the time limits for the top-level streams #5249 (Ivan)
- Link rdkafka with bundled SASL. It should allow to use SASL SCRAM authentication #5253 (Ivan)
- Batched version of RowRefList for ALL JOINS. #5267 (Artem Zuikov)
- clickhouse-server: more informative listen error messages. #5268 (proller)
- Support dictionaries in clickhouse-copier for functions in `<sharding_key>` #5270 (proller)
- Add new setting `kafka_commit_every_batch` to regulate Kafka committing policy. It allows to set commit mode: after every batch of messages is handled, or after the whole block is written to the storage. It's a trade-off between losing some messages or reading them twice in some extreme situations. #5308 (Ivan)
- Make `windowFunnel` support other Unsigned Integer Types. #5320 (sundyli)
- Allow to shadow virtual column `_table` in Merge engine. #5325 (Ivan)
- Make `sequenceMatch` aggregate functions support other unsigned Integer types #5339 (sundyli)
- Better error messages if checksum mismatch is most likely caused by hardware failures. #5355 (alexey-milovidov)
- Check that underlying tables support sampling for `StorageMerge` #5366 (Ivan)
- Close MySQL connections after their usage in external dictionaries. It is related to issue #893 #5395 (Clément Rodriguez)
- Improvements of MySQL Wire Protocol. Changed name of format to MySQLWire. Using RAI<sup>I</sup> for calling `RSA_free`. Disabling SSL if context cannot be created. #5419 (Yuriy Baranov)
- clickhouse-client: allow to run with unaccessible history file (read-only, no disk space, file is directory, ...) #5431 (proller)
- Respect query settings in asynchronous INSERTs into Distributed tables. #4936 (TCeason)
- Renamed functions `leastSqr` to `simpleLinearRegression`, `LinearRegression` to `linearRegression`, `LogisticRegression` to `logisticRegression`. #5391 (Nikolai Kochetov)

## PERFORMANCE IMPROVEMENTS

- Parallelize processing of parts of non-replicated MergeTree tables in ALTER MODIFY query. #4639 (Ivan Kush)
- Optimizations in regular expressions extraction. #5193 #5191 (Danila Kutenin)
- Do not add right join key column to join result if it's used only in join on section #5260 (Artem Zuikov)
- Freeze the Kafka buffer after first empty response. It avoids multiple invocations of `ReadBuffer::next()` for empty result in some row-parsing streams. #5283 (Ivan)
  - concat function optimization for multiple arguments. #5357 (Danila Kutenin)
- Query optimisation. Allow push down IN statement while rewriting comma/cross join into inner one. #5396 (Artem Zuikov)
- Upgrade our LZ4 implementation with reference one to have faster decompression. #5070 (Danila Kutenin)
- Implemented MSD radix sort (based on kxsort), and partial sorting. #5129 (Evgenii Pravda)

## BUG FIXES

- Fix push require columns with join #5192 (Winter Zhang)

- Fixed bug, when ClickHouse is run by systemd, the command `sudo service clickhouse-server forcerestart` was not working as expected. [#5204 \(proller\)](#)
- Fix http error codes in DataPartsExchange (interserver http server on 9009 port always returned code 200, even on errors). [#5216 \(proller\)](#)
- Fix SimpleAggregateFunction for String longer than MAX\_SMALL\_STRING\_SIZE [#5311 \(Azat Khuzhin\)](#)
- Fix error for `Decimal` to `Nullable(Decimal)` conversion in IN. Support other Decimal to Decimal conversions (including different scales). [#5350 \(Artem Zuikov\)](#)
- Fixed FPU clobbering in simdjson library that lead to wrong calculation of `uniqHLL` and `uniqCombined` aggregate function and math functions such as `log`. [#5354 \(alexey-milovidov\)](#)
- Fixed handling mixed const/nonconst cases in JSON functions. [#5435 \(Vitaly Baranov\)](#)
- Fix `retention` function. Now all conditions that satisfy in a row of data are added to the data state. [#5119 \(小路\)](#)
- Fix result type for `quantileExact` with Decimals. [#5304 \(Artem Zuikov\)](#)

## DOCUMENTATION

- Translate documentation for `CollapsingMergeTree` to chinese. [#5168 \(张风啸\)](#)
- Translate some documentation about table engines to chinese. [#5134 #5328 \(never lee\)](#)

## BUILD/TESTING/PACKAGING IMPROVEMENTS

- Fix some sanitizer reports that show probable use-after-free. [#5139 #5143 #5393 \(ivan\)](#)
- Move performance tests out of separate directories for convenience. [#5158 \(alexey-milovidov\)](#)
- Fix incorrect performance tests. [#5255 \(alesapin\)](#)
- Added a tool to calculate checksums caused by bit flips to debug hardware issues. [#5334 \(alexey-milovidov\)](#)
- Make runner script more usable. [#5340 #5360 \(filimonov\)](#)
- Add small instruction how to write performance tests. [#5408 \(alesapin\)](#)
- Add ability to make substitutions in create, fill and drop query in performance tests. [#5367 \(Olga Khvostikova\)](#)

## ClickHouse release 19.7

### ClickHouse release 19.7.5.29, 2019-07-05

#### BUG FIX

- Fix performance regression in some queries with JOIN. [#5192 \(Winter Zhang\)](#)

### ClickHouse release 19.7.5.27, 2019-06-09

#### NEW FEATURES

- Added bitmap related functions `bitmapHasAny` and `bitmapHasAll` analogous to `hasAny` and `hasAll` functions for arrays. [#5279 \(Sergi Vladynkin\)](#)

#### BUG FIXES

- Fix segfault on `minmax` INDEX with Null value. [#5246 \(Nikita Vasilev\)](#)
- Mark all input columns in LIMIT BY as required output. It fixes 'Not found column' error in some distributed queries. [#5407 \(Constantin S. Pan\)](#)
- Fix "Column '0' already exists" error in `SELECT .. PREWHERE` on column with DEFAULT [#5397 \(proller\)](#)
- Fix `ALTER MODIFY TTL` query on `ReplicatedMergeTree`. [#5539 \(Anton Popov\)](#)
- Don't crash the server when Kafka consumers have failed to start. [#5285 \(ivan\)](#)

- Fixed bitmap functions produce wrong result. #5359 (Andy Yang)
- Fix element\_count for hashed dictionary (do not include duplicates) #5440 (Azat Khuzhin)
- Use contents of environment variable TZ as the name for timezone. It helps to correctly detect default timezone in some cases. #5443 (Ivan)
- Do not try to convert integers in dictGetT functions, because it doesn't work correctly. Throw an exception instead. #5446 (Artem Zuikov)
- Fix settings in ExternalData HTTP request. #5455 (Danila Kutenin)
- Fix bug when parts were removed only from FS without dropping them from Zookeeper. #5520 (alesapin)
- Fix segmentation fault in bitmapHasAny function. #5528 (Zhichang Yu)
- Fixed error when replication connection pool doesn't retry to resolve host, even when DNS cache was dropped. #5534 (alesapin)
- Fixed DROP INDEX IF EXISTS query. Now ALTER TABLE ... DROP INDEX IF EXISTS ... query doesn't raise an exception if provided index does not exist. #5524 (Gleb Novikov)
- Fix union all supertype column. There were cases with inconsistent data and column types of resulting columns. #5503 (Artem Zuikov)
- Skip ZNONODE during DDL query processing. Before if another node removes the znode in task queue, the one that did not process it, but already get list of children, will terminate the DDLWorker thread. #5489 (Azat Khuzhin)
- Fix INSERT into Distributed() table with MATERIALIZED column. #5429 (Azat Khuzhin)

## ClickHouse release 19.7.3.9, 2019-05-30

### NEW FEATURES

- Allow to limit the range of a setting that can be specified by user. These constraints can be set up in user settings profile. #4931 (Vitaly Baranov)
- Add a second version of the function groupUniqArray with an optional max\_size parameter that limits the size of the resulting array. This behavior is similar to groupArray(max\_size)(x) function. #5026 (Guillaume Tassery)
- For TSVWithNames/CSVWithNames input file formats, column order can now be determined from file header. This is controlled by input\_format\_with\_names\_use\_header parameter. #5081 (Alexander)

### BUG FIXES

- Crash with uncompressed\_cache + JOIN during merge (#5197) #5133 (Danila Kutenin)
- Segmentation fault on a clickhouse-client query to system tables. #5066 #5127 (Ivan)
- Data loss on heavy load via KafkaEngine (#4736) #5080 (Ivan)
- Fixed very rare data race condition that could happen when executing a query with UNION ALL involving at least two SELECTs from system.columns, system.tables, system.parts, system.parts\_tables or tables of Merge family and performing ALTER of columns of the related tables concurrently. #5189 (alexey-milovidov)

### PERFORMANCE IMPROVEMENTS

- Use radix sort for sorting by single numeric column in ORDER BY without LIMIT. #5106, #4439 (Evgenii Pravda, alexey-milovidov)

### DOCUMENTATION

- Translate documentation for some table engines to Chinese. #5107, #5094, #5087 (张风啸), #5068 (never lee)

### BUILD/TESTING/PACKAGING IMPROVEMENTS

- Print UTF-8 characters properly in clickhouse-test. #5084 (alexey-milovidov)
- Add command line parameter for clickhouse-client to always load suggestion data. #5102 (alexey-milovidov)

- Resolve some of PVS-Studio warnings. #5082 (alexey-milovidov)
- Update LZ4 #5040 (Danila Kutenin)
- Add gperf to build requirements for upcoming pull request #5030. #5110 (proller)

## ClickHouse release 19.6

### ClickHouse release 19.6.3.18, 2019-06-13

#### BUG FIXES

- Fixed IN condition pushdown for queries from table functions mysql and odbc and corresponding table engines. This fixes #3540 and #2384. #5313 (alexey-milovidov)
- Fix deadlock in Zookeeper. #5297 (github1youlc)
- Allow quoted decimals in CSV. #5284 (Artem Zuikov)
- Disallow conversion from float Inf/NaN into Decimals (throw exception). #5282 (Artem Zuikov)
- Fix data race in rename query. #5247 (Winter Zhang)
- Temporarily disable LFAlloc. Usage of LFAlloc might lead to a lot of MAP\_FAILED in allocating UncompressedCache and in a result to crashes of queries at high loaded servers. cfdba93(Danila Kutenin)

### ClickHouse release 19.6.2.11, 2019-05-13

#### NEW FEATURES

- TTL expressions for columns and tables. #4212 (Anton Popov)
- Added support for brotli compression for HTTP responses (Accept-Encoding: br) #4388 (Mikhail)
- Added new function isValidUTF8 for checking whether a set of bytes is correctly utf-8 encoded. #4934 (Danila Kutenin)
- Add new load balancing policy first\_or\_random which sends queries to the first specified host and if it's inaccessible send queries to random hosts of shard. Useful for cross-replication topology setups. #5012 (nvartolomei)

#### EXPERIMENTAL FEATURES

- Add setting index\_granularity\_bytes (adaptive index granularity) for MergeTree\* tables family. #4826 (alesapin)

#### IMPROVEMENTS

- Added support for non-constant and negative size and length arguments for function substringUTF8 . #4989 (alexey-milovidov)
- Disable push-down to right table in left join, left table in right join, and both tables in full join. This fixes wrong JOIN results in some cases. #4846 (Ivan)
- clickhouse-copier : auto upload task configuration from --task-file option #4876 (proller)
- Added typos handler for storage factory and table functions factory. #4891 (Danila Kutenin)
- Support asterisks and qualified asterisks for multiple joins without subqueries #4898 (Artem Zuikov)
- Make missing column error message more user friendly. #4915 (Artem Zuikov)

#### PERFORMANCE IMPROVEMENTS

- Significant speedup of ASOF JOIN #4924 (Martijn Bakker)

#### BACKWARD INCOMPATIBLE CHANGES

- HTTP header Query-Id was renamed to X-ClickHouse-Query-Id for consistency. #4972 (Mikhail)

#### BUG FIXES

- Fixed potential null pointer dereference in `clickhouse-copier`. #4900 (proller)
- Fixed error on query with JOIN + ARRAY JOIN#4938 (Artem Zuikov)
- Fixed hanging on start of the server when a dictionary depends on another dictionary via a database with engine=Dictionary. #4962 (Vitaly Baranov)
- Partially fix distributed\_product\_mode = local. It's possible to allow columns of local tables in where/having/order by/... via table aliases. Throw exception if table does not have alias. There's not possible to access to the columns without table aliases yet. #4986 (Artem Zuikov)
- Fix potentially wrong result for `SELECT DISTINCT` with JOIN #5001 (Artem Zuikov)
- Fixed very rare data race condition that could happen when executing a query with UNION ALL involving at least two SELECTs from `system.columns`, `system.tables`, `system.parts`, `system.parts_tables` or tables of Merge family and performing ALTER of columns of the related tables concurrently. #5189 (alexey-milovidov)

#### BUILD/TESTING/PACKAGING IMPROVEMENTS

- Fixed test failures when running `clickhouse-server` on different host#4713 (Vasily Nemkov)
- `clickhouse-test`: Disable color control sequences in non tty environment.#4937 (alesapin)
- `clickhouse-test`: Allow use any test database (remove `test.` qualification where it possible) #5008 (proller)
- Fix ubsan errors #5037 (Vitaly Baranov)
- Yandex LFAalloc was added to ClickHouse to allocate MarkCache and UncompressedCache data in different ways to catch segfaults more reliable #4995 (Danila Kutenin)
- Python util to help with backports and changelogs.#4949 (Ivan)

## ClickHouse release 19.5

### ClickHouse release 19.5.4.22, 2019-05-13

#### BUG FIXES

- Fixed possible crash in bitmap\* functions#5220 #5228 (Andy Yang)
- Fixed very rare data race condition that could happen when executing a query with UNION ALL involving at least two SELECTs from `system.columns`, `system.tables`, `system.parts`, `system.parts_tables` or tables of Merge family and performing ALTER of columns of the related tables concurrently. #5189 (alexey-milovidov)
- Fixed error Set for IN is not created yet in case of using single LowCardinality column in the left part of IN . This error happened if LowCardinality column was the part of primary key. #5031 #5154 (Nikolai Kochetov)
- Modification of retention function: If a row satisfies both the first and NTH condition, only the first satisfied condition is added to the data state. Now all conditions that satisfy in a row of data are added to the data state. #5119 (小路)

### ClickHouse release 19.5.3.8, 2019-04-18

#### BUG FIXES

- Fixed type of setting `max_partitions_per_insert_block` from boolean to UInt64. #5028 (Mohammad Hossein Sekhavat)

### ClickHouse release 19.5.2.6, 2019-04-15

#### NEW FEATURES

- Hyperscan multiple regular expression matching was added (functions `multiMatchAny` , `multiMatchAnyIndex` , `multiFuzzyMatchAny` , `multiFuzzyMatchAnyIndex` ). #4780, #4841 (Danila Kutenin)
- `multiSearchFirstPosition` function was added. #4780 (Danila Kutenin)
- Implement the predefined expression filter per row for tables. #4792 (Ivan)

- A new type of data skipping indices based on bloom filters (can be used for equal , in and like functions). #4499 (Nikita Vasilev)
- Added ASOF JOIN which allows to run queries that join to the most recent value known #4774 #4867 #4863 #4875 (Martijn Bakker, Artem Zuikov)
- Rewrite multiple COMMA JOIN to CROSS JOIN . Then rewrite them to INNER JOIN if possible. #4661 (Artem Zuikov)

## IMPROVEMENT

- `topK` and `topKWeighted` now supports custom `loadFactor` (fixes issue #4252). #4634 (Kirill Danshin)
- Allow to use `parallel_replicas_count > 1` even for tables without sampling (the setting is simply ignored for them). In previous versions it was lead to exception. #4637 (Alexey Elymanov)
- Support for `CREATE OR REPLACE VIEW` . Allow to create a view or set a new definition in a single statement #4654 (Boris Granveaud)
- Buffer table engine now supports `PREWHERE` . #4671 (Yangkuan Liu)
- Add ability to start replicated table without metadata in zookeeper in `readonly` mode. #4691 (alesapin)
- Fixed flicker of progress bar in clickhouse-client. The issue was most noticeable when using `FORMAT Null` with streaming queries. #4811 (alexey-milovidov)
- Allow to disable functions with `hyperscan` library on per user basis to limit potentially excessive and uncontrolled resource usage. #4816 (alexey-milovidov)
- Add version number logging in all errors. #4824 (proller)
- Added restriction to the `multiMatch` functions which requires string size to fit into `unsigned int` . Also added the number of arguments limit to the `multiSearch` functions. #4834 (Danila Kutenin)
- Improved usage of scratch space and error handling in Hyperscan. #4866 (Danila Kutenin)
- Fill `system.graphite_detentions` from a table config of `*GraphiteMergeTree` engine tables. #4584 (Mikhail f. Shiryaev)
- Rename `trigramDistance` function to `ngramDistance` and add more functions with `CASEINSENSITIVE` and `UTF` . #4602 (Danila Kutenin)
- Improved data skipping indices calculation. #4640 (Nikita Vasilev)
- Keep ordinary, `DEFAULT` , `MATERIALIZED` and `ALIAS` columns in a single list (fixes issue #2867). #4707 (Alex Zatelepin)

## BUG FIX

- Avoid `std::terminate` in case of memory allocation failure. Now `std::bad_alloc` exception is thrown as expected. #4665 (alexey-milovidov)
- Fixes capnproto reading from buffer. Sometimes files wasn't loaded successfully by HTTP. #4674 (Vladislav)
- Fix error `Unknown log entry type: 0` after `OPTIMIZE TABLE FINAL` query. #4683 (Amos Bird)
- Wrong arguments to `hasAny` or `hasAll` functions may lead to segfault. #4698 (alexey-milovidov)
- Deadlock may happen while executing `DROP DATABASE dictionary` query. #4701 (alexey-milovidov)
- Fix undefined behavior in `median` and `quantile` functions. #4702 (hc2)
- Fix compression level detection when `network_compression_method` in lowercase. Broken in v19.1. #4706 (proller)
- Fixed ignorance of `<timezone>UTC</timezone>` setting (fixes issue #4658). #4718 (proller)
- Fix histogram function behaviour with Distributed tables. #4741 (olegkv)
- Fixed tsan report `destroy` of a locked mutex . #4742 (alexey-milovidov)
- Fixed TSan report on shutdown due to race condition in system logs usage. Fixed potential use-after-free on shutdown when `part_log` is enabled. #4758 (alexey-milovidov)

- Fix recheck parts in `ReplicatedMergeTreeAlterThread` in case of error. #4772 (Nikolai Kochetov)
- Arithmetic operations on intermediate aggregate function states were not working for constant arguments (such as subquery results). #4776 (alexey-milovidov)
- Always backquote column names in metadata. Otherwise it's impossible to create a table with column named `index` (server won't restart due to malformed `ATTACH` query in metadata). #4782 (alexey-milovidov)
- Fix crash in `ALTER ... MODIFY ORDER BY` on Distributed table. #4790 (TCeason)
- Fix segfault in `JOIN ON` with enabled `enable_optimize_predicate_expression`. #4794 (Winter Zhang)
- Fix bug with adding an extraneous row after consuming a protobuf message from Kafka. #4808 (Vitaly Baranov)
- Fix crash of `JOIN` on not-nullable vs nullable column. Fix `NULLs` in right keys in `ANY JOIN + join_use_nulls`. #4815 (Artem Zuikov)
- Fix segmentation fault in `clickhouse-copier`. #4835 (proller)
- Fixed race condition in `SELECT` from `system.tables` if the table is renamed or altered concurrently. #4836 (alexey-milovidov)
- Fixed data race when fetching data part that is already obsolete. #4839 (alexey-milovidov)
- Fixed rare data race that can happen during `RENAME` table of MergeTree family. #4844 (alexey-milovidov)
- Fixed segmentation fault in function `arrayIntersect`. Segmentation fault could happen if function was called with mixed constant and ordinary arguments. #4847 (Lixiang Qian)
- Fixed reading from `Array(LowCardinality)` column in rare case when column contained a long sequence of empty arrays. #4850 (Nikolai Kochetov)
- Fix crash in `FULL/RIGHT JOIN` when we joining on nullable vs not nullable. #4855 (Artem Zuikov)
- Fix `No message received` exception while fetching parts between replicas. #4856 (alesapin)
- Fixed `arrayIntersect` function wrong result in case of several repeated values in single array. #4871 (Nikolai Kochetov)
- Fix a race condition during concurrent `ALTER COLUMN` queries that could lead to a server crash (fixes issue #3421). #4592 (Alex Zatelepin)
- Fix incorrect result in `FULL/RIGHT JOIN` with const column. #4723 (Artem Zuikov)
- Fix duplicates in `GLOBAL JOIN` with asterisk. #4705 (Artem Zuikov)
- Fix parameter deduction in `ALTER MODIFY` of column `CODEC` when column type is not specified. #4883 (alesapin)
- Functions `cutQueryStringAndFragment()` and `queryStringAndFragment()` now works correctly when `URL` contains a fragment and no query. #4894 (Vitaly Baranov)
- Fix rare bug when setting `min_bytes_to_use_direct_io` is greater than zero, which occurs when thread have to seek backward in column file. #4897 (alesapin)
- Fix wrong argument types for aggregate functions with `LowCardinality` arguments (fixes issue #4919). #4922 (Nikolai Kochetov)
- Fix wrong name qualification in `GLOBAL JOIN`. #4969 (Artem Zuikov)
- Fix function `toISOWeek` result for year 1970. #4988 (alexey-milovidov)
- Fix `DROP`, `TRUNCATE` and `OPTIMIZE` queries duplication, when executed on `ON CLUSTER` for `ReplicatedMergeTree*` tables family. #4991 (alesapin)

#### BACKWARD INCOMPATIBLE CHANGE

- Rename setting `insert_sample_with_metadata` to setting `input_format_defaults_for_omitted_fields`. #4771 (Artem Zuikov)
- Added setting `max_partitions_per_insert_block` (with value 100 by default). If inserted block contains larger number of partitions, an exception is thrown. Set it to 0 if you want to remove the limit (not recommended). #4845 (alexey-milovidov)

- Multi-search functions were renamed (`multiPosition` to `multiSearchAllPositions`, `multiSearch` to `multiSearchAny`, `firstMatch` to `multiSearchFirstIndex`). [#4780 \(Danila Kutenin\)](#)

#### PERFORMANCE IMPROVEMENT

- Optimize Volnitsky searcher by inlining, giving about 5-10% search improvement for queries with many needles or many similar bigrams. [#4862 \(Danila Kutenin\)](#)
- Fix performance issue when setting `use_uncompressed_cache` is greater than zero, which appeared when all read data contained in cache. [#4913 \(alesapin\)](#)

#### BUILD/TESTING/PACKAGING IMPROVEMENT

- Hardening debug build: more granular memory mappings and ASLR; add memory protection for mark cache and index. This allows to find more memory stomping bugs in case when ASan and MSan cannot do it. [#4632 \(alexey-milovidov\)](#)
- Add support for cmake variables `ENABLE_PROTOBUF`, `ENABLE_PARQUET` and `ENABLE_BROTLI` which allows to enable/disable the above features (same as we can do for librdkafka, mysql, etc). [#4669 \(Silviu Caragea\)](#)
- Add ability to print process list and stacktraces of all threads if some queries are hung after test run [#4675 \(alesapin\)](#)
- Add retries on `Connection loss` error in `clickhouse-test`. [#4682 \(alesapin\)](#)
- Add freebsd build with vagrant and build with thread sanitizer to packager script. [#4712 #4748 \(alesapin\)](#)
- Now user asked for password for user 'default' during installation. [#4725 \(proller\)](#)
- Suppress warning in `rdkafka` library. [#4740 \(alexey-milovidov\)](#)
- Allow ability to build without ssl. [#4750 \(proller\)](#)
- Add a way to launch `clickhouse-server` image from a custom user. [#4753 \(Mikhail f. Shiryaev\)](#)
- Upgrade contrib boost to 1.69. [#4793 \(proller\)](#)
- Disable usage of `mremap` when compiled with Thread Sanitizer. Surprisingly enough, TSan does not intercept `mremap` (though it does intercept `mmap`, `munmap`) that leads to false positives. Fixed TSan report in stateful tests. [#4859 \(alexey-milovidov\)](#)
- Add test checking using format schema via HTTP interface. [#4864 \(Vitaly Baranov\)](#)

### ClickHouse release 19.4

#### ClickHouse release 19.4.4.33, 2019-04-17

##### BUG FIXES

- Avoid `std::terminate` in case of memory allocation failure. Now `std::bad_alloc` exception is thrown as expected. [#4665 \(alexey-milovidov\)](#)
- Fixes capnproto reading from buffer. Sometimes files wasn't loaded successfully by HTTP. [#4674 \(Vladislav\)](#)
- Fix error `Unknown log entry type: 0` after `OPTIMIZE TABLE FINAL` query. [#4683 \(Amos Bird\)](#)
- Wrong arguments to `hasAny` or `hasAll` functions may lead to segfault. [#4698 \(alexey-milovidov\)](#)
- Deadlock may happen while executing `DROP DATABASE dictionary` query. [#4701 \(alexey-milovidov\)](#)
- Fix undefined behavior in `median` and `quantile` functions. [#4702 \(hc2\)](#)
- Fix compression level detection when `network_compression_method` in lowercase. Broken in v19.1. [#4706 \(proller\)](#)
- Fixed ignorance of `<timezone>UTC</timezone>` setting (fixes issue [#4658](#)). [#4718 \(proller\)](#)
- Fix `histogram` function behaviour with Distributed tables. [#4741 \(olegkv\)](#)
- Fixed tsan report destroy of a locked mutex. [#4742 \(alexey-milovidov\)](#)
- Fixed TSan report on shutdown due to race condition in system logs usage. Fixed potential use-after-free on

shutdown when part\_log is enabled. #4758 (alexey-milovidov)

- Fix recheck parts in `ReplicatedMergeTreeAlterThread` in case of error. #4772 (Nikolai Kochetov)
- Arithmetic operations on intermediate aggregate function states were not working for constant arguments (such as subquery results). #4776 (alexey-milovidov)
- Always backquote column names in metadata. Otherwise it's impossible to create a table with column named `index` (server won't restart due to malformed `ATTACH` query in metadata). #4782 (alexey-milovidov)
- Fix crash in `ALTER ... MODIFY ORDER BY` on Distributed table. #4790 (TCeason)
- Fix segfault in `JOIN ON` with enabled `enable_optimize_predicate_expression`. #4794 (Winter Zhang)
- Fix bug with adding an extraneous row after consuming a protobuf message from Kafka. #4808 (Vitaly Baranov)
- Fix segmentation fault in `clickhouse-copier`. #4835 (proller)
- Fixed race condition in `SELECT` from `system.tables` if the table is renamed or altered concurrently. #4836 (alexey-milovidov)
- Fixed data race when fetching data part that is already obsolete. #4839 (alexey-milovidov)
- Fixed rare data race that can happen during `RENAME` table of MergeTree family. #4844 (alexey-milovidov)
- Fixed segmentation fault in function `arrayIntersect`. Segmentation fault could happen if function was called with mixed constant and ordinary arguments. #4847 (Lixiang Qian)
- Fixed reading from `Array(LowCardinality)` column in rare case when column contained a long sequence of empty arrays. #4850 (Nikolai Kochetov)
- Fix `No message received` exception while fetching parts between replicas. #4856 (alesapin)
- Fixed `arrayIntersect` function wrong result in case of several repeated values in single array. #4871 (Nikolai Kochetov)
- Fix a race condition during concurrent `ALTER COLUMN` queries that could lead to a server crash (fixes issue #3421). #4592 (Alex Zatelepin)
- Fix parameter deduction in `ALTER MODIFY` of column `CODEC` when column type is not specified. #4883 (alesapin)
- Functions `cutQueryStringAndFragment()` and `queryStringAndFragment()` now works correctly when `URL` contains a fragment and no query. #4894 (Vitaly Baranov)
- Fix rare bug when setting `min_bytes_to_use_direct_io` is greater than zero, which occurs when thread have to seek backward in column file. #4897 (alesapin)
- Fix wrong argument types for aggregate functions with `LowCardinality` arguments (fixes issue #4919). #4922 (Nikolai Kochetov)
- Fix function `toISOWeek` result for year 1970. #4988 (alexey-milovidov)
- Fix `DROP`, `TRUNCATE` and `OPTIMIZE` queries duplication, when executed on `ON CLUSTER` for `ReplicatedMergeTree*` tables family. #4991 (alesapin)

## IMPROVEMENTS

- Keep ordinary, `DEFAULT`, `MATERIALIZED` and `ALIAS` columns in a single list (fixes issue #2867). #4707 (Alex Zatelepin)

## ClickHouse release 19.4.3.11, 2019-04-02

### BUG FIXES

- Fix crash in `FULL/RIGHT JOIN` when we joining on nullable vs not nullable. #4855 (Artem Zuikov)
- Fix segmentation fault in `clickhouse-copier`. #4835 (proller)

### BUILD/TESTING/PACKAGING IMPROVEMENT

- Add a way to launch `clickhouse-server` image from a custom user. #4753 (Mikhail f. Shiryaev)

## ClickHouse release 19.4.2.7, 2019-03-30

### BUG FIXES

- Fixed reading from `Array(LowCardinality)` column in rare case when column contained a long sequence of empty arrays. [#4850](#) ([Nikolai Kochetov](#))

## ClickHouse release 19.4.1.3, 2019-03-19

### BUG FIXES

- Fixed remote queries which contain both `LIMIT BY` and `LIMIT`. Previously, if `LIMIT BY` and `LIMIT` were used for remote query, `LIMIT` could happen before `LIMIT BY`, which led to too filtered result. [#4708](#) ([Constantin S. Pan](#))

## ClickHouse release 19.4.0.49, 2019-03-09

### NEW FEATURES

- Added full support for `Protobuf` format (input and output, nested data structures). [#4174](#) [#4493](#) ([Vitaly Baranov](#))
- Added bitmap functions with Roaring Bitmaps. [#4207](#) ([Andy Yang](#)) [#4568](#) ([Vitaly Baranov](#))
- Parquet format support. [#4448](#) ([proller](#))
- N-gram distance was added for fuzzy string comparison. It is similar to q-gram metrics in R language. [#4466](#) ([Danila Kutenin](#))
- Combine rules for graphite rollup from dedicated aggregation and retention patterns. [#4426](#) ([Mikhail f. Shiryaev](#))
- Added `max_execution_speed` and `max_execution_speed_bytes` to limit resource usage. Added `min_execution_speed_bytes` setting to complement the `min_execution_speed`. [#4430](#) ([Winter Zhang](#))
- Implemented function `flatten`. [#4555](#) [#4409](#) ([alexey-milovidov](#), [kzon](#))
- Added functions `arrayEnumerateDenseRanked` and `arrayEnumerateUniqRanked` (it's like `arrayEnumerateUniq` but allows to fine tune array depth to look inside multidimensional arrays). [#4475](#) ([proller](#)) [#4601](#) ([alexey-milovidov](#))
- Multiple JOINS with some restrictions: no asterisks, no complex aliases in ON/WHERE/GROUP BY/... [#4462](#) ([Artem Zuikov](#))

### BUG FIXES

- This release also contains all bug fixes from 19.3 and 19.1.
- Fixed bug in data skipping indices: order of granules after `INSERT` was incorrect. [#4407](#) ([Nikita Vasilev](#))
- Fixed `set_index` for `Nullable` and `LowCardinality` columns. Before it, `set_index` with `Nullable` or `LowCardinality` column led to error `Data type must be deserialized with multiple streams while selecting.` [#4594](#) ([Nikolai Kochetov](#))
- Correctly set `update_time` on full executable dictionary update. [#4551](#) ([Tema Novikov](#))
- Fix broken progress bar in 19.3. [#4627](#) ([filimonov](#))
- Fixed inconsistent values of `MemoryTracker` when memory region was shrunked, in certain cases. [#4619](#) ([alexey-milovidov](#))
- Fixed undefined behaviour in `ThreadPool`. [#4612](#) ([alexey-milovidov](#))
- Fixed a very rare crash with the message `mutex lock failed: Invalid argument` that could happen when a `MergeTree` table was dropped concurrently with a `SELECT`. [#4608](#) ([Alex Zatelepin](#))
- ODBC driver compatibility with `LowCardinality` data type. [#4381](#) ([proller](#))
- FreeBSD: Fixup for `AIOContextPool`: Found `io_event` with unknown id 0 error. [#4438](#) ([urgordeadbeef](#))
- `system.part_log` table was created regardless to configuration. [#4483](#) ([alexey-milovidov](#))
- Fix undefined behaviour in `dictIsIn` function for cache dictionaries. [#4515](#) ([alesapin](#))
- Fixed a deadlock when a `SELECT` query locks the same table multiple times (e.g. from different threads or when

executing multiple subqueries) and there is a concurrent DDL query. #4535 (Alex Zatelepin)

- Disable `compile_expressions` by default until we get own `llvm contrib` and can test it with `clang` and `asan`. #4579 (alesapin)
- Prevent `std::terminate` when `invalidate_query` for `clickhouse` external dictionary source has returned wrong resultset (empty or more than one row or more than one column). Fixed issue when the `invalidate_query` was performed every five seconds regardless to the lifetime. #4583 (alexey-milovidov)
- Avoid deadlock when the `invalidate_query` for a dictionary with `clickhouse` source was involving `system.dictionaries` table or `Dictionaries` database (rare case). #4599 (alexey-milovidov)
- Fixes for CROSS JOIN with empty WHERE. #4598 (Artem Zuikov)
- Fixed segfault in function "replicate" when constant argument is passed. #4603 (alexey-milovidov)
- Fix lambda function with predicate optimizer. #4408 (Winter Zhang)
- Multiple JOINs multiple fixes. #4595 (Artem Zuikov)

#### IMPROVEMENTS

- Support aliases in JOIN ON section for right table columns. #4412 (Artem Zuikov)
- Result of multiple JOINs need correct result names to be used in subselects. Replace flat aliases with source names in result. #4474 (Artem Zuikov)
- Improve push-down logic for joined statements. #4387 (Ivan)

#### PERFORMANCE IMPROVEMENTS

- Improved heuristics of "move to PREWHERE" optimization. #4405 (alexey-milovidov)
- Use proper lookup tables that uses HashTable's API for 8-bit and 16-bit keys. #4536 (Amos Bird)
- Improved performance of string comparison. #4564 (alexey-milovidov)
- Cleanup distributed DDL queue in a separate thread so that it doesn't slow down the main loop that processes distributed DDL tasks. #4502 (Alex Zatelepin)
- When `min_bytes_to_use_direct_io` is set to 1, not every file was opened with O\_DIRECT mode because the data size to read was sometimes underestimated by the size of one compressed block. #4526 (alexey-milovidov)

#### BUILD/TESTING/PACKAGING IMPROVEMENT

- Added support for clang-9 #4604 (alexey-milovidov)
- Fix wrong `__asm__` instructions (again) #4621 (Konstantin Podshumok)
- Add ability to specify settings for `clickhouse-performance-test` from command line. #4437 (alesapin)
- Add dictionaries tests to integration tests. #4477 (alesapin)
- Added queries from the benchmark on the website to automated performance tests. #4496 (alexey-milovidov)
- `xxhash.h` does not exist in external lz4 because it is an implementation detail and its symbols are namespaced with `XXH_NAMESPACE` macro. When lz4 is external, xxHash has to be external too, and the dependents have to link to it. #4495 (Orivej Desh)
- Fixed a case when `quantileTiming` aggregate function can be called with negative or floating point argument (this fixes fuzz test with undefined behaviour sanitizer). #4506 (alexey-milovidov)
- Spelling error correction. #4531 (sdk2)
- Fix compilation on Mac. #4371 (Vitaly Baranov)
- Build fixes for FreeBSD and various unusual build configurations. #4444 (proller)

## ClickHouse release 19.3.9.1, 2019-04-02

### BUG FIXES

- Fix crash in FULL/RIGHT JOIN when we joining on nullable vs not nullable.[#4855 \(Artem Zuikov\)](#)
- Fix segmentation fault in clickhouse-copier . [#4835 \(proller\)](#)
- Fixed reading from `Array(LowCardinality)` column in rare case when column contained a long sequence of empty arrays. [#4850 \(Nikolai Kochetov\)](#)

### BUILD/TESTING/PACKAGING IMPROVEMENT

- Add a way to launch clickhouse-server image from a custom user[#4753 \(Mikhail f. Shiryaev\)](#)

## ClickHouse release 19.3.7, 2019-03-12

### BUG FIXES

- Fixed error in #3920. This error manifests itself as random cache corruption (messages Unknown codec family code , Cannot seek through file ) and segfaults. This bug first appeared in version 19.1 and is present in versions up to 19.1.10 and 19.3.6. [#4623 \(alexey-milovidov\)](#)

## ClickHouse release 19.3.6, 2019-03-02

### BUG FIXES

- When there are more than 1000 threads in a thread pool, `std::terminate` may happen on thread exit.[Azat Khuzhin #4485 #4505 \(alexey-milovidov\)](#)
- Now it's possible to create `ReplicatedMergeTree*` tables with comments on columns without defaults and tables with columns codecs without comments and defaults. Also fix comparison of codecs. [#4523 \(alesapin\)](#)
- Fixed crash on JOIN with array or tuple.[#4552 \(Artem Zuikov\)](#)
- Fixed crash in clickhouse-copier with the message ThreadStatus not created . [#4540 \(Artem Zuikov\)](#)
- Fixed hangup on server shutdown if distributed DDLs were used.[#4472 \(Alex Zatelepin\)](#)
- Incorrect column numbers were printed in error message about text format parsing for columns with number greater than 10. [#4484 \(alexey-milovidov\)](#)

### BUILD/TESTING/PACKAGING IMPROVEMENTS

- Fixed build with AVX enabled.[#4527 \(alexey-milovidov\)](#)
- Enable extended accounting and IO accounting based on good known version instead of kernel under which it is compiled. [#4541 \(nvartolomei\)](#)
- Allow to skip setting of `core_dump.size_limit`, warning instead of throw if limit set fail[#4473 \(proller\)](#)
- Removed the `inline` tags of `void readBinary(...)` in `Field.cpp` . Also merged redundant namespace DB blocks. [#4530 \(hcz\)](#)

## ClickHouse release 19.3.5, 2019-02-21

### BUG FIXES

- Fixed bug with large http insert queries processing.[#4454 \(alesapin\)](#)
- Fixed backward incompatibility with old versions due to wrong implementation of `send_logs_level` setting. [#4445 \(alexey-milovidov\)](#)
- Fixed backward incompatibility of table function `remote` introduced with column comments. [#4446 \(alexey-milovidov\)](#)

## ClickHouse release 19.3.4, 2019-02-16

### IMPROVEMENTS

- Table index size is not accounted for memory limits when doing `ATTACH TABLE` query. Avoided the possibility that a table cannot be attached after being detached. [#4396 \(alexey-milovidov\)](#)
- Slightly raised up the limit on max string and array size received from ZooKeeper. It allows to continue to work with increased size of `CLIENT_JVMFLAGS=-Djute.maxbuffer=...` on ZooKeeper. [#4398 \(alexey-milovidov\)](#)
- Allow to repair abandoned replica even if it already has huge number of nodes in its queue [#4399 \(alexey-milovidov\)](#)
- Add one required argument to `SET index` (max stored rows number). [#4386 \(Nikita Vasilev\)](#)

#### BUG FIXES

- Fixed `WITH ROLLUP` result for group by single `LowCardinality key`. [#4384 \(Nikolai Kochetov\)](#)
- Fixed bug in the set index (dropping a granule if it contains more than `max_rows` rows). [#4386 \(Nikita Vasilev\)](#)
- A lot of FreeBSD build fixes. [#4397 \(proller\)](#)
- Fixed aliases substitution in queries with subquery containing same alias (issue [#4110](#)). [#4351 \(Artem Zuikov\)](#)

#### BUILD/TESTING/PACKAGING IMPROVEMENTS

- Add ability to run `clickhouse-server` for stateless tests in docker image. [#4347 \(Vasily Nemkov\)](#)

### ClickHouse release 19.3.3, 2019-02-13

#### NEW FEATURES

- Added the `KILL MUTATION` statement that allows removing mutations that are for some reasons stuck. Added `latest_failed_part`, `latest_fail_time`, `latest_fail_reason` fields to the `system.mutations` table for easier troubleshooting. [#4287 \(Alex Zatelepin\)](#)
- Added aggregate function `entropy` which computes Shannon entropy. [#4238 \(Quid37\)](#)
- Added ability to send queries `INSERT INTO tbl VALUES (...)` to server without splitting on `query` and `data` parts. [#4301 \(alesapin\)](#)
- Generic implementation of `arrayWithConstant` function was added. [#4322 \(alexey-milovidov\)](#)
- Implemented `NOT BETWEEN` comparison operator. [#4228 \(Dmitry Naumov\)](#)
- Implement `sumMapFiltered` in order to be able to limit the number of keys for which values will be summed by `sumMap`. [#4129 \(Léo Ercolanelli\)](#)
- Added support of `Nullable` types in `mysql` table function. [#4198 \(Emmanuel Donin de Rosière\)](#)
- Support for arbitrary constant expressions in `LIMIT` clause. [#4246 \(k3box\)](#)
- Added `topKWeighted` aggregate function that takes additional argument with (unsigned integer) weight. [#4245 \(Andrew Golman\)](#)
- `StorageJoin` now supports `join_any_take_last_row` setting that allows overwriting existing values of the same key. [#3973 \(Amos Bird\)](#)
- Added function `toStartOfInterval`. [#4304 \(Vitaly Baranov\)](#)
- Added `RowBinaryWithNamesAndTypes` format. [#4200 \(Oleg V. Kozlyuk\)](#)
- Added `IPv4` and `IPv6` data types. More effective implementations of `IPv*` functions. [#3669 \(Vasily Nemkov\)](#)
- Added function `toStartOfTenMinutes()`. [#4298 \(Vitaly Baranov\)](#)
- Added `Protobuf` output format. [#4005 #4158 \(Vitaly Baranov\)](#)
- Added brotli support for HTTP interface for data import (INSERTs). [#4235 \(Mikhail \)](#)
- Added hints while user make typo in function name or type in command line client [#4239 \(Danila Kutenin\)](#)
- Added `Query-Id` to Server's HTTP Response header. [#4231 \(Mikhail \)](#)

#### EXPERIMENTAL FEATURES

- Added `minmax` and `set` data skipping indices for MergeTree table engines family. #4143 (Nikita Vasilev)
- Added conversion of `CROSS JOIN` to `INNER JOIN` if possible. #4221 #4266 (Artem Zuikov)

## BUG FIXES

- Fixed `Not found column` for duplicate columns in `JOIN ON` section. #4279 (Artem Zuikov)
- Make `START REPLICATED SENDS` command start replicated sends. #4229 (nvartolomei)
- Fixed aggregate functions execution with `Array(LowCardinality)` arguments. #4055 (KochetovNicolai)
- Fixed wrong behaviour when doing `INSERT ... SELECT ... FROM file(...)` query and file has `CSVWithNames` or `TSVWithNames` format and the first data row is missing. #4297 (alexey-milovidov)
- Fixed crash on dictionary reload if dictionary not available. This bug was appeared in 19.1.6 #4188 (proller)
- Fixed `ALL JOIN` with duplicates in right table. #4184 (Artem Zuikov)
- Fixed segmentation fault with `use_uncompressed_cache=1` and exception with wrong uncompressed size. This bug was appeared in 19.1.6. #4186 (alesapin)
- Fixed `compile_expressions` bug with comparison of big (more than `int16`) dates. #4341 (alesapin)
- Fixed infinite loop when selecting from table function `numbers(0)`. #4280 (alexey-milovidov)
- Temporarily disable predicate optimization for `ORDER BY`. #3890 (Winter Zhang)
- Fixed `Illegal instruction` error when using `base64` functions on old CPUs. This error has been reproduced only when ClickHouse was compiled with `gcc-8`. #4275 (alexey-milovidov)
- Fixed `No message received` error when interacting with PostgreSQL ODBC Driver through TLS connection. Also fixes segfault when using MySQL ODBC Driver. #4170 (alexey-milovidov)
- Fixed incorrect result when `Date` and `DateTime` arguments are used in branches of conditional operator (function `if`). Added generic case for function `if`. #4243 (alexey-milovidov)
- ClickHouse dictionaries now load within `clickhouse` process. #4166 (alexey-milovidov)
- Fixed deadlock when `SELECT` from a table with `File` engine was retried after `No such file or directory` error. #4161 (alexey-milovidov)
- Fixed race condition when selecting from `system.tables` may give `table doesn't exist` error. #4313 (alexey-milovidov)
- `clickhouse-client` can segfault on exit while loading data for command line suggestions if it was run in interactive mode. #4317 (alexey-milovidov)
- Fixed a bug when the execution of mutations containing `IN` operators was producing incorrect results. #4099 (Alex Zatelepin)
- Fixed error: if there is a database with `Dictionary` engine, all dictionaries forced to load at server startup, and if there is a dictionary with ClickHouse source from localhost, the dictionary cannot load. #4255 (alexey-milovidov)
- Fixed error when system logs are tried to create again at server shutdown. #4254 (alexey-milovidov)
- Correctly return the right type and properly handle locks in `joinGet` function. #4153 (Amos Bird)
- Added `sumMapWithOverflow` function. #4151 (Léo Ercolanelli)
- Fixed segfault with `allow_experimental_multiple_joins_emulation`. 52de2c (Artem Zuikov)
- Fixed bug with incorrect `Date` and `DateTime` comparison. #4237 (valexey)
- Fixed fuzz test under undefined behavior sanitizer: added parameter type check for `quantile*Weighted` family of functions. #4145 (alexey-milovidov)
- Fixed rare race condition when removing of old data parts can fail with `File not found` error. #4378 (alexey-milovidov)
- Fix install package with missing `/etc/clickhouse-server/config.xml`. #4343 (proller)

## BUILD/TESTING/PACKAGING IMPROVEMENTS

- Debian package: correct /etc/clickhouse-server/preprocessed link according to config. #4205 (proller)
- Various build fixes for FreeBSD. #4225 (proller)
- Added ability to create, fill and drop tables in perftest. #4220 (alesapin)
- Added a script to check for duplicate includes. #4326 (alexey-milovidov)
- Added ability to run queries by index in performance test. #4264 (alesapin)
- Package with debug symbols is suggested to be installed. #4274 (alexey-milovidov)
- Refactoring of performance-test. Better logging and signals handling. #4171 (alesapin)
- Added docs to anonymized Yandex.Metrika datasets. #4164 (alesapin)
- Added tool for converting an old month-partitioned part to the custom-partitioned format. #4195 (Alex Zatelepin)
- Added docs about two datasets in s3. #4144 (alesapin)
- Added script which creates changelog from pull requests description. #4169 #4173 (KochetovNicolai) (KochetovNicolai)
- Added puppet module for Clickhouse. #4182 (Maxim Fedotov)
- Added docs for a group of undocumented functions. #4168 (Winter Zhang)
- ARM build fixes. #4210#4306 #4291 (proller) (proller)
- Dictionary tests now able to run from ctest . #4189 (proller)
- Now /etc/ssl is used as default directory with SSL certificates. #4167 (alexey-milovidov)
- Added checking SSE and AVX instruction at start. #4234 (lgr)
- Init script will wait server until start. #4281 (proller)

#### BACKWARD INCOMPATIBLE CHANGES

- Removed `allow_experimental_low_cardinality_type` setting. LowCardinality data types are production ready. #4323 (alexey-milovidov)
- Reduce mark cache size and uncompressed cache size accordingly to available memory amount. #4240 (Lopatin Konstantin)
- Added keyword INDEX in CREATE TABLE query. A column with name `index` must be quoted with backticks or double quotes: ``index`` . #4143 (Nikita Vasilev)
- `sumMap` now promote result type instead of overflow. The old `sumMap` behavior can be obtained by using `sumMapWithOverflow` function. #4151 (Léo Ercolanelli)

#### PERFORMANCE IMPROVEMENTS

- `std::sort` replaced by `pdqsort` for queries without `LIMIT` . #4236 (Evgenii Pravda)
- Now server reuse threads from global thread pool. This affects performance in some corner cases #4150 (alexey-milovidov)

#### IMPROVEMENTS

- Implemented AIO support for FreeBSD. #4305 (urgordeadbeef)
- `SELECT * FROM a JOIN b USING a, b` now return `a` and `b` columns only from the left table. #4141 (Artem Zuikov)
- Allow `-C` option of client to work as `-c` option. #4232 (syominsergey)
- Now option `--password` used without value requires password from stdin. #4230 (BSD\_Conqueror)
- Added highlighting of unescaped metacharacters in string literals that contain LIKE expressions or regexps. #4327 (alexey-milovidov)
- Added cancelling of HTTP read only queries if client socket goes away #4213 (nvartolomei)

- Now server reports progress to keep client connections alive.[#4215](#) ([Ivan](#))
- Slightly better message with reason for OPTIMIZE query with `optimize_throw_if_noop` setting enabled. [#4294](#) ([alexey-milovidov](#))
- Added support of `--version` option for clickhouse server. [#4251](#) ([Lopatin Konstantin](#))
- Added `--help/-h` option to `clickhouse-server`. [#4233](#) ([Yuriy Baranov](#))
- Added support for scalar subqueries with aggregate function state result. [#4348](#) ([Nikolai Kochetov](#))
- Improved server shutdown time and ALTERs waiting time. [#4372](#) ([alexey-milovidov](#))
- Added info about the `replicated_can_become_leader` setting to `system.replicas` and add logging if the replica won't try to become leader. [#4379](#) ([Alex Zatelepin](#))

## ClickHouse release 19.1

### ClickHouse release 19.1.14, 2019-03-14

- Fixed error `Column ... queried more than once` that may happen if the setting `asterisk_left_columns_only` is set to 1 in case of using `GLOBAL JOIN` with `SELECT *` (rare case). The issue does not exist in 19.3 and newer. [#6bac7d8d](#) ([Artem Zuikov](#))

### ClickHouse release 19.1.13, 2019-03-12

This release contains exactly the same set of patches as 19.3.7.

### ClickHouse release 19.1.10, 2019-03-03

This release contains exactly the same set of patches as 19.3.6.

## ClickHouse release 19.1

### ClickHouse release 19.1.9, 2019-02-21

#### BUG FIXES

- Fixed backward incompatibility with old versions due to wrong implementation of `send_logs_level` setting. [#4445](#) ([alexey-milovidov](#))
- Fixed backward incompatibility of table function `remote` introduced with column comments. [#4446](#) ([alexey-milovidov](#))

### ClickHouse release 19.1.8, 2019-02-16

#### BUG FIXES

- Fix install package with missing `/etc/clickhouse-server/config.xml`. [#4343](#) ([proller](#))

## ClickHouse release 19.1

### ClickHouse release 19.1.7, 2019-02-15

#### BUG FIXES

- Correctly return the right type and properly handle locks in `joinGet` function. [#4153](#) ([Amos Bird](#))
- Fixed error when system logs are tried to create again at server shutdown. [#4254](#) ([alexey-milovidov](#))
- Fixed error: if there is a database with `Dictionary` engine, all dictionaries forced to load at server startup, and if there is a dictionary with ClickHouse source from localhost, the dictionary cannot load. [#4255](#) ([alexey-milovidov](#))
- Fixed a bug when the execution of mutations containing `IN` operators was producing incorrect results. [#4099](#) ([Alex](#))

Zatelepin)

- clickhouse-client can segfault on exit while loading data for command line suggestions if it was run in interactive mode. #4317 (alexey-milovidov)
- Fixed race condition when selecting from system.tables may give table doesn't exist error. #4313 (alexey-milovidov)
- Fixed deadlock when SELECT from a table with File engine was retried after No such file or directory error. #4161 (alexey-milovidov)
- Fixed an issue: local ClickHouse dictionaries are loaded via TCP, but should load within process #4166 (alexey-milovidov)
- Fixed No message received error when interacting with PostgreSQL ODBC Driver through TLS connection. Also fixes segfault when using MySQL ODBC Driver. #4170 (alexey-milovidov)
- Temporarily disable predicate optimization for ORDER BY . #3890 (Winter Zhang)
- Fixed infinite loop when selecting from table function numbers(0) . #4280 (alexey-milovidov)
- Fixed compile\_expressions bug with comparison of big (more than int16) dates. #4341 (alesapin)
- Fixed segmentation fault with uncompressed\_cache=1 and exception with wrong uncompressed size. #4186 (alesapin)
- Fixed ALL JOIN with duplicates in right table. #4184 (Artem Zuikov)
- Fixed wrong behaviour when doing INSERT ... SELECT ... FROM file(...) query and file has CSVWithNames or TSVWithNames format and the first data row is missing. #4297 (alexey-milovidov)
- Fixed aggregate functions execution with Array(LowCardinality) arguments. #4055 (KochetovNicolai)
- Debian package: correct /etc/clickhouse-server/preprocessed link according to config. #4205 (proller)
- Fixed fuzz test under undefined behavior sanitizer: added parameter type check for quantile\*Weighted family of functions. #4145 (alexey-milovidov)
- Make START REPLICATED SENDS command start replicated sends. #4229 (nvartolomei)
- Fixed Not found column for duplicate columns in JOIN ON section. #4279 (Artem Zuikov)
- Now /etc/ssl is used as default directory with SSL certificates. #4167 (alexey-milovidov)
- Fixed crash on dictionary reload if dictionary not available. #4188 (proller)
- Fixed bug with incorrect Date and DateTime comparison. #4237 (valexey)
- Fixed incorrect result when Date and DateTime arguments are used in branches of conditional operator (function if ). Added generic case for function if . #4243 (alexey-milovidov)

## ClickHouse release 19.1.6, 2019-01-24

### NEW FEATURES

- Custom per column compression codecs for tables. #3899 #4111 (alesapin, Winter Zhang, Anatoly)
- Added compression codec Delta . #4052 (alesapin)
- Allow to ALTER compression codecs. #4054 (alesapin)
- Added functions left , right , trim , ltrim , rtrim , timestampadd , timestampsub for SQL standard compatibility. #3826 (Ivan Blinkov)
- Support for write in HDFS tables and hdfs table function. #4084 (alesapin)
- Added functions to search for multiple constant strings from big haystack: multiPosition , multiSearch , firstMatch also with -UTF8 , -CaseInsensitive , and -CaseInsensitiveUTF8 variants. #4053 (Danila Kutenin)
- Pruning of unused shards if SELECT query filters by sharding key (setting optimize\_skip\_unused\_shards ). #3851 (Gleb Kanterov, Ivan)
- Allow Kafka engine to ignore some number of parsing errors per block #4094 (Ivan)

- Added support for `CatBoost` multiclass models evaluation. Function `modelEvaluate` returns tuple with per-class raw predictions for multiclass models. `libcatboostmodel.so` should be built with #607. #3959 (KochetovNicolai)
- Added functions `filesystemAvailable`, `filesystemFree`, `filesystemCapacity`. #4097 (Boris Granveaud)
- Added hashing functions `xxHash64` and `xxHash32`. #3905 (filimonov)
- Added `gccMurmurHash` hashing function (GCC flavoured Murmur hash) which uses the same hash seed as `gcc` #4000 (sundyli)
- Added hashing functions `javaHash`, `hiveHash`. #3811 (shangshujie365)
- Added table function `remoteSecure`. Function works as `remote`, but uses secure connection. #4088 (proller)

## EXPERIMENTAL FEATURES

- Added multiple JOINS emulation (allow\_experimental\_multiple\_joins\_emulation setting). #3946 (Artem Zuikov)

## BUG FIXES

- Make `compiled_expression_cache_size` setting limited by default to lower memory consumption. #4041 (alesapin)
- Fix a bug that led to hangups in threads that perform ALTERs of Replicated tables and in the thread that updates configuration from ZooKeeper. #2947 #3891 #3934 (Alex Zatelepin)
- Fixed a race condition when executing a distributed ALTER task. The race condition led to more than one replica trying to execute the task and all replicas except one failing with a ZooKeeper error. #3904 (Alex Zatelepin)
- Fix a bug when `from_zk` config elements weren't refreshed after a request to ZooKeeper timed out. #2947 #3947 (Alex Zatelepin)
- Fix bug with wrong prefix for IPv4 subnet masks. #3945 (alesapin)
- Fixed crash (`std::terminate`) in rare cases when a new thread cannot be created due to exhausted resources #3956 (alexey-milovidov)
- Fix bug when in `remote` table function execution when wrong restrictions were used for in `getStructureOfRemoteTable`. #4009 (alesapin)
- Fix a leak of netlink sockets. They were placed in a pool where they were never deleted and new sockets were created at the start of a new thread when all current sockets were in use. #4017 (Alex Zatelepin)
- Fix bug with closing `/proc/self/fd` directory earlier than all fds were read from `/proc` after forking `odbc-bridge` subprocess. #4120 (alesapin)
- Fixed String to UInt monotonic conversion in case of usage String in primary key #3870 (Winter Zhang)
- Fixed error in calculation of integer conversion function monotonicity. #3921 (alexey-milovidov)
- Fixed segfault in `arrayEnumerateUniq`, `arrayEnumerateDense` functions in case of some invalid arguments. #3909 (alexey-milovidov)
- Fix UB in `StorageMerge`. #3910 (Amos Bird)
- Fixed segfault in functions `addDays`, `subtractDays`. #3913 (alexey-milovidov)
- Fixed error: functions `round`, `floor`, `trunc`, `ceil` may return bogus result when executed on integer argument and large negative scale. #3914 (alexey-milovidov)
- Fixed a bug induced by 'kill query sync' which leads to a core dump. #3916 (muVulDeePecker)
- Fix bug with long delay after empty replication queue. #3928 #3932 (alesapin)
- Fixed excessive memory usage in case of inserting into table with `LowCardinality` primary key. #3955 (KochetovNicolai )
- Fixed `LowCardinality` serialization for `Native` format in case of empty arrays. #3907 #4011 (KochetovNicolai)
- Fixed incorrect result while using `distinct` by single `LowCardinality` numeric column. #3895 #4012 (KochetovNicolai)
- Fixed specialized aggregation with `LowCardinality` key (in case when `compile` setting is enabled). #3886

(KochetovNicolai)

- Fix user and password forwarding for replicated tables queries. #3957 (alesapin) (小路)
- Fixed very rare race condition that can happen when listing tables in Dictionary database while reloading dictionaries. #3970 (alexey-milovidov)
- Fixed incorrect result when HAVING was used with ROLLUP or CUBE. #3756 #3837 (Sam Chou)
- Fixed column aliases for query with JOIN ON syntax and distributed tables. #3980 (Winter Zhang)
- Fixed error in internal implementation of quantileTDigest (found by Artem Vakhrushev). This error never happens in ClickHouse and was relevant only for those who use ClickHouse codebase as a library directly. #3935 (alexey-milovidov)

## IMPROVEMENTS

- Support for IF NOT EXISTS in ALTER TABLE ADD COLUMN statements along with IF EXISTS in DROP/MODIFY/CLEAR/COMMENT COLUMN . #3900 (Boris Granveaud)
- Function parseDateTimeBestEffort : support for formats DD.MM.YYYY , DD.MM.YY , DD-MM-YYYY , DD-Mon-YYYY , DD/Month/YYYY and similar. #3922 (alexey-milovidov)
- CapnProtoInputStream now support jagged structures. #4063 (Odin Hultgren Van Der Horst)
- Usability improvement: added a check that server process is started from the data directory's owner. Do not allow to start server from root if the data belongs to non-root user. #3785 (sergey-v-galtsev)
- Better logic of checking required columns during analysis of queries with JOINs. #3930 (Artem Zuikov)
- Decreased the number of connections in case of large number of Distributed tables in a single server #3726 (Winter Zhang)
- Supported totals row for WITH TOTALS query for ODBC driver. #3836 (Maksim Koritckiy)
- Allowed to use Enum s as integers inside if function. #3875 (Ivan)
- Added low\_cardinality\_allow\_in\_native\_format setting. If disabled, do not use LowCardinality type in Native format. #3879 (KochetovNicolai)
- Removed some redundant objects from compiled expressions cache to lower memory usage. #4042 (alesapin)
- Add check that SET send\_logs\_level = 'value' query accept appropriate value. #3873 (Sabyanin Maxim)
- Fixed data type check in type conversion functions. #3896 (Winter Zhang)

## PERFORMANCE IMPROVEMENTS

- Add a MergeTree setting use\_minimalistic\_part\_header\_in\_zookeeper . If enabled, Replicated tables will store compact part metadata in a single part znode. This can dramatically reduce ZooKeeper snapshot size (especially if the tables have a lot of columns). Note that after enabling this setting you will not be able to downgrade to a version that doesn't support it. #3960 (Alex Zatelepin)
- Add an DFA-based implementation for functions sequenceMatch and sequenceCount in case pattern doesn't contain time. #4004 (Léo Ercolanelli)
- Performance improvement for integer numbers serialization. #3968 (Amos Bird)
- Zero left padding PODArray so that -1 element is always valid and zeroed. It's used for branchless calculation of offsets. #3920 (Amos Bird)
- Reverted jemalloc version which lead to performance degradation. #4018 (alexey-milovidov)

## BACKWARD INCOMPATIBLE CHANGES

- Removed undocumented feature ALTER MODIFY PRIMARY KEY because it was superseded by the ALTER MODIFY ORDER BY command. #3887 (Alex Zatelepin)
- Removed function shardByHash . #3833 (alexey-milovidov)

- Forbid using scalar subqueries with result of type AggregateFunction . [#3865](#) ([Ivan](#))

#### BUILD/TESTING/PACKAGING IMPROVEMENTS

- Added support for PowerPC (ppc64le) build. [#4132](#) ([Danila Kutenin](#))
- Stateful functional tests are run on public available dataset. [#3969](#) ([alexey-milovidov](#))
- Fixed error when the server cannot start with the bash: /usr/bin/clickhouse-extract-from-config: Operation not permitted message within Docker or systemd-nspawn. [#4136](#) ([alexey-milovidov](#))
- Updated rdkafka library to v1.0.0-RC5. Used cppkafka instead of raw C interface. [#4025](#) ([Ivan](#))
- Updated mariadb-client library. Fixed one of issues found by UBSan. [#3924](#) ([alexey-milovidov](#))
- Some fixes for UBSan builds. [#3926](#) [#3021](#) [#3948](#) ([alexey-milovidov](#))
- Added per-commit runs of tests with UBSan build.
- Added per-commit runs of PVS-Studio static analyzer.
- Fixed bugs found by PVS-Studio. [#4013](#) ([alexey-milovidov](#))
- Fixed glibc compatibility issues. [#4100](#) ([alexey-milovidov](#))
- Move Docker images to 18.10 and add compatibility file for glibc >= 2.28 [#3965](#) ([alesapin](#))
- Add env variable if user don't want to chown directories in server Docker image [#3967](#) ([alesapin](#))
- Enabled most of the warnings from -Weverything in clang. Enabled -Wpedantic. [#3986](#) ([alexey-milovidov](#))
- Added a few more warnings that are available only in clang 8 [#3993](#) ([alexey-milovidov](#))
- Link to libLLVM rather than to individual LLVM libs when using shared linking. [#3989](#) ([Orivej Desh](#))
- Added sanitizer variables for test images. [#4072](#) ([alesapin](#))
- clickhouse-server debian package will recommend libcap2-bin package to use setcap tool for setting capabilities. This is optional. [#4093](#) ([alexey-milovidov](#))
- Improved compilation time, fixed includes. [#3898](#) ([proller](#))
- Added performance tests for hash functions. [#3918](#) ([filimonov](#))
- Fixed cyclic library dependences. [#3958](#) ([proller](#))
- Improved compilation with low available memory. [#4030](#) ([proller](#))
- Added test script to reproduce performance degradation in jemalloc. [#4036](#) ([alexey-milovidov](#))
- Fixed misspells in comments and string literals under dbms. [#4122](#) ([maiha](#))
- Fixed typos in comments. [#4089](#) ([Evgenii Pravda](#))

## ClickHouse release 18.16

### ClickHouse release 18.16.1, 2018-12-21

#### BUG FIXES:

- Fixed an error that led to problems with updating dictionaries with the ODBC source. [#3825](#), [#3829](#)
- JIT compilation of aggregate functions now works with LowCardinality columns. [#3838](#)

#### IMPROVEMENTS:

- Added the low\_cardinality\_allow\_in\_native\_format setting (enabled by default). When disabled, LowCardinality columns will be converted to ordinary columns for SELECT queries and ordinary columns will be expected for INSERT queries. [#3879](#)

#### BUILD IMPROVEMENTS:

- Fixes for builds on macOS and ARM.

## ClickHouse release 18.16.0, 2018-12-14

### NEW FEATURES:

- `DEFAULT` expressions are evaluated for missing fields when loading data in semi-structured input formats (`JSONEachRow`, `TSKV`). The feature is enabled with the `insert_sample_with_metadata` setting. #3555
- The `ALTER TABLE` query now has the `MODIFY ORDER BY` action for changing the sorting key when adding or removing a table column. This is useful for tables in the `MergeTree` family that perform additional tasks when merging based on this sorting key, such as `SummingMergeTree`, `AggregatingMergeTree`, and so on. #3581 #3755
- For tables in the `MergeTree` family, now you can specify a different sorting key (`ORDER BY`) and index (`PRIMARY KEY`). The sorting key can be longer than the index. #3581
- Added the `hdfs` table function and the `HDFS` table engine for importing and exporting data to HDFS. chenxing-xc
- Added functions for working with base64: `base64Encode`, `base64Decode`, `tryBase64Decode`. Alexander Krasheninnikov
- Now you can use a parameter to configure the precision of the `uniqCombined` aggregate function (select the number of `HyperLogLog` cells). #3406
- Added the `system.contributors` table that contains the names of everyone who made commits in ClickHouse. #3452
- Added the ability to omit the partition for the `ALTER TABLE ... FREEZE` query in order to back up all partitions at once. #3514
- Added `dictGet` and `dictGetOrDefault` functions that don't require specifying the type of return value. The type is determined automatically from the dictionary description. Amos Bird
- Now you can specify comments for a column in the table description and change it using `ALTER`. #3377
- Reading is supported for `Join` type tables with simple keys. Amos Bird
- Now you can specify the options `join_use_nulls`, `max_rows_in_join`, `max_bytes_in_join`, and `join_overflow_mode` when creating a `Join` type table. Amos Bird
- Added the `joinGet` function that allows you to use a `Join` type table like a dictionary. Amos Bird
- Added the `partition_key`, `sorting_key`, `primary_key`, and `sampling_key` columns to the `system.tables` table in order to provide information about table keys. #3609
- Added the `is_in_partition_key`, `is_in_sorting_key`, `is_in_primary_key`, and `is_in_sampling_key` columns to the `system.columns` table. #3609
- Added the `min_time` and `max_time` columns to the `system.parts` table. These columns are populated when the partitioning key is an expression consisting of `DateTime` columns. Emmanuel Donin de Rosière

### BUG FIXES:

- Fixes and performance improvements for the `LowCardinality` data type. `GROUP BY` using `LowCardinality(Nullable(...))`. Getting the values of `extremes`. Processing high-order functions. `LEFT ARRAY JOIN`. Distributed `GROUP BY`. Functions that return `Array`. Execution of `ORDER BY`. Writing to `Distributed` tables (nicelulu). Backward compatibility for `INSERT` queries from old clients that implement the Native protocol. Support for `LowCardinality` for `JOIN`. Improved performance when working in a single stream. #3823 #3803 #3799 #3769 #3744 #3681 #3651 #3649 #3641 #3632 #3568 #3523 #3518
- Fixed how the `select_sequential_consistency` option works. Previously, when this setting was enabled, an incomplete result was sometimes returned after beginning to write to a new partition. #2863
- Databases are correctly specified when executing `DDL ON CLUSTER` queries and `ALTER UPDATE/DELETE`. #3772 #3460
- Databases are correctly specified for subqueries inside a `VIEW`. #3521
- Fixed a bug in `PREWHERE` with `FINAL` for `VersionedCollapsingMergeTree`. 7167bfd7

- Now you can use `KILL QUERY` to cancel queries that have not started yet because they are waiting for the table to be locked. [#3517](#)
- Corrected date and time calculations if the clocks were moved back at midnight (this happens in Iran, and happened in Moscow from 1981 to 1983). Previously, this led to the time being reset a day earlier than necessary, and also caused incorrect formatting of the date and time in text format. [#3819](#)
- Fixed bugs in some cases of `VIEW` and subqueries that omit the database. [Winter Zhang](#)
- Fixed a race condition when simultaneously reading from a `MATERIALIZED VIEW` and deleting a `MATERIALIZED VIEW` due to not locking the internal `MATERIALIZED VIEW`. [#3404 #3694](#)
- Fixed the error `Lock handler cannot be nullptr`. [#3689](#)
- Fixed query processing when the `compile_expressions` option is enabled (it's enabled by default). Nondeterministic constant expressions like the `now` function are no longer unfolded. [#3457](#)
- Fixed a crash when specifying a non-constant scale argument in `toDecimal32/64/128` functions.
- Fixed an error when trying to insert an array with `NULL` elements in the `Values` format into a column of type `Array` without `Nullable` (if `input_format_values_interpret_expressions = 1`). [#3487 #3503](#)
- Fixed continuous error logging in `DDLWorker` if ZooKeeper is not available. [8f50c620](#)
- Fixed the return type for `quantile*` functions from `Date` and `DateTime` types of arguments. [#3580](#)
- Fixed the `WITH` clause if it specifies a simple alias without expressions. [#3570](#)
- Fixed processing of queries with named sub-queries and qualified column names when `enable_optimize_predicate_expression` is enabled. [Winter Zhang](#)
- Fixed the error `Attempt to attach to nullptr thread group` when working with materialized views. [Marek Vavruša](#)
- Fixed a crash when passing certain incorrect arguments to the `arrayReverse` function. [73e3a7b6](#)
- Fixed the buffer overflow in the `extractURLParameter` function. Improved performance. Added correct processing of strings containing zero bytes. [141e9799](#)
- Fixed buffer overflow in the `lowerUTF8` and `upperUTF8` functions. Removed the ability to execute these functions over `FixedSize` type arguments. [#3662](#)
- Fixed a rare race condition when deleting `MergeTree` tables. [#3680](#)
- Fixed a race condition when reading from `Buffer` tables and simultaneously performing `ALTER` or `DROP` on the target tables. [#3719](#)
- Fixed a segfault if the `max_temporary_non_const_columns` limit was exceeded. [#3788](#)

#### IMPROVEMENTS:

- The server does not write the processed configuration files to the `/etc/clickhouse-server/` directory. Instead, it saves them in the `preprocessed_configs` directory inside `path`. This means that the `/etc/clickhouse-server/` directory doesn't have write access for the `clickhouse` user, which improves security. [#2443](#)
- The `min_merge_bytes_to_use_direct_io` option is set to 10 GiB by default. A merge that forms large parts of tables from the `MergeTree` family will be performed in `O_DIRECT` mode, which prevents excessive page cache eviction. [#3504](#)
- Accelerated server start when there is a very large number of tables. [#3398](#)
- Added a connection pool and `HTTP Keep-Alive` for connections between replicas. [#3594](#)
- If the query syntax is invalid, the `400 Bad Request` code is returned in the `HTTP` interface (500 was returned previously). [31bc680a](#)
- The `join_default_strictness` option is set to `ALL` by default for compatibility. [120e2cbe](#)
- Removed logging to `stderr` from the `re2` library for invalid or complex regular expressions. [#3723](#)
- Added for the `Kafka` table engine: checks for subscriptions before beginning to read from Kafka; the `kafka_max_block_size` setting for the table. [Marek Vavruša](#)

- The `cityHash64`, `farmHash64`, `metroHash64`, `sipHash64`, `halfMD5`, `murmurHash2_32`, `murmurHash2_64`, `murmurHash3_32`, and `murmurHash3_64` functions now work for any number of arguments and for arguments in the form of tuples. [#3451](#) [#3519](#)
- The `arrayReverse` function now works with any types of arrays. [#73e3a7b6](#)
- Added an optional parameter: the slot size for the `timeSlots` function. [Kirill Shvakov](#)
- For `FULL` and `RIGHT JOIN`, the `max_block_size` setting is used for a stream of non-joined data from the right table. [Amos Bird](#)
- Added the `--secure` command line parameter in `clickhouse-benchmark` and `clickhouse-performance-test` to enable TLS. [#3688](#) [#3690](#)
- Type conversion when the structure of a `Buffer` type table does not match the structure of the destination table. [Vitaly Baranov](#)
- Added the `tcp_keep_alive_timeout` option to enable keep-alive packets after inactivity for the specified time interval. [#3441](#)
- Removed unnecessary quoting of values for the partition key in the `system.parts` table if it consists of a single column. [#3652](#)
- The modulo function works for `Date` and `DateTime` data types. [#3385](#)
- Added synonyms for the `POWER`, `LN`, `LCASE`, `UCASE`, `REPLACE`, `LOCATE`, `SUBSTR`, and `MID` functions. [#3774](#) [#3763](#) Some function names are case-insensitive for compatibility with the SQL standard. Added syntactic sugar `SUBSTRING(expr FROM start FOR length)` for compatibility with SQL. [#3804](#)
- Added the ability to `mlock` memory pages corresponding to `clickhouse-server` executable code to prevent it from being forced out of memory. This feature is disabled by default. [#3553](#)
- Improved performance when reading from `O_DIRECT` (with the `min_bytes_to_use_direct_io` option enabled). [#3405](#)
- Improved performance of the `dictGet...OrDefault` function for a constant key argument and a non-constant default argument. [Amos Bird](#)
- The `firstSignificantSubdomain` function now processes the domains `gov`, `mil`, and `edu`. [Igor Hatarist](#) Improved performance. [#3628](#)
- Ability to specify custom environment variables for starting `clickhouse-server` using the SYS-V init.d script by defining `CLICKHOUSE_PROGRAM_ENV` in `/etc/default/clickhouse`. [Pavlo Bashynskyi](#)
- Correct return code for the `clickhouse-server` init script. [#3516](#)
- The `system.metrics` table now has the `VersionInteger` metric, and `system.build_options` has the added line `VERSION_INTEGER`, which contains the numeric form of the ClickHouse version, such as `18016000`. [#3644](#)
- Removed the ability to compare the `Date` type with a number to avoid potential errors like `date = 2018-12-17`, where quotes around the date are omitted by mistake. [#3687](#)
- Fixed the behavior of stateful functions like `rowNumberInAllBlocks`. They previously output a result that was one number larger due to starting during query analysis. [Amos Bird](#)
- If the `force_restore_data` file can't be deleted, an error message is displayed. [Amos Bird](#)

#### BUILD IMPROVEMENTS:

- Updated the `jemalloc` library, which fixes a potential memory leak. [Amos Bird](#)
- Profiling with `jemalloc` is enabled by default in order to debug builds. [#2cc82f5c](#)
- Added the ability to run integration tests when only `Docker` is installed on the system. [#3650](#)
- Added the fuzz expression test in `SELECT` queries. [#3442](#)
- Added a stress test for commits, which performs functional tests in parallel and in random order to detect more race conditions. [#3438](#)

- Improved the method for starting clickhouse-server in a Docker image.[Elghazal Ahmed](#)
- For a Docker image, added support for initializing databases using files in the `/docker-entrypoint-initdb.d` directory.  
[Konstantin Lebedev](#)
- Fixes for builds on ARM. [#3709](#)

#### BACKWARD INCOMPATIBLE CHANGES:

- Removed the ability to compare the `Date` type with a number. Instead of `toDate('2018-12-18') = 17883`, you must use explicit type conversion `= toDate(17883)`. [#3687](#)

### ClickHouse release 18.14

#### ClickHouse release 18.14.19, 2018-12-19

##### BUG FIXES:

- Fixed an error that led to problems with updating dictionaries with the ODBC source. [#3825](#), [#3829](#)
- Databases are correctly specified when executing `DDL ON CLUSTER` queries. [#3460](#)
- Fixed a segfault if the `max_temporary_non_const_columns` limit was exceeded. [#3788](#)

##### BUILD IMPROVEMENTS:

- Fixes for builds on ARM.

#### ClickHouse release 18.14.18, 2018-12-04

##### BUG FIXES:

- Fixed error in `dictGet...` function for dictionaries of type `range`, if one of the arguments is constant and other is not. [#3751](#)
- Fixed error that caused messages `netlink: ...: attribute type 1 has an invalid length` to be printed in Linux kernel log, that was happening only on fresh enough versions of Linux kernel. [#3749](#)
- Fixed segfault in function `empty` for argument of `FixedSizeString` type. [Daniel, Dao Quang Minh](#)
- Fixed excessive memory allocation when using large value of `max_query_size` setting (a memory chunk of `max_query_size` bytes was preallocated at once). [#3720](#)

##### BUILD CHANGES:

- Fixed build with LLVM/Clang libraries of version 7 from the OS packages (these libraries are used for runtime query compilation). [#3582](#)

#### ClickHouse release 18.14.17, 2018-11-30

##### BUG FIXES:

- Fixed cases when the ODBC bridge process did not terminate with the main server process. [#3642](#)
- Fixed synchronous insertion into the `Distributed` table with a `columns` list that differs from the column list of the remote table. [#3673](#)
- Fixed a rare race condition that can lead to a crash when dropping a MergeTree table. [#3643](#)
- Fixed a query deadlock in case when query thread creation fails with the `Resource temporarily unavailable` error. [#3643](#)
- Fixed parsing of the `ENGINE` clause when the `CREATE AS table` syntax was used and the `ENGINE` clause was specified before the `AS table` (the error resulted in ignoring the specified engine). [#3692](#)

#### ClickHouse release 18.14.15, 2018-11-21

#### BUG FIXES:

- The size of memory chunk was overestimated while deserializing the column of type `Array(String)` that leads to "Memory limit exceeded" errors. The issue appeared in version 18.12.13. [#3589](#)

### ClickHouse release 18.14.14, 2018-11-20

#### BUG FIXES:

- Fixed `ON CLUSTER` queries when cluster configured as secure (flag `<secure>`). [#3599](#)

#### BUILD CHANGES:

- Fixed problems (llvm-7 from system, macos) [#3582](#)

### ClickHouse release 18.14.13, 2018-11-08

#### BUG FIXES:

- Fixed the Block structure mismatch in MergingSorted stream error. [#3162](#)
- Fixed `ON CLUSTER` queries in case when secure connections were turned on in the cluster config (the `<secure>` flag). [#3465](#)
- Fixed an error in queries that used `SAMPLE`, `PREWHERE` and alias columns. [#3543](#)
- Fixed a rare unknown compression method error when the `min_bytes_to_use_direct_io` setting was enabled. [#3544](#)

#### PERFORMANCE IMPROVEMENTS:

- Fixed performance regression of queries with `GROUP BY` of columns of `UInt16` or `Date` type when executing on AMD EPYC processors. [Igor Lapko](#)
- Fixed performance regression of queries that process long strings. [#3530](#)

#### BUILD IMPROVEMENTS:

- Improvements for simplifying the Arcadia build. [#3475](#), [#3535](#)

### ClickHouse release 18.14.12, 2018-11-02

#### BUG FIXES:

- Fixed a crash on joining two unnamed subqueries. [#3505](#)
- Fixed generating incorrect queries (with an empty `WHERE` clause) when querying external databases. [hotid](#)
- Fixed using an incorrect timeout value in ODBC dictionaries. [Marek Vavruša](#)

### ClickHouse release 18.14.11, 2018-10-29

#### BUG FIXES:

- Fixed the error Block structure mismatch in UNION stream: different number of columns in `LIMIT` queries. [#2156](#)
- Fixed errors when merging data in tables containing arrays inside Nested structures. [#3397](#)
- Fixed incorrect query results if the `merge_tree_uniform_read_distribution` setting is disabled (it is enabled by default). [#3429](#)
- Fixed an error on inserts to a Distributed table in Native format. [#3411](#)

### ClickHouse release 18.14.10, 2018-10-23

- The `compile_expressions` setting (JIT compilation of expressions) is disabled by default. [#3410](#)
- The `enable_optimize_predicate_expression` setting is disabled by default.

## ClickHouse release 18.14.9, 2018-10-16

### NEW FEATURES:

- The `WITH CUBE` modifier for `GROUP BY` (the alternative syntax `GROUP BY CUBE(...)` is also available). [#3172](#)
- Added the `formatDateTime` function. [Alexandr Krasheninnikov](#)
- Added the `JDBC` table engine and `jdbc` table function (requires installing `clickhouse-jdbc-bridge`). [Alexandr Krasheninnikov](#)
- Added functions for working with the ISO week number: `toISOWeek`, `toISOYear`, `toStartOfISOYear`, and `toDayOfYear`. [#3146](#)
- Now you can use `Nullable` columns for `MySQL` and `ODBC` tables. [#3362](#)
- Nested data structures can be read as nested objects in `JSONEachRow` format. Added the `input_format_import_nested_json` setting. [Veloman Yunkan](#)
- Parallel processing is available for many `MATERIALIZED VIEW`s when inserting data. See the `parallel_view_processing` setting. [Marek Vavruša](#)
- Added the `SYSTEM FLUSH LOGS` query (forced log flushes to system tables such as `query_log`) [#3321](#)
- Now you can use pre-defined `database` and `table` macros when declaring Replicated tables. [#3251](#)
- Added the ability to read `Decimal` type values in engineering notation (indicating powers of ten). [#3153](#)

### EXPERIMENTAL FEATURES:

- Optimization of the `GROUP BY` clause for `LowCardinality` data types. [#3138](#)
- Optimized calculation of expressions for `LowCardinality` data types. [#3200](#)

### IMPROVEMENTS:

- Significantly reduced memory consumption for queries with `ORDER BY` and `LIMIT`. See the `max_bytes_before_remerge_sort` setting. [#3205](#)
- In the absence of `JOIN` (`LEFT`, `INNER`, ...), `INNER JOIN` is assumed. [#3147](#)
- Qualified asterisks work correctly in queries with `JOIN`. [Winter Zhang](#)
- The `ODBC` table engine correctly chooses the method for quoting identifiers in the SQL dialect of a remote database. [Alexandr Krasheninnikov](#)
- The `compile_expressions` setting (JIT compilation of expressions) is enabled by default.
- Fixed behavior for simultaneous `DROP DATABASE/TABLE IF EXISTS` and `CREATE DATABASE/TABLE IF NOT EXISTS`. Previously, a `CREATE DATABASE ... IF NOT EXISTS` query could return the error message "File ... already exists", and the `CREATE TABLE ... IF NOT EXISTS` and `DROP TABLE IF EXISTS` queries could return Table ... is creating or attaching right now. [#3101](#)
- `LIKE` and `IN` expressions with a constant right half are passed to the remote server when querying from `MySQL` or `ODBC` tables. [#3182](#)
- Comparisons with constant expressions in a `WHERE` clause are passed to the remote server when querying from `MySQL` and `ODBC` tables. Previously, only comparisons with constants were passed. [#3182](#)
- Correct calculation of row width in the terminal for `Pretty` formats, including strings with hieroglyphs. [Amos Bird](#).
- `ON CLUSTER` can be specified for `ALTER UPDATE` queries.
- Improved performance for reading data in `JSONEachRow` format. [#3332](#)
- Added synonyms for the `LENGTH` and `CHARACTER_LENGTH` functions for compatibility. The `CONCAT` function is no longer case-sensitive. [#3306](#)
- Added the `TIMESTAMP` synonym for the `DateTime` type. [#3390](#)

- There is always space reserved for query\_id in the server logs, even if the log line is not related to a query. This makes it easier to parse server text logs with third-party tools.
- Memory consumption by a query is logged when it exceeds the next level of an integer number of gigabytes. #3205
- Added compatibility mode for the case when the client library that uses the Native protocol sends fewer columns by mistake than the server expects for the INSERT query. This scenario was possible when using the clickhouse-cpp library. Previously, this scenario caused the server to crash. #3171
- In a user-defined WHERE expression in clickhouse-copier , you can now use a partition\_key alias (for additional filtering by source table partition). This is useful if the partitioning scheme changes during copying, but only changes slightly. #3166
- The workflow of the Kafka engine has been moved to a background thread pool in order to automatically reduce the speed of data reading at high loads. Marek Vavruša.
- Support for reading Tuple and Nested values of structures like struct in the Cap'n'Proto format . Marek Vavruša
- The list of top-level domains for the firstSignificantSubdomain function now includes the domain biz . decaseal
- In the configuration of external dictionaries, null\_value is interpreted as the value of the default data type. #3330
- Support for the intDiv and intDivOrZero functions for Decimal . b48402e8
- Support for the Date , DateTime , UUID , and Decimal types as a key for the sumMap aggregate function. #3281
- Support for the Decimal data type in external dictionaries. #3324
- Support for the Decimal data type in SummingMergeTree tables. #3348
- Added specializations for UUID in if . #3366
- Reduced the number of open and close system calls when reading from a MergeTree table . #3283
- A TRUNCATE TABLE query can be executed on any replica (the query is passed to the leader replica). Kirill Shvakov

#### BUG FIXES:

- Fixed an issue with Dictionary tables for range\_hashed dictionaries. This error occurred in version 18.12.17. #1702
- Fixed an error when loading range\_hashed dictionaries (the message Unsupported type Nullable (...) ). This error occurred in version 18.12.17. #3362
- Fixed errors in the pointInPolygon function due to the accumulation of inaccurate calculations for polygons with a large number of vertices located close to each other. #3331 #3341
- If after merging data parts, the checksum for the resulting part differs from the result of the same merge in another replica, the result of the merge is deleted and the data part is downloaded from the other replica (this is the correct behavior). But after downloading the data part, it couldn't be added to the working set because of an error that the part already exists (because the data part was deleted with some delay after the merge). This led to cyclical attempts to download the same data. #3194
- Fixed incorrect calculation of total memory consumption by queries (because of incorrect calculation, the max\_memory\_usage\_for\_all\_queries setting worked incorrectly and the MemoryTracking metric had an incorrect value). This error occurred in version 18.12.13. Marek Vavruša
- Fixed the functionality of CREATE TABLE ... ON CLUSTER ... AS SELECT ... This error occurred in version 18.12.13. #3247
- Fixed unnecessary preparation of data structures for JOIN s on the server that initiates the query if the JOIN is only performed on remote servers. #3340
- Fixed bugs in the Kafka engine: deadlocks after exceptions when starting to read data, and locks upon completion Marek Vavruša.
- For Kafka tables, the optional schema parameter was not passed (the schema of the Cap'n'Proto format). Vojtech Splichal

- If the ensemble of ZooKeeper servers has servers that accept the connection but then immediately close it instead of responding to the handshake, ClickHouse chooses to connect another server. Previously, this produced the error Cannot read all data. Bytes read: 0. Bytes expected: 4. and the server couldn't start. [8218cf3a](#)
- If the ensemble of ZooKeeper servers contains servers for which the DNS query returns an error, these servers are ignored. [17b8e209](#)
- Fixed type conversion between `Date` and `DateTime` when inserting data in the `VALUES` format (if `input_format_values_interpret_expressions = 1`). Previously, the conversion was performed between the numerical value of the number of days in Unix Epoch time and the Unix timestamp, which led to unexpected results. [#3229](#)
- Corrected type conversion between `Decimal` and integer numbers. [#3211](#)
- Fixed errors in the `enable_optimize_predicate_expression` setting. [Winter Zhang](#)
- Fixed a parsing error in CSV format with floating-point numbers if a non-default CSV separator is used, such as; [#3155](#)
- Fixed the `arrayCumSumNonNegative` function (it does not accumulate negative values if the accumulator is less than zero). [Aleksey Studnev](#)
- Fixed how `Merge` tables work on top of `Distributed` tables when using `PREWHERE`. [#3165](#)
- Bug fixes in the `ALTER UPDATE` query.
- Fixed bugs in the `odbc` table function that appeared in version 18.12. [#3197](#)
- Fixed the operation of aggregate functions with `StateArray` combinators. [#3188](#)
- Fixed a crash when dividing a `Decimal` value by zero. [69dd6609](#)
- Fixed output of types for operations using `Decimal` and integer arguments. [#3224](#)
- Fixed the segfault during `GROUP BY` on `Decimal128`. [3359ba06](#)
- The `log_query_threads` setting (logging information about each thread of query execution) now takes effect only if the `log_queries` option (logging information about queries) is set to 1. Since the `log_query_threads` option is enabled by default, information about threads was previously logged even if query logging was disabled. [#3241](#)
- Fixed an error in the distributed operation of the quantiles aggregate function (the error message Not found column `quantile...`). [292a8855](#)
- Fixed the compatibility problem when working on a cluster of version 18.12.17 servers and older servers at the same time. For distributed queries with `GROUP BY` keys of both fixed and non-fixed length, if there was a large amount of data to aggregate, the returned data was not always fully aggregated (two different rows contained the same aggregation keys). [#3254](#)
- Fixed handling of substitutions in `clickhouse-performance-test`, if the query contains only part of the substitutions declared in the test. [#3263](#)
- Fixed an error when using `FINAL` with `PREWHERE`. [#3298](#)
- Fixed an error when using `PREWHERE` over columns that were added during `ALTER`. [#3298](#)
- Added a check for the absence of `arrayJoin` for `DEFAULT` and `MATERIALIZED` expressions. Previously, `arrayJoin` led to an error when inserting data. [#3337](#)
- Added a check for the absence of `arrayJoin` in a `PREWHERE` clause. Previously, this led to messages like `Size ... doesn't match` or `Unknown compression method` when executing queries. [#3357](#)
- Fixed segfault that could occur in rare cases after optimization that replaced AND chains from equality evaluations with the corresponding IN expression. [liuyimin-bytedance](#)
- Minor corrections to `clickhouse-benchmark`: previously, client information was not sent to the server; now the number of queries executed is calculated more accurately when shutting down and for limiting the number of iterations. [#3351](#)  
[#3352](#)

#### BACKWARD INCOMPATIBLE CHANGES:

- Removed the `allow_experimental_decimal_type` option. The `Decimal` data type is available for default use.[#3329](#)

## ClickHouse release 18.12

### ClickHouse release 18.12.17, 2018-09-16

#### NEW FEATURES:

- `invalidate_query` (the ability to specify a query to check whether an external dictionary needs to be updated) is implemented for the `clickhouse` source. [#3126](#)
- Added the ability to use `UInt*`, `Int*`, and `DateTime` data types (along with the `Date` type) as a `range_hashed` external dictionary key that defines the boundaries of ranges. Now `NULL` can be used to designate an open range. [Vasily Nemkov](#)
- The `Decimal` type now supports `var*` and `stddev*` aggregate functions. [#3129](#)
- The `Decimal` type now supports mathematical functions (`exp`, `sin` and so on.) [#3129](#)
- The `system.part_log` table now has the `partition_id` column. [#3089](#)

#### BUG FIXES:

- `Merge` now works correctly on `Distributed` tables. [Winter Zhang](#)
- Fixed incompatibility (unnecessary dependency on the `glibc` version) that made it impossible to run ClickHouse on `Ubuntu Precise` and older versions. The incompatibility arose in version 18.12.13. [#3130](#)
- Fixed errors in the `enable_optimize_predicate_expression` setting. [Winter Zhang](#)
- Fixed a minor issue with backwards compatibility that appeared when working with a cluster of replicas on versions earlier than 18.12.13 and simultaneously creating a new replica of a table on a server with a newer version (shown in the message `Can not clone replica, because the ... updated to new ClickHouse version`, which is logical, but shouldn't happen). [#3122](#)

#### BACKWARD INCOMPATIBLE CHANGES:

- The `enable_optimize_predicate_expression` option is enabled by default (which is rather optimistic). If query analysis errors occur that are related to searching for the column names, set `enable_optimize_predicate_expression` to 0. [Winter Zhang](#)

### ClickHouse release 18.12.14, 2018-09-13

#### NEW FEATURES:

- Added support for `ALTER UPDATE` queries. [#3035](#)
- Added the `allow_ddl` option, which restricts the user's access to DDL queries. [#3104](#)
- Added the `min_merge_bytes_to_use_direct_io` option for `MergeTree` engines, which allows you to set a threshold for the total size of the merge (when above the threshold, data part files will be handled using `O_DIRECT`). [#3117](#)
- The `system.merges` system table now contains the `partition_id` column. [#3099](#)

#### IMPROVEMENTS

- If a data part remains unchanged during mutation, it isn't downloaded by replicas. [#3103](#)
- Autocomplete is available for names of settings when working with `clickhouse-client`. [#3106](#)

#### BUG FIXES:

- Added a check for the sizes of arrays that are elements of `Nested` type fields when inserting. [#3118](#)
- Fixed an error updating external dictionaries with the `ODBC` source and `hashed` storage. This error occurred in version 18.12.13.

- Fixed a crash when creating a temporary table from a query with an IN condition. [Winter Zhang](#)
- Fixed an error in aggregate functions for arrays that can have NULL elements. [Winter Zhang](#)

## ClickHouse release 18.12.13, 2018-09-10

### NEW FEATURES:

- Added the DECIMAL(digits, scale) data type ( Decimal32(scale) , Decimal64(scale) , Decimal128(scale) ). To enable it, use the setting allow\_experimental\_decimal\_type . [#2846](#) [#2970](#) [#3008](#) [#3047](#)
- New WITH ROLLUP modifier for GROUP BY (alternative syntax: GROUP BY ROLLUP(...)). [#2948](#)
- In queries with JOIN, the star character expands to a list of columns in all tables, in compliance with the SQL standard. You can restore the old behavior by setting asterisk\_left\_columns\_only to 1 on the user configuration level. [Winter Zhang](#)
- Added support for JOIN with table functions. [Winter Zhang](#)
- Autocomplete by pressing Tab in clickhouse-client. [Sergey Shcherbin](#)
- Ctrl+C in clickhouse-client clears a query that was entered. [#2877](#)
- Added the join\_default\_strictness setting (values: " , 'any' , 'all' ). This allows you to not specify ANY or ALL for JOIN . [#2982](#)
- Each line of the server log related to query processing shows the query ID[#2482](#)
- Now you can get query execution logs in clickhouse-client (use the send\_logs\_level setting). With distributed query processing, logs are cascaded from all the servers. [#2482](#)
- The system.query\_log and system.processes ( SHOW PROCESSLIST ) tables now have information about all changed settings when you run a query (the nested structure of the Settings data). Added the log\_query\_settings setting. [#2482](#)
- The system.query\_log and system.processes tables now show information about the number of threads that are participating in query execution (see the thread\_numbers column). [#2482](#)
- Added ProfileEvents counters that measure the time spent on reading and writing over the network and reading and writing to disk, the number of network errors, and the time spent waiting when network bandwidth is limited. [#2482](#)
- Added ProfileEvents counters that contain the system metrics from rusage (you can use them to get information about CPU usage in userspace and the kernel, page faults, and context switches), as well as taskstats metrics (use these to obtain information about I/O wait time, CPU wait time, and the amount of data read and recorded, both with and without page cache). [#2482](#)
- The ProfileEvents counters are applied globally and for each query, as well as for each query execution thread, which allows you to profile resource consumption by query in detail. [#2482](#)
- Added the system.query\_thread\_log table, which contains information about each query execution thread. Added the log\_query\_threads setting. [#2482](#)
- The system.metrics and system.events tables now have built-in documentation. [#3016](#)
- Added the arrayEnumerateDense function. [Amos Bird](#)
- Added the arrayCumSumNonNegative and arrayDifference functions. [Aleksey Studnev](#)
- Added the retention aggregate function. [Sundy Li](#)
- Now you can add (merge) states of aggregate functions by using the plus operator, and multiply the states of aggregate functions by a nonnegative constant. [#3062](#) [#3034](#)
- Tables in the MergeTree family now have the virtual column \_partition\_id . [#3089](#)

### EXPERIMENTAL FEATURES:

- Added the LowCardinality(T) data type. This data type automatically creates a local dictionary of values and allows data processing without unpacking the dictionary. [#2830](#)

- Added a cache of JIT-compiled functions and a counter for the number of uses before compiling. To JIT compile expressions, enable the `compile_expressions` setting. [#2990](#) [#3077](#)

#### IMPROVEMENTS:

- Fixed the problem with unlimited accumulation of the replication log when there are abandoned replicas. Added an effective recovery mode for replicas with a long lag.
- Improved performance of `GROUP BY` with multiple aggregation fields when one of them is string and the others are fixed length.
- Improved performance when using `PREWHERE` and with implicit transfer of expressions in `PREWHERE`.
- Improved parsing performance for text formats (`CSV`, `TSV`). [Amos Bird](#) [#2980](#)
- Improved performance of reading strings and arrays in binary formats. [Amos Bird](#)
- Increased performance and reduced memory consumption for queries to `system.tables` and `system.columns` when there is a very large number of tables on a single server. [#2953](#)
- Fixed a performance problem in the case of a large stream of queries that result in an error (the `_dl_addr` function is visible in `perf top`, but the server isn't using much CPU). [#2938](#)
- Conditions are cast into the View (when `enable_optimize_predicate_expression` is enabled). [Winter Zhang](#)
- Improvements to the functionality for the `UUID` data type. [#3074](#) [#2985](#)
- The `UUID` data type is supported in The-Alchemist dictionaries. [#2822](#)
- The `visitParamExtractRaw` function works correctly with nested structures. [Winter Zhang](#)
- When the `input_format_skip_unknown_fields` setting is enabled, object fields in `JSONEachRow` format are skipped correctly. [BlahGeek](#)
- For a `CASE` expression with conditions, you can now omit `ELSE`, which is equivalent to `ELSE NULL`. [#2920](#)
- The operation timeout can now be configured when working with ZooKeeper. [urykhy](#)
- You can specify an offset for `LIMIT n, m` as `LIMIT n OFFSET m`. [#2840](#)
- You can use the `SELECT TOP n` syntax as an alternative for `LIMIT`. [#2840](#)
- Increased the size of the queue to write to system tables, so the `SystemLog` parameter queue is full error doesn't happen as often.
- The `windowFunnel` aggregate function now supports events that meet multiple conditions. [Amos Bird](#)
- Duplicate columns can be used in a `USING` clause for `JOIN`. [#3006](#)
- Pretty formats now have a limit on column alignment by width. Use the `output_format_pretty_max_column_pad_width` setting. If a value is wider, it will still be displayed in its entirety, but the other cells in the table will not be too wide. [#3003](#)
- The `odbc` table function now allows you to specify the database/schema name. [Amos Bird](#)
- Added the ability to use a username specified in the `clickhouse-client` config file. [Vladimir Kozbin](#)
- The `ZooKeeperExceptions` counter has been split into three counters: `ZooKeeperUserExceptions`, `ZooKeeperHardwareExceptions`, and `ZooKeeperOtherExceptions`.
- `ALTER DELETE` queries work for materialized views.
- Added randomization when running the cleanup thread periodically for `ReplicatedMergeTree` tables in order to avoid periodic load spikes when there are a very large number of `ReplicatedMergeTree` tables.
- Support for `ATTACH TABLE ... ON CLUSTER` queries. [#3025](#)

#### BUG FIXES:

- Fixed an issue with Dictionary tables (throws the `Size of offsets doesn't match size of column` or `Unknown compression method` exception). This bug appeared in version 18.10.3. [#2913](#)

- Fixed a bug when merging `CollapsingMergeTree` tables if one of the data parts is empty (these parts are formed during merge or `ALTER DELETE` if all data was deleted), and the `vertical` algorithm was used for the merge. #3049
- Fixed a race condition during `DROP` or `TRUNCATE` for `Memory` tables with a simultaneous `SELECT`, which could lead to server crashes. This bug appeared in version 1.1.54388. #3038
- Fixed the possibility of data loss when inserting in `Replicated` tables if the `Session` is expired error is returned (data loss can be detected by the `ReplicatedDataLoss` metric). This error occurred in version 1.1.54378. #2939 #2949 #2964
- Fixed a segfault during `JOIN ... ON`. #3000
- Fixed the error searching column names when the `WHERE` expression consists entirely of a qualified column name, such as `WHERE table.column`. #2994
- Fixed the "Not found column" error that occurred when executing distributed queries if a single column consisting of an `IN` expression with a subquery is requested from a remote server. #3087
- Fixed the `Block structure mismatch in UNION stream: different number of columns` error that occurred for distributed queries if one of the shards is local and the other is not, and optimization of the move to `PREWHERE` is triggered. #2226 #3037 #3055 #3065 #3073 #3090 #3093
- Fixed the `pointInPolygon` function for certain cases of non-convex polygons. #2910
- Fixed the incorrect result when comparing `nan` with integers. #3024
- Fixed an error in the `zlib-ng` library that could lead to segfault in rare cases. #2854
- Fixed a memory leak when inserting into a table with `AggregateFunction` columns, if the state of the aggregate function is not simple (allocates memory separately), and if a single insertion request results in multiple small blocks. #3084
- Fixed a race condition when creating and deleting the same `Buffer` or `MergeTree` table simultaneously.
- Fixed the possibility of a segfault when comparing tuples made up of certain non-trivial types, such as tuples. #2989
- Fixed the possibility of a segfault when running certain `ON CLUSTER` queries. Winter Zhang
- Fixed an error in the `arrayDistinct` function for `Nullable` array elements. #2845 #2937
- The `enable_optimize_predicate_expression` option now correctly supports cases with `SELECT *`. Winter Zhang
- Fixed the segfault when re-initializing the ZooKeeper session. #2917
- Fixed potential blocking when working with ZooKeeper.
- Fixed incorrect code for adding nested data structures in a `SummingMergeTree`.
- When allocating memory for states of aggregate functions, alignment is correctly taken into account, which makes it possible to use operations that require alignment when implementing states of aggregate functions. chenxing-xc

#### SECURITY FIX:

- Safe use of ODBC data sources. Interaction with ODBC drivers uses a separate `clickhouse-odbc-bridge` process. Errors in third-party ODBC drivers no longer cause problems with server stability or vulnerabilities. #2828 #2879 #2886 #2893 #2921
- Fixed incorrect validation of the file path in the `catBoostPool` table function. #2894
- The contents of system tables (`tables`, `databases`, `parts`, `columns`, `parts_columns`, `merges`, `mutations`, `replicas`, and `replication_queue`) are filtered according to the user's configured access to databases (`allow_databases`). Winter Zhang

#### BACKWARD INCOMPATIBLE CHANGES:

- In queries with `JOIN`, the star character expands to a list of columns in all tables, in compliance with the SQL standard. You can restore the old behavior by setting `asterisk_left_columns_only` to 1 on the user configuration level.

#### BUILD CHANGES:

- Most integration tests can now be run by commit.
- Code style checks can also be run by commit.

- The `memcpy` implementation is chosen correctly when building on CentOS7/Fedora. [Etienne Champetier](#)
- When using clang to build, some warnings from `-Weverything` have been added, in addition to the regular `-Wall-Wextra -Werror`. [#2957](#)
- Debugging the build uses the `jemalloc` debug option.
- The interface of the library for interacting with ZooKeeper is declared abstract. [#2950](#)

## ClickHouse release 18.10

### ClickHouse release 18.10.3, 2018-08-13

#### NEW FEATURES:

- HTTPS can be used for replication. [#2760](#)
- Added the functions `murmurHash2_64`, `murmurHash3_32`, `murmurHash3_64`, and `murmurHash3_128` in addition to the existing `murmurHash2_32`. [#2791](#)
- Support for Nullable types in the ClickHouse ODBC driver (`ODBCDriver2` output format). [#2834](#)
- Support for `UUID` in the key columns.

#### IMPROVEMENTS:

- Clusters can be removed without restarting the server when they are deleted from the config files. [#2777](#)
- External dictionaries can be removed without restarting the server when they are removed from config files. [#2779](#)
- Added `SETTINGS` support for the `Kafka` table engine. [Alexander Marshalov](#)
- Improvements for the `UUID` data type (not yet complete). [#2618](#)
- Support for empty parts after merges in the `SummingMergeTree`, `CollapsingMergeTree` and `VersionedCollapsingMergeTree` engines. [#2815](#)
- Old records of completed mutations are deleted (`ALTER DELETE`). [#2784](#)
- Added the `system.merge_tree_settings` table. [Kirill Shvakov](#)
- The `system.tables` table now has dependency columns: `dependencies_database` and `dependencies_table`. [Winter Zhang](#)
- Added the `max_partition_size_to_drop` config option. [#2782](#)
- Added the `output_format_json_escape_forward_slashes` option. [Alexander Bocharov](#)
- Added the `max_fetch_partition_retries_count` setting. [#2831](#)
- Added the `prefer_localhost_replica` setting for disabling the preference for a local replica and going to a local replica without inter-process interaction. [#2832](#)
- The `quantileExact` aggregate function returns `nan` in the case of aggregation on an empty `Float32` or `Float64` set. [Sundy Li](#)

#### BUG FIXES:

- Removed unnecessary escaping of the connection string parameters for ODBC, which made it impossible to establish a connection. This error occurred in version 18.6.0.
- Fixed the logic for processing `REPLACE PARTITION` commands in the replication queue. If there are two `REPLACE` commands for the same partition, the incorrect logic could cause one of them to remain in the replication queue and not be executed. [#2814](#)
- Fixed a merge bug when all data parts were empty (parts that were formed from a merge or from `ALTER DELETE` if all data was deleted). This bug appeared in version 18.1.0. [#2930](#)
- Fixed an error for concurrent `Set` or `Join`. [Amos Bird](#)
- Fixed the `Block structure mismatch in UNION stream: different number of columns` error that occurred for `UNION ALL` queries

inside a sub-query if one of the `SELECT` queries contains duplicate column names. [Winter Zhang](#)

- Fixed a memory leak if an exception occurred when connecting to a MySQL server.
- Fixed incorrect clickhouse-client response code in case of a query error.
- Fixed incorrect behavior of materialized views containing `DISTINCT`. [#2795](#)

#### BACKWARD INCOMPATIBLE CHANGES

- Removed support for `CHECK TABLE` queries for Distributed tables.

#### BUILD CHANGES:

- The allocator has been replaced: `jemalloc` is now used instead of `tcmalloc`. In some scenarios, this increases speed up to 20%. However, there are queries that have slowed by up to 20%. Memory consumption has been reduced by approximately 10% in some scenarios, with improved stability. With highly competitive loads, CPU usage in userspace and in system shows just a slight increase. [#2773](#)
- Use of `libressl` from a submodule. [#1983](#) [#2807](#)
- Use of `unixodbc` from a submodule. [#2789](#)
- Use of `mariadb-connector-c` from a submodule. [#2785](#)
- Added functional test files to the repository that depend on the availability of test data (for the time being, without the test data itself).

## ClickHouse release 18.6

### ClickHouse release 18.6.0, 2018-08-02

#### NEW FEATURES:

- Added support for ON expressions for the JOIN ON syntax: `JOIN ON Expr([table.]column ...)` = `Expr([table.]column, ...)` [AND `Expr([table.]column, ...) = Expr([table.]column, ...) ...`]. The expression must be a chain of equalities joined by the AND operator. Each side of the equality can be an arbitrary expression over the columns of one of the tables. The use of fully qualified column names is supported (`table.name`, `database.table.name`, `table_alias.name`, `subquery_alias.name`) for the right table. [#2742](#)
- HTTPS can be enabled for replication. [#2760](#)

#### IMPROVEMENTS:

- The server passes the patch component of its version to the client. Data about the patch version component is in `system.processes` and `query_log`. [#2646](#)

## ClickHouse release 18.5

### ClickHouse release 18.5.1, 2018-07-31

#### NEW FEATURES:

- Added the hash function `murmurHash2_32` [#2756](#).

#### IMPROVEMENTS:

- Now you can use the `from_env` [#2741](#) attribute to set values in config files from environment variables.
- Added case-insensitive versions of the `coalesce`, `ifNull`, and `nullIf` functions [#2752](#).

#### BUG FIXES:

- Fixed a possible bug when starting a replica [#2759](#).

## ClickHouse release 18.4

### ClickHouse release 18.4.0, 2018-07-28

#### NEW FEATURES:

- Added system tables: `formats`, `data_type_families`, `aggregate_function_combinators`, `table_functions`, `table_engines`, `collations` (#2721).
- Added the ability to use a table function instead of a table as an argument of a `remote` or `cluster` table function (#2708).
- Support for `HTTP Basic` authentication in the replication protocol (#2727).
- The `has` function now allows searching for a numeric value in an array of `Enum` values Maxim Khrisanfov.
- Support for adding arbitrary message separators when reading from Kafka Amos Bird.

#### IMPROVEMENTS:

- The `ALTER TABLE t DELETE WHERE` query does not rewrite data parts that were not affected by the `WHERE` condition #2694.
- The `use_minimalistic_checksums_in_zookeeper` option for `ReplicatedMergeTree` tables is enabled by default. This setting was added in version 1.1.54378, 2018-04-16. Versions that are older than 1.1.54378 can no longer be installed.
- Support for running `KILL` and `OPTIMIZE` queries that specify `ON CLUSTER` Winter Zhang.

#### BUG FIXES:

- Fixed the error `Column ... is not under an aggregate function and not in GROUP BY` for aggregation with an `IN` expression. This bug appeared in version 18.1.0. (bbdd780b)
- Fixed a bug in the `windowFunnel` aggregate function Winter Zhang.
- Fixed a bug in the `anyHeavy` aggregate function (a2101df2)
- Fixed server crash when using the `countArray()` aggregate function.

#### BACKWARD INCOMPATIBLE CHANGES:

- Parameters for `Kafka` engine was changed from `Kafka(kafka_broker_list, kafka_topic_list, kafka_group_name, kafka_format[, kafka_schema, kafka_num_consumers])` to `Kafka(kafka_broker_list, kafka_topic_list, kafka_group_name, kafka_format[, kafka_row_delimiter, kafka_schema, kafka_num_consumers])`. If your tables use `kafka_schema` or `kafka_num_consumers` parameters, you have to manually edit the metadata files `path/metadata/database/table.sql` and add `kafka_row_delimiter` parameter with `"` value.

## ClickHouse release 18.1

### ClickHouse release 18.1.0, 2018-07-23

#### NEW FEATURES:

- Support for the `ALTER TABLE t DELETE WHERE` query for non-replicated `MergeTree` tables (#2634).
- Support for arbitrary types for the `uniq*` family of aggregate functions (#2010).
- Support for arbitrary types in comparison operators (#2026).
- The `users.xml` file allows setting a subnet mask in the format `10.0.0.1/255.255.255.0`. This is necessary for using masks for IPv6 networks with zeros in the middle (#2637).
- Added the `arrayDistinct` function (#2670).
- The `SummingMergeTree` engine can now work with `AggregateFunction` type columns Constantin S. Pan).

#### IMPROVEMENTS:

- Changed the numbering scheme for release versions. Now the first part contains the year of release (A.D., Moscow timezone, minus 2000), the second part contains the number for major changes (increases for most releases), and the third part is the patch version. Releases are still backward compatible, unless otherwise stated in the changelog.
- Faster conversions of floating-point numbers to a string ([Amos Bird](#)).
- If some rows were skipped during an insert due to parsing errors (this is possible with the `input_allow_errors_num` and `input_allow_errors_ratio` settings enabled), the number of skipped rows is now written to the server log ([Leonardo Cecchi](#)).

#### BUG FIXES:

- Fixed the TRUNCATE command for temporary tables ([Amos Bird](#)).
- Fixed a rare deadlock in the ZooKeeper client library that occurred when there was a network error while reading the response ([c315200](#)).
- Fixed an error during a CAST to Nullable types ([#1322](#)).
- Fixed the incorrect result of the `maxIntersection()` function when the boundaries of intervals coincided ([Michael Furmur](#)).
- Fixed incorrect transformation of the OR expression chain in a function argument ([chenxing-xc](#)).
- Fixed performance degradation for queries containing `IN (subquery)` expressions inside another subquery ([#2571](#)).
- Fixed incompatibility between servers with different versions in distributed queries that use a `CAST` function that isn't in uppercase letters ([fe8c4d6](#)).
- Added missing quoting of identifiers for queries to an external DBMS ([#2635](#)).

#### BACKWARD INCOMPATIBLE CHANGES:

- Converting a string containing the number zero to `DateTime` does not work. Example: `SELECT toDate('0')`. This is also the reason that `DateTime DEFAULT '0'` does not work in tables, as well as `<null_value>0</null_value>` in dictionaries. Solution: replace `0` with `0000-00-00 00:00:00`.

## ClickHouse release 1.1

### ClickHouse release 1.1.54394, 2018-07-12

#### NEW FEATURES:

- Added the `histogram` aggregate function ([Mikhail Surin](#)).
- Now `OPTIMIZE TABLE ... FINAL` can be used without specifying partitions for `ReplicatedMergeTree` ([Amos Bird](#)).

#### BUG FIXES:

- Fixed a problem with a very small timeout for sockets (one second) for reading and writing when sending and downloading replicated data, which made it impossible to download larger parts if there is a load on the network or disk (it resulted in cyclical attempts to download parts). This error occurred in version 1.1.54388.
- Fixed issues when using chroot in ZooKeeper if you inserted duplicate data blocks in the table.
- The `has` function now works correctly for an array with Nullable elements ([#2115](#)).
- The `system.tables` table now works correctly when used in distributed queries. The `metadata_modification_time` and `engine_full` columns are now non-virtual. Fixed an error that occurred if only these columns were queried from the table.
- Fixed how an empty `TinyLog` table works after inserting an empty data block ([#2563](#)).
- The `system.zookeeper` table works if the value of the node in ZooKeeper is `NULL`.

### ClickHouse release 1.1.54390, 2018-07-06

## NEW FEATURES:

- Queries can be sent in `multipart/form-data` format (in the `query` field), which is useful if external data is also sent for query processing ([Olga Hvostikova](#)).
- Added the ability to enable or disable processing single or double quotes when reading data in CSV format. You can configure this in the `format_csv_allow_single_quotes` and `format_csv_allow_double_quotes` settings ([Amos Bird](#)).
- Now `OPTIMIZE TABLE ... FINAL` can be used without specifying the partition for non-replicated variants of MergeTree ([Amos Bird](#)).

## IMPROVEMENTS:

- Improved performance, reduced memory consumption, and correct memory consumption tracking with use of the IN operator when a table index could be used ([#2584](#)).
- Removed redundant checking of checksums when adding a data part. This is important when there are a large number of replicas, because in these cases the total number of checks was equal to  $N^2$ .
- Added support for `Array(Tuple(...))` arguments for the `arrayEnumerateUniq` function ([#2573](#)).
- Added `Nullable` support for the `runningDifference` function ([#2594](#)).
- Improved query analysis performance when there is a very large number of expressions ([#2572](#)).
- Faster selection of data parts for merging in `ReplicatedMergeTree` tables. Faster recovery of the ZooKeeper session ([#2597](#)).
- The `format_version.txt` file for `MergeTree` tables is re-created if it is missing, which makes sense if ClickHouse is launched after copying the directory structure without files ([Ciprian Hacman](#)).

## BUG FIXES:

- Fixed a bug when working with ZooKeeper that could make it impossible to recover the session and readonly states of tables before restarting the server.
- Fixed a bug when working with ZooKeeper that could result in old nodes not being deleted if the session is interrupted.
- Fixed an error in the `quantileTDigest` function for `Float` arguments (this bug was introduced in version 1.1.54388) ([Mikhail Surin](#)).
- Fixed a bug in the index for MergeTree tables if the primary key column is located inside the function for converting types between signed and unsigned integers of the same size ([#2603](#)).
- Fixed segfault if `macros` are used but they aren't in the config file ([#2570](#)).
- Fixed switching to the default database when reconnecting the client ([#2583](#)).
- Fixed a bug that occurred when the `use_index_for_in_with_subqueries` setting was disabled.

## SECURITY FIX:

- Sending files is no longer possible when connected to MySQL (`LOAD DATA LOCAL INFILE`).

## ClickHouse release 1.1.54388, 2018-06-28

## NEW FEATURES:

- Support for the `ALTER TABLE t DELETE WHERE` query for replicated tables. Added the `system.mutations` table to track progress of this type of queries.
- Support for the `ALTER TABLE t [REPLACE|ATTACH] PARTITION` query for \*MergeTree tables.
- Support for the `TRUNCATE TABLE` query ([Winter Zhang](#))
- Several new `SYSTEM` queries for replicated tables (`RESTART REPLICAS`, `SYNC REPLICA`, `[STOP|START]` `[MERGES|FETCHES|SENDS REPLICATED|REPLICATION QUEUES]`).

- Added the ability to write to a table with the MySQL engine and the corresponding table functions ([sundy-li](#)).
- Added the `url()` table function and the URL table engine ([Alexander Sapin](#)).
- Added the `windowFunnel` aggregate function ([sundy-li](#)).
- New `startsWith` and `endsWith` functions for strings ([Vadim Plakhtinsky](#)).
- The `numbers()` table function now allows you to specify the offset ([Winter Zhang](#)).
- The password to `clickhouse-client` can be entered interactively.
- Server logs can now be sent to syslog ([Alexander Krasheninnikov](#)).
- Support for logging in dictionaries with a shared library source ([Alexander Sapin](#)).
- Support for custom CSV delimiters ([Ivan Zhukov](#))
- Added the `date_time_input_format` setting. If you switch this setting to 'best\_effort', DateTime values will be read in a wide range of formats.
- Added the `clickhouse-obfuscator` utility for data obfuscation. Usage example: publishing data used in performance tests.

#### EXPERIMENTAL FEATURES:

- Added the ability to calculate `and` arguments only where they are needed ([Anastasia Tsarkova](#))
- JIT compilation to native code is now available for some expressions ([pyos](#)).

#### BUG FIXES:

- Duplicates no longer appear for a query with `DISTINCT` and `ORDER BY`.
- Queries with `ARRAY JOIN` and `arrayFilter` no longer return an incorrect result.
- Fixed an error when reading an array column from a Nested structure ([#2066](#)).
- Fixed an error when analyzing queries with a HAVING clause like `HAVING tuple IN (...)`.
- Fixed an error when analyzing queries with recursive aliases.
- Fixed an error when reading from ReplacingMergeTree with a condition in PREWHERE that filters all rows ([#2525](#)).
- User profile settings were not applied when using sessions in the HTTP interface.
- Fixed how settings are applied from the command line parameters in `clickhouse-local`.
- The ZooKeeper client library now uses the session timeout received from the server.
- Fixed a bug in the ZooKeeper client library when the client waited for the server response longer than the timeout.
- Fixed pruning of parts for queries with conditions on partition key columns ([#2342](#)).
- Merges are now possible after `CLEAR COLUMN IN PARTITION` ([#2315](#)).
- Type mapping in the ODBC table function has been fixed ([sundy-li](#)).
- Type comparisons have been fixed for `DateTime` with and without the time zone ([Alexander Bocharov](#)).
- Fixed syntactic parsing and formatting of the `CAST` operator.
- Fixed insertion into a materialized view for the Distributed table engine ([Babacar Diassé](#)).
- Fixed a race condition when writing data from the `Kafka` engine to materialized views ([Yangkuan Liu](#)).
- Fixed SSRF in the `remote()` table function.
- Fixed exit behavior of `clickhouse-client` in multiline mode ([#2510](#)).

#### IMPROVEMENTS:

- Background tasks in replicated tables are now performed in a thread pool instead of in separate threads ([Silviu Caragea](#)).

- Improved LZ4 compression performance.
- Faster analysis for queries with a large number of JOINs and sub-queries.
- The DNS cache is now updated automatically when there are too many network errors.
- Table inserts no longer occur if the insert into one of the materialized views is not possible because it has too many parts.
- Corrected the discrepancy in the event counters `Query`, `SelectQuery`, and `InsertQuery`.
- Expressions like `tuple IN (SELECT tuple)` are allowed if the tuple types match.
- A server with replicated tables can start even if you haven't configured ZooKeeper.
- When calculating the number of available CPU cores, limits on cgroups are now taken into account ([Atri Sharma](#)).
- Added chown for config directories in the systemd config file ([Mikhail Shiryaev](#)).

#### BUILD CHANGES:

- The gcc8 compiler can be used for builds.
- Added the ability to build llvm from submodule.
- The version of the librdkafka library has been updated to v0.11.4.
- Added the ability to use the system libcpuid library. The library version has been updated to 0.4.0.
- Fixed the build using the vectorclass library ([Babacar Diassé](#)).
- Cmake now generates files for ninja by default (like when using `-G Ninja`).
- Added the ability to use the libtinfo library instead of libtermcap ([Georgy Kondratiev](#)).
- Fixed a header file conflict in Fedora Rawhide ([#2520](#)).

#### BACKWARD INCOMPATIBLE CHANGES:

- Removed escaping in `Vertical` and `Pretty*` formats and deleted the `VerticalRaw` format.
- If servers with version 1.1.54388 (or newer) and servers with an older version are used simultaneously in a distributed query and the query has the `cast(x, 'Type')` expression without the `AS` keyword and doesn't have the word `cast` in uppercase, an exception will be thrown with a message like `Not found column cast(0, 'UInt8') in block`. Solution: Update the server on the entire cluster.

### **ClickHouse release 1.1.54385, 2018-06-01**

#### BUG FIXES:

- Fixed an error that in some cases caused ZooKeeper operations to block.

### **ClickHouse release 1.1.54383, 2018-05-22**

#### BUG FIXES:

- Fixed a slowdown of replication queue if a table has many replicas.

### **ClickHouse release 1.1.54381, 2018-05-14**

#### BUG FIXES:

- Fixed a nodes leak in ZooKeeper when ClickHouse loses connection to ZooKeeper server.

### **ClickHouse release 1.1.54380, 2018-04-21**

#### NEW FEATURES:

- Added the table function `file(path, format, structure)`. An example reading bytes from `/dev/urandom`: `In -s /dev/urandom /var/lib/clickhouse/user_files/random`clickhouse-client -q "SELECT * FROM file('random', 'RowBinary', 'd UInt8') LIMIT 10"`.

## IMPROVEMENTS:

- Subqueries can be wrapped in () brackets to enhance query readability. For example: (SELECT 1) UNION ALL (SELECT 1).
- Simple SELECT queries from the system.processes table are not included in the max\_concurrent\_queries limit.

## BUG FIXES:

- Fixed incorrect behavior of the IN operator when select from MATERIALIZED VIEW .
- Fixed incorrect filtering by partition index in expressions like partition\_key\_column IN (...).
- Fixed inability to execute OPTIMIZE query on non-leader replica if REANAME was performed on the table.
- Fixed the authorization error when executing OPTIMIZE or ALTER queries on a non-leader replica.
- Fixed freezing of KILL QUERY .
- Fixed an error in ZooKeeper client library which led to loss of watches, freezing of distributed DDL queue, and slowdowns in the replication queue if a non-empty chroot prefix is used in the ZooKeeper configuration.

## BACKWARD INCOMPATIBLE CHANGES:

- Removed support for expressions like (a, b) IN (SELECT (a, b)) (you can use the equivalent expression (a, b) IN (SELECT a, b)). In previous releases, these expressions led to undetermined WHERE filtering or caused errors.

## ClickHouse release 1.1.54378, 2018-04-16

### NEW FEATURES:

- Logging level can be changed without restarting the server.
- Added the SHOW CREATE DATABASE query.
- The query\_id can be passed to clickhouse-client (elBroom).
- New setting: max\_network\_bandwidth\_for\_all\_users .
- Added support for ALTER TABLE ... PARTITION ... for MATERIALIZED VIEW .
- Added information about the size of data parts in uncompressed form in the system table.
- Server-to-server encryption support for distributed tables (<secure>1</secure> in the replica config in <remote\_servers> ).
- Configuration of the table level for the ReplicatedMergeTree family in order to minimize the amount of data stored in Zookeeper: : use\_minimalistic\_checksums\_in\_zookeeper = 1
- Configuration of the clickhouse-client prompt. By default, server names are now output to the prompt. The server's display name can be changed. It's also sent in the X-ClickHouse-Display-Name HTTP header (Kirill Shvakov).
- Multiple comma-separated topics can be specified for the Kafka engine (Tobias Adamson)
- When a query is stopped by KILL QUERY or replace\_running\_query , the client receives the Query was canceled exception instead of an incomplete result.

## IMPROVEMENTS:

- ALTER TABLE ... DROP/DETACH PARTITION queries are run at the front of the replication queue.
- SELECT ... FINAL and OPTIMIZE ... FINAL can be used even when the table has a single data part.
- A query\_log table is recreated on the fly if it was deleted manually (Kirill Shvakov).
- The lengthUTF8 function runs faster (zhang2014).
- Improved performance of synchronous inserts in Distributed tables ( insert\_distributed\_sync = 1 ) when there is a very large number of shards.

- The server accepts the `send_timeout` and `receive_timeout` settings from the client and applies them when connecting to the client (they are applied in reverse order: the server socket's `send_timeout` is set to the `receive_timeout` value received from the client, and vice versa).
- More robust crash recovery for asynchronous insertion into `Distributed` tables.
- The return type of the `countEqual` function changed from `UInt32` to `UInt64` (谢磊).

#### BUG FIXES:

- Fixed an error with `IN` when the left side of the expression is `Nullable`.
- Correct results are now returned when using tuples with `IN` when some of the tuple components are in the table index.
- The `max_execution_time` limit now works correctly with distributed queries.
- Fixed errors when calculating the size of composite columns in the `system.columns` table.
- Fixed an error when creating a temporary table `CREATE TEMPORARY TABLE IF NOT EXISTS`.
- Fixed errors in `StorageKafka` (#2075)
- Fixed server crashes from invalid arguments of certain aggregate functions.
- Fixed the error that prevented the `DETACH DATABASE` query from stopping background tasks for `ReplicatedMergeTree` tables.
- Too many parts state is less likely to happen when inserting into aggregated materialized views (#2084).
- Corrected recursive handling of substitutions in the config if a substitution must be followed by another substitution on the same level.
- Corrected the syntax in the metadata file when creating a `VIEW` that uses a query with `UNION ALL`.
- `SummingMergeTree` now works correctly for summation of nested data structures with a composite key.
- Fixed the possibility of a race condition when choosing the leader for `ReplicatedMergeTree` tables.

#### BUILD CHANGES:

- The build supports `ninja` instead of `make` and uses `ninja` by default for building releases.
- Renamed packages: `clickhouse-server-base` in `clickhouse-common-static`; `clickhouse-server-common` in `clickhouse-server`; `clickhouse-common-dbg` in `clickhouse-common-static-dbg`. To install, use `clickhouse-server` `clickhouse-client`. Packages with the old names will still load in the repositories for backward compatibility.

#### BACKWARD INCOMPATIBLE CHANGES:

- Removed the special interpretation of an `IN` expression if an array is specified on the left side. Previously, the expression `arr IN (set)` was interpreted as "at least one `arr` element belongs to the `set`". To get the same behavior in the new version, write `arrayExists(x -> x IN (set), arr)`.
- Disabled the incorrect use of the socket option `SO_REUSEPORT`, which was incorrectly enabled by default in the Poco library. Note that on Linux there is no longer any reason to simultaneously specify the addresses `::` and `0.0.0.0` for `listen` – use just `::`, which allows listening to the connection both over IPv4 and IPv6 (with the default kernel config settings). You can also revert to the behavior from previous versions by specifying `<listen_reuse_port>1</listen_reuse_port>` in the config.

### ClickHouse release 1.1.54370, 2018-03-16

#### NEW FEATURES:

- Added the `system.macros` table and auto updating of macros when the config file is changed.
- Added the `SYSTEM RELOAD CONFIG` query.
- Added the `maxIntersections(left_col, right_col)` aggregate function, which returns the maximum number of simultaneously

intersecting intervals `[left; right]`. The `maxIntersectionsPosition(left, right)` function returns the beginning of the "maximum" interval. ([Michael Furmur](#)).

#### IMPROVEMENTS:

- When inserting data in a `Replicated` table, fewer requests are made to `ZooKeeper` (and most of the user-level errors have disappeared from the `ZooKeeper` log).
- Added the ability to create aliases for data sets. Example: `WITH (1, 2, 3) AS set SELECT number IN set FROM system.numbers LIMIT 10`.

#### BUG FIXES:

- Fixed the `Illegal PREWHERE` error when reading from Merge tables for Distributed tables.
- Added fixes that allow you to start `clickhouse-server` in IPv4-only Docker containers.
- Fixed a race condition when reading from system `system.parts_columns` tables.
- Removed double buffering during a synchronous insert to a `Distributed` table, which could have caused the connection to timeout.
- Fixed a bug that caused excessively long waits for an unavailable replica before beginning a `SELECT` query.
- Fixed incorrect dates in the `system.parts` table.
- Fixed a bug that made it impossible to insert data in a `Replicated` table if `chroot` was non-empty in the configuration of the `ZooKeeper` cluster.
- Fixed the vertical merging algorithm for an empty `ORDER BY` table.
- Restored the ability to use dictionaries in queries to remote tables, even if these dictionaries are not present on the requestor server. This functionality was lost in release 1.1.54362.
- Restored the behavior for queries like `SELECT * FROM remote('server2', default.table) WHERE col IN (SELECT col2 FROM default.table)` when the right side of the `IN` should use a remote `default.table` instead of a local one. This behavior was broken in version 1.1.54358.
- Removed extraneous error-level logging of `Not found column ... in block`.

### Clickhouse Release 1.1.54362, 2018-03-11

#### NEW FEATURES:

- Aggregation without `GROUP BY` for an empty set (such as `SELECT count(*) FROM table WHERE 0`) now returns a result with one row with null values for aggregate functions, in compliance with the SQL standard. To restore the old behavior (return an empty result), set `empty_result_for_aggregation_by_empty_set` to 1.
- Added type conversion for `UNION ALL`. Different alias names are allowed in `SELECT` positions in `UNION ALL`, in compliance with the SQL standard.
- Arbitrary expressions are supported in `LIMIT BY` clauses. Previously, it was only possible to use columns resulting from `SELECT`.
- An index of `MergeTree` tables is used when `IN` is applied to a tuple of expressions from the columns of the primary key. Example: `WHERE (UserID, EventDate) IN ((123, '2000-01-01'), ...)` ([Anastasiya Tsarkova](#)).
- Added the `clickhouse-copier` tool for copying between clusters and resharding data (beta).
- Added consistent hashing functions: `yandexConsistentHash`, `jumpConsistentHash`, `sumburConsistentHash`. They can be used as a sharding key in order to reduce the amount of network traffic during subsequent reshardings.
- Added functions: `arrayAny`, `arrayAll`, `hasAny`, `hasAll`, `arrayIntersect`, `arrayResize`.
- Added the `arrayCumSum` function ([Javi Santana](#)).
- Added the `parseDateTimeBestEffort`, `parseDateTimeBestEffortOrZero`, and `parseDateTimeBestEffortOrNull` functions to read the `DateTime` from a string containing text in a wide variety of possible formats.

- Data can be partially reloaded from external dictionaries during updating (load just the records in which the value of the specified field greater than in the previous download) (Arsen Hakobyan).
- Added the `cluster` table function. Example: `cluster(cluster_name, db, table)`. The `remote` table function can accept the cluster name as the first argument, if it is specified as an identifier.
- The `remote` and `cluster` table functions can be used in `INSERT` queries.
- Added the `create_table_query` and `engine_full` virtual columns to the `system.tables` table. The `metadata_modification_time` column is virtual.
- Added the `data_path` and `metadata_path` columns to `system.tables` and `system.databases` tables, and added the `path` column to the `system.parts` and `system.parts_columns` tables.
- Added additional information about merges in the `system.part_log` table.
- An arbitrary partitioning key can be used for the `system.query_log` table (Kirill Shvakov).
- The `SHOW TABLES` query now also shows temporary tables. Added temporary tables and the `is_temporary` column to `system.tables` (zhang2014).
- Added `DROP TEMPORARY TABLE` and `EXISTS TEMPORARY TABLE` queries (zhang2014).
- Support for `SHOW CREATE TABLE` for temporary tables (zhang2014).
- Added the `system_profile` configuration parameter for the settings used by internal processes.
- Support for loading `object_id` as an attribute in MongoDB dictionaries (Pavel Litvinenko).
- Reading `null` as the default value when loading data for an external dictionary with the MongoDB source (Pavel Litvinenko).
- Reading `DateTime` values in the `Values` format from a Unix timestamp without single quotes.
- Failover is supported in `remote` table functions for cases when some of the replicas are missing the requested table.
- Configuration settings can be overridden in the command line when you run `clickhouse-server`. Example: `clickhouse-server --logger.level=information`.
- Implemented the `empty` function from a `FixedString` argument: the function returns 1 if the string consists entirely of null bytes (zhang2014).
- Added the `listen_try` configuration parameter for listening to at least one of the listen addresses without quitting, if some of the addresses can't be listened to (useful for systems with disabled support for IPv4 or IPv6).
- Added the `VersionedCollapsingMergeTree` table engine.
- Support for rows and arbitrary numeric types for the `library` dictionary source.
- `MergeTree` tables can be used without a primary key (you need to specify `ORDER BY tuple()`).
- A `Nullable` type can be `CAST` to a non-`Nullable` type if the argument is not `NULL`.
- `RENAME TABLE` can be performed for `VIEW`.
- Added the `throwIf` function.
- Added the `odbc_default_field_size` option, which allows you to extend the maximum size of the value loaded from an ODBC source (by default, it is 1024).
- The `system.processes` table and `SHOW PROCESSLIST` now have the `is_cancelled` and `peak_memory_usage` columns.

#### IMPROVEMENTS:

- Limits and quotas on the result are no longer applied to intermediate data for `INSERT SELECT` queries or for `SELECT` subqueries.
- Fewer false triggers of `force_restore_data` when checking the status of `Replicated` tables when the server starts.
- Added the `allow_distributed_ddl` option.
- Nondeterministic functions are not allowed in expressions for `MergeTree` table keys.

- Files with substitutions from `config.d` directories are loaded in alphabetical order.
- Improved performance of the `arrayElement` function in the case of a constant multidimensional array with an empty array as one of the elements. Example: `[[1], []][x]`.
- The server starts faster now when using configuration files with very large substitutions (for instance, very large lists of IP networks).
- When running a query, table valued functions run once. Previously, `remote` and `mysql` table valued functions performed the same query twice to retrieve the table structure from a remote server.
- The `MkDocs` documentation generator is used.
- When you try to delete a table column that `DEFAULT / MATERIALIZED` expressions of other columns depend on, an exception is thrown (zhang2014).
- Added the ability to parse an empty line in text formats as the number 0 for `Float` data types. This feature was previously available but was lost in release 1.1.54342.
- `Enum` values can be used in `min`, `max`, `sum` and some other functions. In these cases, it uses the corresponding numeric values. This feature was previously available but was lost in the release 1.1.54337.
- Added `max_expanded_ast_elements` to restrict the size of the AST after recursively expanding aliases.

#### BUG FIXES:

- Fixed cases when unnecessary columns were removed from subqueries in error, or not removed from subqueries containing `UNION ALL`.
- Fixed a bug in merges for `ReplacingMergeTree` tables.
- Fixed synchronous insertions in `Distributed` tables (`insert_distributed_sync = 1`).
- Fixed segfault for certain uses of `FULL` and `RIGHT JOIN` with duplicate columns in subqueries.
- Fixed segfault for certain uses of `replace_running_query` and `KILL QUERY`.
- Fixed the order of the `source` and `last_exception` columns in the `system.dictionaries` table.
- Fixed a bug when the `DROP DATABASE` query did not delete the file with metadata.
- Fixed the `DROP DATABASE` query for `Dictionary` databases.
- Fixed the low precision of `uniqHLL12` and `uniqCombined` functions for cardinalities greater than 100 million items (Alex Bocharov).
- Fixed the calculation of implicit default values when necessary to simultaneously calculate default explicit expressions in `INSERT` queries (zhang2014).
- Fixed a rare case when a query to a `MergeTree` table couldn't finish (chenxing-xc).
- Fixed a crash that occurred when running a `CHECK` query for `Distributed` tables if all shards are local (chenxing.xc).
- Fixed a slight performance regression with functions that use regular expressions.
- Fixed a performance regression when creating multidimensional arrays from complex expressions.
- Fixed a bug that could cause an extra `FORMAT` section to appear in an `.sql` file with metadata.
- Fixed a bug that caused the `max_table_size_to_drop` limit to apply when trying to delete a `MATERIALIZED VIEW` looking at an explicitly specified table.
- Fixed incompatibility with old clients (old clients were sometimes sent data with `theDateTime('timezone')` type, which they do not understand).
- Fixed a bug when reading `Nested` column elements of structures that were added using `ALTER` but that are empty for the old partitions, when the conditions for these columns moved to `PREWHERE`.
- Fixed a bug when filtering tables by virtual `_table` columns in queries to `Merge` tables.
- Fixed a bug when using `ALIAS` columns in `Distributed` tables.

- Fixed a bug that made dynamic compilation impossible for queries with aggregate functions from the `quantile` family.
- Fixed a race condition in the query execution pipeline that occurred in very rare cases when using `Merge` tables with a large number of tables, and when using `GLOBAL` subqueries.
- Fixed a crash when passing arrays of different sizes to an `arrayReduce` function when using aggregate functions from multiple arguments.
- Prohibited the use of queries with `UNION ALL` in a `MATERIALIZED VIEW`.
- Fixed an error during initialization of the `part_log` system table when the server starts (by default, `part_log` is disabled).

#### **BACKWARD INCOMPATIBLE CHANGES:**

- Removed the `distributed_ddl_allow_replicated_alter` option. This behavior is enabled by default.
- Removed the `strict_insert_defaults` setting. If you were using this functionality, write to `clickhouse-feedback@yandex-team.com`.
- Removed the `UnsortedMergeTree` engine.

#### **Clickhouse Release 1.1.54343, 2018-02-05**

- Added macros support for defining cluster names in distributed DDL queries and constructors of Distributed tables:  
`CREATE TABLE distr ON CLUSTER '{cluster}' (...) ENGINE = Distributed('{cluster}', 'db', 'table')` .
- Now queries like `SELECT ... FROM table WHERE expr IN (subquery)` are processed using the table index.
- Improved processing of duplicates when inserting to Replicated tables, so they no longer slow down execution of the replication queue.

#### **Clickhouse Release 1.1.54342, 2018-01-22**

This release contains bug fixes for the previous release 1.1.54337:

- Fixed a regression in 1.1.54337: if the default user has readonly access, then the server refuses to start up with the message `Cannot create database in readonly mode` .
- Fixed a regression in 1.1.54337: on systems with `systemd`, logs are always written to `syslog` regardless of the configuration; the `watchdog` script still uses `init.d`.
- Fixed a regression in 1.1.54337: wrong default configuration in the Docker image.
- Fixed nondeterministic behavior of `GraphiteMergeTree` (you can see it in log messages `Data after merge is not byte-identical to the data on another replicas` ).
- Fixed a bug that may lead to inconsistent merges after `OPTIMIZE` query to Replicated tables (you may see it in log messages `Part ... intersects the previous part` ).
- Buffer tables now work correctly when `MATERIALIZED` columns are present in the destination table (by `zhang2014`).
- Fixed a bug in implementation of `NULL`.

#### **Clickhouse Release 1.1.54337, 2018-01-18**

#### **NEW FEATURES:**

- Added support for storage of multi-dimensional arrays and tuples (`Tuple` data type) in tables.
- Support for table functions for `DESCRIBE` and `INSERT` queries. Added support for subqueries in `DESCRIBE`.  
Examples: `DESC TABLE remote('host', default.hits)` ; `DESC TABLE (SELECT 1)` ; `INSERT INTO TABLE FUNCTION remote('host', default.hits)` . Support for `INSERT INTO TABLE` in addition to `INSERT INTO` .
- Improved support for time zones. The `DateTime` data type can be annotated with the timezone that is used for parsing and formatting in text formats. Example: `DateTime('Europe/Moscow')` . When timezones are specified in functions for `DateTime` arguments, the return type will track the timezone, and the value will be displayed as expected.

- Added the functions `toTimeZone`, `timeDiff`, `toQuarter`, `toRelativeQuarterNum`. The `toRelativeHour / Minute / Second` functions can take a value of type `Date` as an argument. The `now` function name is case-sensitive.
- Added the `toStartOfFifteenMinutes` function (Kirill Shvakov).
- Added the `clickhouse format` tool for formatting queries.
- Added the `format_schema_path` configuration parameter (Marek Vavruša). It is used for specifying a schema in `Cap'n Proto` format. Schema files can be located only in the specified directory.
- Added support for config substitutions (`incl` and `conf.d`) for configuration of external dictionaries and models (Pavel Yakunin).
- Added a column with documentation for the `system.settings` table (Kirill Shvakov).
- Added the `system.parts_columns` table with information about column sizes in each data part of `MergeTree` tables.
- Added the `system.models` table with information about loaded `CatBoost` machine learning models.
- Added the `mysql` and `odbc` table function and corresponding MySQL and ODBC table engines for accessing remote databases. This functionality is in the beta stage.
- Added the possibility to pass an argument of type `AggregateFunction` for the `groupArray` aggregate function (so you can create an array of states of some aggregate function).
- Removed restrictions on various combinations of aggregate function combinator. For example, you can use `avgForEachIf` as well as `avgIfForEach` aggregate functions, which have different behaviors.
- The `-ForEach` aggregate function combinator is extended for the case of aggregate functions of multiple arguments.
- Added support for aggregate functions of `Nullable` arguments even for cases when the function returns a non-`Nullable` result (added with the contribution of Silviu Caragea). Example: `groupArray`, `groupUniqArray`, `topK`.
- Added the `max_client_network_bandwidth` for `clickhouse-client` (Kirill Shvakov).
- Users with the `readonly = 2` setting are allowed to work with TEMPORARY tables (CREATE, DROP, INSERT...) (Kirill Shvakov).
- Added support for using multiple consumers with the `Kafka` engine. Extended configuration options for `Kafka` (Marek Vavruša).
- Added the `intExp3` and `intExp4` functions.
- Added the `sumKahan` aggregate function.
- Added the `to * Number OrNull functions`, where `* Number` is a numeric type.
- Added support for `WITH` clauses for an `INSERT SELECT` query (author: zhang2014).
- Added settings: `http_connection_timeout`, `http_send_timeout`, `http_receive_timeout`. In particular, these settings are used for downloading data parts for replication. Changing these settings allows for faster failover if the network is overloaded.
- Added support for `ALTER` for tables of type `Null` (Anastasiya Tsarkova).
- The `reinterpretAsString` function is extended for all data types that are stored contiguously in memory.
- Added the `--silent` option for the `clickhouse-local` tool. It suppresses printing query execution info in `stderr`.
- Added support for reading values of type `Date` from text in a format where the month and/or day of the month is specified using a single digit instead of two digits (Amos Bird).

#### PERFORMANCE OPTIMIZATIONS:

- Improved performance of aggregate functions `min`, `max`, `any`, `anyLast`, `anyHeavy`, `argMin`, `argMax` from string arguments.
- Improved performance of the functions `isInfinite`, `isFinite`, `isNaN`, `roundToExp2`.
- Improved performance of parsing and formatting `Date` and `DateTime` type values in text format.

- Improved performance and precision of parsing floating point numbers.
- Lowered memory usage for `JOIN` in the case when the left and right parts have columns with identical names that are not contained in `USING`.
- Improved performance of aggregate functions `varSamp`, `varPop`, `stddevSamp`, `stddevPop`, `covarSamp`, `covarPop`, `corr` by reducing computational stability. The old functions are available under the names `varSampStable`, `varPopStable`, `stddevSampStable`, `stddevPopStable`, `covarSampStable`, `covarPopStable`, `corrStable`.

#### BUG FIXES:

- Fixed data deduplication after running a `DROP` or `DETACH PARTITION` query. In the previous version, dropping a partition and inserting the same data again was not working because inserted blocks were considered duplicates.
- Fixed a bug that could lead to incorrect interpretation of the `WHERE` clause for `CREATE MATERIALIZED VIEW` queries with `POPULATE`.
- Fixed a bug in using the `root_path` parameter in the `zookeeper_servers` configuration.
- Fixed unexpected results of passing the `Date` argument to `toStartOfDay`.
- Fixed the `addMonths` and `subtractMonths` functions and the arithmetic for `INTERVAL n MONTH` in cases when the result has the previous year.
- Added missing support for the `UUID` data type for `DISTINCT`, `JOIN`, and `uniq` aggregate functions and external dictionaries (Evgeniy Ivanov). Support for `UUID` is still incomplete.
- Fixed `SummingMergeTree` behavior in cases when the rows summed to zero.
- Various fixes for the `Kafka` engine (Marek Vavruša).
- Fixed incorrect behavior of the `Join` table engine (Amos Bird).
- Fixed incorrect allocator behavior under FreeBSD and OS X.
- The `extractAll` function now supports empty matches.
- Fixed an error that blocked usage of `libressl` instead of `openssl`.
- Fixed the `CREATE TABLE AS SELECT` query from temporary tables.
- Fixed non-atomicity of updating the replication queue. This could lead to replicas being out of sync until the server restarts.
- Fixed possible overflow in `gcd`, `lcm` and `modulo` (`%` operator) (Maks Skorokhod).
- `-preprocessed` files are now created after changing `umask` (`umask` can be changed in the config).
- Fixed a bug in the background check of parts (`MergeTreePartChecker`) when using a custom partition key.
- Fixed parsing of tuples (values of the `Tuple` data type) in text formats.
- Improved error messages about incompatible types passed to `multilf`, `array` and some other functions.
- Redesigned support for `Nullable` types. Fixed bugs that may lead to a server crash. Fixed almost all other bugs related to `NULL` support: incorrect type conversions in `INSERT SELECT`, insufficient support for `Nullable` in `HAVING` and `PREWHERE`, `join_use_nulls` mode, `Nullable` types as arguments of `OR` operator, etc.
- Fixed various bugs related to internal semantics of data types. Examples: unnecessary summing of `Enum` type fields in `SummingMergeTree`; alignment of `Enum` types in `Pretty` formats, etc.
- Stricter checks for allowed combinations of composite columns.
- Fixed the overflow when specifying a very large parameter for the `FixedSizeString` data type.
- Fixed a bug in the `topK` aggregate function in a generic case.
- Added the missing check for equality of array sizes in arguments of n-ary variants of aggregate functions with an `Array` combinator.
- Fixed a bug in `--pager` for `clickhouse-client` (author: ks1322).

- Fixed the precision of the `exp10` function.
- Fixed the behavior of the `visitParamExtract` function for better compliance with documentation.
- Fixed the crash when incorrect data types are specified.
- Fixed the behavior of `DISTINCT` in the case when all columns are constants.
- Fixed query formatting in the case of using the `tupleElement` function with a complex constant expression as the tuple element index.
- Fixed a bug in Dictionary tables for `range_hashed` dictionaries.
- Fixed a bug that leads to excessive rows in the result of `FULL` and `RIGHT JOIN` (Amos Bird).
- Fixed a server crash when creating and removing temporary files in `config.d` directories during config reload.
- Fixed the `SYSTEM DROP DNS CACHE` query: the cache was flushed but addresses of cluster nodes were not updated.
- Fixed the behavior of `MATERIALIZED VIEW` after executing `DETACH TABLE` for the table under the view (Marek Vavruša).

#### BUILD IMPROVEMENTS:

- The `pbuilder` tool is used for builds. The build process is almost completely independent of the build host environment.
- A single build is used for different OS versions. Packages and binaries have been made compatible with a wide range of Linux systems.
- Added the `clickhouse-test` package. It can be used to run functional tests.
- The source tarball can now be published to the repository. It can be used to reproduce the build without using GitHub.
- Added limited integration with Travis CI. Due to limits on build time in Travis, only the debug build is tested and a limited subset of tests are run.
- Added support for `Cap'n'Proto` in the default build.
- Changed the format of documentation sources from `Restricted Text` to `Markdown`.
- Added support for `systemd` (Vladimir Smirnov). It is disabled by default due to incompatibility with some OS images and can be enabled manually.
- For dynamic code generation, `clang` and `lld` are embedded into the `clickhouse` binary. They can also be invoked as `clickhouse clang` and `clickhouse lld`.
- Removed usage of GNU extensions from the code. Enabled the `-Wextra` option. When building with `clang` the default is `libc++` instead of `libstdc++`.
- Extracted `clickhouse_parsers` and `clickhouse_common_io` libraries to speed up builds of various tools.

#### BACKWARD INCOMPATIBLE CHANGES:

- The format for marks in `Log` type tables that contain `Nullable` columns was changed in a backward incompatible way. If you have these tables, you should convert them to the `TinyLog` type before starting up the new server version. To do this, replace `ENGINE = Log` with `ENGINE = TinyLog` in the corresponding `.sql` file in the `metadata` directory. If your table doesn't have `Nullable` columns or if the type of your table is not `Log`, then you don't need to do anything.
- Removed the `experimental_allow_extended_storage_definition_syntax` setting. Now this feature is enabled by default.
- The `runningIncome` function was renamed to `runningDifferenceStartingWithFirstValue` to avoid confusion.
- Removed the `FROM ARRAY JOIN arr` syntax when `ARRAY JOIN` is specified directly after `FROM` with no table (Amos Bird).
- Removed the `BlockTabSeparated` format that was used solely for demonstration purposes.
- Changed the state format for aggregate functions `varSamp`, `varPop`, `stddevSamp`, `stddevPop`, `covarSamp`, `covarPop`, `corr`. If you have stored states of these aggregate functions in tables (using the `AggregateFunction` data type or

materialized views with corresponding states), please write to clickhouse-feedback@yandex-team.com.

- In previous server versions there was an undocumented feature: if an aggregate function depends on parameters, you can still specify it without parameters in the AggregateFunction data type. Example: `AggregateFunction(quantiles, UInt64)` instead of `AggregateFunction(quantiles(0.5, 0.9), UInt64)`. This feature was lost. Although it was undocumented, we plan to support it again in future releases.
- Enum data types cannot be used in min/max aggregate functions. This ability will be returned in the next release.

#### PLEASE NOTE WHEN UPGRADING:

- When doing a rolling update on a cluster, at the point when some of the replicas are running the old version of ClickHouse and some are running the new version, replication is temporarily stopped and the message `unknown parameter 'shard'` appears in the log. Replication will continue after all replicas of the cluster are updated.
- If different versions of ClickHouse are running on the cluster servers, it is possible that distributed queries using the following functions will have incorrect results: `varSamp`, `varPop`, `stddevSamp`, `stddevPop`, `covarSamp`, `covarPop`, `corr`. You should update all cluster nodes.

### ClickHouse release 1.1.54327, 2017-12-21

This release contains bug fixes for the previous release 1.1.54318:

- Fixed bug with possible race condition in replication that could lead to data loss. This issue affects versions 1.1.54310 and 1.1.54318. If you use one of these versions with Replicated tables, the update is strongly recommended. This issue shows in logs in Warning messages like `Part ... from own log doesn't exist`. The issue is relevant even if you don't see these messages in logs.

### ClickHouse release 1.1.54318, 2017-11-30

This release contains bug fixes for the previous release 1.1.54310:

- Fixed incorrect row deletions during merges in the SummingMergeTree engine
- Fixed a memory leak in unreplicated MergeTree engines
- Fixed performance degradation with frequent inserts in MergeTree engines
- Fixed an issue that was causing the replication queue to stop running
- Fixed rotation and archiving of server logs

### ClickHouse release 1.1.54310, 2017-11-01

#### NEW FEATURES:

- Custom partitioning key for the MergeTree family of table engines.
- [Kafka](#) table engine.
- Added support for loading [CatBoost](#) models and applying them to data stored in ClickHouse.
- Added support for time zones with non-integer offsets from UTC.
- Added support for arithmetic operations with time intervals.
- The range of values for the Date and DateTime types is extended to the year 2105.
- Added the `CREATE MATERIALIZED VIEW x TO y` query (specifies an existing table for storing the data of a materialized view).
- Added the `ATTACH TABLE` query without arguments.
- The processing logic for Nested columns with names ending in -Map in a SummingMergeTree table was extracted to the sumMap aggregate function. You can now specify such columns explicitly.
- Max size of the IP trie dictionary is increased to 128M entries.

- Added the getSizeOfEnumType function.
- Added the sumWithOverflow aggregate function.
- Added support for the Cap'n Proto input format.
- You can now customize compression level when using the zstd algorithm.

#### BACKWARD INCOMPATIBLE CHANGES:

- Creation of temporary tables with an engine other than Memory is not allowed.
- Explicit creation of tables with the View or MaterializedView engine is not allowed.
- During table creation, a new check verifies that the sampling key expression is included in the primary key.

#### BUG FIXES:

- Fixed hangups when synchronously inserting into a Distributed table.
- Fixed nonatomic adding and removing of parts in Replicated tables.
- Data inserted into a materialized view is not subjected to unnecessary deduplication.
- Executing a query to a Distributed table for which the local replica is lagging and remote replicas are unavailable does not result in an error anymore.
- Users don't need access permissions to the `default` database to create temporary tables anymore.
- Fixed crashing when specifying the Array type without arguments.
- Fixed hangups when the disk volume containing server logs is full.
- Fixed an overflow in the `toRelativeWeekNum` function for the first week of the Unix epoch.

#### BUILD IMPROVEMENTS:

- Several third-party libraries (notably Poco) were updated and converted to git submodules.

### ClickHouse release 1.1.54304, 2017-10-19

#### NEW FEATURES:

- TLS support in the native protocol (to enable, set `tcp_ssl_port` in `config.xml` ).

#### BUG FIXES:

- ALTER for replicated tables now tries to start running as soon as possible.
- Fixed crashing when reading data with the setting `preferred_block_size_bytes=0`.
- Fixed crashes of `clickhouse-client` when pressing Page Down
- Correct interpretation of certain complex queries with `GLOBAL IN` and `UNION ALL`
- `FREEZE PARTITION` always works atomically now.
- Empty POST requests now return a response with code 411.
- Fixed interpretation errors for expressions like `CAST(1 AS Nullable(UInt8))`.
- Fixed an error when reading `Array(Nullable(String))` columns from MergeTree tables.
- Fixed crashing when parsing queries like `SELECT dummy AS dummy, dummy AS b`
- Users are updated correctly with invalid `users.xml`
- Correct handling when an executable dictionary returns a non-zero response code.

### ClickHouse release 1.1.54292, 2017-09-20

#### NEW FEATURES:

- Added the `pointInPolygon` function for working with coordinates on a coordinate plane.
- Added the `sumMap` aggregate function for calculating the sum of arrays, similar to `SummingMergeTree`.
- Added the `trunc` function. Improved performance of the rounding functions (`round`, `floor`, `ceil`, `roundToExp2`) and corrected the logic of how they work. Changed the logic of the `roundToExp2` function for fractions and negative numbers.
- The ClickHouse executable file is now less dependent on the libc version. The same ClickHouse executable file can run on a wide variety of Linux systems. There is still a dependency when using compiled queries (with the setting `compile = 1`, which is not used by default).
- Reduced the time needed for dynamic compilation of queries.

#### BUG FIXES:

- Fixed an error that sometimes produced `part ... intersects previous part` messages and weakened replica consistency.
- Fixed an error that caused the server to lock up if ZooKeeper was unavailable during shutdown.
- Removed excessive logging when restoring replicas.
- Fixed an error in the UNION ALL implementation.
- Fixed an error in the concat function that occurred if the first column in a block has the Array type.
- Progress is now displayed correctly in the `system.merges` table.

### ClickHouse release 1.1.54289, 2017-09-13

#### NEW FEATURES:

- `SYSTEM` queries for server administration: `SYSTEM RELOAD DICTIONARY`, `SYSTEM RELOAD DICTIONARIES`, `SYSTEM DROP DNS CACHE`, `SYSTEM SHUTDOWN`, `SYSTEM KILL`.
- Added functions for working with arrays: `concat`, `arraySlice`, `arrayPushBack`, `arrayPushFront`, `arrayPopBack`, `arrayPopFront`.
- Added `root` and `identity` parameters for the ZooKeeper configuration. This allows you to isolate individual users on the same ZooKeeper cluster.
- Added aggregate functions `groupBitAnd`, `groupBitOr`, and `groupBitXor` (for compatibility, they are also available under the names `BIT_AND`, `BIT_OR`, and `BIT_XOR`).
- External dictionaries can be loaded from MySQL by specifying a socket in the filesystem.
- External dictionaries can be loaded from MySQL over SSL (`ssl_cert`, `ssl_key`, `ssl_ca` parameters).
- Added the `max_network_bandwidth_for_user` setting to restrict the overall bandwidth use for queries per user.
- Support for `DROP TABLE` for temporary tables.
- Support for reading `DateTime` values in Unix timestamp format from the `CSV` and `JSONEachRow` formats.
- Lagging replicas in distributed queries are now excluded by default (the default threshold is 5 minutes).
- FIFO locking is used during ALTER: an ALTER query isn't blocked indefinitely for continuously running queries.
- Option to set `umask` in the config file.
- Improved performance for queries with `DISTINCT`.

#### BUG FIXES:

- Improved the process for deleting old nodes in ZooKeeper. Previously, old nodes sometimes didn't get deleted if there were very frequent inserts, which caused the server to be slow to shut down, among other things.
- Fixed randomization when choosing hosts for the connection to ZooKeeper.
- Fixed the exclusion of lagging replicas in distributed queries if the replica is localhost.

- Fixed an error where a data part in a `ReplicatedMergeTree` table could be broken after running `ALTER MODIFY` on an element in a `Nested` structure.
- Fixed an error that could cause `SELECT` queries to "hang".
- Improvements to distributed DDL queries.
- Fixed the query `CREATE TABLE ... AS <materialized view>`.
- Resolved the deadlock in the `ALTER ... CLEAR COLUMN IN PARTITION` query for `Buffer` tables.
- Fixed the invalid default value for `Enum` `s` (0 instead of the minimum) when using the `JSONEachRow` and `TSKV` formats.
- Resolved the appearance of zombie processes when using a dictionary with an `executable` source.
- Fixed segfault for the `HEAD` query.

#### **IMPROVED WORKFLOW FOR DEVELOPING AND ASSEMBLING CLICKHOUSE:**

- You can use `pbuilder` to build ClickHouse.
- You can use `libc++` instead of `libstdc++` for builds on Linux.
- Added instructions for using static code analysis tools: `Coverage`, `clang-tidy`, `cppcheck`.

#### **PLEASE NOTE WHEN UPGRADING:**

- There is now a higher default value for the `MergeTree` setting `max_bytes_to_merge_at_max_space_in_pool` (the maximum total size of data parts to merge, in bytes): it has increased from 100 GiB to 150 GiB. This might result in large merges running after the server upgrade, which could cause an increased load on the disk subsystem. If the free space available on the server is less than twice the total amount of the merges that are running, this will cause all other merges to stop running, including merges of small data parts. As a result, `INSERT` queries will fail with the message "Merges are processing significantly slower than inserts." Use the `SELECT * FROM system.merges` query to monitor the situation. You can also check the `DiskSpaceReservedForMerge` metric in the `system.metrics` table, or in Graphite. You don't need to do anything to fix this, since the issue will resolve itself once the large merges finish. If you find this unacceptable, you can restore the previous value for the `max_bytes_to_merge_at_max_space_in_pool` setting. To do this, go to the section in `config.xml`, set
 

```
<merge_tree><max_bytes_to_merge_at_max_space_in_pool>107374182400</max_bytes_to_merge_at_max_space_in_pool>
```

 and restart the server.

#### **ClickHouse release 1.1.54284, 2017-08-29**

- This is a bugfix release for the previous 1.1.54282 release. It fixes leaks in the parts directory in ZooKeeper.

#### **ClickHouse release 1.1.54282, 2017-08-23**

This release contains bug fixes for the previous release 1.1.54276:

- Fixed `DB::Exception: Assertion violation: !_path.empty()` when inserting into a `Distributed` table.
- Fixed parsing when inserting in `RowBinary` format if input data starts with ':'.
- Errors during runtime compilation of certain aggregate functions (e.g. `groupArray()` ).

#### **Clickhouse Release 1.1.54276, 2017-08-16**

##### **NEW FEATURES:**

- Added an optional `WITH` section for a `SELECT` query. Example query: `WITH 1+1 AS a SELECT a, a*a`
- `INSERT` can be performed synchronously in a `Distributed` table: `OK` is returned only after all the data is saved on all the shards. This is activated by the setting `insert_distributed_sync=1`.
- Added the `UUID` data type for working with 16-byte identifiers.

- Added aliases of CHAR, FLOAT and other types for compatibility with the Tableau.
- Added the functions toYYYYMM, toYYYYMMDD, and toYYYYMMDDhhmmss for converting time into numbers.
- You can use IP addresses (together with the hostname) to identify servers for clustered DDL queries.
- Added support for non-constant arguments and negative offsets in the function `substring(str, pos, len)`.
- Added the `max_size` parameter for the `groupArray(max_size)(column)` aggregate function, and optimized its performance.

#### MAIN CHANGES:

- Security improvements: all server files are created with 0640 permissions (can be changed via config parameter).
- Improved error messages for queries with invalid syntax.
- Significantly reduced memory consumption and improved performance when merging large sections of MergeTree data.
- Significantly increased the performance of data merges for the ReplacingMergeTree engine.
- Improved performance for asynchronous inserts from a Distributed table by combining multiple source inserts. To enable this functionality, use the setting `distributed_directory_monitor_batch_inserts=1`.

#### BACKWARD INCOMPATIBLE CHANGES:

- Changed the binary format of aggregate states of `groupArray(array_column)` functions for arrays.

#### COMPLETE LIST OF CHANGES:

- Added the `output_format_json_quote_denormals` setting, which enables outputting nan and inf values in JSON format.
- Optimized stream allocation when reading from a Distributed table.
- Settings can be configured in readonly mode if the value doesn't change.
- Added the ability to retrieve non-integer granules of the MergeTree engine in order to meet restrictions on the block size specified in the `preferred_block_size_bytes` setting. The purpose is to reduce the consumption of RAM and increase cache locality when processing queries from tables with large columns.
- Efficient use of indexes that contain expressions like `toStartOfHour(x)` for conditions like `toStartOfHour(x) op constexpr`.
- Added new settings for MergeTree engines (the `merge_tree` section in `config.xml`):
- `replicated_deduplication_window_seconds` sets the number of seconds allowed for deduplicating inserts in Replicated tables.
- `cleanup_delay_period` sets how often to start cleanup to remove outdated data.
- `replicated_can_become_leader` can prevent a replica from becoming the leader (and assigning merges).
- Accelerated cleanup to remove outdated data from ZooKeeper.
- Multiple improvements and fixes for clustered DDL queries. Of particular interest is the new setting `distributed_ddl_task_timeout`, which limits the time to wait for a response from the servers in the cluster. If a ddl request has not been performed on all hosts, a response will contain a timeout error and a request will be executed in an async mode.
- Improved display of stack traces in the server logs.
- Added the "none" value for the compression method.
- You can use multiple `dictionaries_config` sections in `config.xml`.
- It is possible to connect to MySQL through a socket in the file system.
- The `system.parts` table has a new column with information about the size of marks, in bytes.

#### BUG FIXES:

- Distributed tables using a Merge table now work correctly for a SELECT query with a condition on the `_table` field.
- Fixed a rare race condition in ReplicatedMergeTree when checking data parts.
- Fixed possible freezing on "leader election" when starting a server.
- The `max_replica_delay_for_distributed_queries` setting was ignored when using a local replica of the data source. This has been fixed.
- Fixed incorrect behavior of `ALTER TABLE CLEAR COLUMN IN PARTITION` when attempting to clean a non-existing column.
- Fixed an exception in the `multilf` function when using empty arrays or strings.
- Fixed excessive memory allocations when deserializing Native format.
- Fixed incorrect auto-update of Trie dictionaries.
- Fixed an exception when running queries with a GROUP BY clause from a Merge table when using SAMPLE.
- Fixed a crash of GROUP BY when using `distributed_aggregation_memory_efficient=1`.
- Now you can specify the database.table in the right side of IN and JOIN.
- Too many threads were used for parallel aggregation. This has been fixed.
- Fixed how the "if" function works with `FixedString` arguments.
- SELECT worked incorrectly from a Distributed table for shards with a weight of 0. This has been fixed.
- Running `CREATE VIEW IF EXISTS` no longer causes crashes.
- Fixed incorrect behavior when `input_format_skip_unknown_fields=1` is set and there are negative numbers.
- Fixed an infinite loop in the `dictGetHierarchy()` function if there is some invalid data in the dictionary.
- Fixed Syntax error: unexpected (...) errors when running distributed queries with subqueries in an IN or JOIN clause and Merge tables.
- Fixed an incorrect interpretation of a SELECT query from Dictionary tables.
- Fixed the "Cannot mremap" error when using arrays in IN and JOIN clauses with more than 2 billion elements.
- Fixed the failover for dictionaries with MySQL as the source.

#### IMPROVED WORKFLOW FOR DEVELOPING AND ASSEMBLING CLICKHOUSE:

- Builds can be assembled in Arcadia.
- You can use gcc 7 to compile ClickHouse.
- Parallel builds using ccache+distcc are faster now.

#### ClickHouse release 1.1.54245, 2017-07-04

##### NEW FEATURES:

- Distributed DDL (for example, `CREATE TABLE ON CLUSTER`)
- The replicated query `ALTER TABLE CLEAR COLUMN IN PARTITION`.
- The engine for Dictionary tables (access to dictionary data in the form of a table).
- Dictionary database engine (this type of database automatically has Dictionary tables available for all the connected external dictionaries).
- You can check for updates to the dictionary by sending a request to the source.
- Qualified column names
- Quoting identifiers using double quotation marks.
- Sessions in the HTTP interface.
- The `OPTIMIZE` query for a Replicated table can run not only on the leader.

#### **BACKWARD INCOMPATIBLE CHANGES:**

- Removed SET GLOBAL.

#### **MINOR CHANGES:**

- Now after an alert is triggered, the log prints the full stack trace.
- Relaxed the verification of the number of damaged/extra data parts at startup (there were too many false positives).

#### **BUG FIXES:**

- Fixed a bad connection "sticking" when inserting into a Distributed table.
- GLOBAL IN now works for a query from a Merge table that looks at a Distributed table.
- The incorrect number of cores was detected on a Google Compute Engine virtual machine. This has been fixed.
- Changes in how an executable source of cached external dictionaries works.
- Fixed the comparison of strings containing null characters.
- Fixed the comparison of Float32 primary key fields with constants.
- Previously, an incorrect estimate of the size of a field could lead to overly large allocations.
- Fixed a crash when querying a Nullable column added to a table using ALTER.
- Fixed a crash when sorting by a Nullable column, if the number of rows is less than LIMIT.
- Fixed an ORDER BY subquery consisting of only constant values.
- Previously, a Replicated table could remain in the invalid state after a failed DROP TABLE.
- Aliases for scalar subqueries with empty results are no longer lost.
- Now a query that used compilation does not fail with an error if the .so file gets damaged.

修复于 ClickHouse Release 18.12.13, 2018-09-10

#### **CVE-2018-14672**

加载CatBoost模型的功能，允许遍历路径并通过错误消息读取任意文件。

来源: Yandex信息安全团队的Andrey Krasichkov

修复于 ClickHouse Release 18.10.3, 2018-08-13

#### **CVE-2018-14671**

unixODBC允许从文件系统加载任意共享对象，从而导致“远程执行代码”漏洞。

来源：Yandex信息安全团队的Andrey Krasichkov和Evgeny Sidorov

修复于 ClickHouse Release 1.1.54388, 2018-06-28

#### **CVE-2018-14668**

远程表函数功能允许在 "user", "password" 及 "default\_database" 字段中使用任意符号，从而导致跨协议请求伪造攻击。

来源：Yandex信息安全团队的Andrey Krasichkov

修复于 ClickHouse Release 1.1.54390, 2018-07-06

## **CVE-2018-14669**

ClickHouse MySQL客户端启用了 "LOAD DATA LOCAL INFILE" 功能，该功能允许恶意MySQL数据库从连接的ClickHouse服务器读取任意文件。

来源：Yandex信息安全团队的Andrey Krasichkov和Evgeny Sidorov

修复于 ClickHouse Release 1.1.54131, 2017-01-10

## **CVE-2018-14670**

deb软件包中的错误配置可能导致使用未经授权的数据库。

来源：英国国家网络安全中心（NCSC）

©2016–2020 Yandex LLC

Built from