opentext™

OpenText™ Content Management for Oracle® E-Business Suite

Installation Guide

This guide describes how to plan the installation, how to install the OpenText Content Management for Oracle E-Business Suite application and how to set up the communication between OpenText Content Management for Oracle E-Business Suite and Content Server.

ERO260200-IGD-EN-1

OpenText™ Content Management for Oracle® E-Business Suite
Installation Guide
ERO260200-IGD-EN-1
Rev.: 2026-Feb-13

This documentation has been created for OpenText™ Content Management for Oracle® E-Business Suite 26.2.
It is also valid for subsequent software releases unless OpenText has made newer documentation available with the product, on an OpenText website, or by any other means.

Open Text Corporation

275 Frank Tompa Drive, Waterloo, Ontario, Canada, N2L 0A1

Tel: +1-519-888-7111
Toll Free Canada/USA: 1-800-499-6544 International: +800-4996-5440
Fax: +1-519-888-0677
Support: https://support.opentext.com
For more information, visit https://www.opentext.com

© 2026 Open Text

Patents may cover this product, see https://www.opentext.com/patents.

Disclaimer

No Warranties and Limitation of Liability

Every effort has been made to ensure the accuracy of the features and techniques presented in this publication. However, Open Text Corporation and its affiliates accept no responsibility and offer no warranty whether expressed or implied, for the accuracy of this publication.

Table of Contents

1 What is OpenText Content Management for Oracle E-Business Suite? ... 7

Part 1 Installing OpenText Content Management for Oracle E-Business Suite 9

2 Installation overview ... 11
2.1 Deployment ... 11
2.1.1 Database privileges ... 11
2.2 Installation sequence ... 12

3 Checking the prerequisites ... 15
3.1 Required knowledge ... 15
3.2 Prerequisites ... 15
3.2.1 Oracle E-Business Suite prerequisites ... 15
3.2.2 Content Server prerequisites ... 15

4 Installing OpenText Content Management for Oracle E-Business on Oracle E-Business Suite ... 17
4.1 Installing OpenText Content Management for Oracle E-Business on Oracle E-Business Suite 12.1.3 ... 18
4.2 Installing OpenText Content Management for Oracle E-Business on Oracle E-Business Suite 12.2.x using COLD patch mode ... 22
4.2.1 Finding Duplicate Rest Service Operations ... 29
4.3 Installing OpenText Content Management for Oracle E-Business on Oracle E-Business Suite 12.2.x using HOT patch mode ... 29
4.4 Deploy the web service on standalone WebLogic ... 35

Part 2 Upgrading OpenText Content Management for Oracle E-Business Suite 39

5 Upgrading OpenText Content Management for Oracle E-Business on Oracle E-Business Suite ... 41

6 Upgrading Content Server and the Connected Workspaces module ... 53

7 Upgrading from Connected Workspaces 16 with Content Server 16 to OpenText Content Management for Oracle E-Business 20.2 ... 55
7.1 Checklist for upgrade from Connected Workspaces 16 with Content Server 16 to OpenText Content Management for Oracle E-Business 20.2 ... 55
7.2 Upgrading the database schema ... 57

8 Upgrading from Connected Workspaces 16.2 with Content Server 16.2 to OpenText Content Management for Oracle E-Business 20.2 ... 59

8.1 Checklist for upgrade from Connected Workspaces 16.2 with Content Server 16.2 to OpenText Content Management for Oracle E-Business 20.2 ... 59

8.2 Upgrading the database schema ... 61

Part 3 Performing post-installation tasks 63

9 Setting up the connection between Content Server and Oracle E-Business Suite ... 65

10 Performing post-installation or post-upgrade tasks in Content Server ... 69

10.1 Importing root certificates for Secure Sockets Layer (SSL) connections ... 69

10.2 Connecting an external system ... 70

10.3 Configuring the storage provider ... 74

11 Performing post-installation or post-upgrade tasks in Oracle E-Business Suite ... 75

11.1 Managing users ... 75

11.1.1 Creating and configuring a user synchronization provider ... 76

11.1.2 Creating a user name mapping provider ... 79

11.1.3 Synchronizing users and groups regularly ... 81

11.1.4 Synchronizing users from Oracle E-Business Suite to a non-synchronized OTDS partition ... 82

11.1.5 Synchronizing roles to Content Server groups ... 84

11.1.6 Configuring Single Sign-On ... 84

11.2 Importing the Content Server category for attachments ... 85

12 Transporting OpenText Content Management for Oracle E-Business configurations ... 87

12.1 Exporting and importing Oracle E-Business Suite configuration ... 87

12.2 Transporting configuration objects ... 91

12.2.1 Exporting business object types and unique names ... 92

13 Installing Content Server patches using the cluster management tool ... 93

14 Analyzing the installation and configuration ... 95

15 Appendix ... 97

15.1 Objects created for OpenText Content Management ... 97

15.2 Concurrent programs ... 103

15.2.1 OpenText Content Management Archive Attachments 103
15.2.2 OpenText Content Management Native Attachments 105
15.2.3 OpenText Content Management Synchronize All Groups 106
15.2.4 OpenText Content Management Synchronize EBS Role to CS Group 106
15.2.5 OpenText Content Management Synchronize User 106
15.2.6 OpenText Content Management Configurations Report 106
15.2.7 OpenText Content Management Sync Deleted EBS Attachments with Content Server 107
15.2.8 Delete Copy of Archived Attachments from Oracle E-Business Suite 108
15.2.9 Incompatibilities for a concurrent program 108

Part 4 Uninstalling OpenText Content Management for Oracle E-Business Suite 109

16 Uninstall OpenText Content Management for Oracle E-Business Suite 111

Chapter 1

What is OpenText Content Management for Oracle E-Business Suite?

OpenText Content Management for Oracle E-Business Suite (OpenText Content Management for Oracle E-Business) is a combination of OpenText Content Server and an Oracle E-Business Suite add-on, with which you can integrate Content Server functionality into Oracle E-Business Suite processes. Beyond Content Server, which includes extensive functionality for document management, OpenText Content Management for Oracle E-Business comes with the entire OpenText Content Suite Platform, including additional functionality for archiving, workflow and collaboration.

In addition, you can enrich this scenario with OpenText information management systems, products and methodologies.

Business object

The cornerstone of OpenText Content Management for Oracle E-Business is the *business object* in Oracle E-Business Suite. A business object represents an entity that is being processed in the system, automatically or manually by users. Examples for business objects are *bills of material*, *orders*, or *assets* in Manufacturing Management. In HRMS, business objects can be defined for *employees*, *reimbursement request*, or *applicants*. Each module has its own very specific business objects.

Business objects consist of structured data, that is data stored in a database. Often, business processes also require unstructured data, such a documents, email, or images and drawings. These types of information are best stored in OpenText Content Server with its document management and archiving, workflow and collaboration capabilities. OpenText Content Management for Oracle E-Business links structured and unstructured data in *business workspaces*.

Business workspaces

A *business workspace* in Content Server contains content that is relevant for a business object. From Content Server side, authorized OpenText Content Management users can easily view the data of this business object, even if they are not Oracle E-Business Suite users. From the Oracle E-Business Suite side, users can access Content Server items in the business workspace without leaving their EBS system. To make full use of Content Server functionality, business workspaces can be configured for OpenText Content Management for Oracle E-Business.

Attachments

In addition to the content that is stored in a business workspace for a business object, users can add additional documents as *attachments* to the business object.

Business relationships

OpenText Content Management for Oracle E-Business provides tools to illustrate a relationship between business workspaces. For example, a hierarchical relationship between business workspaces can be displayed in a side bar widget of a business workspace.

Document entity

This is an Oracle E-Business Suite concept. It identifies the Oracle item with which an attachment is associated. It is related to the business object defined above, but often more granular. For example, an Oracle purchase order will have a header, generally one or more line items, and possibly line item shipments and other components. Each of these components is an Oracle document entity, but would all be part of a single OpenText Content Management business object, for example a purchase order.

Document entity type

This is an Oracle E-Business Suite concept. Each document entity as defined above has a corresponding document entity type. The document entity type both defines the type of Oracle records to which content may be attached and indicates the table in which those records are stored.

Document category

This is an Oracle E-Business Suite concept. The customer may define document categories to classify the various attached documents. For example, some document categories for purchasing-related attachments might be *request for quote*, *quote*, *requisition*, *purchase order*, or *packing list*.

Document type

This is an OpenText Content Management concept. It is very similar to the Oracle *document category* discussed above. The available document types are defined as part of the business object type definition. Content Server uses the document type to select how the attachment is stored in Content Server, for example its categories and attributes, its location, or its name.

Document properties

These are metadata associated with an attachment in Oracle E-Business Suite. These are sent along with the attachment to Content Server to be stored in categories and attributes set on the document or otherwise used while processing the attachment.

Part 1

Installing OpenText Content Management for Oracle E-Business Suite

This part explains how you install OpenText Content Management for Oracle E-Business Suite on Oracle E-Business Suite and Content Server.

Note: This part covers the details of OpenText Content Management for Oracle E-Business installation on both Content Server and Oracle E-Business Suite. The installation procedures of other products of OpenText Content Management for Oracle E-Business Suite such as Archive Center or Content Server are not part of this guide. For detailed installation instructions, see the respective installation guides for the product, which are available on OpenText My Support.

Chapter 2

Installation overview

This chapter contains information about the deployment method and installation sequence for OpenText Content Management for Oracle E-Business Suite.

Important
Always check for the most recent version of an installation guide and Release Notes on OpenText My Support.

2.1 Deployment

OpenText Content Management is deployed as a separate EAR application in the `oacore` container for EBS on the OC4J technology stack.

Following the standard Oracle procedure for custom applications, the `XXXECM4O` schema for the OpenText Content Management application is created using `autoconfig`. The OpenText Content Management is an extension of E-Business Suite. As such it runs within E-Business Suite but cannot run stand-alone.

The bigger part of the OpenText Content Management schema objects is installed in the `XXXECM4O` schema. Because of technical restrictions some objects require that they are being installed in the `APPS` schema. For a complete list of OpenText Content Management related objects, see "Objects created for OpenText Content Management" on page 97.

Technically, the application itself is contained in Java class files in the computer file system that are loaded by OC4J to perform the business logic.

For more information about the installation, see "Installing OpenText Content Management for Oracle E-Business on Oracle E-Business Suite" on page 17.

2.1.1 Database privileges

The `xxxecm4o` database user is created by the `$XXECM4O_TOP/sql/install/OO_createUser.sql` script. The script provides unlimited quotas on the `APPS` tablespaces and then grants the following privileges:

- ALTER ANY OUTLINE
- ALTER SESSION
- ANALYZE ANY
- CREATE ANY OUTLINE
- CREATE CLUSTER
- CREATE DATABASE LINK
- CREATE MATERIALIZED VIEW
- CREATE SEQUENCE

- CREATE SESSION
- CREATE TABLE
- CREATE TRIGGER
- CREATE TYPE
- DROP ANY OUTLINE
- QUERY REWRITE

The `xxxecm4o` database user does not get any privileges from the `$XXECM4O_TOP/sql/eventPkgGrants` script. This script only grants the following privileges:

- `EXECUTE` privilege on the `DBMS_CQ_NOTIFICATION` package
- `CHANGE NOTIFICATION` privilege to the `APPS` user

2.2 Installation sequence

The following installation sequence sets up a prototypical architecture.

1. On the Oracle E-Business Suite server, install the OpenText Content Management for Oracle E-Business Suite application that you find on the installation medium.
2. On the Content Server server, Content Server modules, web services and other OpenText products using the master setup. During installation, select the following:
   - Select the deployment scenario. For a typical all-in-one installation for one instance of Content Server, select **All-in-one Deployment (Archive Center, Content Server, Directory Services, etc.)**.

     For a two-server landscape, select **Content Server Deployment** on one server and **Extended Archive Center Deployment (Archive Center,, Directory Services, etc.)** on the other server.
3. Install the required patches, see the respective installation guides. Also check the installation medium for relevant patches.
4. Configure OpenText Content Management for Oracle E-Business:
   - User Management
   - Workspace customizing: business workspaces, business relations. Customizing is covered in *OpenText Content Management for Oracle E-Business Suite - Configuration Guide (ERO-CGD)*.
   - User role mapping
5. Install the following **optional** software clients, depending on your implementation:
   - Imaging (Web Viewer, Windows Viewer, Enterprise Scan, DesktopLink, ExchangeLink, NotesLink)
   - Enterprise Connect Client (MS Windows Explorer/MS Outlook)

- OpenText™ Administration Client

Chapter 3

Checking the prerequisites

3.1 Required knowledge

The following knowledge is required from the person dealing with the installation as described in this document:

- In-depth knowledge of Oracle E-Business Suite administration tasks
- In-depth knowledge of OpenText Content Server
- Basic knowledge of the employed operating system

3.2 Prerequisites

3.2.1 Oracle E-Business Suite prerequisites

Oracle E-Business Suite must be installed in the following version:

- 12.1.3
- 12.2.3 or higher

  `p17765665_R12.OWF.C_R12_GENERIC` patch must be installed

3.2.2 Content Server prerequisites

Important

See the Release Notes for a comprehensive and most current list of prerequisites.

Required patches for the installed Content Server version

Content Server – The security fixes for Content Server are vital for proper installation. If you already have a Content Server installation, make sure you have installed Content Server. Additionally, install the patches provided in the `Patches` folder on the installation medium.

You can also use OpenText™ System Center to install patches. For more information, see *OpenText System Center Manager - Installation and Configuration Guide (SYSCM-IGD)*.

Note: If you create a completely new system, Content Server is installed with the master setup.

Chapter 4

Installing OpenText Content Management for Oracle E-Business on Oracle E-Business Suite

This chapter explains how to install OpenText Content Management for Oracle E-Business on Oracle E-Business Suite. A thorough knowledge of Oracle administration tasks is required.

Required passwords

During the installation procedure you need the following passwords:

- Administration password for Oracle E-Business Suite, for example for the `sysadmin` user.
- Apps password
- Password for the database connection, that is for the system user
- Password for the `oc4jadmin` user

Path variables and other variables

- **APPL_TOP**

  `$APPL_TOP` (Unix): Application root directory, for example, `c:/oracle/<SID>/apps/appl_st/appl`

- **INST_TOP**

  `$INST_TOP` (Unix): Instance home directory, for example, `c:/oracle/<SID>/inst/apps/<SID>_<hostname>`

- **PATCH_TOP**

  `$PATCH_TOP` (Unix): Directory for patch installation, for example, `<EBS_ROOT>/fs_ne/EBSapps/patch`

- **ADMIN_SCRIPTS_HOME**

  `$ADMIN_SCRIPTS_HOME` (Unix): Location of startup scripts, under `INST_TOP`, for example, `c:/oracle/<SID>/inst/apps/<SID>_<hostname>/admin/scripts`

- **FND_SECURE**

  `$FND_SECURE` (Unix): Secure directory where `*.dbc` files are stored, for example, `INST_TOP/appl/fnd/12.0.0/secure<SID>.dbc`

- **JAVA_TOP**

  `$JAVA_TOP` (Unix): Java root directory, for example, `c:/oracle/<SID>/apps/appl_st/comn/java/classes`

- **XXXECM4O_TOP**

  $XXXECM4O_TOP (Unix): OpenText Content Management for Oracle E-Business application root directory, for example, `c:/oracle/<SID>/apps/appl_st/appl/xxxecm4o/12.0.0`

- **<SID>**

  SID of the Oracle system

- **<hostname>**

  Name of the computer where Oracle E-Business Suite is installed.

4.1 Installing OpenText Content Management for Oracle E-Business on Oracle E-Business Suite 12.1.3

To install OpenText Content Management for Oracle E-Business on Oracle E-Business Suite 12.1.3:

1. Copy and extract the installation files:

   a. Create a directory for patch distributions if your installation does not already have one:

      - Go to the directory which will hold the patch directory:

        Unix: `home/applvis/`

        Create the patch directory:

        ```
        mkdir patch
        ```

   b. On the installation medium, open the following directory:

      Unix: `Extended_ECM_for_Oracle`

   c. Copy the distribution to the patch directory:

      Unix: `xecm4o_xx_x_x.tar.gz`

   d. Extract the files from the distribution:

      Unix: `tar -xzf xecm4o_xx_x_x.tar.gz`

2. Edit the AutoConfig Context file in Oracle E-Business Suite:

   This step is for new installations only.

   a. Sign in as system administrator, for example `SYSADMIN`.

   b. From the main menu, select **System Administrator > Oracle Application Manager > AutoConfig**.

   c. Click **Manage Custom Parameters**.

   d. Add a new parameter:

      i. Click **Add**.

ii. Select **Application Tier** and click **Next**.

iii. Enter the following parameters:

OA_VAR: `c_xxxecm4o`

Default Value: `%s_at%/xxxecm4o/12.0.0`

Title: `XXXECM4O Product Top`

Description: `OpenText xECM for Oracle EBS Product Top`

OA_TYPE: `PROD_TOP`

iv. Click **Next** twice and then **Finish**.

e. Source the *apps* environment:

i. Open a command prompt window.

ii. Go to the following directory:

Unix: `$APPL_TOP`

iii. Run the following command:

Unix: `. ./APPS<SID>_<hostname>.env`

f. Run AutoConfig to setup the custom application:

i. Change to the `ADMIN_SCRIPTS_HOME` directory for the middle-tier:

Unix: `cd $ADMIN_SCRIPTS_HOME`

ii. Stop the middle-tier services using the APPS user name and password:

Unix: `./adstpall.sh apps/apps`

iii. Run the AutoConfig script:

Unix: `./adautocfg.sh`

Enter the APPS password when prompted.

g. Start a new Linux session after AutoConfig.

3. Deploy the distribution files:

Note: Start a new session after Auto-Config.

a. Source the *apps* environment:

i. Go to the `APPL_TOP` directory:

Unix: `cd $APPL_TOP`

ii. Source the environment file:

Unix: `. ./APPS<SID>_<hostname>.env`

b. Change to the directory containing the extracted files:

Unix: `cd /u01/<SID>/patch/xecm4o_xx_x_x`

c. Deploy the files:

Unix: `./deployFiles.sh`

4. Run AutoConfig to configure the deployed files:

   a. Change to the `ADMIN_SCRIPTS_HOME` directory for the middle-tier:

      Unix: `cd $ADMIN_SCRIPTS_HOME`

   b. Stop the middle-tier services using the APPS user name and password, if not already done.

      Unix: `./adstpall.sh apps/apps`

   c. Run the AutoConfig script:

      Unix: `./adautocfg.sh`

      Enter the APPS password when prompted.

      The installation was successful if the script completes without error and you see the following entry:

      ```
      Configuring XXXECM4O_TOP ......... Completed
      ```

   d. Restart the middle-tier services using the APPS user name and password:

      Unix: `./adstrtal.sh apps/apps`

   e. Start a new Linux session after Auto-Config.

5. Grant database permissions to the `xxxecm4o` user:

   Tip: If your database runs on a different host than Oracle E-Business Suite, copy the `XXXECM_TOP/sql/eventPkgGrants.sql` file to that host.

   For more information about database permissions of the `xxxecm4o` user, see "Database privileges" on page 11.

   Note: Start a new session after Auto-Config.

   a. Source the *database* environment:

      Unix: `. /u01/<SID>/db/tech_st/11.2.0.2/<SID>_<hostname>.env`

   b. Change to the database schema installation directory:

      Unix: `cd $XXXECM4O_TOP/sql`

   c. Run the following command: `sqlplus <apps>/<apps_pwd> @createPubSynonym.sql`

   d. Run the following command: `sqlplus / as sysdba @eventPkgGrants.sql`

6. Install the OpenText Content Management application:

   a. Source the *apps* environment:

      Unix: `. $APPL_TOP/APPS<SID>_<hostname>.env`

   b. Install the database schema:

      i. Change to the database schema installation directory:

         Unix: `cd $XXXECM4O_TOP/sql`

ii. Install the schema:

Unix: `./installSchema.sh //<host>:1521/$TWO_TASK SYSTEM`

c. Install the application files:

i. Change to the application installation directory:

Unix: `cd ../admin`

ii. Install the application:

Unix: `./install.sh`

Note: During installation, you will be asked if you want to install Records Management. Enter `Y` and continue with installation or upgrade, if you want to configure and implement the Record Management.

d. Deploy the EAR file:

i. Change to the EAR file directory:

Unix: `cd ../java/oas`

ii. Source the *application server* environment:

Unix: `. $INST_TOP/ora/10.1.3/<SID>_<hostname>.env`

iii. Deploy the web service:

Unix:

```
java -Djava.util.logging.config.file=logging.properties -jar
$ORACLE_HOME/j2ee/home/admin_client.jar deployer:oc4j:localhost:20000
oc4jadmin welcome -deploy -file xxxecm4o.ear -deploymentName xxxecm4o -
bindAllWebApps default-web-site > deploy.log
```

The above example assumes the password “welcome” for the **oc4jadmin** user.

Troubleshooting

If your deployment fails, check if your `oacore` default port range is different. The deployer uses port `20000`. To find a similar port on your system, open the `$INST_TOP/appl/admin/<SID>_<hostname>.xml` file in an editor and look for the following:

```
oacore_rmi_portrange

base="20000"
```

To verify the entry, run the following command:

```
java -jar $ORACLE_HOME/j2ee/home/admin_client.jar
deployer:oc4j:localhost:20000 oc4jadmin welcome -validateURI
```

Replace **20000** with your port number that you found above and run the deploy web service.

Tip: To redeploy the ear file, replace the `-deploy` option with `-redeploy`.

4.2 Installing OpenText Content Management for Oracle E-Business on Oracle E-Business Suite 12.2.x using COLD patch mode

Important

- Oracle E-Business Suite 12.2 introduced the online patching mechanism. The instructions below refer to the *run*, *patch*, and *non-editioned* file systems. For more information about the online patching mechanism, see the Oracle documentation.
- Before installing OpenText Content Management on Oracle E-Business Suite 12.2.x, you must apply Oracle patch `p17765665_R12.OWF.C_R12_GENERIC`. For more information on how to apply this patch, see the Oracle documentation.

  Without this patch, you cannot load `ISGECMLinkSPI_java.ildt` when running `./install.sh` and subsequently prevents you from deploying ISG web service later.

To install OpenText Content Management for Oracle E-Business on Oracle E-Business Suite 12.2.x using COLD patch mode:

1. Source the *run* environment:

   Unix: `. EBSapps.env run`

2. Copy and unzip the installation files:

   a. Copy the distribution `xecm4o_xx_x_x.tar.gz` to the patch directory at `$PATCH_TOP`.

   b. Go to the patch directory:

   Unix: `cd $PATCH_TOP`

   c. Extract the files from the distribution:

   Unix: `tar -xzf xecm4o_xx_x_x.tar.gz`

   d. Go to the distribution directory:

   `cd xecm4o_xx_x_x`

3. Create the `xxxecm4o` custom application.

   Tip: The `README.txt` file in the `setup` directory contains a copy of the following instructions for creating the custom application.

   a. Go to the *setup* directory:

   `cd setup`

```
dos2unix*.*
```

b. Use the `FindProdID.sql` script to find an unused product ID:

   i. Start with *<previous_ID>*= `50000`

   ```
   sqlplus apps/<apps password> @FindProdID.sql <previous_ID>
   ```

   If no rows are found, use *<previous_ID>*+1 as the product ID. If an unused ID exists among the ones displayed, you can use it. For example, if the display shows `50002` and `50005`, you can use `50003`. Otherwise, run the script again, setting *<previous_ID>= <highest ID displayed>*.

   Repeat until you select an appropriate product ID.

   ii. The `xxxecm4oprod.txt` file is configured for product ID `50001`. If you had selected a different product ID, edit the file and change the three occurrences of `50001` to the selected product ID.

c. Copy the `newprods.txt`, `xxxecm4oprod.txt`, `xxxecm4oerr.txt`, `xxxecmsaprod.txt`, and `xxxecmsaerr.txt` files to the `APPL_TOP/admin` directory:

   Unix: `cp newprods.txt xxxecm4oprod.txt xxxecm4oterr.txt xxxecmsaprod.txt xxxecmsaerr.txt $APPL_TOP/admin`

   Note: This is used only when installing enabler version is 24.2 or higher.

d. Change to the `APPL_TOP/admin` directory:

   Unix: `cd $APPL_TOP/admin`

e. Verify if you set the run-edition environment. The following command must return the `run` as a result.

   ```
   echo $FILE_EDITION
   ```

f. Run the `adsplice` script. You may accept the default responses to any prompts issued by the script:

   ```
   adsplice
   ```

g. Revert to the distribution directory:

   Unix: `cd $PATCH_TOP/xecm4o_xx_x_x/setup`

h. Run the `VerifyDBSetup.sql` script to verify the property entries created in the database:

   ```
   sqlplus apps/<apps password> @VerifyDBSetup.sql <product_ID>
   ```

   The *<product_ID>* is the ID you selected in step 3.b.i. The script should return three lines with the status *passed*.

i. Verify that the XXXECM4O_TOP environment variable was created.

   - Verify the XXXECM4O_TOP environment variable is present:

     Unix: `env | grep XXXECM4O_TOP`

Online patching cycle

1. **Prepare:**

   - Prepare the adop phase cycle by running the following command:

     `adop phase=prepare`

     Note: Ensure that the run-edition environment is set.

2. **Apply:**

   a. Source the *patch* environment.

   b. Install the files:
      i. Change to the distribution directory.
      ii. Run the `deployfiles.sh` script.
      iii. Answer `N` to the question: "Do you want to install in HOT Patch Mode [Y/y]? (Default is COLD Patch)."

3. Grant database permissions to the APPS user:

   Tip: If your database runs on a different host than Oracle E-Business Suite, copy the `XXXECM_TOP/sql/eventPkgGrants.sql` file to that host.

   For more information about database permissions of the `xxxecm4o` user, see "Database privileges" on page 11.

   a. Source the *database* environment:

      Unix: `/u01/ebs/db/12.1.0/<VIS_<SID>>.env`

   b. Change to the database schema installation directory:

      Unix: `cd $XXXECM4O_TOP/sql`

   c. Run the following command: `sqlplus <apps>/<apps> @createPubSynonym_12_2.sql`

   d. Run the following command: `sqlplus / as sysdba @eventPkgGrants.sql`

4. Install the OpenText Content Management application:

   a. Source the *patch* environment:

      Unix: `. EBSapps.env patch`

   b. Install the database schema:

      i. Change the database schema installation directory:

         Unix: `cd $XXXECM4O_TOP/sql`

      ii. Connect to the database and run the following SQL command:

         `show parameter service_names`

         Use the name of patch service returned in the next step.

Note: If you get an error on running the program `xdfcmp.pl`, the program cannot find the Perl utility in `/usr/local/bin`. Copy this tool from `/usr/bin` to `/usr/local/bin` as root user:

```
su root
cp /usr/bin/perl* /usr/local/bin
exit
```

iii. Install the schema:

Note: The EBS_SYSTEM user and schema were introduced in Oracle E-Business Suite (EBS) Release 12.2.11. It was also introduced via the AD-TXK Delta 13 patch for earlier 12.2 releases (12.2.3 through 12.2.10).

Unix: `./installSchema.sh //<host>:<dbport>/<patch service name>`

The command defaults to user SYSTEM (for versions <12.2.11) or EBS_SYSTEM (for versions ≥12.2.11) unless a custom username is specified.

When no user is provided then command will run with `EBS_SYSTEM` user by default, else admin can provide custom user if needed. This command work in both ways.

c. Install the application files:

Note: This step can take several minutes to complete.

i. Source the run environment:

Unix: `. EBSapps.env run`

ii. Change to the application installation directory:

Unix: `cd $XXXECM4O_TOP/admin`

iii. Install the application:

Unix: `./install.sh`

Notes

- During installation, you will be asked if you want to install Records Management. Enter `Y` and continue with installation or upgrade, if you want to configure and implement Records Management.
- Use the name of the patch service returned in step 3.b.ii.
- Answer `N` to the question: "Do you want to install in HOT Patch Mode [Y/y]? (Default is COLD Patch)." If `N` was entered for step 2.b.iii. then `N` should be entered while running install.sh.

5. Finish the online patching cycle:

a. Source the *run* environment:

   Unix: `. EBSapps.env run`

b. Run `adop phase=finalize`.

   Important
   This task can take several hours.

c. Run `adop phase=cutover`.

d. Run `adop phase=cleanup`.

6. Deploy the web service:

   a. Sign in to the Oracle WebLogic Server® Administration console.
   b. Click **Lock & Edit** to modify items in the domain.
   c. In the **Domain Structure** area, click **Deployments**.
   d. On the **Control** tab, click **Install**.
   e. Enter the path to the `xxxecm4o-web.war` file and click **Next**.
   f. Select **Install this deployment as an application**.
   g. In the next screen, select `oacore_cluster1` as the target and the **All servers in the cluster** option.
   h. Click **Next**.
   i. Enter `xxxecm4o` as the name of the application.
   j. Select other options, as required and then click **Next**.
   k. Select **Yes, take me to the deployment's configuration screen**.
   l. Click **Finish**.
   m. Wait for the installation to finish and then click **Activate Changes** in the **Change Center** area.
   n. Start the `xxxecm4o` web service:
   o. On the **Control** tab, select the `xxxecm4o` deployment.
   p. Click **Start** and select the **Servicing all requests** option.

7. Optional Deploy the web service on standalone WebLogic. For more information, see "Deploy the web service on standalone WebLogic" on page 35.

8. Deploy the integrated SOA Gateway:

   a. In the main menu of Oracle E-Business Suite, click **System Administration > Lookup Types**.
   b. Search for **Business Entity**, and click **Update** to view the search result.
   c. If the Lookup Code is not available in EBS, click **Add** to add the following Lookup Code:

      - **Code**: `XXXECM4O`
      - **Meaning**: `XXXECM4O`
      - **Description**: `XXXECM4O`

Note: If the navigation mentioned in 7.a is not found, navigate to **System Administrator** > **Application** > **Menu**. Search for the **ICX_SYSTEM_ADMINISTRATION** menu and add the following record:

- Sequence: Select the appropriate sequence as per your setup.
- Prompt: Lookup Type
- Submenu: Leave it blank
- Function: Maintain Lookup Types
- Description: Self-service interface for the maintenance of Lookup Types and Codes.

After adding the above record, log out and log in again. Observe whether the navigation mentioned in 7.a is available now and continue with the next steps.

9. Regenerate `customall.jar` and restart the services:

   a. Set the run environment:

      Unix: `. EBSapps.env run`

   b. Regenerate the customall.jar file:

      Unix:

      ```
      tar -xzf xxxecm4o.tar.gz
      cd $PATCH_TOP/xecm4o_xx_x_x/java/wls/xxxecm4o_ear
      unzip xxxecm4o-web.war
      cd $PATCH_TOP/xecm4o_xx_x_x/java/wls/xxxecm4o_ear/WEB-INF/classes
      cp -R . $JAVA_TOP
      cd $JAVA_TOP
      adcgnjar
      ```

   c. Restart Apps Server:

      Unix:

      ```
      cd $ADMIN_SCRIPTS_HOME
      ./ adstpall.sh
      ./ adstrtal.sh
      ```

10. Deploy the Rest services in the ISG page:

    a. Sign in to Oracle E-Business Suite with sysadmin credentials.
    b. Click **Integrated SOA Gateway** > **Integration Repository**.
    c. Click **Search**.
    d. In the **Internal Name** box, enter `com.opentext.xecm4o.spi.v1.isg.service.ISGECMLinkSPI` as the internal name and then click **Go**.

e. In the search results area, under **Name**, click **XXXECM4O_ISGECMLinkSPI** and verify whether its REST service is in the `Deployed` state. If it is not, enter the Service alias **XXXECM4O_ISGECMLinkSPI** and click **Deploy**.

Notes

- If you receive an error message, such as *Java.lang.SecurityException: User.ASADMIN~~TEST, failed to be authenticated*, check if ASADMIN has required roles like `IsgAdmin` and `IsgDeveloper`. If not, then assign the roles and try deploying the service. If errors still occur, refer to the Oracle Doc IDs: 1317697.1 and 1311068.1.
- If you receive the "Too many objects match the primary key oracle.jbo.key" error message, or if duplicate Rest Service Operations are present in Oracle E-Business Suite, run the following SQL query to delete the duplicates.

```
delete from FND_IREP_FUNCTION_FLAVORS
where rowid in (select rowid from (
select function_id,row_number() over(partition by function_id
order by function_id) rank
from FND_IREP_FUNCTION_FLAVORS
where function_id in (select function_id from FND_FORM_FUNCTIONS
where function_name like '%ISGECM%'
and irep_class_id is not null))
where rank > 1);
```

  For more information about duplicate web service methods, refer to the Oracle Doc ID:2448141.1.

  To find the duplicate Rest Service operations present in Oracle E-Business Suite, see "Finding Duplicate Rest Service Operations" on page 29.

11. Navigate to the **Grants** tab and select **Rest Service Operations** to enable appropriate grants for the same.

    The OpenText Content Management for Oracle E-Business on Oracle E-Business Suite 12.2.x installation is complete.

4.2.1 Finding Duplicate Rest Service Operations

To find the duplicate Rest Service - XXXECM4O_ISGECMLinkSPI operations present in Oracle E-Business Suite, complete the following steps.

1. Navigate to **Integrated SOA Gateway**> **Integration Repository**.
2. Click **Search**.
3. In the **Internal Name** box, enter `com.opentext.xecm4o.spi.v1.isg.service.ISGECMLinkSPI` as the internal name and then click **Go**.
4. In the search results area, under **Name**, click **XXXECM4O_ISGECMLinkSPI**.
5. Click the **REST Web Service** tab to view the duplicate Rest Web Services.

4.3 Installing OpenText Content Management for Oracle E-Business on Oracle E-Business Suite 12.2.x using HOT patch mode

To install OpenText Content Management for Oracle E-Business on Oracle E-Business Suite 12.2.x using HOT patch mode

1. Source the *run* environment:

   Unix: `. EBSapps.env run`

2. Copy and unzip the installation files:

   a. Copy the distribution `xecm4o_xx_x_x.tar.gz` to the patch directory at `$PATCH_TOP`.

   b. Go to the patch directory:

   Unix: `cd $PATCH_TOP`

   c. Extract the files from the distribution:

   Unix: `tar -xzf xecm4o_xx_x_x.tar.gz`

   d. Go to the distribution directory:

   `cd xecm4o_xx_x_x.`

3. Create the `xxxecm4o` custom application.

   Tip: The `README.txt` file in the `setup` directory contains a copy of the following instructions for creating the custom application.

   a. Go to the *setup* directory:

   ```
   cd setup
   dos2unix*.*
   ```

   b. Use the `FindProdID.sql` script to find an unused product ID:

i. Start with *<previous_ID>*= 50000

```
sqlplus apps/<apps password> @FindProdID.sql <previous_ID>
```

If no rows are found, use *<previous_ID>*+1 as the product ID. If an unused ID exists among the ones displayed, you can use it. For example, if the display shows 50002 and 50005, you can use 50003. Otherwise, run the script again, setting *<previous_ID>= <highest ID displayed>*.

Repeat until you select an appropriate product ID.

ii. The xxxecm4oprod.txt file is configured for product ID 50001. If you had selected a different product ID, edit the file and change the three occurrences of 50001 to the selected product ID.

c. Copy the newprods.txt, xxxecm4oprod.txt, xxxecm4oerr.txt, xxxecmsaprod.txt, and xxxecmsaerr.txt files to the APPL_TOP/admin directory:

Unix: `cp newprods.txt xxxecm4oprod.txt xxxecm4oterr.txt xxxecmsaprod.txt xxxecmsaerr.txt $APPL_TOP/admin`

Note: This is used only when installing enabler version 24.2 or higher.

d. Change to the APPL_TOP/admin directory:

Unix: `cd $APPL_TOP/admin`

e. Verify if you set the run-edition environment. The following command must return the run as a result.

```
echo $FILE_EDITION
```

f. Run the adsplice script. You may accept the default responses to any prompts issued by the script:

```
adsplice
```

g. Revert to the distribution directory:

Unix: `cd $PATCH_TOP/xecm4o_xx_x_x/setup`

h. Run the VerifyDBSetup.sql script to verify the property entries created in the database:

```
sqlplus apps/<apps password> @VerifyDBSetup.sql <product_ID>
```

The *<product_ID>* is the ID you selected in step 3.b.i. The script should return three lines with the status *passed*.

i. Verify that the XXXECM4O_TOP environment variable was created.

i. Verify the XXXECM4O_TOP environment variable is present:

Unix: `env | grep XXXECM4O_TOP`

ii. Verify that the XXXECMSA_TOP environment variable is present:

Unix: `env | grep XXXECMSA_TOP`

4. Install the files:
   i. Change to the distribution directory.
   ii. Run the `deployfiles.sh` script.
   iii. Answer 'Y' to the question: "Do you want to install in HOT Patch Mode [Y/y]? (Default is Cold Patch)."

5. Grant database permissions to the APPS user:

   Tip: If your database runs on a different host than Oracle E-Business Suite, copy the `XXXECM_TOP/sql/eventPkgGrants.sql` file to that host.

   For more information about database permissions of the `xxxecm4o` user, see "Database privileges" on page 11.

   For more information about database permissions of the xxxecm4o user, see "Database privileges" on page 11.

   a. Source the *database* environment:

      Unix: `. <SID>_<hostname>.env`, for example, `/u01/ebs/db/12.1.0/<<SID>>_<<hostname>>.env`

   b. Change to the database schema installation directory:

      Unix: `cd $XXXECM4O_TOP/sql`

   c. Run the following command: `sqlplus <apps>/<apps> @createPubSynonym_12_2.sql`

   d. Run the following command: `sqlplus / as sysdba @eventPkgGrants.sql`

6. Install the OpenText Content Management application:

   a. Install the database schema:

      i. Change the database schema installation directory:

         Unix: `cd $XXXECM4O_TOP/sql`

      ii. Connect to the database and run the following SQL command:

         ```
         show parameter service_names
         ```

         Use the name of run service returned in the next step.

         Note: If you get an error on running the program `xdfcmp.pl`, the program cannot find the Perl utility in `/usr/local/bin`. Copy this tool from `/usr/bin` to `/usr/local/bin` as root user:

         ```
         su root
         cp /usr/bin/perl* /usr/local/bin
         exit
         ```

      iii. Install the schema:

         Note: The EBS_SYSTEM user and schema were introduced in Oracle E-Business Suite (EBS) Release 12.2.11. It was also

introduced via the AD-TXK Delta 13 patch for earlier 12.2 releases (12.2.3 through 12.2.10).

Unix: `./installSchema.sh //<host>:<dbport>/<patch service name>`

The command defaults to user SYSTEM (for versions <12.2.11) or EBS_SYSTEM (for versions ≥12.2.11) unless a custom username is specified.

When no user is provided then command will run with `EBS_SYSTEM` user by default, else admin can provide custom user if needed. This command work in both ways.

b. Install the application files:

Note: This step can take several minutes to complete.

i. Source the run environment:

Unix: `.EBSapps.env run`

ii. Change to the application installation directory:

Unix: `cd $XXXECM4O_TOP/admin`

iii. Install the application:

Unix: `./install.sh`

Notes

- During installation, you will be asked if you want to install Records Management. Enter `Y` and continue with installation or upgrade, if you want to configure and implement Records Management.
- Answer `Y` to the question: "Do you want to install in HOT Patch Mode [Y/y]? (Default is Cold Patch)."

  If `Y` was entered for step 4iii, then `Y` should be entered while running install.sh.
- Use the name of the run service returned in step 6.a.ii.

7. Deploy the web service:

a. Sign in to the Oracle WebLogic Server® Administration console.

b. Click **Lock & Edit** to modify items in the domain.

c. In the **Domain Structure** area, click **Deployments**.

d. On the **Control** tab, click **Install**.

e. Enter the path to the `xxxecm4o-web.war` file and click **Next**.

f. Select **Install this deployment as an application**.

g. In the next screen, select `oacore_cluster1` as the target and the **All servers in the cluster** option.

h. Click **Next**.
i. Enter `xxxecm4o` as the name of the application.
j. Select other options, as required and then click **Next**.
k. Select **Yes, take me to the deployment's configuration screen**.
l. Click **Finish**.
m. Wait for the installation to finish and then click **Activate Changes** in the **Change Center** area.
n. Start the `xxxecm4o` web service:
o. On the **Control** tab, select the `xxxecm4o` deployment.
p. Click **Start** and select the **Servicing all requests** option.

8. Optional Deploy the web service on standalone WebLogic. For more information, see "Deploy the web service on standalone WebLogic" on page 35.

9. Deploy the integrated SOA Gateway:

   a. In the main menu of Oracle E-Business Suite, click **System Administration > Lookup Types**.
   b. Search for **Business Entity**, and click **Update** to view the search result.
   c. If the Lookup Code is not available in EBS, click **Add** to add the following code:

      - **Code**: `XXXECM4O`
      - **Meaning**: `XXXECM4O`
      - **Description**: `XXXECM4O`

      Note: If the navigation mentioned in 7.a is not found, navigate to **System Administrator** > **Application** > **Menu**. Search for the **ICX_SYSTEM_ADMINISTRATION** menu and add the following record:

      - Sequence: Select the appropriate sequence as per your setup.
      - Prompt: Lookup Type
      - Submenu: Leave it blank
      - Function: Maintain Lookup Types
      - Description: Self-service interface for the maintenance of Lookup Types and Codes.

      After adding the above record, log out and log in again. Observe whether the navigation mentioned in 7.a is available now and continue with the next steps.

10. Regenerate `customall.jar` and restart the services:

    a. Set the run environment:

       Unix: `. EBSapps.env run`

b. Regenerate the customall.jar file:

Unix: `tar -xzf xxxecm4o.tar.gz`

```
cd $PATCH_TOP/xecm4o_xx_x_x/java/wls/xxxecm4o_ear
unzip xxxecm4o-web.war
cd $PATCH_TOP/xecm4o_xx_x_x/java/wls/xxxecm4o_ear/WEB-INF/classes
cp -R . $JAVA_TOP
cd $JAVA_TOP
adcgnjar
```

c. Restart Apps Server:

Unix:

```
cd $ADMIN_SCRIPTS_HOME
./ adstpall.sh
./ adstrtal.sh
```

11. Deploy the Rest services in the ISG page:

a. Sign in to Oracle E-Business Suite with sysadmin credentials.

b. Click **Integrated SOA Gateway** > **Integration Repository**.

c. Click **Search**.

d. In the **Internal Name** box, enter `com.opentext.xecm4o.spi.v1.isg.service.ISGECMLinkSPI` as the internal name and then click **Go**.

e. In the search results area, under **Name**, click **XXXECM4O_ISGECMLinkSPI** and verify whether its REST service is in the `Deployed` state. If it is not, enter the Service alias **XXXECM4O_ISGECMLinkSPI** and click **Deploy**.

Notes

- If you receive an error message, such as *Java.lang.SecurityException: User.ASADMIN~~TEST, failed to be authenticated*, check if ASADMIN has required roles like `IsgAdmin` and `IsgDeveloper`. If not, then assign the roles and try deploying the service. If errors still occur, refer to the Oracle Doc IDs: 1317697.1 and 1311068.1.
- If you receive the "Too many objects match the primary key oracle.jbo.key" error message, or if duplicate Rest Service Operations are present in Oracle E-Business Suite, run the following SQL query to delete the duplicates.

```
delete from FND_IREP_FUNCTION_FLAVORS
where rowid in (select rowid from (
select function_id,row_number() over(partition by function_id
order by function_id) rank
from FND_IREP_FUNCTION_FLAVORS
```

```
where function_id in (select function_id from FND_FORM_FUNCTIONS
where function_name like '%ISGECM%'
and irep_class_id is not null))
where rank > 1);
```

For more information about duplicate web service methods, refer to the Oracle Doc ID:2448141.1.

To find the duplicate Rest Service operations present in Oracle E-Business Suite, see "Finding Duplicate Rest Service Operations" on page 29.

12. Navigate to the **Grants** tab and select **Rest Service Operations** to enable appropriate grants for the same.

    The OpenText Content Management for Oracle E-Business on Oracle E-Business Suite 12.2.x installation is complete using hot patching.

13. Execute below steps to synchronize run and patch edition.

    - `adop phase=fs_clone (Source RUN file system to clone RUN->PATCH)`
    - `adop phase=cleanup`
    - `cd $ADMIN_SCRIPTS_HOME`
    - `./adstpall.sh <apps_username>/<apps_password>`
    - `./adstrtal.sh <apps_username>/<apps_password>`

4.4 Deploy the web service on standalone WebLogic

You can deploy the web service on standalone WebLogic, as per your business requirement. The following are the prerequisite steps to perform to deploy the web service on WebLogic:

To execute the prerequisite steps:

1. Install Java JDK 1.7 or the latest version on the environment.
2. Install the external WebLogic version available in OpenText Content Management for Oracle EBS and select the Java version installed in the earlier step.
3. Place the Jackson libraries JARs, such as `jackson_core`, `jackson-annotations`, and `jackson-databind` at `DOMAIN_HOME\lib`. For example, `C:\oracle\Middleware\user_projects\domains\base_domain\lib`.
4. Create a WebLogic user that is available in OpenText Content Management for Oracle EBS, such as `CBROWN`. The username and password for this user should be the same as that in EBS.

a. To create a user in WebLogic, go to **Console** > **Security Realms** > **myrelam** > **Users and groups** > **New**. Enter the same required details as entered for the EBS user.

b. Go to the created user > groups and assign the required groups, such as **Administrator**.

c. Go to **Security Realm** > **myrealm** > **Roles and Policies** tab.

d. Expand **Global Roles** > **Roles** and click **View Role Conditions** for the **Administrator** role.

e. Click **Add Condition**, select **Group for Predicate List**, and click **Next**.

f. Type the AD Group Name for which you added the user in WebLogic for **Group Argument Name** and click **Add**.

g. Click **Finish**, and then on the next window, click **Save**.

5. Create a file **info.properties** under the WebLogic `DOMAIN_HOME`. For example, `C:\oracle\Middleware\user_projects\domains\base_domain`.

6. Add an EBS URL in the **info.propeties** file under the domain `EBS_URL=<EBS machine hostname>:<Port>`.

To deploy the web service:

1. Extract the **xxxecm4o.tar** file from the xECM for Oracle enabler package and select the **xxxecm4o-web.war** file from the following path: `\xxxecm4o\java\wls\xxxecm4o_ear_standalone`.

2. Sign in to the Oracle WebLogic Server® Administration console.

3. Click **Lock & Edit** to modify the items in the domain.

4. In the **Domain Structure** area, click **Deployments**.

5. On the **Control** tab, click **Install**.

6. Type the path to the `xxxecm4o-web.war` file, for example, `\xxxecm4o\java\wls\xxxecm4o_ear_standalone\ xxxecm4o-web.war` and click **Next**.

7. Select **Install this deployment as an application**.

8. Click **Next**.

9. Type `xxxecm4o` as the name of the application.

10. Select other options, as required, and then click **Next**.

11. Select **Yes, take me to the deployment's configuration screen**.

12. Click **Finish**.

13. Wait for the installation to finish, and then click **Activate Changes in the Change Center area**.

14. Start the `xxxecm4o` web service.

15. On the **Control** tab, select the `xxxecm4o` deployment.
16. Click **Start** and select the **Servicing all requests** option.

Part 2

Upgrading OpenText Content Management for Oracle E-Business Suite

This part explains how you upgrade an existing installation of OpenText Content Management for Oracle E-Business Suite to version xx.x.

Chapter 5

Upgrading OpenText Content Management for Oracle E-Business on Oracle E-Business Suite

To upgrade OpenText Content Management for Oracle E-Business on Oracle E-Business Suite 12.1.x

1. Copy and extract the installation files:

   a. Create a directory for patch distributions if your installation does not already have one:

      - Go to the directory which will hold the patch directory:

        Unix: `home/applvis/`

        Create the patch directory:

        ```
        mkdir patch
        ```

   b. On the installation medium, open the following directory:

      Unix: `Extended_ECM_for_Oracle`

   c. Copy the distribution to the patch directory:

      Unix: `xecm4o_xx_x_x.tar.gz`

   d. Extract the files from the distribution:

      Unix: `tar -xzf xecm4o_xx_x_x.tar.gz`

2. Stop the middle-tier services using the APPS user name and password:

   Unix:

   a. `cd $ADMIN_SCRIPTS_HOME`

   b. `./adstpall.sh apps/apps`

3. Deploy the distribution files:

   Note: Start a new session after Auto-Config.

   a. Source the *apps* environment:

      i. Go to the `APPL_TOP` directory:

         Unix: `cd $APPL_TOP`

      ii. Source the environment file:

         Unix: `. ./APPS<SID>_<hostname>.env`

   b. Change to the directory containing the extracted files:

Unix: `cd/home/applvis/patch/xecm4o_xx_x_x`

c. Deploy the files:

Unix: `./deployFiles.sh`

4. Run AutoConfig to configure the deployed files:

a. Change to the `ADMIN_SCRIPTS_HOME` directory for the middle-tier:

Unix: `cd $ADMIN_SCRIPTS_HOME`

b. Stop the middle-tier services using the APPS user name and password, if not already done.

Unix: `./adstpall.sh apps/apps`

c. Run the AutoConfig script:

Unix: `./adautocfg.sh`

Enter the APPS password when prompted.

The installation was successful if the script completes without error and you see the following entry:

```
Configuring XXXECM4O_TOP ......... Completed
```

d. Restart the middle-tier services using the APPS user name and password:

Unix: `./adstrtal.sh apps/apps`

Note: Close the current session after Auto-Config.

e. Start a new Linux session after Auto-Config.

5. Install the OpenText Content Management application:

a. Source the *apps* environment:

Unix: `. $APPL_TOP/APPS<SID>_<hostname>.env`

b. Install the database schema:

i. Change to the database schema installation directory:

Unix: `cd $XXXECM4O_TOP/sql`

ii. Install the schema:

Unix: `./installSchema.sh //<host>:1521/$TWO_TASK SYSTEM`

Note: Check whether public synonym for FND_ENV_CONTEXT exists in the instance or not by using the following SQL query:*SELECT * FROM ALL_OBJECTS WHERE OBJECT_NAME='FND_ENV_CONTEXT' AND OWNER ='PUBLIC'*; before running `installSchema.sh` script.

If the above SQL query does not return any result, then run `createPubSynonym.sql` using the following SQL command: *sqlplus <apps>/<apps> @createPubSynonym.sql.*

c. Install the application files:

   i. Change to the application installation directory:

      Unix: `cd ../admin`

   ii. Install the application:

      Unix: `./install.sh`

      Note: During installation, you will be asked if you want to install Records Management. Enter `Y` and continue with installation or upgrade, if you want to configure and implement the Record Management.

d. Deploy the EAR file:

   i. Change to the EAR file directory:

      Unix: `cd ../java/oas`

   ii. Source the *application server* environment:

      Unix: `. $INST_TOP/ora/10.1.3/<SID>_<hostname>.env`

   iii. Deploy the web service:

      Unix:

```
java -Djava.util.logging.config.file=logging.properties -jar
$ORACLE_HOME/j2ee/home/admin_client.jar deployer:oc4j:localhost:20000
oc4jadmin welcome -deploy -file xxxecm4o.ear -deploymentName xxxecm4o -
bindAllWebApps default-web-site > deploy.log
```

      The above example assumes the password "welcome" for the **oc4jadmin** user.

      Troubleshooting

      If your deployment fails, check if your `oacore` default port range is different. The deployer uses port `20000`. To find a similar port on your system, open the `$INST_TOP/appl/admin/<SID>_<hostname>.xml` file in an editor and look for the following:

```
oacore_rmi_portrange

base="20000"
```

      To verify the entry, run the following command:

```
java -jar $ORACLE_HOME/j2ee/home/admin_client.jar
deployer:oc4j:localhost:20000 oc4jadmin welcome -validateURI
```

      Replace **20000** with your port number that you found above and run the deploy web service.

      Tip: To redeploy the ear file, replace the `-deploy` option with `-redeploy`.

To upgrade OpenText Content Management for Oracle E-Business on Oracle E-Business Suite 12.2.x using COLD patch mode:

1. Set the run-edition environment:
   - Source the run environment:

     `Unix:./EBSapps.env run`

2. Copy and unzip the installation files:
   a. Copy the distribution `xecm4o_xx_x_x.tar.gz` to the patch directory at `$PATCH_TOP`.

      Note: `xx_x_x` represents an actual version, such as `xecm4o_20_2_0`.

   b. Go to the patch directory:

      `Unix: cd $PATCH_TOP`

   c. Extract the files from the distribution:

      `Unix: tar -xzf xecm4o_xx_x_x.tar.gz`

   d. Go to the distribution directory:

      `Unix: cd xecm4o_xx_x_x`

Online patching cycle

1. Apply:
   a. Run the command `adop phase=prepare`.

      Note: Ensure that the run edition environment is set.

   b. Source the patch environment.
   c. Install the files by performing the following steps:
      i. Change to the distribution directory.
      ii. Execute the `deployfiles.sh` script.
      iii. Answer `N` to the question: "Do you want to install in HOT Patch Mode [Y/y]? (Default is COLD Patch)."

2. Install the OpenText Content Management application by performing the following steps:
   a. Install the database schema:
      i. Change the database schema installation directory:

         `Unix: cd $XXXECM4O_TOP/sql`

      ii. Connect to the database and run the following SQL command:

         `show parameter service_names`

Use the name of the patch service returned in the next step.

iii. Install the schema:

> **Note:** The EBS_SYSTEM user and schema were introduced in Oracle E-Business Suite (EBS) Release 12.2.11. It was also introduced via the AD-TXK Delta 13 patch for earlier 12.2 releases (12.2.3 through 12.2.10).

Unix: `./installSchema.sh //<host>:<dbport>/<patch service name>`

The command defaults to user SYSTEM (for versions <12.2.11) or EBS_SYSTEM (for versions ≥12.2.11) unless a custom username is specified.

When no user is provided then command will run with `EBS_SYSTEM` user by default, else admin can provide custom user if needed. This command work in both ways.

> **Note:** Check whether public synonym for FND_ENV_CONTEXT exists in the instance or not by using the following SQL query:*SELECT * FROM ALL_OBJECTS WHERE OBJECT_NAME='FND_ENV_CONTEXT' AND OWNER ='PUBLIC'*; before running `installSchema.sh` script.
>
> If the above SQL query does not return any result, then run `createPubSynonym_12_2.sql` using the following SQL command: *sqlplus <apps>/<apps> @createPubSynonym_12_2.sql.*

b. Install the application files:

i. Change to the application installation directory:

`Unix: cd ../admin`.

ii. Install the application:

`Unix: ./install.sh`

> **Notes**
>
> - During installation, you will be prompted to install Records Management. Enter `Y` and continue with installation or upgrade, if you want to configure and implement Records Management.
> - Use the name of the patch service returned in step 2.a.ii.
> - Answer `N` to the question: "Do you want to install in HOT Patch Mode [Y/y]? (Default is COLD Patch)." If `N` was entered for step 1.c.iii. then `N` should be entered while running install.sh.

3. Finish the online patching cycle by performing the following steps:

a. Source the run environment:

```
Unix: ./EBSapps.env run
```

b. Run `adop phase=finalize`.
c. Run `adop phase=cutover`.
d. Run `adop phase=cleanup`.

4. Delete the **xxxecm4o** web service if it is already present by performing the following steps:

   a. Login to the Oracle WebLogic Server® Administration console.
   b. Click **Lock & Edit** to modify items in the domain.
   c. In the **Domain Structure** area, click **Deployments**.
   d. Select the **xxxecm4o** webservice and then click **Stop > Force stop now**.

      Select **Yes** to confirm.
   e. Click **Delete** and confirm deletion.
   f. Activate the changes.

5. Deploy the **xxxecm4o** webservice on both standalone and integrated WebLogic by performing the following steps:

   a. Login to the Oracle WebLogic Server® Administration console.
   b. Click **Lock & Edit** to modify items in the domain.
   c. In the **Domain Structure** area, click **Deployments**.
   d. On the **Control** tab, click **Install**.
   e. Enter the path to the **xxxecm4o-web.war** file and then click **Next**.
   f. Select **Install this deployment as an application**.
   g. In the next screen, select `oacore_cluster1` as the target and then click **All servers in the cluster**.

      Click **Next**.
   h. Enter **xxxecm4o** as the name of the application. Select other options as required. Click **Next**.
   i. Select **Yes** to navigate to the deployment's configuration screen. Click **Finish**.

      Wait for the installation to finish. Then click **Activate Changes in the Change Center area**.
   j. Start the **xxxecm4o** web service.
   k. On the **Control** tab, select the **xxxecm4o** deployment.
   l. Click **Start** and then select **Servicing all requests** on that button.

6. Regenerate **customall.jar** and restart the services by performing the following steps:

   a. Set the run environment:

      ```
      Unix: . EBSapps.env run
      ```
   b. Regenerate the **customall.jar** file by running the following commands:

```
cd $PATCH_TOP/xecm4o_xx_x_x
tar -xzvf xxxecm4o.tar.gz
cd $PATCH_TOP/xecm4o_xx_x_x/java/wls/xxxecm4o_ear
unzip xxxecm4o-web.war
cd $PATCH_TOP/xecm4o_xx_x_x/java/wls/xxxecm4o_ear/WEB-INF/classes
cp -R . $JAVA_TOP
cd $JAVA_TOP
adcgnjar
```

c. Restart Apps Server:

```
cd $ADMIN_SCRIPTS_HOME
./ adstpall.sh
./ adstrtal.sh
```

7. Deploy the Rest services on the ISG page by performing the following steps:

   a. Login to Oracle EBS with sysadmin credentials.
   b. Click **Integrated SOA Gateway > Integration Repository**.
   c. Click **Search** and enter `%ECM%` as the internal name and then click **Go**.
   d. Click **XXXECM4O_ISGECMLinkSPI** and analyze whether the corresponding Rest Service is in deployed status.
   e. If the Rest Service is not deployed, enter service alias as **XXXECM4O_ISGECMLinkSPI** and click **Deploy**.
   f. If the Rest service status is deployed, then click **Undeploy**.
   g. Enter service alias as **XXXECM4O_ISGECMLinkSPI** and click **Deploy**.

   Note: If an error is encountered during the undeploy process, check whether duplicate service operations are present. If yes, execute the following query to delete them and try to undeploy again.

```
delete from FND_IREP_FUNCTION_FLAVORS
where rowid in (select rowid from (
select function_id,row_number() over(partition by function_id
order by function_id) rank
from FND_IREP_FUNCTION_FLAVORS
where function_id in (select function_id from
FND_FORM_FUNCTIONS
where function_name like '%ISGECM%'
and irep_class_id is not null)) where rank > 1);
```

   h. Grant access to the individual user(s) or all the Rest Service operations by accessing the **Grants** tab and selecting **Rest service operations**.

To upgrade OpenText Content Management for Oracle E-Business on Oracle E-Business Suite 12.2.x using HOT patch mode:

1. Set the run-edition environment:
   - Source the run environment:

     `Unix:./EBSapps.env run`

2. Copy and unzip the installation files:
   a. Copy the distribution `xecm4o_xx_x_x.tar.gz` to the patch directory at `$PATCH_TOP`.

      Note: `xx_x_x` represents an actual version, such as `xecm4o_20_2_0`.

   b. Go to the patch directory:

      `Unix: cd $PATCH_TOP`

   c. Extract the files from the distribution:

      `Unix: tar -xzf xecm4o_xx_x_x.tar.gz`

   d. Go to the distribution directory:

      `Unix: cd xecm4o_xx_x_x`

3. Install the files by performing the following steps:
   a. Change to the distribution directory.
   b. Execute the `deployfiles.sh` script.
   c. Answer 'Y' to the question: "Do you want to install in HOT Patch Mode [Y/y]? (Default is Cold Patch)."

4. Install the OpenText Content Management application by performing the following steps:
   a. Install the database schema:
      i. Change the database schema installation directory:

         `Unix: cd $XXXECM4O_TOP/sql`

      ii. Connect to the database and run the following SQL command:

         `show parameter service_names`

         Use the name of the run service returned in the next step.

      iii. Install the schema:

         Note: The EBS_SYSTEM user and schema were introduced in Oracle E-Business Suite (EBS) Release 12.2.11. It was also introduced via the AD-TXK Delta 13 patch for earlier 12.2 releases (12.2.3 through 12.2.10).

         Unix: `./installSchema.sh //<host>:<dbport>/<patch service name>`

The command defaults to user SYSTEM (for versions <12.2.11) or EBS_SYSTEM (for versions ≥12.2.11) unless a custom username is specified.

When no user is provided then command will run with `EBS_SYSTEM` user by default, else admin can provide custom user if needed. This command work in both ways.

Note: Check whether public synonym for FND_ENV_CONTEXT exists in the instance or not by using the sql query: `SELECT * FROM ALL_OBJECTS WHERE OBJECT_NAME='FND_ENV_CONTEXT' AND OWNER ='PUBLIC'`; before running installSchema.sh script.

If the above SQL query does not return any result, then run `createPubSynonym_12_2.sql` using the SQL command: `sqlplus <apps>/<apps> @createPubSynonym_12_2.sql`.

b. Install the application files:

i. Change to the application installation directory:

```
Unix: cd ../admin.
```

ii. Install the application:

```
Unix: ./install.sh
```

Notes

- During installation, you will be prompted to install Records Management. Enter `Y` and continue with installation or upgrade, if you want to configure and implement Records Management.
- Use the name of the run service returned in step 4.a.ii.
- Answer `Y` to the question: "Do you want to install in HOT Patch Mode [Y/y]? (Default is Cold Patch)."

  If `Y` was entered for step 3c, then `Y` should be entered while running install.sh.

c. Set the run environment:

```
Unix: . EBSapps.env run
```

d. Extract xxxecm4o by running the following commands:

```
cd $PATCH_TOP/xecm4o_xx_x_x

tar -xzvf xxxecm4o.tar.gz
```

5. Delete the **xxxecm4o** web service if it is already present by performing the following steps:

a. Login to the Oracle WebLogic Server® Administration console.

b. Click **Lock & Edit** to modify items in the domain.

c. In the **Domain Structure** area, click **Deployments**.

d. Select the **xxxecm4o** webservice and then click **Stop > Force stop now**.

   Select **Yes** to confirm.

e. Click **Delete** and confirm deletion.

f. Activate the changes.

6. Deploy the **xxxecm4o** webservice on both standalone and integrated WebLogic by performing the following steps:

   a. Login to the Oracle WebLogic Server® Administration console.

   b. Click **Lock & Edit** to modify items in the domain.

   c. In the **Domain Structure** area, click **Deployments**.

   d. On the **Control** tab, click **Install**.

   e. Enter the path to the **xxxecm4o-web.war** file and then click **Next**.

   f. Select **Install this deployment as an application**.

   g. In the next screen, select `oacore_cluster1` as the target and then click **All servers in the cluster**.

      Click **Next**.

   h. Enter **xxxecm4o** as the name of the application. Select other options as required. Click **Next**.

   i. Select **Yes** to navigate to the deployment's configuration screen. Click **Finish**.

      Wait for the installation to finish. Then click **Activate Changes in the Change Center area**.

   j. Start the **xxxecm4o** web service.

   k. On the **Control** tab, select the **xxxecm4o** deployment.

   l. Click **Start** and then select **Servicing all requests** on that button.

7. Regenerate **customall.jar** and restart the services by performing the following steps:

   a. Set the run environment:

      ```
      Unix: . EBSapps.env run
      ```

   b. To regenerate the **customall.jar** file, navigate to `cd $PATCH_TOP/xecm4o_xx_x_x/java/wls/xxxecm4o_ear` that you have extracted in step 4.d and run the following commands:

      ```
      unzip xxxecm4o-web.war
      cd $PATCH_TOP/xecm4o_xx_x_x/java/wls/xxxecm4o_ear/WEB-INF/classes
      cp -R . $JAVA_TOP
      cd $JAVA_TOP
      adcgnjar
      ```

   c. Restart Apps Server:

      ```
      cd $ADMIN_SCRIPTS_HOME
      ```

```
./ adstpall.sh
./ adstrtal.sh
```

8. Deploy the Rest services on the ISG page by performing the following steps:

   a. Login to Oracle EBS with sysadmin credentials.
   b. Click **Integrated SOA Gateway > Integration Repository**.
   c. Click **Search** and enter `%ECM%` as the internal name and then click **Go**.
   d. Click **XXXECM4O_ISGECMLinkSPI** and analyze whether the corresponding Rest Service is in deployed status.
   e. If the Rest Service is not deployed, enter service alias as **XXXECM4O_ISGECMLinkSPI** and click **Deploy**.
   f. If the Rest service status is deployed, then click **Undeploy**.
   g. Enter service alias as **XXXECM4O_ISGECMLinkSPI** and click **Deploy**.

      Note: If an error is encountered during the undeploy process, check whether duplicate service operations are present. If yes, execute the following query to delete them and try to undeploy again.

```
delete from FND_IREP_FUNCTION_FLAVORS
where rowid in (select rowid from (
select function_id,row_number() over(partition by function_id
order by function_id) rank
from FND_IREP_FUNCTION_FLAVORS
where function_id in (select function_id from
FND_FORM_FUNCTIONS
where function_name like '%ISGECM%'
and irep_class_id is not null)) where rank > 1);
```

   h. Grant access to the individual user(s) or all the Rest Service operations by accessing the **Grants** tab and selecting **Rest service operations**.

Chapter 6

Upgrading Content Server and the Connected Workspaces module

Table 6-1: Upgrade to OpenText Content Management for Oracle E-Business

Old Content Server version	Old ECMLink version	New Content Server version	New OpenText Content Management application
Content Server 16	Connected Workspaces 16	Content Server 20.2	OpenText Content Management for Oracle E-Business 20.2
Content Server 16.2	Connected Workspaces 16.2	Content Server 20.2	OpenText Content Management for Oracle E-Business 20.2

Chapter 7

Upgrading from Connected Workspaces 16 with Content Server 16 to OpenText Content Management for Oracle E-Business 20.2

7.1 Checklist for upgrade from Connected Workspaces 16 with Content Server 16 to OpenText Content Management for Oracle E-Business 20.2

Table 7-1: Upgrade checklist for upgrade from OpenText Content Management for Oracle E-Business 21.4 to 25.4

Step	System and tools	Information
Upgrading Content Server, Content Server modules, Directory Services, Archive Center		
Migrate OpenText Directory Services to newest version	Server on which Directory Services is installed	For more information, see *OpenText Directory Services - Installation and Administration Guide (OTDS-IWC)*.
Upgrade and configure Archive Center	Archive Center	For more information, see the following information in OpenText My Support: • Use Directory Services authentication. • Use the new resource ID that was created for Archive Center during Directory Services migration.
Upgrade Document Pipelines (only relevant if you are using Document Pipelines)		For more information, see *OpenText Document Pipeline - Installation and Upgrade Guide (AR-IDPDP)*.

Step	System and tools	Information
Upgrade Content Server	Content Server	To upgrade Content Server, you perform a *parallel upgrade installation:* Make copies of your database, External File Store, and search index. You install a new instance of Content Server and set up your new instance to match your existing deployment. You then connect that instance to a copy of your production database. The database directs you as you install required modules, set up your Admin servers, connect to your Storage Providers, and finally upgrade the database itself. After that, you connect to Directory Services (OTDS). If necessary, you make adjustments to your search and indexing environment, and apply a new license to Content Server.
Install the Updates for Content Server and Archive Center and finish the Archive Center configuration.		Always use the latest patches from OpenText My Support.
Perform post-upgrade steps in Oracle E-Business Suite	Oracle E-Business Suite	Update the connection settings to point to the new systems. Check if the **Member Service URL** refers to the `cws` web service. For more information, see "Setting up the connection between Content Server and Oracle E-Business Suite" on page 65.
Perform post-upgrade steps in Content Server	Content Server	If there is a change in the Archive Center port or system, update the setting in Content Server in the Archive Storage Provider settings.
Perform post-upgrade steps in Archive Center	Archive Center	Upload the relevant certificates and enable them for Archive Center and for the logical archives: `SP_<hostname>`: Archive Storage Provider certificate
Upgrade clients	Clients	Upgrade the Enterprise Connect client after the Enterprise Connect module and the Office Editor module are updated.

7.2 Upgrading the database schema

The current version of the Business Workspaces module changes database tables.

The database schema is upgraded with the standard Content Server mechanism. When an upgrade is necessary, you are prompted accordingly and can upgrade the database.

Note: You can monitor the database schema upgrade in a separate log file. This log file is created in the `logs` directory of Content Server during the upgrade: `ECMLinkDBSchemaUpgrade_<threadID>.log`. It logs all SQL statements of the upgrade.

Important

Make sure that you installed the latest patch of Business Workspaces before you upgrade the database schema.

Chapter 8

Upgrading from Connected Workspaces 16.2 with Content Server 16.2 to OpenText Content Management for Oracle E-Business 20.2

8.1 Checklist for upgrade from Connected Workspaces 16.2 with Content Server 16.2 to OpenText Content Management for Oracle E-Business 20.2

Table 8-1: Upgrade checklist for upgrade from OpenText Content Management for Oracle E-Business 16.2 to 20.2

Step	System and tools	Information
Upgrading Content Server, Content Server modules, Directory Services, Archive Center		
Prepare your system for the upgrade	All OpenText systems	For more information, see section 5 "Upgrading Enterprise Library" in *OpenText Enterprise Library - Installation and Upgrade Guide (EL-IGD)* and the linked guides.
Migrate OpenText Directory Services to newest version	Server on which Directory Services is installed	For more information, see *OpenText Directory Services - Installation and Administration Guide (OTDS-IWC)*.
Upgrade and configure Archive Center	Archive Center	For more information, see section 5.1 "Upgrade roadmap" in *OpenText Enterprise Library - Installation and Upgrade Guide (EL-IGD)* and the linked guides. • Use Directory Services authentication. • Use the new resource ID that was created for Archive Center during Directory Services migration.

Step	System and tools	Information
Upgrade Document Pipelines (only relevant if you are using Document Pipelines)		For more information, see *OpenText Document Pipeline - Installation and Upgrade Guide (AR-IDPDP)*.
Upgrade Content Server	Content Server	To upgrade Content Server, you perform a *parallel upgrade installation:* Make copies of your database, External File Store, and search index. You install a new instance of Content Server and set up your new instance to match your existing deployment. You then connect that instance to a copy of your production database. The database directs you as you install required modules, set up your Admin servers, connect to your Storage Providers, and finally upgrade the database itself. After that, you connect to Directory Services (OTDS). If necessary, you make adjustments to your search and indexing environment, and apply a new license to Content Server.
Install the Updates for Content Server and Archive Center, and finish the Archive Center configuration.		For more information, see section 5.1 “Upgrade roadmap” in *OpenText Enterprise Library - Installation and Upgrade Guide (EL-IGD)* and the linked guides. Always use the latest patches from OpenText My Support.
Perform post-upgrade steps in Oracle E-Business Suite	Oracle E-Business Suite	Update the connection settings to point to the new systems. Check if the **Member Service URL** refers to the `cws` web service. For more information, see “Setting up the connection between Content Server and Oracle E-Business Suite“ on page 65.

Step	System and tools	Information
Perform post-upgrade steps in Content Server	Content Server	If there is a change in the Archive Center port or system, update the setting in Content Server in the Archive Storage Provider settings.
Perform post-upgrade steps in Archive Center	Archive Center	Upload the relevant certificates and enable them for Archive Center and for the logical archives. The following certificates are relevant: • `SP_<hostname>`: Archive Storage Provider certificate For more information, see section 4.7 "Configuring security settings and connection details" in *OpenText Enterprise Library - Installation and Upgrade Guide (EL-IGD)* and section 5.2 "Starting services and concluding upgrade" in *OpenText Enterprise Library - Installation and Upgrade Guide (EL-IGD)*.
Upgrade clients	Clients	Upgrade the Enterprise Connect client after the Enterprise Connect module and the Office Editor module are updated.
Upgrading the SAP Add-on		

8.2 Upgrading the database schema

The current version of the Business Workspaces module changes database tables.

The database schema is upgraded with the standard Content Server mechanism. When an upgrade is necessary, you are prompted accordingly and can upgrade the database.

Note: You can monitor the database schema upgrade in a separate log file. This log file is created in the `logs` directory of Content Server during the upgrade: `ECMLinkDBSchemaUpgrade_<threadID>.log`. It logs all SQL statements of the upgrade.

Important

Make sure that you installed the latest patch of Business Workspaces before you upgrade the database schema.

Part 3

Performing post-installation tasks

This part explains how you set up OpenText Content Management for Oracle E-Business before you can start configuration of business workspaces.

Chapter 9

Setting up the connection between Content Server and Oracle E-Business Suite

To establish the connection between Content Server and Oracle E-Business Suite, you must configure Oracle E-Business Suite System Configuration. In addition to the connection parameters, you can also configure system-wide behavior here.

To configure the system parameters in Oracle E-Business Suite:

1. From the menu, select **OpenText Content Management Configuration > System Configuration**.

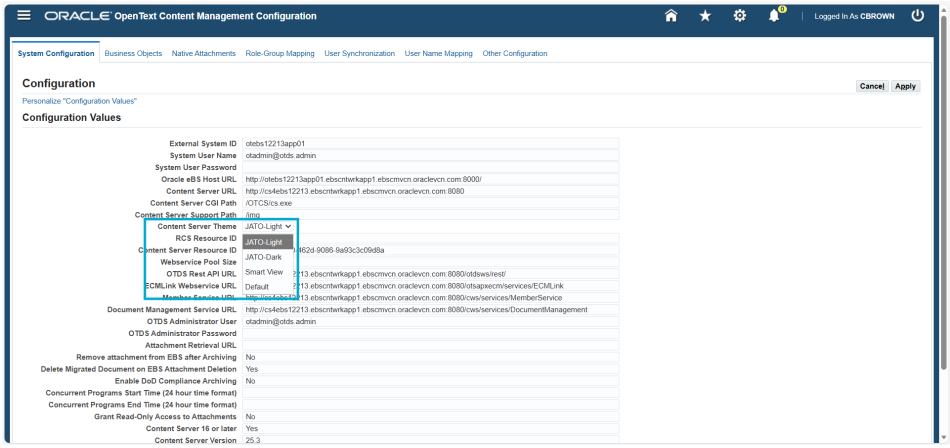

2. Enter the following information:

External System ID

Logical name of this Oracle E-Business Suite system. This name must be unique as it is used when you select the external system in the business object type configuration on Content Server. Maximum length is 32 characters.

> **Caution**
>
> Do not change the name later as the value is used in Content Server.

System User Name

Name of the system user that is used for the connection to OpenText Content Management.

System User Password

Password of the system user.

Oracle eBS Host URL
URL and port of this Oracle E-Business Suite host. This information is necessary for the attachment archiving on Content Server.

Content Server URL
Fully qualified URL of the Content Server, for example `http://mycontentserver.mydomain.com`.

Content Server CGI Path
Path to the Content Server executable, usually `/OTCS/cs.exe`.

Content Server Support Path
Directory on Content Server where the files for the Content Server UI widget are stored. This is only relevant if you want to use this widget. For more information, see *OpenText Content Management for Oracle E-Business Suite - Configuration Guide (ERO-CGD)*.

Content Server Theme
List of content server themes available, by defaulting theme to JATO-Light.

RCS Resource ID
Deprecated; leave this field empty.

Content Server Resource ID
Necessary for installations on Content Server 10.5 and 16.

This option is necessary when you want to use impersonation with web-based SSO. To retrieve the Content Server Resource ID, open Administration Client; then go to **Directory Services > Resources > [Content Server entry] > Edit** and copy the **Resource identifier**, for example `d7c6b26b-af12-4d87-87cd-050de0768f4a`.

Webservice Pool Size
Number of Web services that can run simultaneously.

OTDS Rest API URL
URL to the OTDS Web service that you installed earlier, for example `<host name:port>/ot-authws/services/Authentication`.

ECMLink Webservice URL
URL to the OpenText Content Management webservice that you installed earlier, for example `<host name:port>/otsapxecm/services/ECMLink`.

Member Service URL
URL to the Content Server Member Service webservice that you installed earlier, for example `<host name:port>/cws/services/MemberService`.

Document Management Service URL
URL to the Content Server Document Management service, for example `<host name:port>/cws/services/DocumentManagement`.

OTDS Administrator User
Name of the OTDS Administrator user. This is only needed if you are using internal user synchronization.

OTDS Administrator Password

Password for the OTDS Administrator user. This is only needed if you are using internal user synchronization.

Attachment Retrieval URL

URL to where the documents are retrieved from, for example `/jsp/xxxecm4o/retrieval.jsp`.

Remove Attachment from EBS after Archiving

Decision if attachments are kept in E-Business Suite after they have been archived to Content Server:

- **Yes** or empty: Physical file in E-Business Suite is removed and replaced by a link to the archived file in Content Server. This is the default.
- **No**: Physical file is copied to Content Server and the original file is still available in E-Business Suite. Since the file is still available in E-Business Suite, there is *no* URL link to the Content Server location provided.

For more information, see *OpenText Content Management for Oracle E-Business Suite - Configuration Guide (ERO-CGD)*.

Enable DoD Compliance Archiving

Enable to remove archived attachments from EBS and maintain them in Content Server Records Management exclusively.

Delete Migrated Document on EBS Attachment Deletion

Decision if migrated documents must be deleted from Content Server when the corresponding attachment records are deleted in the E-Business Suite application.

- **Yes**: The document will be deleted from Content Server when its corresponding attachment record gets deleted in E-Business Suite.
- **No** or empty: This is the default option. The document will be available in Content Server even if the attachment record is deleted in E-Business Suite.

Concurrent Programs Start Time (24 hour time format)

Start time of scheduled concurrent programs. You can use this to run concurrent programs in times of lesser workload, for example `22:00`.

Concurrent Programs End Time (24 hour time format)

End time of scheduled concurrent programs, for example, `4:00`

Grant Read-Only Access to Attachment

Yes: any user who is attempting to view an attachment, which was migrated to Content Server will be granted read-only access to the document. This allows workflow users to view attachments even though they may not otherwise be included on the document's permissions list.

Important
Do not use this feature in combination with Records Management, as this will compromise records management protections.

Content Server 16 or later
Yes: To use Content Server 16 integration widgets. The default is **No**.

Note: If the profile in EBS is set to integrate a business workspace as iFrame, this value has no effect.

Content Server Version
Content Server version in the format `major.minor.micro`, for example, 16.2.0 or 16.0.3.

Archiving Document with EBS Attachment Creator
Yes: To archive a document with the EBS attachment creator. The default is **No**.

OTDS Content Server Resource __NAME__ Attribute
The value of the `__NAME__` attribute in the OTDS resource for Content Server. This will be one of the `oTExternalIDn` attributes. Required for the information provider for OTDS user name mapping to select the correct format of the user name in Content Server. For more information, see "Creating a user name mapping provider" on page 79.

3. Click **Apply**.

Chapter 10

Performing post-installation or post-upgrade tasks in Content Server

After the actual installation of the module, you must perform post-installation tasks in Content Server.

10.1 Importing root certificates for Secure Sockets Layer (SSL) connections

To secure communication between Content Server and the business application, OpenText strongly recommends that you use the Secure Sockets Layer (SSL) protocol. Install the certificates on the business application, the Tomcat server running the OpenText Content Management Web Services, and in the OpenText Content Management keystore. The OpenText Content Management keystore is located in `<Opentext home>/config/ecmlink-spi.cacerts`. It contains the common root certificates known from Java runtime.

Notes

- If you want to use self-signed certificates, you must import them into the following keystores:
  - OpenText Content Management keystore (`<Opentext home>\config\ecmlink-spi.cacerts`)
  - Content Server keystore (`<Opentext home>\jre\lib\security\cacerts`)
  - JRE keystore for the Tomcat server running the OpenText Content Management Web Services

  For more information about keystores in Tomcat, see the Tomcat documentation (http://tomcat.apache.org/tomcat-8.5-doc/ssl-howto.html).
- The certificate should be in Base64 format.

The following procedure describes how to import a certificate to the OpenText Content Management keystore `ecmlink-spi.cacerts`.

To import a certificate:

1. Open a command prompt window.
2. To list the certificates, run the following command:

```
keytool -list -keystore <Opentext home>\config\ecmlink-spi.cacerts -storepass
changeit
```

3. The key store password is `changeit`. To change the password, enter:

```
keytool -storepasswd changeit -new <KeystorePassphrase> -keystore <Opentext home>
\config\ecmlink-spi.cacerts
```

4. To add a certificate, run the following command:

```
<Java home>\bin\keytool -import
                       -alias <CertificateAlias>
                       -file <CertificateFile>
                       -keystore <Keystore>
                       -storepass <KeystorePassphrase>
```

Example:

```
C:\OPENTEXT\jre\bin\keytool
                          -import
                          -alias mycertificate
                          -file c:\temp\mycertificate.cer
                          -keystore c:\opentext\config\ecmlink-spi.cacerts
                          -storepass mypassword
```

10.2 Connecting an external system

To connect Content Server with Oracle E-Business Suite, you define connection parameters on Content Server.

To connect a business application:

1. On the global menu, click **Enterprise > Enterprise Application Integration**, and then click **Connections to Business Applications (External Systems)**.
2. Click **Add Item > Business Application**.
3. Specify the parameters for your business application according to the list below.
4. Click **Add**.

Business Application ID

Define the logical name of the business application. The name must be unique. It cannot be longer than 32 characters. This name is used when you select the business application in the business object type configuration.

This name can be, for example, the name of the Oracle E-Business Suite system.

Connection Type

Select the adapter for your business application. If there is no special adapter for your specific business application available, select **Default WebService Adapter**.

Important

If you have selected `Default WebService Adapter` or `SFWebService` as Connection Type, you can choose between the authentication methods Basic and OAuth. For the other Connection Types, you can only use the Basic authentication.

Enabled

Select this option to enable the configuration.

Tip: You can disable a configuration, for example if you created it only for testing and you do not want it to be used.

Comment

Enter a comment to give further information.

Base URL

Enter the common URL for accessing the business applications via a Web browser. You can use this base URL when configuring business object types on OpenText Content Management. The base URL is represented by the `$BaseURL$` variable for new business object types.

For example, `http://ebs01.example.com:8000/OA_HTML/OA.jsp`.

Application Server Endpoint

Specify the URL that will be called to obtain business object information.

Example 10-1: Oracle E-Business Suite

The following is an example for an Oracle E-Business Suite system: `http://myhost.example.com:8000/xxxecm4o/xxxecm4o`

- `https://myhost.example.com:8000`: Common URL.

  Port 8080 is the default HTTP port. For HTTPS the default port is 8090.

- `xxxecm4o/xxxecm4o` is the name of the Web service endpoint of OpenText Content Management in Oracle E-Business Suite.

Schema Version

Select the interface version.

Authentication Method

If you have selected `Default WebService Adapter` or `SFWebService` as Connection Type, you can choose between the authentication methods Basic and OAuth. For the other Connection Types, you can only use the Basic authentication.

Basic

This option is selected by default. The user must enter a username and a password.

- **User Name** – enter the user that is used to access business object type information in the business application.
- **Password** – specify the password of the defined user for the specified application server endpoint.

Note: With using basic authentication, OpenText strongly recommends that you use SSL at the web server. For information about importing certificates to the keystore, see .

OAuth

Select this option to configure OAuth2 authentication. You must specify a token endpoint which is the URL of an authentication server. Authenticating against this authentication server with a client ID and a client secret, you obtain an access token which can then be used to authenticate against the application server.

- **OAuth Token Endpoint** – enter the URL of the authorization server that is used to acquire an access token.
- **OAuth Client ID** – enter the API Key created in the OAuth configuration.
- **OAuth Client Secret** – enter the private key you have generated in the OAuth configuration.
- **OAuth Request Type** – some SAP systems only support the basic authentication transport. Select the option suitable for your system:
  - **Basic** – select this option to send the OAuth parameter as basic authentication header.
  - **HTTP Body** – select this option to send the OAuth parameter within the request body.
- **OAuth Scope** – specify an OAuth Scope to restrict access to the application. OAuth 2.0 authentication supports Access Token Scopes to restrict access to certain subsets of the server resources. Note that this parameter is mandatory when using Azure Active Directory for authentication.

Test Connection

Click **Test** to perform a connection check to the specified business application. After a successful check, the message **Connection test was successful** is displayed next to the button. If the **Test** button is not active, you must first save the configuration. To save the configuration, click **Apply**.

Note: You can only test the connection after you have configured the SPI service in the business application accordingly and have saved the configuration.

Business Application Name

Enter localized names for the business application if required. For each available **Language**, enter the respective **Name**.

Repository root folder

For a CMIS integration, select the root folder of your CMIS document structure.

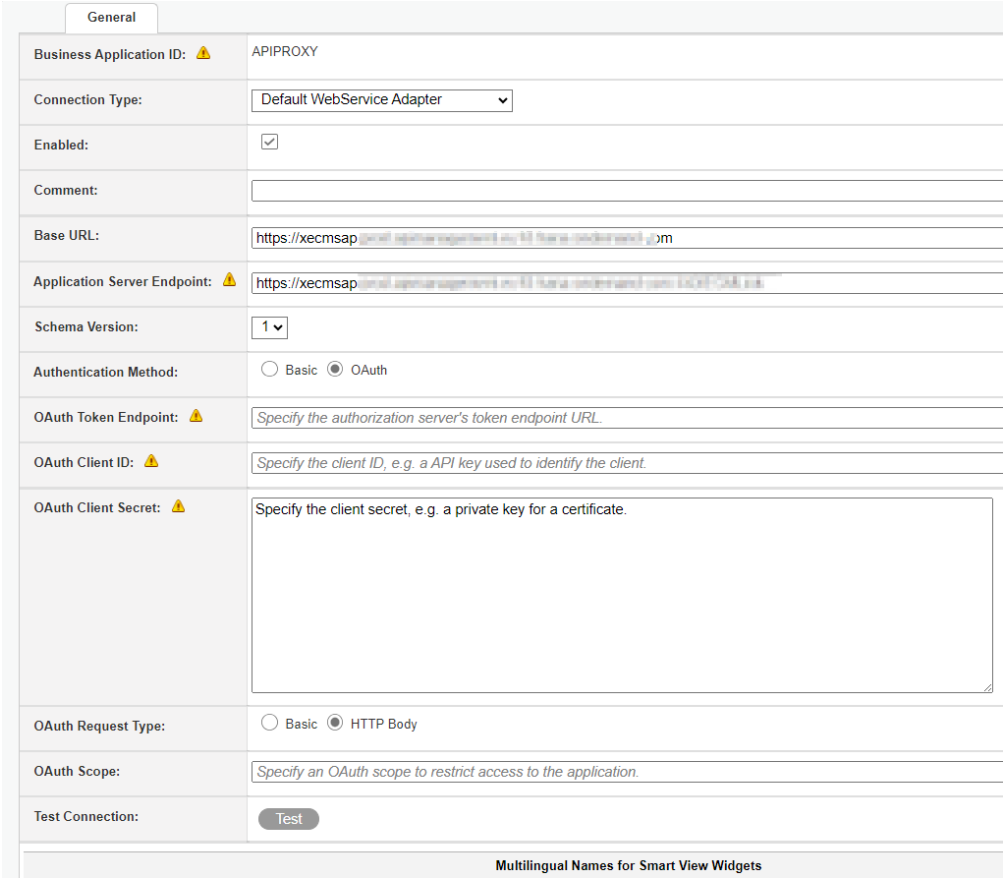

Figure 10-1: Connection to Oracle E-Business Suite system

Troubleshooting

Testing an external system in Content Server might fail with a 500 internal error, because the `xxxecm4o` web service might fail. In such a situation, see the `oacore` and `oafm` logs. You might see an error like `java.lang.NoClassDefFoundError: oracle/apps/fnd/common/Log`. To fix the issue, run autoconfig and deploy the web service again.

10.3 Configuring the storage provider

The storage provider configuration connects the logical archives of Archive Center with Content Server. Create a storage provider configuration for each logical archive.

To configure the storage provider:

1. Switch to the OpenText Content Management Administration in a browser: `../OTCS/cs.exe?func=admin.index`

   Log in as `otadmin@otds.admin`.

2. In the **Archive Storage Provider Administration** section, click **Configure Archive Storage Provider**.

3. In the **Archive Center** field, enter the name of the Archive Center host.

4. Click **Save Changes**.

5. Click **Upload Certificate to Archive Center**. Archive Storage Provider uploads its certificate to Archive Center automatically.

6. Click **OK**.

Note: In the **Storage Provider Settings** section of the OpenText Content Management Administration, all entries under **Configure Storage Providers** that use the above archive storage provider must have `none` as storage tier.

Chapter 11

Performing post-installation or post-upgrade tasks in Oracle E-Business Suite

11.1 Managing users

An integrated system of OpenText Content Management for Oracle E-Business and Content Server must establish a common identity for each user. Which scenario is best for you depends on whether there is already an Oracle E-Business Suite system in place or not.

- **User synchronization scenario**

  Content Server and OpenText Content Management for Oracle E-Business are introduced to a company with an existing Oracle E-Business Suite system. In this case, users can be synchronized from the E-Business Suite system into OTDS and Content Server. As a result, user IDs are common across all systems.

  This is an alternative to synchronizing EBS users into a non-synchronized partition of OTDS. For more information, see "Synchronizing users from Oracle E-Business Suite to a non-synchronized OTDS partition" on page 82.

- **User mapping scenario**

  OpenText Content Management for Oracle E-Business will be installed on an existing Content Server installation and integrated with an E-Business Suite system. In this case, the E-Business Suite users are already in OTDS, perhaps being synchronized from an enterprise directory service, but the user IDs may be different between the various systems.

- In a variation of the previous scenarios, only some of the E-Business Suite users may be in OTDS, again possibly from an enterprise directory service. In this case, the remaining users must be added to OTDS with users being authenticated correctly.

OpenText Content Management for Oracle E-Business provides a framework that you can use to set up these scenarios. You set up *Information providers*.

User information providers

User information enhancements for OpenText Content Management for Oracle E-Business are designed around the concept of an information provider. The following types of providers are available:

- User synchronization provider to synchronize OTDS user records with information from E-Business Suite
- User name mapping provider to find the OTDS or Content Server name of a user based on his E-Business Suite user name

The user information enhancements to OpenText Content Management for Oracle E-Business are designed as a framework, which treats providers as black boxes, which provide information, but are free to provide this information in any way they wish as long as they adhere to the proper interfaces. New providers can be added as needed.

You can use a concurrent program to run the user synchronization or user name mapping. For more information, see "Synchronizing users and groups regularly" on page 81.

11.1.1 Creating and configuring a user synchronization provider

To create a user synchronization provider:

1. From the menu, select **OpenText Content Management Configuration > User Synchronization**.
2. Click **Add Provider**.
3. Enter the following information:
   - **Provider Name**

     This name is used to identify the provider; it must be unique.
   - **Provider Type**

     `USER_SYNC` is displayed as provider type for the user synchronization scenario.
   - **Identity Attribute**

     OTDS user record attribute, which is shared with an E-Business Suite user record to match the two records. This can be, for example, the E-Business Suite user name in `oTExternalID1`, or, in a more complex scenarios, this can be the **mail** attribute for the employee's email address.
   - **Partition Name**

     OTDS partition name to which the user data is to be synchronized.
   - **Add/update/delete Users**

     Indicate whether the provider adds new users to OTDS, updates existing users in OTDS, or deletes OTDS users, which are not available in E-Business Suite. Any and all may be specified.

     Important

     OpenText recommends that you do not synchronize multiple providers into the same OTDS partition. However, if you have a need to do so, you must not select **Delete Users** as each provider would delete the other's users. Deletion must be handled by a provider which covers all users in a partition.

Note: If you are synchronizing to an OTDS synchronized partition, only select **Update Users**.

- **Priority**

  Relative priority of the provider. Providers are processed in priority order from low to high, for example, priority 1 is processed before priority 2. If multiple providers have the same priority, the order in which they are processed is indeterminate.

- **Enabled**

  Providers must be enabled to be available for synchronizing users.

- **Implementation Type**

  Select a type:

  – **Generic** – as provided by OpenText and configured accordingly. For more information, see "To configure a generic user synchronization provider:" on page 77.

  – **Custom Java** – provided to allow new providers to be written and added to the framework. Details of writing custom providers are outside the scope of this document.

    ○ **Provider Class** – Enter the full name of the Java class providing the implementation.

    ○ **Initialization parameters** – Implementation-defined string passed to the custom Java provider. Typically, this is used to provide the implementation with some context.

  – **Custom PL/SQL** – The configuration page has a section for each interface method. Each interface method must have a PL/SQL implementation function.

4. Run or schedule the concurrent program **OpenText Content Management Synchronize Users**. For more information, see "Synchronizing users and groups regularly" on page 81.

To configure a generic user synchronization provider:

1. From the menu, select **OpenText Content Management Configuration > User Synchronization**.
2. Click **Provider Configuration**, then click **Add Provider Configuration**.
3. Enter the information for the configuration setup:

   - **Provider Name:** Find the user synchronization provider that you created.
   - **Configuration Name**: Name of the provider configuration.
   - **userPassword**: Configure the userPassword attribute in OTDS Attribute Mapping so that a unique password is automatically generated for each user during synchronization, based on a combination of user fields using a field

expression. For more information about field expression handling, see "Field expressions" on page 80.

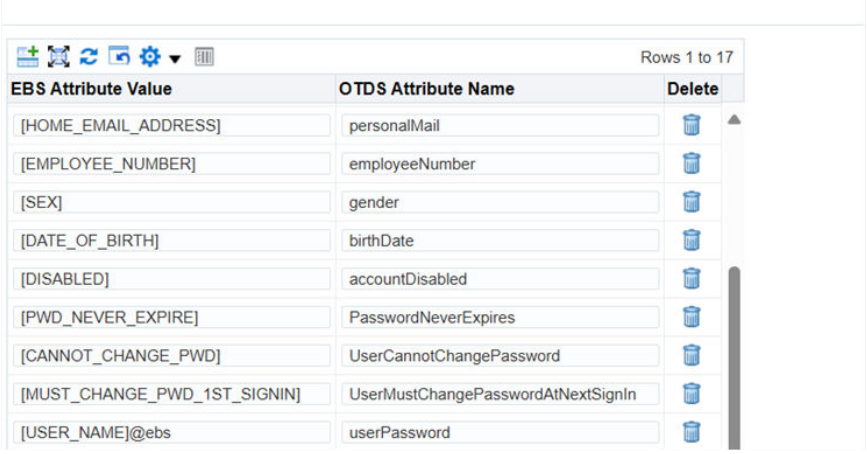

Rows 1 to 17

EBS Attribute Value	OTDS Attribute Name	Delete
[HOME_EMAIL_ADDRESS]	personalMail	
[EMPLOYEE_NUMBER]	employeeNumber	
[SEX]	gender	
[DATE_OF_BIRTH]	birthDate	
[DISABLED]	accountDisabled	
[PWD_NEVER_EXPIRE]	PasswordNeverExpires	
[CANNOT_CHANGE_PWD]	UserCannotChangePassword	
[MUST_CHANGE_PWD_1ST_SIGNIN]	UserMustChangePasswordAtNextSignIn	
[USER_NAME]@ebs	userPassword	

- **Blank Password Action**: Action to be executed if the password is blank or cannot be decrypted. Select an option:
  - **Skip**: Do nothing with this user
  - **User name**: Change password to the user's user name
  - **Specified**: Change the password to the value of the **Specified User Password** field
  - **Random**: Change the password to a random value.

  These options only apply to new users. For existing users, the password will not be updated, but all other fields will be.
- **Specified User Password**: Replaces user passwords with this value if **Blank Password Action** is set to **Specified**.
- **Table Name** and **Schema**: Name of the schema and table/view providing the user records. A query against this table must return one E-Business Suite user per result set row.
- **Filter**: Optional condition, which you can use when querying the table/view. This allows a single table/view to provide records for multiple providers.
- **User Name Column**: Column that contains the user name.

4. Click **Add Attribute Mapping** and map E-Business Suite attributes to OTDS attributes.

11.1.2 Creating a user name mapping provider

With a user name mapping provider, you can realize the following scenarios:

Simple user name mapping provider

Use for scenarios where the OTDS and Content Server user names can be derived from the E-Business Suite user name. This provider is configured as follows:

Provider class – `com.opentext.xecm4o.userinfo.namemapping.impl.SimpleNameMappingProvider`

Initialization parameters – `OTDS_USERNAME=`**`field-expression`**`,CS_USERNAME=`**`field-expression`**

The **field expressions** may only specify a single field, typically USERNAME, which contains the E-Business Suite user name. For more information about field expression handling, see "Field expressions" on page 80.

Example: To duplicate the original E-Business Suite implementation of the user mapping use the following initialization parameters:

```
OTDS_USERNAME=[UserName]@ebs,CS_USERNAME=[UserName]@ebs
```

OTDS name mapping provider

Use for scenarios where the OTDS and Content Server user names cannot be derived from the E-Business Suite user name. The Java class queries the user's OTDS record and retrieves the OTDS and Content Server names from there. This provider is configured as follows:

Provider class – `com.opentext.xecm4o.userinfo.namemapping.impl.OtdsNameMappingProvider`

Initialization parameters – `OTDS_PARTITION=`**`partition-name`**`,PRINCIPAL_ATTRIBUTE=`**`OTDS-attribute`**

Example: The **partition name** is the partition to search with this provider. The **OTDS-attribute** is the attribute in the OTDS user record, which contains the E-Business Suite user name. The **PRINCIPAL_ATTRIBUTE** is probably the same as the one in the OTDS authentication handler for that partition.

```
OTDS_PARTITION=ldap,PRINCIPAL_ATTRIBUTE=oTExtraAttr0
```

Note: To use this provider, you must set the **OTDS Content Server Resource __NAME__ Attribute** in the **OpenText Content Management Configuration** page to the **otExternalID1-4** attribute specified in the OTDS Content Server resource.

To create a user mapping provider:

1. From the menu, select **OpenText Content Management Configuration > User Name Mapping**.

2. Click **Add Provider**.
3. Enter the following information:
   - **Provider Name**

     This name is used to identify the provider; it must be unique.
   - **Provider Type**

     `USER_NAME_MAPPING` is displayed as provider type for the user mapping scenario.
   - **Priority**

     Relative priority of the provider. Providers are processed in priority order from low to high, for example, priority 1 is processed before priority 2. If multiple providers have the same priority, the order in which they are processed is indeterminate.
   - **Enabled**

     Providers must be enabled to be available for synchronizing users.
   - **Implementation Type**

     Select a type:

     – **Custom Java** – provided to allow new providers to be written and added to the framework. OpenText provides sample Java classes for the user mapping. Details of writing custom providers are outside the scope of this document.

       ○ **Provider Class** – Enter the full name of the Java class providing the implementation.

       ○ **Initialization parameters** – Implementation-defined string passed to the custom Java provider. Typically, this is used to provide the implementation with some context.

     – **Custom PL/SQL** – The configuration page has a section for each interface method. Each interface method must have a PL/SQL implementation function.
4. Run or schedule the concurrent program **OpenText Content Management Synchronize Users**. For more information, see "Synchronizing users and groups regularly" on page 81.

Field expressions

A *field expression* is an expression that consists of constants, field names, and operations.

Constant values are copied directly into the result, field expressions are replaced with the possibly modified contents of the corresponding field from the queried table or view. The general form of a field expression is as follows:

```
[field_name+offset(max_length)]
```

`field_name` is the field from the table, `+offset` is an optional number of characters to skip, and `(max_length)` is the maximum number of characters to extract. If not set, `offset` defaults to 0, and `max_length` defaults to the entire value.

Example: The zipcode field contains the value 20500-0001. You can alter the field as follows:

Expression	Result value
[zipcode]	20500-0001
[zipcode+6]	0001
[zipcode(5)]	20500
[zipcode+5(1)	-
Zipcode: [zipcode(5)]	Zipcode: 20500

Note: Encrypted values like passwords are decrypted before the field expression is evaluated. Leading and trailing spaces will be removed from the resulting value.

For more information about field expressions, see also *OpenText Content Management for Oracle E-Business Suite - Configuration Guide (ERO-CGD)*.

11.1.3 Synchronizing users and groups regularly

You use a concurrent program to synchronize users from Oracle E-Business Suite to Directory Services (OTDS). You can use the concurrent program once for initial system setup. OpenText recommends that you also schedule the concurrent program to run daily so that expired users are removed from OTDS.

To run the concurrent program for user synchronization:

1. From the menu, select **OpenText Content Management Configuration > Concurrent Programs > Run**.
2. In the following window, select **Single Request** and click **OK**.
3. In the following window, select **OpenText Content Management Synchronize Users** in the **Name** field.

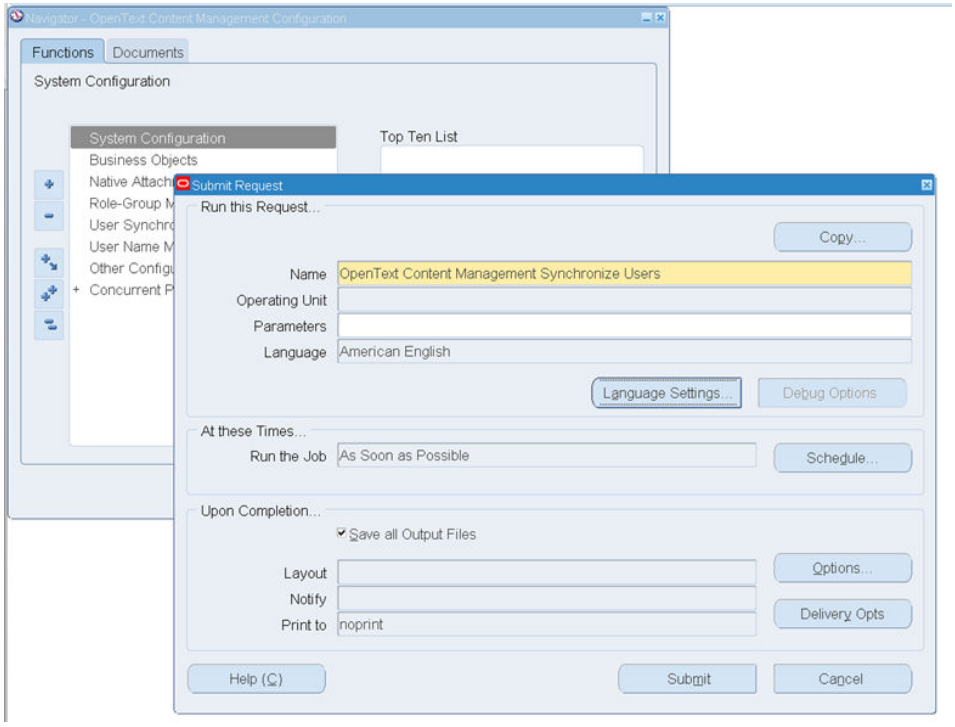

4. Enter the information provider name.

   Tip: If you want to schedule this job, click **Schedule**. Select **Periodical** and select the options as required.

5. Click **Submit**.

11.1.4 Synchronizing users from Oracle E-Business Suite to a non-synchronized OTDS partition

You can setup the system so that users, which are created and maintained in Oracle E-Business Suite, are synchronized to OpenText Directory Services (OTDS). This step is only necessary if you use the internal user management of Oracle E-Business Suite.

Note: If you use Oracle Internet Directory, you can synchronize with OTDS directly. For more information, see *OpenText Directory Services - Installation and Administration Guide (OTDS-IWC)*.

You can send user information from Oracle E-Business Suite into multiple OTDS partitions.

To set up user synchronization:

1. Set up an OTDS partition in OpenText Administration Client:

a. Sign in to OpenText Administration Client and connect to **Directory Services**.

b. Open the **User Partitions** node.

c. Click **New Non-synchronized User Partition**.

d. Enter a partition name and click **OK**.

e. Open the newly created partition.

f. Click **Password Policy** and configure the password policy according to your requirements.

   OpenText recommends that you set the password restrictions to match your settings in Oracle E-Business Suite.

2. Configure the access roles for the resource:

   a. Open the **Resources** node and select the Content Server resource.

   b. Click **Edit**.

   c. Click **Next** until you reach the **User Attribute Mappings** page.

   d. Map the `__NAME__` resource user attribute to the desired `oTExternalIDn` OTDS user attribute

3. Edit the System Configuration:

   a. In Oracle E-Business Suite, from the menu, select **OpenText Content Management Configuration > System Configuration**.

   b. Enter the **OTDS Administrator User Name** and **OTDS Administrator Password**.

4. Verify that the Oracle E-Business Suite event subscriptions are enabled:

   a. From the menu, select **Workflow Administer Web Applications > Administrator Workflow > Business Events**.

   b. Search for `fnd.user`.

   c. Verify that the following events are enabled:

      - `oracle.apps.fnd.user.delete`
      - `oracle.apps.fnd.user.insert`
      - `oracle.apps.fnd.user.update`
      - `oracle.apps.fnd.wf.ds.user.updated`

   d. For each of the above events, click **Subscription** and set the subscription `java://com.opentext.xecm4o.events.UserSyncEventHandler` to **Enabled**.

11.1.5 Synchronizing roles to Content Server groups

You use concurrent programs to synchronize roles from Oracle E-Business Suite to Content Server groups. You can use the **Synchronize All Groups** concurrent program once for initial system setup. OpenText recommends that you also schedule the **Synchronize Groups** concurrent program to run daily so that groups are always up to date.

To run the concurrent program for user role synchronization:

1. From the menu, select **OpenText Content Management Configuration > Concurrent Programs > Run**.
2. In the following window, select **Single Request** and click **OK**.
3. **For initial load** – In the following window, select **OpenText Content Management Synchronize All Groups** in the **Name** field.

   For scheduled update – In the following window, select **OpenText Content Management Synchronize Group** in the **Name** field. Add the name of the group that you want to synchronize.

   Tip: If you want to schedule this job, click **Schedule**. Select **Periodical** and select the options as required.
4. Set other options if required.
5. Click **Submit**.

11.1.6 Configuring Single Sign-On

Previously, the Classic View used an iframe and the Content Server login page was displayed when the workspace is launched from EBS. Whereas, the Smart View used the OTDS-token based authentication where the workspace is launched without the Content Server login page, which gives the users a seamless experience.

The same OTDS-token based authentication is now implemented in Classic View. Now, when an existing Content Server user launches a workspace from EBS, the Content Server login page is not shown and the user can directly log in by providing the OTDS token. So, the single sign-on configuration is no longer required.

11.2 Importing the Content Server category for attachments

OpenText Content Management for Oracle E-Business Suite contains a Content Server category *EBS Attachment*, which is designed for EBS attachments. You can import the category from the XML file.

After installation or upgrade OpenText Content Management for Oracle E-Business Suite on your Oracle E-Business Suite host, the `attachment_category.xml` categories file is located in the `%XXXECM4O_TOP%/CS`.

With version 16, the attachment category contains the following attributes:

Type	Attribute Name	Field Length
Integer Field	Attachment ID	
Text Field	Category	254
Integer Field	Security Type	
Integer Field	Security ID	
Date Field	Last Updated At	
Text Field	Last Updated By	254
Date Field	Created At	40
Text Field	Created By	254
Text Field	Description	240
Text Field	Status	
Text Field	Document Entity	

To import the category:

1. Copy the `attachment_category.xml` file to a directory on the Content Server server.

2. Open the following URL in a Web browser:

```
<content_server_URL>?
func=admin.xmlimport&filename=<attachment_category.xml>&objid=<nnnn>&<optional_par
ameters>
```

   - *`<content_server_URL>`* is the URL that accesses your Content Server installation.

   - `?func=admin.xmlimport&filename=`*`<my.xml>`* is the request that causes the XML file, *<my.xml>*, specified by the `&filename` parameter, to be imported. The file to be imported must be on the server and must be referenced fully in the import URL.

- `&objid=<nnnn>` is the parameter which specifies the numeric value, *<nnnn>*, representing the node ID of the existing Content Server object, node or volume, that will contain the objects to be created.

  Note: The node ID of the object is retrieved by navigating to that object in Content Server. For example, if you want to import a folder, navigate to that folder. Included in the URL which is displayed in your browser, you will see the text: `&objId=1234`. The numbers after `&objId=` comprise the ID of the object.

- `&<optional_parameters>` include any of the parameters listed in Table 3-1 that you can use to tailor a particular XML import.

For more information about importing categories, see *OpenText Content Management - XML Import and Export Guide (LLESCOR-PGD)*.

Chapter 12

Transporting OpenText Content Management for Oracle E-Business configurations

12.1 Exporting and importing Oracle E-Business Suite configuration

OpenText Content Management for Oracle E-Business provides a transport tool with which you can export configuration parameters on one system to an XML file, and import the XML file to another system. You can also use the transport tool to delete the configuration items.

```
transport.sh [options] import [-s[ection] <section> [<object specifier 1> ...]]
```

or

```
transport.sh [options] export [-s[ection] <section> [<object specifier 1> ...]]
```

or

```
transport.sh [options] delete [-s[ection] <section> [<object specifier 1> ...]]
```

Note: The above commands can be executed after navigating to **$XXXECM4O_TOP/admin**.

Import

Commands

`import`, `export`, or `delete`

The `command` specifies the type of transport job.

Important

To prevent data loss when using the `delete` command, you must specify object identifiers: you must either provide the names of the objects, a regular expression with the `-re` option, or the `*` wildcard to select *all* objects. For more information, see the *object specifiers* section.

Sections

A transport package consists of sections of different transport data types. You can import, export, or delete sections individually. If no sections are specified, the command is processed for all sections.

For this, you use the `-s` option.

- `entityTypes` or `et`: Section with entity type definitions.
- `businessRelations` or `br`: Section with business relations definitions.

- `groupMappings` or `gm`: Section with group mappings.
- `businessObjectIdProviders` or `boid`: Section with business object ID providers.
- `businessEventConfigurations` or `becfg`: Section with business event configurations.
- `user info providers` or `uip`: Section with userinfo providers, provider configurations, and attribute mappings.
- `botr`: Section with Business Object Type Resolvers.
- `pp`: Section with Document Property Providers.
- `dr`: Section with Document Type Resolvers.
- `all`: Used to process a command for each of the sections even if specific sections are specified which normally causes the command to be processed only for the specified sections.

  Example: You want to export entity type definition `t1` and `t2`, and for all other sections you want to do a full export. The following command exports only the entity definitions `t1` and `t2`.

  ```
  export -s et t1 t2
  ```

  To add all other sections, you use the following command:

  ```
  export -s all -s et t1 t2
  ```

  To delete all objects from all sections, you use the following command:

  ```
  delete -s all "*"
  ```

Object specifiers

Select specific objects from a transport data section. Object specifiers are object names, or a regular expression specified with the `-re` option. You can use the wildcard `'*'` to select all objects of a section. You can use object specifier for the following parts of the transport data section:

- **entityTypes**: The name of the entity type definition.
- **businessRelations**: The name of the business relation definition.
- **groupMappings**: Must be specified as pairs of object specifiers with the first referring to the ERP role and the second to the Content Server group.

  Examples:

  ```
  s gm -re "FND_RESP\|ABM\|.*" xECM_Group2
  ```

  Selects all group mappings where the ERP role begins with *FND|ABM|* and the Content Server group is *xECM_Group2*.

  ```
  -s gm -re "FND_RESP\|ABM\|.*" " * "
  ```

  Selects all group mappings where the ERP role begins with *FND|ABM|* and any Content Server group name.

  ```
  -s gm -re "FND_RESP\|ABM\|.*" -re ".*XECM"
  ```

Selects all group mappings where the ERP role begins with *FND|ABM|* and the Content Server group name ends with *XECM*.

- **businessObjectIdProviders**: The page ID of the business object ID provider definition.
- **businessEventConfigurations**: Must be specified as object specifier pairs where the first one is the business event name and the second one is the name of the business object type.

  Examples:

  ```
  -s becfg oracle.apps.ar.hz.Person.create Customer
  ```

  Selects the business event `oracle.apps.ar.hz.Person.create` for business object `Customer`
- **user info providers**: The provider name of the user synchronization provider or the user name mapping provider. Following are the examples for exporting, importing, and deleting user info providers:

  – `transport.sh -cs //servername:dbport/SID -f out.xml -user apps -pwd apps export -s uip -re "Provider Name"`

  – `transport.sh -cs //servername:dbport/SID -f out.xml -user apps -pwd apps import -s uip -re "Provider Name"`

  – `transport.sh -cs //servername:dbport/SID -f out.xml -user apps -pwd apps delete -s uip -re "Provider Name"`
- **Business Object Type Resolvers**: The name of the document entity or the relation.

  Following are the examples for exporting, importing, and deleting Business Object Type Resolvers (BOTRs):

  – **Using document entity**

    ○ `transport.sh -cs //servername:dbport/SID -user apps -pwd apps -f out.xml export - s botr "PO_HEADERS"`

    ○ `transport.sh -cs //servername:dbport/SID -user apps -pwd apps -f out.xml import - s botr "PO_HEADERS"`

    ○ `transport.sh -cs //servername:dbport/SID -user apps -pwd apps -f out.xml delete - s botr "PO_HEADERS"`

    Note: Do not mention **-re** in the above command if the document entity is specified.

    ○ **Using relation name**

    - `transport.sh -cs //servername:dbport/SID -user apps -pwd apps -f out.xml export - s botr -re "relation name"`
    - `transport.sh -cs //servername:dbport/SID -user apps -pwd apps -f out.xml import - s botr -re "relation name"`

- `transport.sh -cs //servername:dbport/SID -user apps -pwd apps -f out.xml` **`delete`** `- s botr -re "relation name"`

  Note: If the import option `dac` is mentioned for the `botr` section with a regular expression, it deletes and creates the mentioned BOTR only instead of deleting all the BOTRs and creating the mentioned one.

- **Property providers**: The name of the Property provider.

  Following are the examples for exporting, importing, and deleting Property providers:

  – `transport.sh -cs //servername:dbport/SID -f out.xml -user apps -pwd apps` **`export`** `-s pp -re "Property Provider Name"`

  – `transport.sh -cs //servername:dbport/SID -f out.xml -user apps -pwd apps` **`import`** `-s pp -re "Property Provider Name"`

  – `transport.sh -cs //servername:dbport/SID -f out.xml -user apps -pwd apps` **`delete`** `-s pp -re "Property Provider Name"`

  Note: If the import option `dac` is mentioned for `pp` or `uip` sections with a regular expression, it deletes and creates the mentioned `pp` or `uip` sections only instead of deleting all the property providers or user info providers and creating the mentioned one.

Options

- `-cs <connect string>`: the connect string for the database system to logon, for example, `//<host>:1521/VIS`.
- `-user <login>`: Login name of the database user.
- `-pwd <pwd>`: Password of the database user. If the password is not specified, you are prompted for the password.
- `-f <file name>`: Name of the XML file. Default for the export is the standard output (`stdout`).
- `-section <section specifier>` or `-s <section specifier>`: Defines which transport package section is processed. You can use this option several times for different sections or in the same section.
- `-im <import mode>`: Import mode.
  - `updateOrCreate` or `uoc`: Updates imported objects if they already exist in the system or creates an item them if they do not yet exist. All other objects remain as they are. This is the default setting.
  - `deleteAndCreate` or `dac`: Deletes all objects in the specified section, and then creates the imported objects.
- `-re <regular expression>`: Regular expression to select objects of a transport data section. This option applies to the section specification to the left.

When you use a regular expression, you must add the `\` (backslash) to escape special characters like `.` (period) or `|` (pipe).

Example:

```
-s gm -re "FND_RESP\|ABM\|.*" " * "
```

- `-ps`: Print full stack trace instead of error messages only.
- `-h`: Write short help to `stdout`.
- `--help`: Write long help to `stdout`.

Examples

`transport.sh -cs //servername:dbport/SID -user apps -pwd apps -f fullexport.xml export`
Creates a full export.

`transport.sh -cs //servername:dbport/SID -user apps -pwd apps -f export.xml export -s et -s br`
Exports the entity type definitions and business relations for the exported entity types.

`transport.sh -cs //servername:dbport/SID -user apps -pwd apps -f export.xml import -im deleteAndCreate -s et Customer Supplier -s br`
Deletes all entity type definitions and business relations, and then imports the business object type definitions *Customer* and *Supplier* as well as business relations for these entity types.

`transport.sh -cs //servername:dbport/SID -user apps -pwd apps -f out.xml import -s et -re "CUS.*" -s br -s gm`
Imports all entity type definitions that begin with *CUS* as well as all business relations, and the group mappings.

`transport.sh -cs //servername:dbport/SID -user apps -pwd apps delete -s gm "*"`
Deletes all group mappings.

12.2 Transporting configuration objects

You can use Content Server Transport Warehouse to transport a Connected Workspaces configuration from one Content Server installation to another, for example if you are using development, test and productive systems.

- Categories, classifications and folders
- Workspace types and variables for group replacement
- Workspace templates including workspace hierarchies, if available
- Unique names and unique name groups

- Business object types

For more information about the Transport Warehouse, see the Content Server online help.

To export business object types and unique names, you use the Connected Workspaces transport mechanism. For more information, see "Exporting business object types and unique names" on page 92.

12.2.1 Exporting business object types and unique names

You can export business object types with the OpenText Content Management transport mechanism.

To export business object types and unique names from a Content Server:

1. On theOpenText Content Management Administration page, click **Connected Workspaces > Import/Export Configuration**.
2. On the following page, click **Export Configuration**.
3. Enter a name for the transport file.
4. Select the items that you want to export.

   You can click the business object type to open the configuration and view details.
5. Click **Export**.

   The transport file is stored in the temp directory on this Content Server. Additionally, it is stored in the personal workspace of the user who started the export. You are redirected to that page after the export. You can download the file from there.

   Tip: You can include the transport file, which is stored in your personal workspace, into a workbench to use Content Server Warehouse for transports.

Chapter 13

Installing Content Server patches using the cluster management tool

Update Content Server to the current patch level. You can do this using Content Server Cluster Management, which helps you to find the required patches and deploy them correctly. Cluster Management enforces patch dependencies and removes superseded patches.

In some cases there are dependencies between the patch levels on the Content Server and Web service side. The cluster management tool only provides the Content Server side patch. For more information, see Cluster Management Patch Deployment System (https://knowledge.opentext.com/knowledge/cs.dll/Open/41561891) on OpenText My Support.

Note: You need a user login with access to OpenText My Support. OpenText strongly recommends that you backup your installation and the database before deploying the patches.

1. Go to the OpenText Content Management Administration Page (`../OTCS/cs.exe?func=admin.index`).
2. Go to **Server Configuration > Cluster Management**.
3. Click **Manage Cluster Settings** and configure the cluster:
   - **Manifest URL**: `http://mimage.opentext.com/support/ecm/contentserver/16.2/manifest_win.xml`. Click **Check URL** to validate.
   - **Master System**: Click **Browse** and select the system.
   - **Patch Staging Folder**: `C:\OPENTEXT\clustermanagement\staging`.
   - **Download**: Select **Yes**.

   Click **Save Settings**.
4. Click **Manage Updates**
5. Select the required Content Server update and the matching patches.
6. Click **Download**. The patches are retrieved from OpenText My Support and moved to the staging folder.
7. From there you can deploy them. Follow the instructions of the online help and messages on the screen. You may want to deploy the Content Server first and then deploy the patches. Make sure you have backed up your database and the Content Server installation.

Chapter 14

Analyzing the installation and configuration

You can use the Diagnostic concurrent program to analyze aspects of the installation and configuration. The concurrent program tests, for example, connection parameters, business object and relation configuration and database triggers.

To run the diagnostics report for OpenText Content Management for Oracle E-Business Suite:

1. From the menu, select **OpenText Content Management Configuration > Concurrent Programs > Run**.
2. In the following screen, select **Single Request** and click **OK**.
3. Find the **OpenText Content Management Diagnostic Reports** program and click **Submit**.

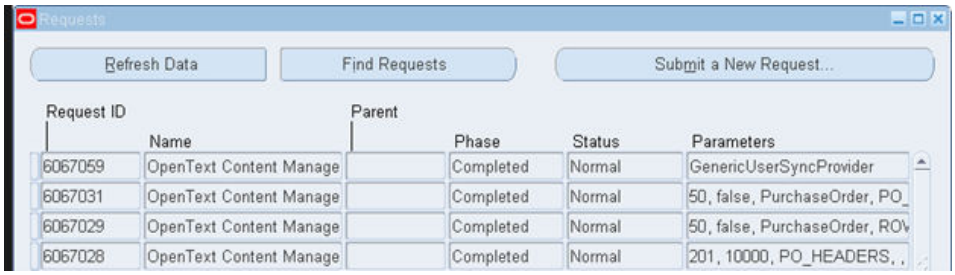

4. Click **View Output** to see the report results.
5. Click **View Log** to see the log for the report.

Tip: If you are using a solution accelerator for OpenText Content Management for Oracle E-Business Suite, you must use the **OpenText Content Management Oracle Solution Accelerator Diagnostic Reports** concurrent program.

Chapter 15

Appendix

15.1 Objects created for OpenText Content Management

The following objects are created for OpenText Content Management for Oracle E-Business core.

Note: For objects created for Solution Accelerators, see the respective documentation.

APPS schema

Synonyms

XECM4O_FND_ATTACHED_DOCS_TRIG

XX_XECM4O_ATTACHED_DOCUMENTS_V

XX_XECM4O_BOTYPE_RSLVR_RELS

XX_XECM4O_BO_FORMATTED_VAL_V

XX_XECM4O_BO_ID_PROVIDERS

XX_XECM4O_BO_TYPE_DEF_T

XX_XECM4O_BUSINESS_RELATIONS

XX_XECM4O_BUSINESS_REL_PATHS

XX_XECM4O_BUS_OBJ_DOC_TYPES

XX_XECM4O_BUS_OBJ_IDS_NT

XX_XECM4O_BUS_OBJ_ID_T

XX_XECM4O_BUS_OBJ_RESOLVERS

XX_XECM4O_BUS_REL_DEF_T

XX_XECM4O_CHANGE_COUNTERS

XX_XECM4O_COLUMN_INFO_NT

XX_XECM4O_COLUMN_INFO_T

XX_XECM4O_CONFIG_KEY

XX_XECM4O_CONFIG_VALUE

XX_XECM4O_CS_UI_MODES

XX_XECM4O_CS_UI_MODES_TL

XX_XECM4O_CS_UI_MODES_VL

XX_XECM4O_DATATYPE_INFO_T
XX_XECM4O_DB_UTIL
XX_XECM4O_DOC_ENTITIES
XX_XECM4O_DOC_TYPE_RESOLVER
XX_XECM4O_EBS_USER_V
XX_XECM4O_ENTITY_MAPPINGS
XX_XECM4O_ENTITY_TYPES
XX_XECM4O_EVENTS
XX_XECM4O_EVENT_CONFIG
XX_XECM4O_EVENT_DATA
XX_XECM4O_FILTER
XX_XECM4O_FILTER_T
XX_XECM4O_FILTER_TERMS_NT
XX_XECM4O_FILTER_TERM_T
XX_XECM4O_GROUP_MAPPING
XX_XECM4O_GROUP_MAPPING_TRIG
XX_XECM4O_INT_ARRAY
XX_XECM4O_JOIN_COLUMNS
XX_XECM4O_KEY_COLUMNS
XX_XECM4O_LOGGING
XX_XECM4O_MENU_PKG
XX_XECM4O_MIG_ATTCH_DOCS
XX_XECM4O_NVS_NT
XX_XECM4O_NV_LIST_T
XX_XECM4O_NV_T
XX_XECM4O_OPERATOR_T
XX_XECM4O_PROPERTIES
XX_XECM4O_PROPERTIES_T
XX_XECM4O_PROPS_NT
XX_XECM4O_PROP_GROUPS_NT
XX_XECM4O_PROP_GROUP_T
XX_XECM4O_PROP_PROV_CFG
XX_XECM4O_PROP_ROWS_NT
XX_XECM4O_PROP_ROW_T
XX_XECM4O_PROP_T

XX_XECM4O_QRY_FLD_INFOS_NT
XX_XECM4O_QRY_FLD_INFO_T
XX_XECM4O_QRY_FLD_VALS_NT
XX_XECM4O_QRY_FLD_VAL_T
XX_XECM4O_QRY_RESULT_T
XX_XECM4O_QRY_RES_FLD_INFOS_NT
XX_XECM4O_QRY_RES_FLD_INFO_T
XX_XECM4O_QRY_RES_ROWS_NT
XX_XECM4O_QRY_RES_ROW_T
XX_XECM4O_RELATIONS
XX_XECM4O_STRING_ARRAY
XX_XECM4O_USR_INFO_ATTR_MAP
XX_XECM4O_USR_INFO_PROVIDERS
XX_XECM4O_USR_INFO_PROV_CFG

XXXECM4O schema

Packages

XX_XECM4O_DB_UTIL
XX_XECM4O_EVENTS
XX_XECM4O_FILTER
XX_XECM4O_MENU_PKG

Tables

XX_XECM4O_BOTYPE_RSLVR_RELS
XX_XECM4O_BO_ID_PROVIDERS
XX_XECM4O_BUSINESS_RELATIONS
XX_XECM4O_BUSINESS_REL_PATHS
XX_XECM4O_BUS_OBJ_DOC_TYPES
XX_XECM4O_BUS_OBJ_RESOLVERS
XX_XECM4O_CHANGE_COUNTERS
XX_XECM4O_CONFIG_KEY
XX_XECM4O_CONFIG_VALUE
XX_XECM4O_CS_UI_MODES
XX_XECM4O_CS_UI_MODES_TL
XX_XECM4O_DOC_ENTITIES
XX_XECM4O_DOC_TYPE_RESOLVER
XX_XECM4O_ENTITY_MAPPINGS

XX_XECM4O_ENTITY_TYPES

XX_XECM4O_EVENT_CONFIG

XX_XECM4O_EVENT_DATA

XX_XECM4O_GROUP_MAPPING

XX_XECM4O_JOIN_COLUMNS

XX_XECM4O_KEY_COLUMNS

XX_XECM4O_LOGGING

XX_XECM4O_MIG_ATTCH_DOCS

XX_XECM4O_PROPERTIES

XX_XECM4O_PROP_PROV_CFG

XX_XECM4O_RELATIONS

XX_XECM4O_USR_INFO_ATTR_MAP

XX_XECM4O_USR_INFO_PROVIDERS

XX_XECM4O_USR_INFO_PROV_CFG

Triggers

XECM4O_FND_ATTACHED_DOCS_TRIG

XX_XECM4O_GROUP_MAPPING_TRIG

Types

XX_XECM4O_BO_TYPE_DEF_T

XX_XECM4O_BUS_OBJ_IDS_NT

XX_XECM4O_BUS_OBJ_ID_T

XX_XECM4O_BUS_REL_DEF_T

XX_XECM4O_COLUMN_INFO_NT

XX_XECM4O_COLUMN_INFO_T

XX_XECM4O_DATATYPE_INFO_T

XX_XECM4O_FILTER_T

XX_XECM4O_FILTER_TERMS_NT

XX_XECM4O_FILTER_TERM_T

XX_XECM4O_INT_ARRAY

XX_XECM4O_NVS_NT

XX_XECM4O_NV_LIST_T

XX_XECM4O_NV_T

XX_XECM4O_OPERATOR_T

XX_XECM4O_PROPERTIES_T

XX_XECM4O_PROPS_NT

XX_XECM4O_PROP_GROUPS_NT

XX_XECM4O_PROP_GROUP_T

XX_XECM4O_PROP_ROWS_NT

XX_XECM4O_PROP_ROW_T

XX_XECM4O_PROP_T

XX_XECM4O_QRY_FLD_INFOS_NT

XX_XECM4O_QRY_FLD_INFO_T

XX_XECM4O_QRY_FLD_VALS_NT

XX_XECM4O_QRY_FLD_VAL_T

XX_XECM4O_QRY_RESULT_T

XX_XECM4O_QRY_RES_FLD_INFOS_NT

XX_XECM4O_QRY_RES_FLD_INFO_T

XX_XECM4O_QRY_RES_ROWS_NT

XX_XECM4O_QRY_RES_ROW_T

XX_XECM4O_STRING_ARRAY

Views

XX_XECM4O_ATTACHED_DOCUMENTS_V

XX_XECM4O_BOTYPE_RSLVR_RELS#

XX_XECM4O_BO_FORMATTED_VAL_V

XX_XECM4O_BO_ID_PROVIDERS#

XX_XECM4O_BUSINESS_RELATIONS#

XX_XECM4O_BUSINESS_REL_PATHS#

XX_XECM4O_BUS_OBJ_DOC_TYPES#

XX_XECM4O_BUS_OBJ_RESOLVERS#

XX_XECM4O_CHANGE_COUNTERS#

XX_XECM4O_CONFIG_KEY#

XX_XECM4O_CONFIG_VALUE#

XX_XECM4O_CS_UI_MODES#

XX_XECM4O_CS_UI_MODES_TL#

XX_XECM4O_CS_UI_MODES_VL

XX_XECM4O_DOC_ENTITIES#

XX_XECM4O_DOC_TYPE_RESOLVER#

XX_XECM4O_EBS_USER_V

XX_XECM4O_ENTITY_MAPPINGS#

XX_XECM4O_ENTITY_TYPES#

XX_XECM4O_EVENT_CONFIG#

XX_XECM4O_EVENT_DATA#

XX_XECM4O_GROUP_MAPPING#

XX_XECM4O_JOIN_COLUMNS#

XX_XECM4O_KEY_COLUMNS#

XX_XECM4O_LOGGING#

XX_XECM4O_MIG_ATTCH_DOCS#

XX_XECM4O_PROPERTIES#

XX_XECM4O_PROP_PROV_CFG#

XX_XECM4O_RELATIONS#

XX_XECM4O_USR_INFO_ATTR_MAP#

XX_XECM4O_USR_INFO_PROVIDERS#

XX_XECM4O_USR_INFO_PROV_CFG#

Indexes

XX_XECM4O_BOTYPE_RSLVR_RELS_PK

XX_XECM4O_BO_ID_PROVIDERS_PK

XX_XECM4O_BUSINESS_REL_PA_PK

XX_XECM4O_BUSINESS_REL_PK

XX_XECM4O_BUS_OBJ_DOC_TYPES_PK

XX_XECM4O_BUS_OBJ_RESOLVERS_PK

XX_XECM4O_BUS_REL_NAME_UK

XX_XECM4O_CHANGE_COUNTERS_PK

XX_XECM4O_CONFIG_KEY_PK

XX_XECM4O_CONFIG_VALUE_PK

XX_XECM4O_CS_UI_MODES_PK

XX_XECM4O_CS_UI_MODES_TL_PK

XX_XECM4O_DOC_ENTITIES_PK

XX_XECM4O_DOC_TYPE_RESOLVER_PK

XX_XECM4O_ENTITY_MAPPINGS_PK

XX_XECM4O_ENTITY_TYPES_PK

XX_XECM4O_EVENT_CONFIG_PK

XX_XECM4O_GROUP_MAPPING_PK

XX_XECM4O_GROUP_MAPPING_UQ1

XX_XECM4O_GROUP_MAPPING_UQ2

XX_XECM4O_MIG_ATTCH_DOCS_PK

XX_XECM4O_PROPERTIES_OID_CN_UQ

XX_XECM4O_PROPERTIES_PK

XX_XECM4O_PROP_PROV_CFG_PK

XX_XECM4O_RELATIONS_PK

XX_XECM4O_USR_INFO_ATTR_MAP_PK

XX_XECM4O_USR_INFO_PROV_CFG_PK

XX_XECM4O_USR_INFO_PROV_PK

Sequences

XX_XECM4O_EVENT_NUMBER

XX_XECM4O_OBJECT_ID

Functions

XX_XECM4O_SAMPLE_QUERY

15.2 Concurrent programs

Incompatibilities are added for all the programs. But, it might not work in 12.1 instance due to a Oracle product limitation. If it is not working for you, do the following:

To add an incompatibility manually:

1. Go to **Application Developer** > **Concurrent Programs**.
2. Search for the program.
3. Click **Incompatibilities**.
4. Remove the existing incompatibility and click **Save**.
5. Add the incompatibility and click **Save**.

15.2.1 OpenText Content Management Archive Attachments

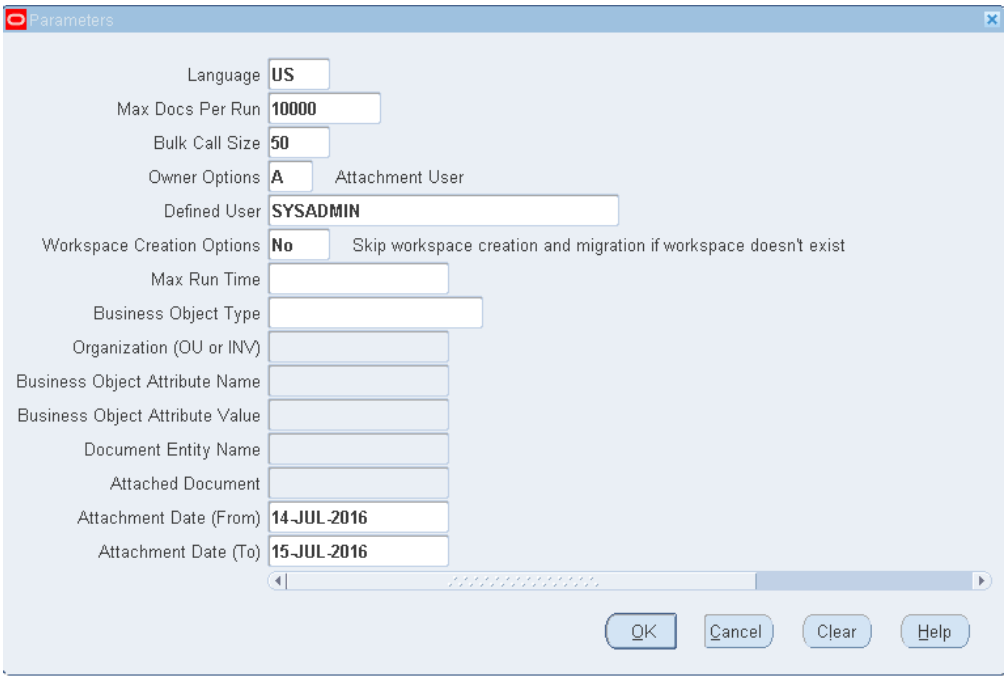

- **Language**: Used to retrieve values from the respective localization tables.
- **Max Docs Per Run**: Number of documents that you want to process in one run. Default is `10000`.
- **Bulk Call Size**: Number of workspaces that are created with a single call or number of workspace node IDs that are retrieved with a single call. Default is `50`.
- **Owner Options**: User who will be the owner of the document in Content Server. This can either be the original owner in E-Business Suite or a predefined user. Default is the E-Business Suite user.
- **Defined User**: Predefined user to be used as the document owner in Content Server.
- **Workspace Creation Options**: Creates a business workspace if it does not exist in Content Server and then migrate attachments. Default is *not* to create the workspace if it does not exist in Content Server. In this case, the document is not moved to Content Server.
- **Max Run Time**: Maximum run time of the concurrent program. Format is `HH:mm`. Hours can be any number of hours and minutes is from 00 to 59.
- **Business Object Type**: Select a business object type from the list.
- **Organization (OU or INV)**: Operating Unit ID or Inventory Organization ID. Enabled only when the selected business object type belongs to an Operating Unit or Inventory Organization. Select an organization ID from the list.
- **Business Object Attribute Name**: Attribute name of the business object. Enabled only when a value is selected for the “Business Object Type” parameter. Select an attribute name from the list.

- **Business Object Attribute Value**: Attribute value for the selected attribute name. Enabled only when a value is selected for the “Business Object Attribute Name” parameter.
- **Document Entity Name**: Registered document entity name for the object type. Enabled only when a value is selected for the “Business Object Type” parameter. Select a document entity name from the list.
- **Attached Document**: Enabled only when a value is selected for the “Document Entity Name” parameter. Select a document from the list.
- **Attachment Date (From)**: Start date for the EBS attachment creation.
- **Attachment Date (To)**: End date for the EBS attachment creation.

Note: OpenText recommends that you provide as much data as possible, especially for the “Attachment Date” parameters, so that your job can be completed quickly.

15.2.2 OpenText Content Management Native Attachments

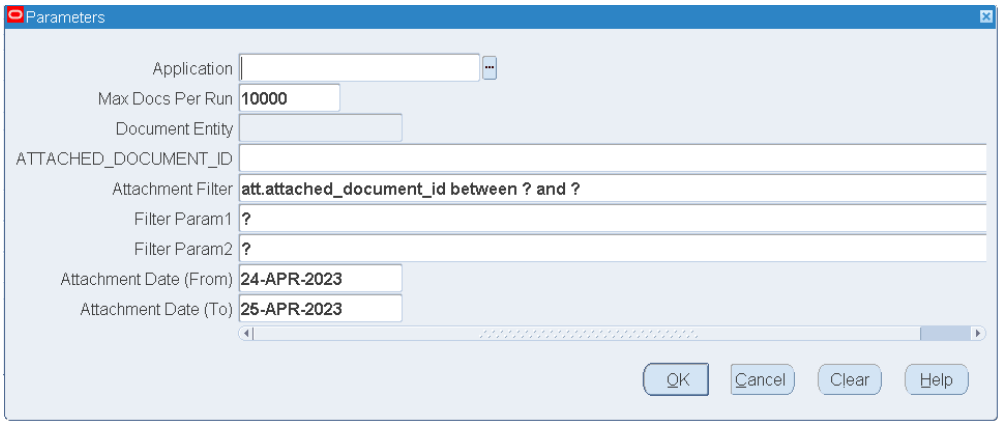

- **Application**: Registered applications in Oracle E-Business Suite. Select the application from the list for which you want to migrate the document.
- **Document Entity Name**: Registered document entity names in Oracle E-Business Suite. Enabled only when a value is selected for the “Application” parameter. Select the document entity name from the list for which you want to migrate the document.
- **Attached Document**: Enabled only when a value is selected for the “Document Entity Name” parameter. Select a document from the list.
- **Attachment Filter**: Filter condition to select or exclude attachments more precisely. Default condition can be replaced with custom user specific condition where att is the alias name of table in the sql query and COLUMN_NAME is the column name you want to use.
- **Filter Param1**: Parameter 1 for Attachment Filter condition. Replace the default value (?) with the actual data if available.

- **Filter Param2**: Parameter 2 for Attachment Filter condition if available. Replace the default value (?) with the actual data if available.
- **Attachment Date (From)**: Start date for the EBS attachment creation.
- **Attachment Date (To)**: End date for the EBS attachment creation.

Note: OpenText recommends that you provide as much data as possible, especially for the "Attachment Date" parameters, so that your job can be completed quickly.

15.2.3 OpenText Content Management Synchronize All Groups

No input parameters.

For more information, see "Synchronizing roles to Content Server groups" on page 84.

15.2.4 OpenText Content Management Synchronize EBS Role to CS Group

Name of role to synchronize: Enter the name of the Oracle E-Business Suite role that you want to map to a Content Server group.

For more information, see "Synchronizing roles to Content Server groups" on page 84.

15.2.5 OpenText Content Management Synchronize User

Provider Name: The name of the information provider that you created.

For more information, see "Managing users" on page 75.

15.2.6 OpenText Content Management Configurations Report

You can use the configuration report to see the application, user synchronization and user name mapping configurations.

To run the configuration report:

1. From the menu, select **OpenText Content Management Configuration > Concurrent Programs > Run**.
2. In the following window, select **Single Request** and click **OK**.
3. Find the **OpenText Content Management Configurations Repor** program and click **Submit**.
4. Click **View Output** to see the report results.

15.2.7 OpenText Content Management Sync Deleted EBS Attachments with Content Server

You can run this concurrent program to delete documents from Content Server when the corresponding attachment record is deleted from the Oracle E-Business Suite application.

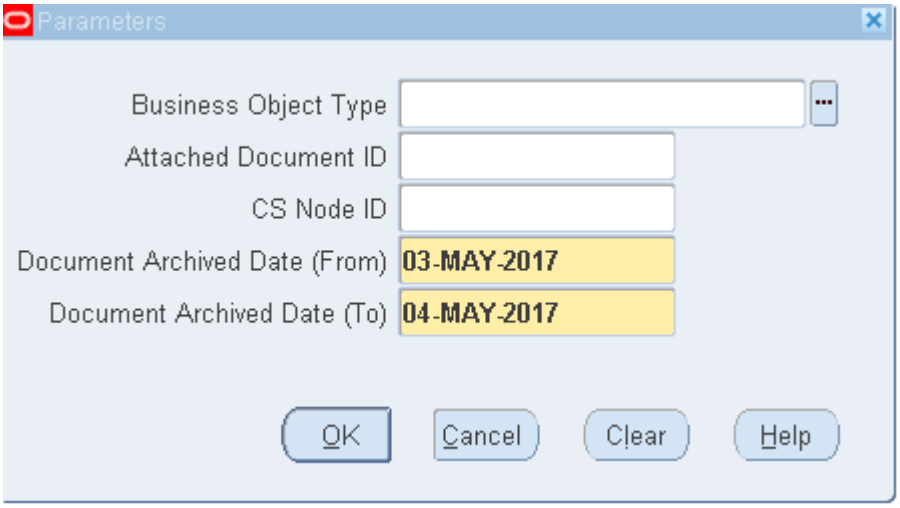

- **Business Object Type**: Displays the list of registered business object types of OpenText Content Management for Oracle E-Business Suite. Select a business object type from the list.
- **Attached Document ID**: Enter the attachment ID that was deleted from the Oracle E-Business Suite application and must also be deleted from Content Server.
- **CS Node ID**: Enter the Content Server Node ID of the document that must be deleted from Content Server
- **Document Archived Date (From)**: Start date of document migration to Content Server.
- **Document Archived Date (To)**: End date of document migration to Content Server.

Note: OpenText recommends that you provide as much data as possible, especially for the “Date” parameters to ensure quick job completion.

15.2.8 Delete Copy of Archived Attachments from Oracle E-Business Suite

You can run this concurrent program to delete documents from Oracle E-Business Suite when the corresponding attachment record is migrated with copy option from the Oracle E-Business Suite application. Following are the parameters to run the program:

- **Application**: Registered applications in Oracle E-Business Suite. Select the application from the list for which you want to migrate the document.
- **Max Docs Per Run**: Number of documents that you want to process in one run. Default is 10000.
- **Document Entity Name**: Registered document entity names in Oracle E-Business Suite. Enabled only when a value is selected for the "Application" parameter. Select the document entity name from the list for which you want to delete the archived document from EBS.
- **Attached Document**: Enabled only when a value is selected for the "Document Entity Name" parameter. Select a document from the list.
- **Attachment Date (From)**: Start date for the Oracle E-Business Suite attachment creation.
- **Attachment Date (To)**: End date for the Oracle E-Business Suite attachment creation.

Note: OpenText recommends that you provide as much data as possible, especially for the "Attachment Date" parameters to ensure quick job completion.

15.2.9 Incompatibilities for a concurrent program

Incompatibilities are added to the following programs to avoid parallel execution of programs.

- Delete Copy of Archived Attachments from EBS
- OpenText Content Management Sync Deleted EBS Attachments with Content Server
- OpenText Content Management Archive Attachments
- OpenText Content Management Native Attachments

Part 4

Uninstalling OpenText Content Management for Oracle E-Business Suite

This part explains how you uninstall OpenText Content Management for Oracle E-Business Suite.

Chapter 16

Uninstall OpenText Content Management for Oracle E-Business Suite

Note: For Oracle database version 12.1, patch 9468252 from Oracle Support needs to be applied to delete users. OpenText recommends that you always apply the latest patch.

To uninstall OpenText Content Management for Oracle E-Business on Oracle E-Business Suite 12.1.3:

1. Connect to the Unix server and source the APPS environment (.env) file:

   ```
   Unix: . $APPL_TOP/APPS<SID>_<hostname>.env
   ```

2. Copy the distribution directory **xecm4o_xx_x_x.tar.gz**, which you downloaded during the installation or upgrade of the product to a temporary location, such as `/home/applvis` and extract its contents with the following command:

   ```
   Unix: tar –xzf xecm4o_xx_x_x.tar.gz
   ```

3. Uninstall the xECM for Oracle enabler by performing the following actions:

   a. Navigate to the **Uninstall** folder in the distribution directory **xecm4o_xx_x_x** and run the following command:

      ```
      Unix: sh uninstall.sh
      ```

   b. Enter values for the following parameters:

      - `Apps user[APPS]?`
      - `Apps password [APPS]?`
      - `DB user[system]?`
      - `DB password []?`
      - `Database connection [//localhost/VIS]?`
      - `OC4J Admin Password?`

To uninstall OpenText Content Management for Oracle E-Business on Oracle E-Business Suite 12.2 and later:

1. Connect to the database with the APPS user and run the following SQL query:

   ```
   select application_short_name,application_id from fnd_application_vl
   where application_short_name LIKE '%XECM%';
   ```

   The output of the query is as follows:

Table 16-1:

APPLICATION_SHORT_NAME	APPLICATION_ID
XXXECM4O	50001
XXXECMSA	50002

2. Source the Run edition environment by connecting to the UNIX server.

3. Copy the distribution directory **xecm4o_xx_x_x.tar.gz**, which you downloaded during the installation or upgrade of the product to a temporary location, that is a `$PATCH_TOP` location and extract its contents with the following command:

   `Unix: tar –xzf` **`xecm4o_xx_x_x.tar.gz`**

4. Uninstall the OpenText Content Management for Oracle enabler by performing the following actions:

   a. Navigate to the **Uninstall** folder in the distribution directory **xecm4o_xx_x_x** and run the following command:

      `Unix: sh uninstall.sh`

   b. Enter values for the following parameters:

      - `Apps user[APPS]?`
      - `Apps password [APPS]?`
      - `DB user[system]?` or `DB user[EBS_SYSTEM]?`

        Note: The command defaults to `user SYSTEM (for versions <12.2.11)` or `EBS_SYSTEM (for versions ≥12.2.11)`.

      - `DB password []?`
      - `Database connection [//localhost/VIS]?`
      - `Weblogic Console Password`

      Note: To deregister the custom application, enter the application ID and the application name for `xxxecmsa` and `xxxecm4o` in the specified order.

      For `xxxecmsa`, enter the following:

      - **APPS username**: `apps`
      - **APPS password**: `<<APPS PASSWORD>>`
      - **Custom Application to De-Register**: `xxxecmsa`
      - **Application ID to De-Register**: <<APPLICATION_ID>> based on the output of the SQL query in step 1.

      For `xxxecm4o`, enter the following:

- **APPS username**: `apps`
- **APPS password**: `<<APPS PASSWORD>>`
- **Custom Application to De-Register**: `xxxecm4o`
- **Application ID to De-Register:** <<APPLICATION_ID>> based on the output of the SQL query in step 1.

5. Run the following command and check if it is returning any results:

   1. Source the *database* environment:

      ```
      Unix: ./u01/<SID>/db/tech_st/11.2.0.2/<SID>_<hostname>.env
      ```

   2. Change to the database schema installation directory:

      ```
      Unix: cd $XXXECM4O_TOP/sql
      ```

   3. Run the following command: `sqlplus <apps>/<apps_pwd>`

      ```
      @uninstallValidation.sql
      ```

   Note: Do not proceed with the next steps if there are any existing records returned from above execution.

6. Run `autoconfig` on the RUN file system by performing the following steps:

   a. Source the RUN edition environment.
   b. Run the command:`cd $ADMIN_SCRIPTS_HOME`
   c. Run the command: `adautocfg.sh`

7. Clear the cache by performing the following steps:

   a. Sign in to the application as the system administrator.
   b. Select **Functional Administrator** > **Core Services** > **Caching Framework** > **Global Configuration**.
   c. Click **Clear All Cache**.
   d. Clear the browser cache.
   e. Source the RUN edition environment.
   f. Navigate to `$ADMIN_SCRIPTS_HOME`.
   g. Use `admanagedsrvctl.sh` to stop and then start `oafm` and `oacore`.

8. Source the patch edition environment.

9. Manually remove or comment the entries for `xxxecmsa` and `xxxecm4o` in the PATCH edition context file.

10. Source the RUN edition environment from a new Terminal and run `adop phase=fs_clone` to synchronize both RUN and PATCH file systems.