
Nexidia Real-Time Grid Pre-Installation Engage Validation

Version 12.5.1

Table of Contents

Copyright

Overview

Checklist

Verify the Engage Version

Verify if Engage Media Encryption is Enabled

Verify the Engage ConnectAPI CN Field Name

ConnectAPI Access

Engage ConnectAPI Login Method

Download and Prepare Curl

Determine the ConnectAPI Login Method

Disable NICE Application Recycling for the ConnectAPI Application Pool

Copyright

PROPRIETARY AND CONFIDENTIAL INFORMATION

Information herein is proprietary information and trade secrets of NICE Ltd. and/or its affiliated companies (Affiliates). This document and the information herein is the exclusive property of NICE and its Affiliates and shall not be disclosed, in whole or in part, to any third party or utilized for any purpose other than the express purpose for which it has been provided.

IMPORTANT NOTICE

Subject always to any existing terms and conditions agreed between you and NICE or any Affiliate with respect to the products which are the subject matter of this document, neither NICE nor any of its Affiliates shall bear any responsibility or liability to a client or to any person or entity with respect to liability, loss or damage caused or alleged to be caused directly or indirectly by any product supplied or any reliance placed on the content of this document. This includes, but is not limited to, any interruption of service, loss of business or anticipatory profits or consequential damage resulting from the use or operation of any products supplied or the content of this document. Information in this document is subject to change without notice and does not represent a commitment on the part of NICE or any Affiliate.

All information included in this document, such as text, graphics, photos, logos and images, is the exclusive property of NICE or in Affiliate and is protected by United States and international copyright laws. Permission is granted to use, view and photocopy (or print) materials from this document only in connection with the products to which this document relates and subject to the terms of license applicable to such products. Any other use, copying, distribution, retransmission or modification of the information in this document without the express prior written permission of NICE or an Affiliate is strictly prohibited. In the event of any permitted copying, redistribution or publication of copyrighted material, no changes in, or deletion of, author attribution, trademark legend or copyright notice shall be made.

Products supplied may be protected by one or more of the US patents listed at www.nice.com/Patents. For the full list of trademarks of NICE and its Affiliates, visit www.nice.com/Nice-Trademarks. All other marks used are the property of their respective proprietors.

All contents of this document are: Copyright © 2025 NICE Ltd. All rights reserved.

For assistance, contact your local supplier or nearest NICE Customer Service Center:

EMEA Region (Europe, Middle East, Africa) Tel: +972-9-775-3800 Fax: +972-9-775-3000 email: support@nice.com	APAC Region (Asia/Pacific) Tel: +852-8338-9818 Fax: +852-2802-1800 email: support.apac@nice.com	North America Tel: 1-800-663-5601 Fax: +201-356-2197 email: na_sales@nice.com	International Headquarters-Israel Tel: +972-9-775-3100 Fax: +972-9-775-3070 email: info@nice.com
The Americas Region (North, Central, South America) Tel: 1-800-6423-611 Fax: +720-264-4012 email: support.americas@nice.com	Israel Tel: 09-775-3333 Fax: 09-775-3000 email: support@nice.com	France Tel: +33-(0)1-41-38-5000 Fax: +33-(0)1-41-38-5001	Hong-Kong Tel: +852-2598-3838 Fax: +852-2802-1800
United Kingdom Tel: +44-8707-22-4000 Fax: +44-8707-22-4500	Germany Tel: +49-(0)-69-97177-0 Fax: +49-(0)-69-97177-200		

NICE invites you to join the NICE User Group (NUG).

Visit the NUG Website at www.niceusergroup.org; and follow the instructions.

All queries, comments, and suggestions are welcome! Please email: nicebooks@nice.com.

For more information about NICE, visit www.nice.com

Overview

This document describes validation procedures necessary to determine that Engage ConnectAPI is configured to support Nexidia Real-Time Grid (RTG).

In these steps, the term *RTG machine* refers to the server where the RTG Telephony Proxy will be installed.

Checklist

Please answer these questions and send the results to Nexidia:

1. What version of Engage is installed? Verify the Engage Version
2. Is Engage Media Encryption enabled? Verify if Engage Media Encryption is Enabled
3. What is the Engage ConnectAPI CN Field Name? Verify the Engage ConnectAPI CN Field Name
4. Is the ConnectAPI WSDL accessible? ConnectAPI Access
5. What is the Engage ConnectAPI Login Method? Engage ConnectAPI Login Method
6. Are the required Engage SQL Server Views accessible? Also send the results of the “Select Top 1000 Rows” queries for the listed views. [Engage SQL Server Access]
7. Is the ConnectAPI application pool recycling disabled? Disable NICE Application Recycling for the ConnectAPI Application Pool

Verify the Engage Version

RTG depends on NICE Engage. Refer to the *Nexidia Real-Time Grid System Requirements* to verify that the Engage version is compatible with RTG.

Verify if Engage Media Encryption is Enabled

Engage media encryption can be enabled to cause AIR loggers to encrypt the NMF recordings of the calls they receive. Enabling media encryption has the side effect of requiring SIP transactions with the AIR loggers to be transacted using TLS. SIP/TLS configuration requires additional RTG Scan configuration. It is therefore important to verify if Engage media encryption is enabled.

1. Log into the NICE Engage Application Suite on the Engage application server.
2. Select Settings→Technician Mode
3. Navigate to Master Site→System Mapping→Recording Profiles
4. Select the Voice Recording Profile
5. If the Encryption checkbox in the lower pane is checked, Engage media encryption is enabled.

Verify the Engage ConnectAPI CN Field Name

Production deployments should enable TLS to secure traffic between applications and Engage ConnectAPI. Once TLS is enabled, applications or browsers must use the exact name of the Engage application server specified in the CN field of the SSL certificate used in the IIS hosted on the Engage application server. Determine the CN field using the following steps.

1. Log onto the Engage application server
2. Open IIS manager
3. Select the server connection, which should be the first entry under “Start Page.”
4. Select “SSL Certificates”
5. Select the certificate used by ConnectAPI
6. In the right pane, select “View.”
7. Select the Certificate’s Details tab
8. Select the Subject field. The CN field will be in the bottom pane of the Details tab.

ConnectAPI Access

In a browser running on the RTG machine, navigate to the address of the Engage ConnectAPI Events Service WSDL. The address of the Engage ConnectAPI server will be the CN field name (above). The URL of the WSDL will be of the following format:

"https://<address of Engage application server>/NICEConnectAPI/Events.svc?wsdl"

If access is successful, the resulting page will contain XML similar to this:

```

- <wsdl:definitions name="EventsService" targetNamespace="http://tempuri.org/">
- <wsp:Policy wsu:Id="IDuplexEvents_Websocket_SOAP_Endpoint_policy">
- <wsp:ExactlyOne>
- <wsp:All>
- <sp:TransportBinding>
- <wsp:Policy>
- <sp:TransportToken>
- <wsp:Policy>
- <sp:HttpsToken RequireClientCertificate="false"/>
- <wsp:Policy>
- <sp:TransportToken>
- <sp:AlgorithmSuite>
- <wsp:Policy>
- <sp:Basic256/>
- <wsp:Policy>
- <sp:AlgorithmSuite>
- <sp:Layout>
- <wsp:Policy>
- <sp:Strict/>
- <wsp:Policy>
- <sp:Layout>
- <wsp:Policy>
- <sp:TransportBinding>
- <wsaw:UsingAddressing/>
- </wsp:All>
- </wsp:ExactlyOne>
- </wsp:Policy>
- </wsp:Policy wsu:Id="IEventsService_SOAP_Endpoint_policy">
- <wsp:ExactlyOne>
- <wsp:All>
- <sp:TransportBinding>
- <wsp:Policy>
- <sp:TransportToken>
- <wsp:Policy>
- <sp:HttpsToken RequireClientCertificate="false"/>
- <wsp:Policy>
- <sp:TransportToken>
- <sp:AlgorithmSuite>
- <wsp:Policy>
- <sp:Basic256/>
- <wsp:Policy>
- <sp:AlgorithmSuite>
- <sp:Layout>
- <wsp:Policy>
- <sp:Strict/>
- <wsp:Policy>
- <sp:Layout>
- <wsp:Policy>
- <sp:TransportBinding>
- </wsp:All>
- </wsp:ExactlyOne>
- </wsp:Policy>
- <wsdl:import namespace="ConnectAPI.EventsService/Operations/Duplex" location="https://smb-ws-2012-r2.ifast-talk.com/NICEConnectAPI/Events.svc?wsdl=wsdl0"/>
- <wsdl:import namespace="ConnectAPI.EventsService/Operations" location="https://smb-ws-2012-r2.ifast-talk.com/NICEConnectAPI/Events.svc?wsdl=wsdl1"/>

```

Coloration and formatting may vary, and will depend on the browser used.

If the browser shows a very different page or error, there is a configuration problem that must be fixed prior to configuring RTG. Engage ConnectAPI must be configured by an Engage Deployment Engineer.

Engage ConnectAPI Login Method

The Telephony Proxy Service must run as a user with the Windows permission to "Log on as a Service." This user account must be configured before attempting to determine the ConnectAPI login method. Once the user account has been configured, Curl usage is the preferred method for determining the ConnectAPI login, because Curl can be used as described below without installing anything permanent on the RTG machine.

Download and Prepare Curl

1. Download curl from here: https://curl.haxx.se/windows/dl-7.61.1_6/curl-7.61.1_6-win64-mingw.zip
2. Log onto the RTG machine [sub.mindtouch.us/Nexidia Analytics and Data Exchange Framework/NXQC 12.5/Grid Documentati...](https://sub.mindtouch.us/Nexidia_Analytics_and_Data_Exchange_Framework/NXQC_12.5/Grid_Documentation)

Updated: Thu, 30 Apr 2026 18:12:55 GMT

3. Extract Curl and copy the extracted folder to the RTG machine. When the ConnectAPI login method has been determined, the Curl folder can be deleted.
4. Use Windows File Explorer to Navigate to the bin directory in the Curl folder on the RTG machine
5. Click in the File Explorer address field, and type "cmd", which will open a command prompt.
6. Execute "curl --help" to verify that curl can execute on the RTG machine.

Determine the ConnectAPI Login Method

1. Run each of the following commands in the command prompt, substituting the Engage application server, and RTG service user and password for the ExampleAccount user, examplepassword, and EXAMPLE-DOMAIN below.
 - **ClientLogin:** curl -v -k -H "Content-Type: application/json;charset=utf-8" -X POST "https://<address of Engage application server>/NICEConnectAPI/Login.svc/Rest/ClientLogin" -d '{"OsLogin":{"ExampleAccount"},"Password":{"examplepassword"}}'
 - **ClientLoginWithDomain:** curl -v -k -H "Content-Type: application/json;charset=utf-8" -X POST "https://<address of Engage application server>/NICEConnectAPI/Login.svc/Rest/ClientLoginWithDomain" -d '{"OsLogin":{"ExampleAccount"},"Password":{"examplepassword"},"Domain":{"EXAMPLE-DOMAIN"}}'
 - **ClientLoginSSO:** curl -v -k --ntlm -u ExampleAccount -H "Content-Type: application/json;charset=utf-8" -X POST "https:// ://<address of Engage application server>/NICEConnectAPI/Login.svc/Rest/iwa/ClientLoginSSO" -d ""
 - Enter the password when prompted

TIP

The address of the Engage application server must exactly match the name used in the CN field of the SSL certificate. see Verify the Engage ConnectAPI CN Field Name

One of the login methods above should succeed, and display something similar to the output below in the command prompt.

```
{"Result":{"ResultCode":1,"ResultMessage":"Success"},"Value":{"LoginToken":"1_d5857080-a538-4acf-ad71-32578e99a15a"}}
```

If more than one login method succeeds, configure the Telephony Proxy Service to use the most secure login method available. The order of relative security, from lowest to highest, is ClientLogin, ClientLoginWithDomain, and ClientLoginSSO.

If none of the login methods succeeds, Engage ConnectAPI login must be configured by an Engage Deployment Engineer.


Disable NICE Application Recycling for the ConnectAPI Application Pool

Engage ConnectAPI is a WCF service hosted by IIS on the Engage application server. By default, IIS will recycle any application pool every 1740 minutes, i.e. 29 hours. The ConnectAPI Application Pool recycle will cause the Telephony Proxy Service to temporarily lose its connection to Engage ConnectAPI, and thereby temporarily stop receiving call-related events.


If the recycle occurs, Telephony Proxy Service will restart and recover in approximately 30 seconds. During this time no call events will be received.

To prevent the Engage ConnectAPI application pool from recycling, the Engage MCR team recommends disabling ConnectAPI recycling in IIS. Steps to disable recycling:

- 1. open IIS Manager
- 2. In the Connections pane, select Application Pools
- 3. In the Application Pools pane, select the application pool for NICEConnectAPIPool, and then click Advanced Settings in the Actions pane
- 4. In the Advanced Settings window, expand Process Model, and change the Idle Time-out (minutes) value to 0

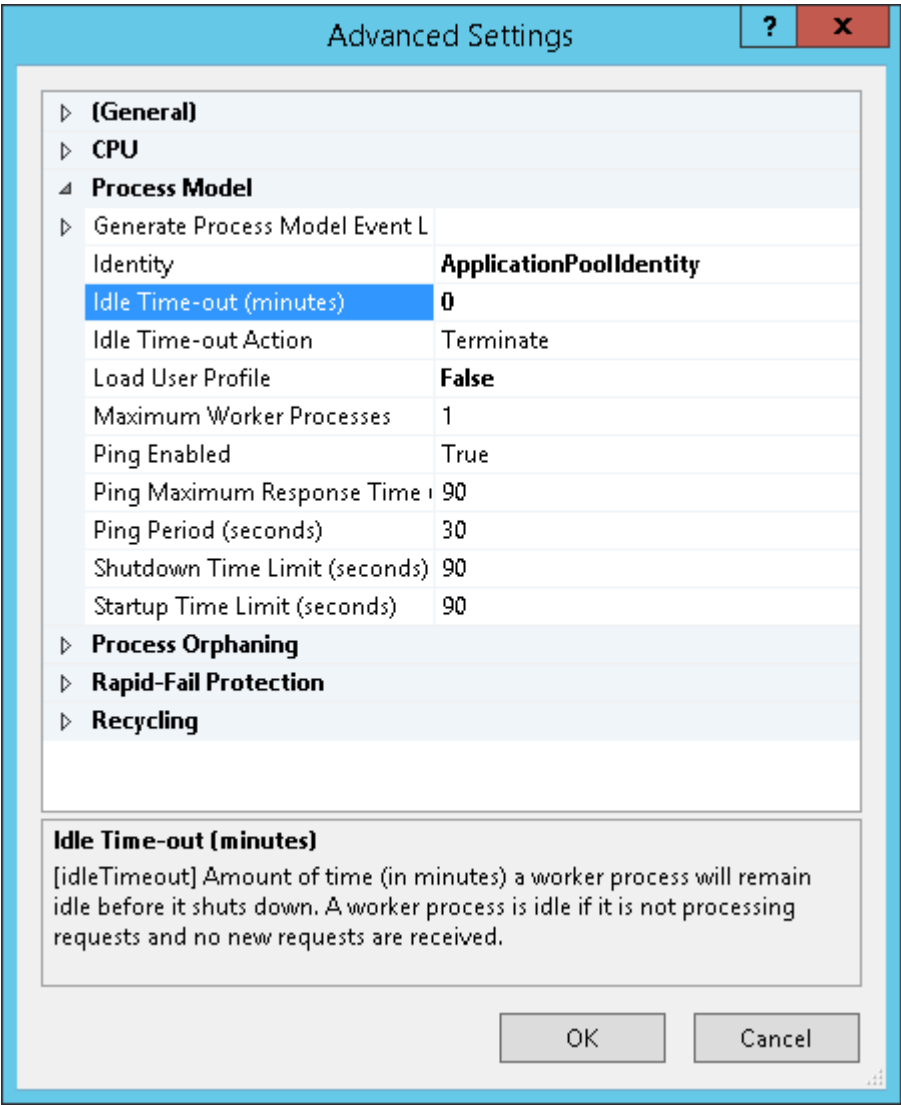

- 5. Expand Recycling, and change the Regular time intervals (in minutes) value to 0

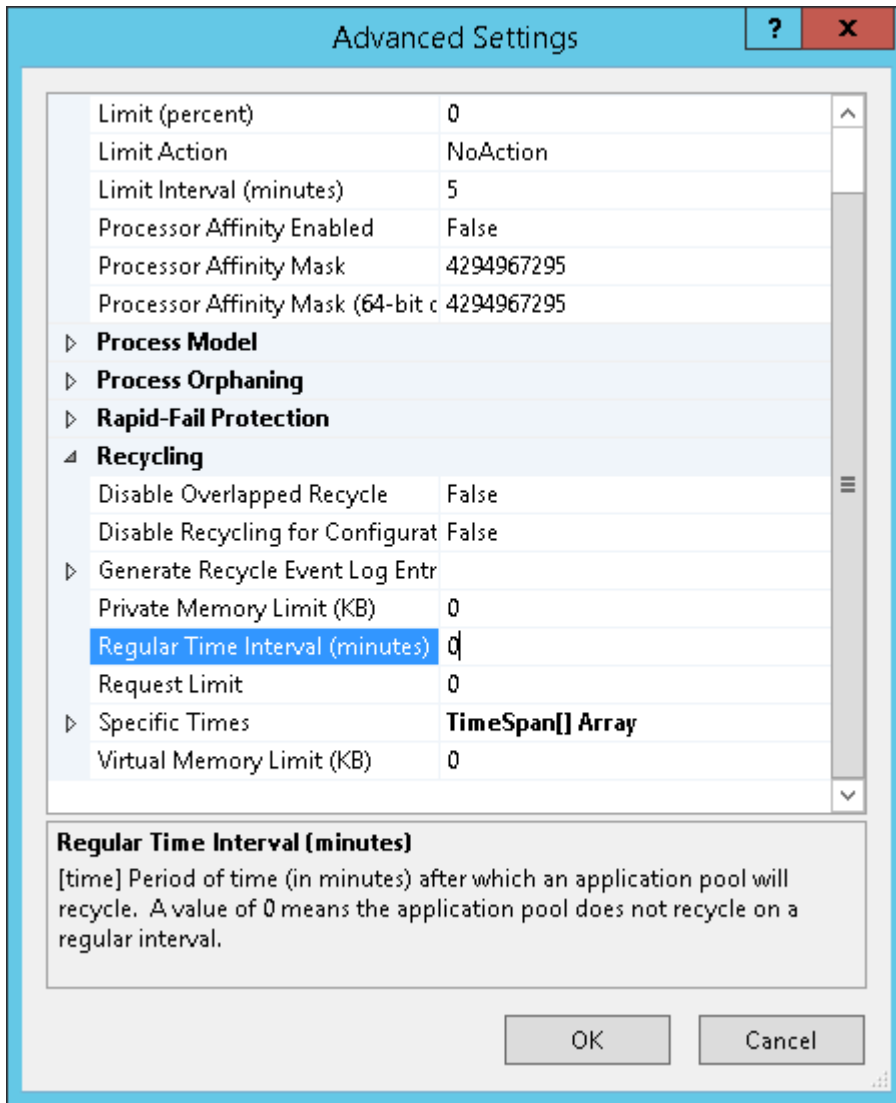

6. Click OK

Engage and Engage ConnectAPI should be configured by an Engage Deployment Engineer.

TIP

NICE Engage documentation, including ConnectAPI documentation, is available in ExtraNICE, and requires an ExtraNICE account for access.