

DEF Fundamentals v12.5 – Exercise Book

Contents

DEF Fundamentals v12.5 FP1 – Exercise Book	1
Environment	2
1 – Install the NEAT Server.....	2
2 – Install the NEST Server.....	3
3 - Building a Process	4
4 – Running a Process.....	4
5 – Import File Key Column.....	5
6 – File Mover Part 1	5
7 – File Mover Part 2	6
8 – Parameterized Folder	6
9 – Import Metadata & Audio Files from the Customer System	6
10A - IA Data	9
10B - IA Data	11
11 - Stitch Action.....	12
12 – Engage Hierarchy Import	16
13 – Generate Protected Key (GPK).....	19
14– Key Extraction.....	22
15 – Load Key & NMF Decryption.....	24
16 – Error Message	27
17 – Chat Interactions (Optional)	29
18 – Extract and Prepare Engage Screens(Optional)	29
.....	38

This course covers many of the common procedures a Professional Services Engineer will employ. This includes installing and configuring the Data Exchange Framework. The Exercises are setup using a Statement of Work or Service Request. Use this workbook as the guide for the steps outlined in the course book for each procedure. In addition, you will want to use the latest “Data Exchange Framework Installation Guide” and “Using Data Exchange Framework” Installation Guides to assist in completing each task.

Environment

1. Verify that each student has the following servers as part of their group

Details	Value
Server Components	Hostname
NIA Apps Server	NIA
DB Server – NIA and DEF	NXDB1
DEF Server	NEAT1
DEF Server	NEST1
Engage Apps Server (Engage 7.4)	APPS1

DEF Login Information:

DEF URL: <http://localhost:30000/#/login>

User Name:admin

Password: 4dm1n

1 – Install the NEAT Server

1. Navigate to the D:\ drive and create a new folder named “SharedComm” – This will be used for heartbeat communication to the NEST servers. Create the share permissions and give the niceservices account read/write access.
2. Locate the DEF software (D:\nicetech)
3. Navigate to that directory “D:\Program Files\NEAT\Data Exchange Framework” and create a new folder named “DEF Data”. **NOTE: In a customer system, you would create the NEAT folder manually and extract the DEF installation zip file to this folder.**
4. Go to the Install folder and execute Install.bat (run as administrator)
5. Follow the prompts and use the following options:
 - a. Use embedded JRE – Yes
 - b. Server Type – NEAT / File System
 - c. Database type – SQL with Integrated Auth (ignore the SQL version)
 - d. Database Host – NXDB1

- e. Database Name – NEAT
 - f. Create Database – Selected
 - g. Database log path - Leave blank
 - h. Service account – nicetraining\niceservices, pwd – nicecti
 - i. Path to Data Folder – Browse to the DEF Data folder you created step 3.
 - j. Configure Server - NEAT/File
 - i. Service Name Suffix – NEAT (This will be added to the service name in windows and cannot be blank. This will help to identify the service when multiple DEF services are installed on the same machine).
 - ii. Leave all other defaults
 - k. Check the box to disable TLS 1.0/1.1
 - l. Installation Complete – wait for the button “Click here to launch DEF Admin Tool” is enabled. Click the button to open the admin tool and close the install wizard.
 - m. DEF UI will open in the browser.
6. The New System Wizard will start. Use the following options:
- a. Company – any name you choose
 - b. Site Name – any name you choose
 - c. File System Comms Path - \\NEAT1\\SharedComm
 - d. File System Comms Username – nicetraining\niceservices
 - e. File System Comms Password – nicecti
 - f. Server Name – NEST
 - g. Communication Directory - /nest (DEF will create this directory in the SharedComm folder)
 - h. Process – We will NOT create a process yet, click next and finish the wizard
 - i. Navigate to your NEST server and note the Server ID – you will need this when you install NEST

2 – Install the NEST Server

1. Navigate to NEST1. Navigate to “D:\Program Files\Data Exchange Framework” and create a new folder named “DEF Data”.
2. Go to the Install folder and execute Install.bat (run as administrator)
3. Follow the prompts and use the following options:
 - a. Use embedded JRE – Yes
 - b. Server Type – NEST / File System
 - c. Database type – SQL with Integrated Auth (ignore the SQL version)
 - d. Database Host – NXDB1
 - e. Database Name – NEST
 - f. Create Database – Selected
 - g. Database log path - Leave blank

- h. Service account – nicetraining\niceservices, pwd – nicecti
- i. NEST Service Name Suffix - NEST
- j. NEST Server ID – enter the ID you noted during the NEAT install
- k. File Comms Path - \\NEAT1\SharedComm\nest
- l. File Path Username – nicetraining\niceservices
- m. File Path Password – nicecti
- n. Disable TLS 1.0 / 1.1 – Check the box to disable
- o. When the installation completes, click OK to close the wizard

3 - Building a Process

Statement of Work:

The purpose of this exercise is for students to become familiar with different actions and resources. Additionally, students will gain experience using the process designer tool.

Please create a short process that copies the test-001.csv from a local folder that you create (you need to create the folder) as a resource and transfer the metadata into a Working Table. Make sure that the test-001.csv file will NOT be deleted from the input folder at the end of the process.



Do not set any value as a Key Column. The necessary files needed for this exercise are located on the NEAT1 server

Review Question #1

Which action will you use for this process?

Review Question #2

What is the Working Table key?

4 – Running a Process

Statement of Work:

The customer has a new metadata file test-002.csv.

Run the process you created in the previous exercise using test-002.csv as an input.

Copy the file from D:\nicetech\Metadata Input Files and place it in the input folder



Do not delete the Working Table before you run the process.

Review Question #1

How many records were added to the Working Table (no key defined)?

5 – Import File Key Column

Statement of Work:

The customer forgot to let you know that the files should be imported with a unique key identifier: ExternalInteractionId column. Modify the metadata import action, save publish, and launch the process. This should be the key for both files (test-001.csv and test-002.csv). Run the process again using this key.



Do not delete the Working Table before you run the process.

Review Question #1

How many records were added to the Working Table (no key defined)?

6 – File Mover Part 1

Statement of Work:

Change the process you created in Exercise 5 to use the File Mover action. Move the WAV files to a new output folder. Identify the column in the metadata that holds the absolute path to the WAV files. In the 'file mover' configuration action window, set the "file path column name" to this value.

Set the File mover action to process files from metadata.



In the 'file mover' configuration action window, set the "Delete inputs after move" parameter to false.

Review Question #1

What will be the File Mover input resource?

7 – File Mover Part 2

Statement of Work:

Create a copy of the process you used in Exercise 6. Delete all files in the “audio out” folder.

Identify the column that holds the files’ names and use them to move the WAV files.

At the 'file mover' configuration action window, set the “file path column name” to this value.



In the 'file mover' configuration action window, set the "Delete inputs after move" parameter to false.

Review Question :

What will you set for the path field of the File mover input resource?

8 – Parameterized Folder

Statement of Work:

Modify the process from exercise 7, apply relevant changes to organize the output folder by the department.



Be sure to clear the contents of the “audio out” folder and drop the working table.

Review Question :

What are the departments, and how many interactions exist in each folder?

9 – Import Metadata & Audio Files from the Customer System

Statement of Work:


You need to Import interaction metadata and audio files from the customer’s system.

Connection details to the customer DB:

Data Source Name	Training lab Connection URL
NICE Interactions	Follow the wizard to complete the JDBC connection details: Driver Type – SQL Server Host Name – db1

	Instance Name - <leave blank> Port Number - <leave blank> Database Name – nice_interactions Integrated Security - enabled This will create the following JDBC Connection: jdbc:sqlserver://db1;databaseName=nice_interactions;integratedSecurity=true; Username – nicetraining\niceadmin PW - nicecti Append DEF Certificate - True
--	--

File system Name	Sample File System Path	File System Description
Engage Archive	\\APPS1\Storage	The location of the Engage Archive

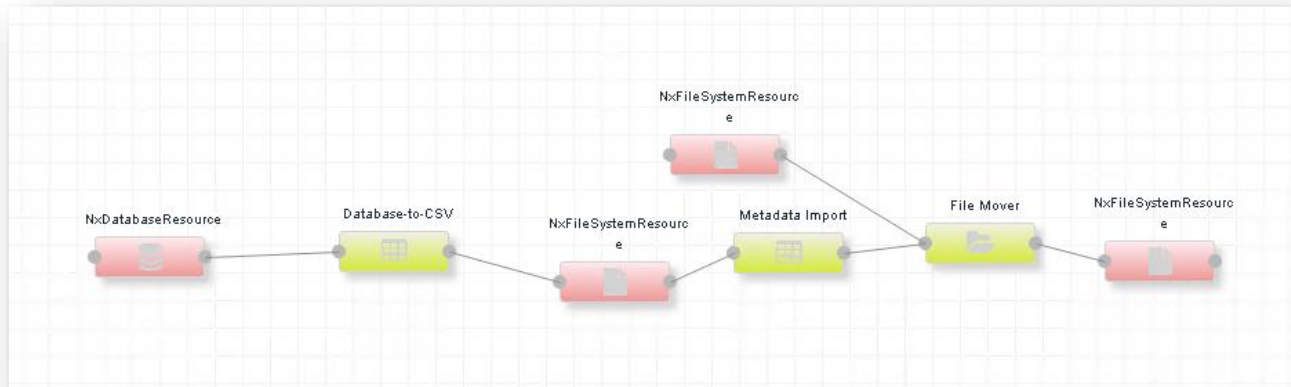

1. Create a new process named EX9
2. **SQL query to use**: copy the query to the database to CSV action

SELECT

ID.iInteractionID,ID.dtInteractionLocalStartTime,ID.dtInteractionLocalStopTime,ID.biInteractionDuration,SC.vcArchivePath

FROM [nice_interactions].[dbo].[tblInteraction01] ID

INNER Join [nice_storage_center].[dbo].[tblStorageCenter01] SC ON ID.iInteractionID = SC.iInteractionID

Note: You can also find the query in the following location:

NEAT1 server D:\nicetech\SQL Queries\ Exercise 9.txt

3. In the metadata import action, set the key column to be the iInteractionID column.
4. The column that contains the path to the audio file is vcArchivePath which is Partial path to the audio location



In the 'file mover' configuration action window, set the "Delete inputs after move" parameter to false.

Action - File Mover

[Edit](#)
[Properties](#)
[Labels](#)
[Logs](#)

Process files from metadata	true	?
File filter	*.*	?
File path column name	vcArchivePath	?
Flatten output directory structure	false	?
Treat missing files as errors	false	?
Overwrite existing output files	true	?
Fail if no files moved	false	?
Delete inputs after move	false	?

Review Question :

What action will you use to import the Metadata?



The path to the audio file is not the absolute path. You need to add the archive location to get the absolute path: \\apps1\Storage


10A - IA Data

Statement of Work: Create a process that extracts audio + metadata from Engage and transfers it to the Nexidia server. The production media folder should contain an NMF File and an XML file with the metadata.



\\Nexidia\ProductionMedia


1. Create a new process and import the Base.JSON file located under NEAT1: D:\nicetech\JSON file as a starting point to your process.
2. Set the Quantum Lower date bound to December 30, 2024.
3. Start by creating and assigning the relevant resources for the template. The resource pink color indicates that it is not assigned. **NOTE: You can re-use resources that you've already created (for example, the Engage DB). Simply delete the resource from the template and replace it with the resource you want to re-use. Just be aware that any changes you make to the shared resource will affect that resource in other processes!**
4. The Database-to-CSV action already contains the appropriate SQL query for this exercise.
5. Add a new action, Metadata Mapping and Export to create the associated XML file for each NMF file. The XML file will be placed in Production Media along with the NMF file.

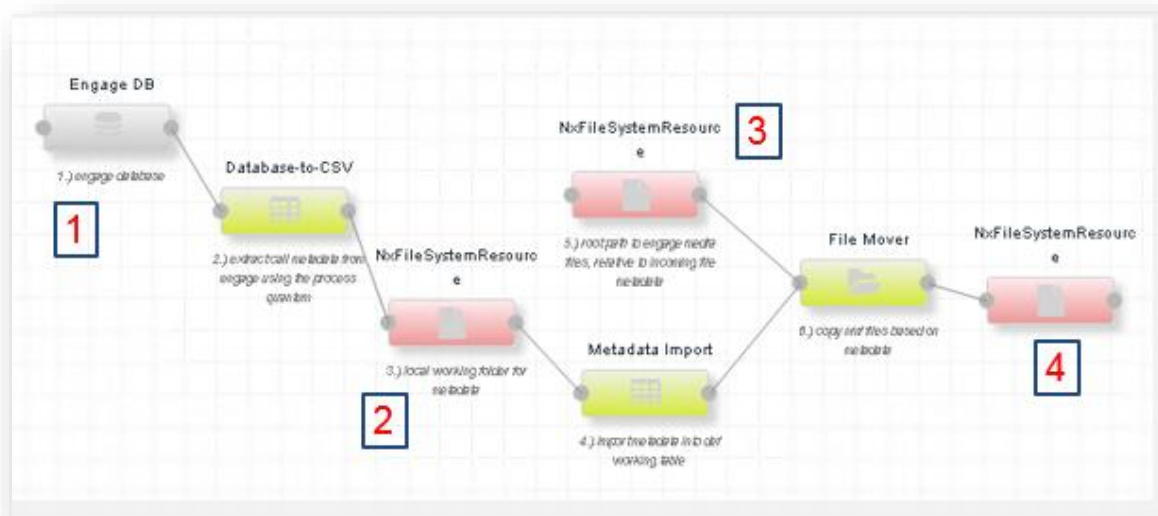


File system Name	Sample File System Path	File System Description
Input CSV 2	E:\Input CSV	Stores the metadata CSV files after the extraction query
Audio Path 3	(empty, dummy file)	Dummy root path to Engage media file
Production Media 4	\\NIA\Production Media Username – nicetraining\niceservices PW - nicecti	
Training lab Connection URL		
NICE Interactions 1	jdbc:sqlserver://db1;databaseName=nice_interactions;integratedSecurity=true;	

10B - IA Data

Statement of Work: Create a process that extracts audio + metadata from Engage and transfers it to the Nexidia server. The production media folder should contain an NMF File, and the metadata should be inserted to the Inbox table.



[\\Nexidia\\Production Media](#)




Inbox Table

NOTE: Delete the files in the \\NIA\\Production Media folder before you begin.

1. Copy the process you created in Exercise 10a. Rename the process to Ex10b and set the same value for the Process Group.
2. Remove the Metadata Mapping and Export action. You will use the Inbox Publisher action for this exercise.
3. Create a new database resource for the NexidiaESI database using the details below.

Data Source Name	Training lab Connection URL
Nexidia ESI (location of the Inbox table)	Follow the wizard to complete the JDBC connection details: Driver Type – SQL Server Host Name – nxdb1 Instance Name - <leave blank> Port Number - <leave blank> Database Name – NexidiaESI Integrated Security – enabled This will create the following JDBC Connection: jdbc:sqlserver://nxdb1;databaseName=NexidiaESI;integratedSecurity=true; Username – nicetraining\niceadmin PW – nicecti Append DEF Certificate - true

4. Add the Inbox Publisher action as the output from the File Mover. It will then be the input to the NexidiaESI database. An example of the process is below:

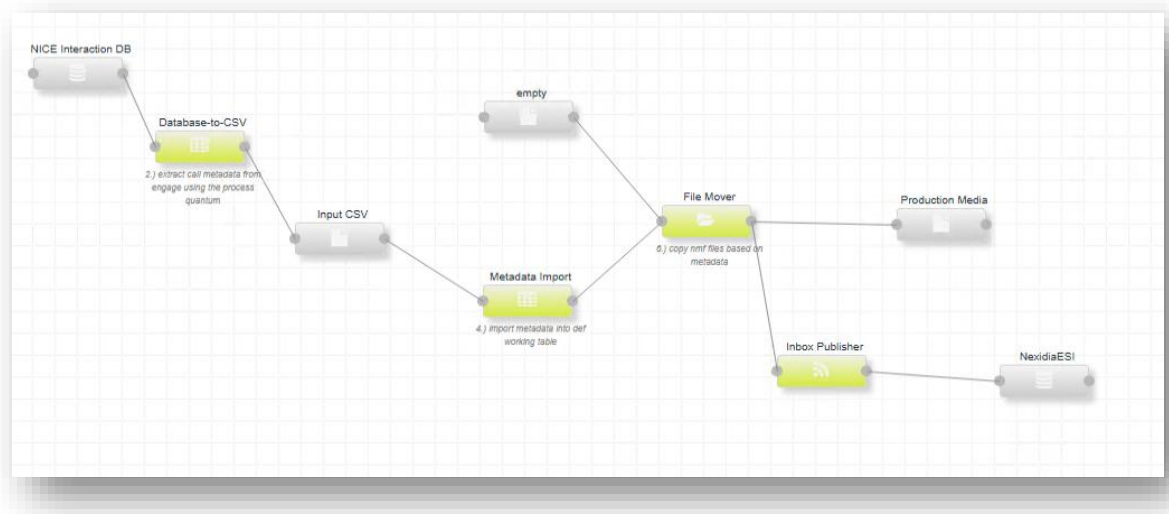

11 - Stitch Action

Statement of Work: Create a process that extracts audio files and metadata from Engage. Place the audio files in the Nexidia Production media folder and metadata into the Nexidia inbox table.

Note: the calls in this site are comprised of several segments, you will need to stitch the calls

1. Delete the files in the \\NIA\Production Media folder.
2. Delete the Inbox table you can find the deletion command located under NEAT1:
D:\nicetech\SQL Queries\Delete inbox.txt
3. Create a new process and set the Quantum Lower date bound to **December 30, 2024**.
4. The process should do the following:

Import Metadata from Engage

Import Audio from Engage

Stitch Audio Files

Move the stitch audio to Nexidia

Insert metadata to the Inbox tbl

5. You can find the Engage SQL query located under NEAT1: D:\nicetech\SQL Queries\Engage query.txt
6. In the Metadata import action set the import file key column to MediaFilePath
7. Set the parameters for the file mover action to look like the parameter in the below screenshots:
 - File path column name: MediaFilePath - This is the absolute path to the audio files.
 - Flatten the output directory – true
 - Delete inputs after move - false
 - Capture ExternalMediaId metadata during move – false

Action - File Mover

[Edit](#)
[Properties](#)
[Labels](#)
[Logs](#)

File path column name	MediaFilePath	?
Flatten output directory structure	true	?
Treat missing files as errors	true	?
Overwrite existing output files	true	?
Fail if no files moved	false	?
Delete inputs after move	false	?
Capture ExternalMediaId metadata during move	false	?
Gets and sets dispositions	true	?

8. Set the following parameters in the Stitch action. (Only the change the parameters listed below. All values are case sensitive):
 - Media File Type - NMF
 - Call ID column name: iCompoundId
 - Segment ID column name: SegmentId
 - Segment sequence column name: SegmentSequence
 - Delete Segments after Stitching – false

Delete

Close

Edit

Properties

Labels

Logs

Media file type	NMF	
Stitching method	Sequence	?
Call duration correction	None	?
Call ID column name	iCompoundId	?
Segment ID column name	SegmentId	?
Segment sequence column name	SegmentSequence	?
Delete segments after stitching?	false	
Failure Threshold	0	?

Submit


9. Set the second file move action as follows:

- Process files from metadata – false
- Flatten output directory – true
- Delete inputs after move – false
- Capture ExternalMediaId Metadata during move – true (This is necessary since this file move will move the media to the final location).

Connection details to the customer DB and needed input and output resources:

Data Source Name	Training lab Connection URL
Nice Interactions 1	jdbc:sqlserver://db1;databaseName=nice_interactions;integratedSecurity=true;
Nexidia ESI (Inbox table location) 6	jdbc:sqlserver://nxdb1;databaseName=NexidiaESI;integratedSecurity=true;
Production Media 5	\\NIA\Production Media

File system Name	Sample File System Path	File System Description
Input CSV 2	E:\InputCSV	Stores the metadata CSV files
Engage Segment 3	E:\Engage Segment	Store the segments of the calls imported from Engage
Stitched Engage Audio 4	E:\Stitched Engage Audio	Store the Stitched audio

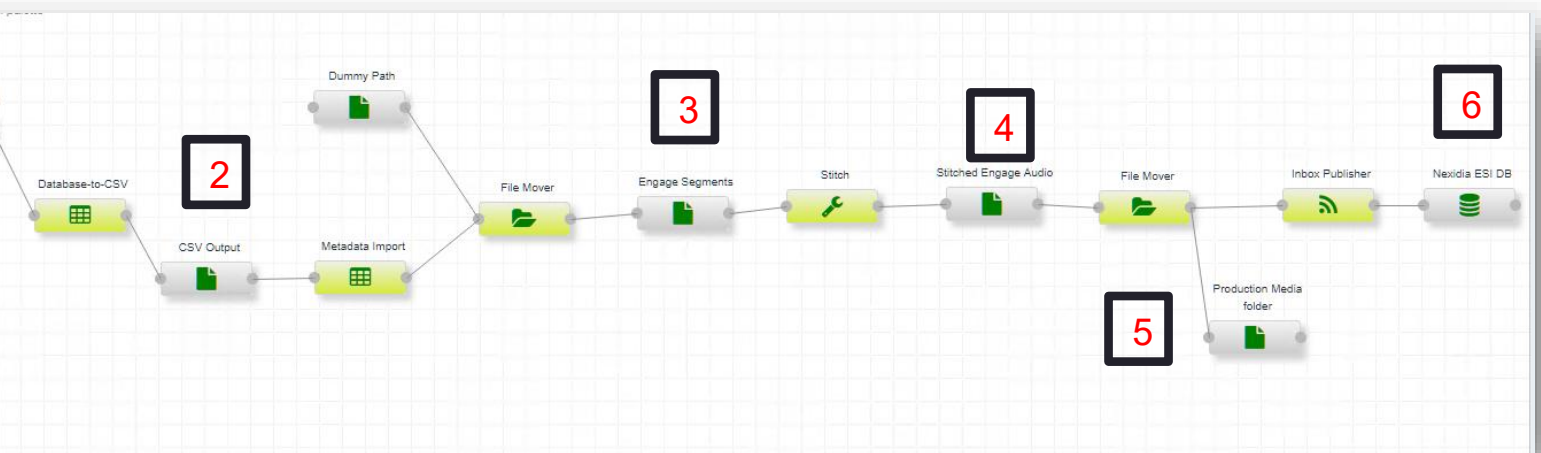

12 – Engage Hierarchy Import


Statement of Work: The purpose of this exercise is for the students to become familiar with the Engage Hierarchy Import.

Before you begin:

Make sure the Nexidia services are up and running on the NIA server.

Exercise Instructions:

1. Create a new process that runs every day. Import the Engage - Import Hierarchy Agent and User (V2) to Nia Rev B.JSON file located on NEAT1, D:\nicetech\JSON File. Set the process group name "hierarchy_import".
2. Create and assign the relevant input and output resources

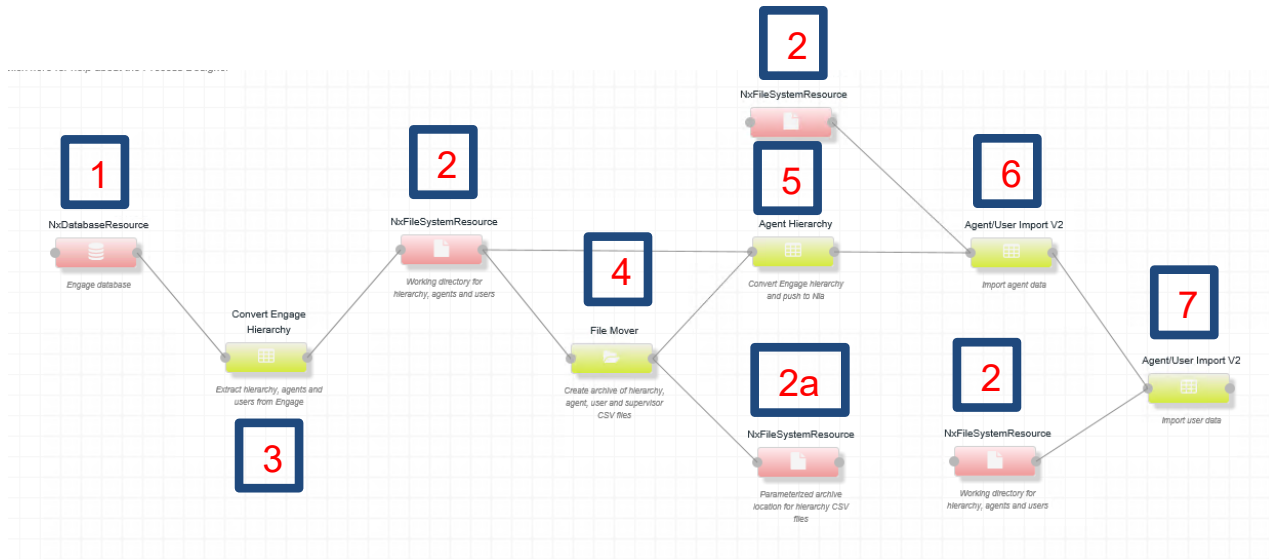


Data Source Name	Training lab Connection URL	
Nice Admin DB 1	jdbc:sqlserver://db1;databaseName=nice_admin;integratedSecurity=true;	
Resource Name	Sample File System Path	File System Description
Hierarchy CSV 2	E:\HierarchyCSV	Local working folder for the hierarchy CSV data files
Hierarchy Archive 2a	E:\HierarchyArchive	Temporary storage for the Hierarchy CSV for archival purpose

3. Convert Engage Hierarchy Action. Change the parameter below and leave all others at the default settings:
 - a. Integrated Authentication - false
4. File Mover:
 - b. File filter – change to *.csv (the entered value is *.CSV and is an invalid filter that will cause the action to fail).
5. Agent Hierarchy Action
 - c. Host Name – nia
6. Agent / User Import Action v2
 - d. Flow – Agent
 - e. Host Name – nia
7. Agent / User Import Action v2
 - f. Flow – User
 - g. Host Name – NIA
8. Save, Publish and Launch the process.
9. From NIA, login to the NIA Application (username – superuser, pw – password)
 - h. Go to Administration >> Hierarchy and confirm the hierarchy has been imported
 - i. Go to Administration >> Security >> Users and confirm the users have been imported
 - j. Go to Administration >> Agent Inventory and confirm the agents have been imported

13 – Generate Protected Key (GPK)

Customer Site Map



Install a second NEST server for Key Extraction:

In order to implement the Encryption Process, we will need to install a second NEST server. We will install a NEST server on NEAT1 (This will be the Extraction Server).

1. Login to NEAT and navigate to Servers >> NEST
2. Click Edit and modify the name of the server to “NEST Decryption Server (NEST1)”. Click Submit.
3. Add a new server named “NEST Extraction Server (NEAT1)”. Set the communication directory to “/extraction_server”. Click Submit and make note of the Server ID.
4. Navigate to D:\Program Files\NEST Extractor\Data Exchange Framework and create a new folder “DEF Data”.
5. Navigate to the Install folder and run Install.bat as an administrator. Install NEST/File System
6. When prompted enter the database name “extraction_server”

Initial Setup:

The NEST (worker) server that will run the Key Extraction action must have a self-signed certificate manually created as a preliminary step.


Generate the self-signed certificate on the Key Extraction Worker server with the Java keytool utility. Make a note the Keystore location, password, and alias name.

1. **Login to the Extractor server (NEAT1)**
2. You can find the relevant command for the Keystore creation at the **keystore.txt** file located at **D:\nicetech**.
3. Open a CMD prompt with admin privileges. Type D: to change to the D:\ drive.
4. Execute commands 1, 2 and 3 separately. After the third command you will be prompted to enter a password, enter nicecti. Follow the prompts:
First and Last name enter: **NICE**
When prompted for the organizational unit enter: **Training**
When prompted for the organization enter the division: **Training**
Enter your home City, State, and 2-digit Country code, i.e. for United States, enter **US**
5. Enter y to validate the info you provided, and press enter
6. Enter the password for the KeyStore Alias – password is nicecti
7. Navigate to D:\DEF File System\Extraction Key Store and validate the file ExtractionkeyStore.ks was created. This is the KeyStore.
8. Execute command 4. Enter the password nicecti. You will now see a certificate named ExtractCert.cer located in the Key Store folder.


- Copy ExtractCert.cer to the decryption server (NEST1). Place it in E:\Extraction Server Cert (You will need to create this folder).

Statement of Work: The purpose of this exercise is for the students to become familiar with the encryption templates.

- Login to the DEF UI on the NEAT1 server
Under the NEST (Decryption Server NEST1) branch, create a new process that runs every day. Import NICE Decryption - Generate Protected Keys Rev H.json from D:\nicetech\JSON file\Encryption JSON.

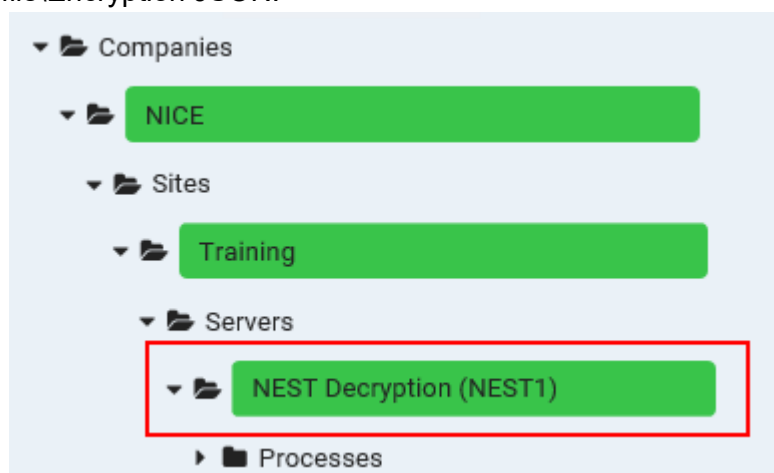

- Delete the engage audit action and the associated DB resource
- Create the folder manually where the GPK action would install the Keystore.
Login to NEST1 and navigate to the D:\ drive and create a new folder named GPK KeyStore (D:\GPK Keystore)
- Create and assign the relevant input and output resources

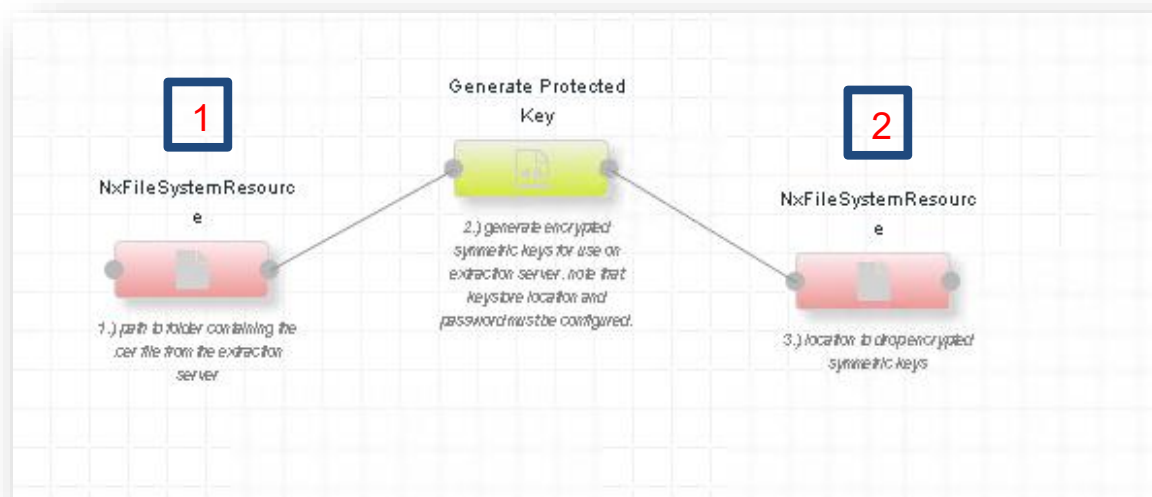

File system Name	Sample File System Path	File System Description
Extraction Server Certificate	E:\Extraction Server Cert (Created manually by you when the cert was copied over)	This will contain the certificate that was created on the Extraction Server and copied to the Decryption Server.
Symmetric Key	E:\Symmetric Key (DEF will create this folder on the NEST1 server) NOTE: Share this folder to the niceservices account with read/write permissions.	The location of the symmetric key that is generated by the GPK action

- In the “Generate Protected Key” action Enter the path to the location where the GPK action would install the Keystore and the Keystore name
D:\GPK_keystore\GPK_keystore.ks
- Enter the Keystore password: nicecti

Action - Generate Protected Key

Delete Close

Edit Properties Labels Logs

Process files from metadatafalse?

File filter*.cer?

Keystore locationD:\GPK_keystore\GPK_keystore.ks?

Keystore password.....

Delete certificate files after processingfalse?

Failure Threshold0?

Submit


Show AdvancedFields in bold are required

7. Save, publish, and launch the process.
8. Verify the symmetric keys were created (on NEST1 server)


14– Key Extraction

Statement of Work: The purpose of this exercise is for the students to become familiar with the encryption templates.

1. Login to the DEF UI on the NEAT1 server
Under the Extraction server branch, create a new process that runs every day. Import the "NICE Decryption – Key Extraction RevH.json" from D:\nicetech\JSON file\Encryption JSON

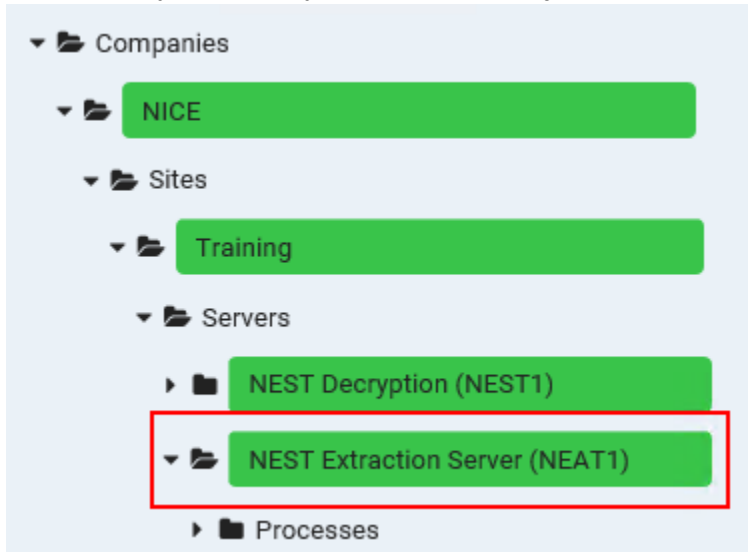

2. Click in the “View Quantum” tab, **Set the Quantum** Lower date bound to April 1, 2025. Click OK then **submit**.
3. Delete the engage audit action and the associated DB resource
4. Create and assign the relevant input and output resources

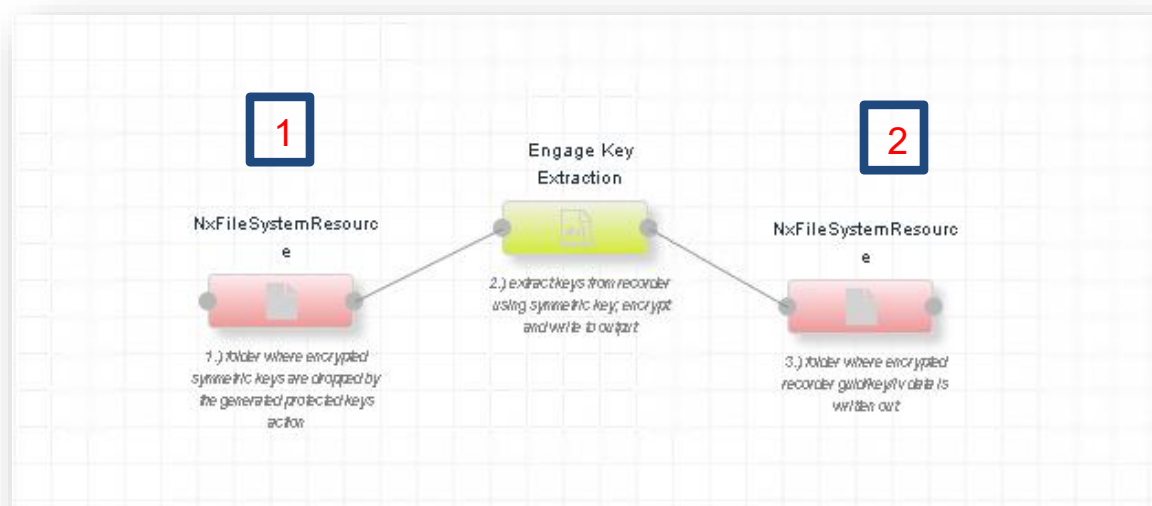

File system Name	Sample File System Path	File System Description
Symmetric Key 1	\\NEST1\Symmetric Key NOTE: This folder needs to be shared with the niceservices account with read/write permissions.	The location of the symmetric key that is generated by the GPK action
Encrypted CSV 2	E:\Encrypted CSV (DEF will create this folder on the NEAT1 server) NOTE: Add share permissions to the niceservices account with read/write permissions.	The location of the encrypted CSV files

- In the “Key Extraction” action enter the path and the name of the Keystore that is installed on the Extractor server:
 - Database Connection
jdbc:sqlserver://db1:1433;databaseName=nice_crypto;integratedSecurity=true
 - Keystore Location - D:\DEF FILE SYSTEM\Extraction Key Store\ExtractionkeyStore.ks
 - Keystore password: nicecti
 - Keystore alias – ExtractAlias

Action - Engage Key Extraction



Delete Close

Edit Properties Labels Logs

NICE crypto database connection string

jdbc:sqlserver://db1:1433;databaseNar

?

Keystore location

D:\DEF FILE SYSTEM\Extraction Key Sto x

?

Keystore password

.....

?

Keystore alias

ExtractAlias

?

Logger Identifiers

?

Failure Threshold

0

?

Submit

Show Advanced

Fields in bold are required

15 – Load Key & NMF Decryption


Statement of Work: The purpose of this exercise is for the students to become familiar with the encryption templates.

1. Login to the DEF UI on the NEAT1 server
2. Under the Decryption server branch, create a new process that runs every day, choose to use the "NICE Integration Base Template – Load Keys RevH.json" template found in D:\nicetech\JSON File.



3. Set the Quantum Lower date bound to April 1, 2025
4. Edit the template - In Design mode right click on the design area and add the 'Engage NMF Decrypt' action and two file system resources to connect as an input and output the 'Engage NMF Decrypt' action

Click to display the floating tool palette

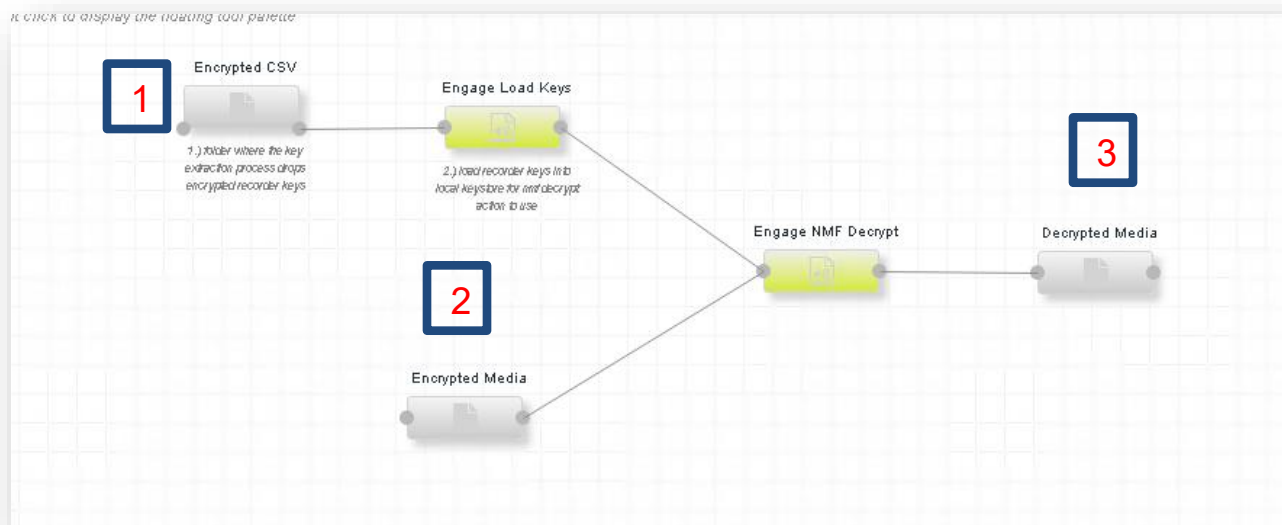

File system Name	Sample File System Path	File System Description
Encrypted CSV 1	\\neat1\Encrypted CSV	The folder where the key extraction process drops encrypted recorder keys (CSV files)
Encrypted Media 2	E:\Encrypted Media (DEF will create this folder on the NEST1 server)	The location of the encrypted media (NMF) files. copy NMF files file to this folder from Neat1 server D:\nicetech\Encrypted Media
Decrypted Media 3	E:\Decrypted Media (DEF will create this folder on the NEST1 server)	This is the location where the decrypted media files will be stored

5. In the “Engage NMF Decrypt” action Set the Keystore location to the directory that was created on the Decryption server by the GPK action

Keystore location and name:

D:\GPK keystore\GPK_keystore.ks

Password: nicecti

- Set the **Delete encrypted NMF files after processing** filter to false

Action - Engage NMF Decrypt

Delete Close

Edit Properties Labels Logs

Process files from metadata false ?

File filter *.* ?

Keystore location D:\GPK keystore\GPK_keystore.ks ?

Keystore password

Delete encrypted NMF files after processing false ?

Failure Threshold 0 ?

Submit

Show Advanced Fields in bold are required

- In the “Engage Load Keys” action Set the Keystore location to the directory that was created on the Decryption server by the GPK action
Keystore location and name:
D:\GPK keystore\GPK_keystore.ks
Password: nicecti
- Set the **Delete encrypted CSV files after processing** filter to false

Action - Engage Load Keys

Delete

Close

Edit

Properties

Labels

Logs

Process files from metadata

false

?

Keystore location

D:\GPK keystore\GPK_keystore ks

?

Keystore password

.....

Delete encrypted CSV files after processing

false

Delete keys older than # days

0

?

Failure Threshold

0

?

Submit

Show Advanced

Fields in bold are required

16 – Error Message

Statement of Work: The purpose of this exercise is for the students to become familiar with Debugging the system.

- Under the Decryption server branch, create a new process that runs every day, choose to import the Error.json file located on the NEAT1 server D:\nicetech\JSON file folder

Add a Process

View Quantum

View Schedule

Process Template

Engage Integration - Extract from Engage

?

Name

Engage Integration - Extract from Engage

Description

Extracts metadata and media from Engage dat

Start Time

05/19/2019 00:00

Interval

15

(min: 1; max: 60)

Interval Type

Minute

Blackout Start Time

00:00:00


?

Blackout End Time

00:00:00

?

Submit

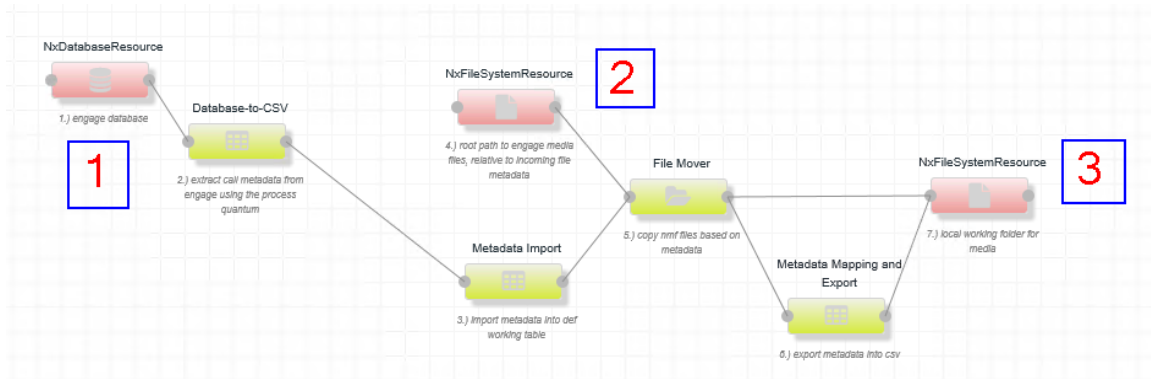

2. Create \ attach the relevant data sources as they appear in the tables below:

File system Name	Sample File System Path	File System Description
Engage Archive 2	\\Apps1\Storage	Location of Engage Storage center
Interactions Audio 3	D:\Interactions Audio	Stores the imported interactions from Engage


Data Source Name	Training lab Connection URL
Nice Interactions 1	jdbc:sqlserver://db1;databaseName=nice_interactions;integratedSecurity=true; User – nicetraining/niceadmin; PW - nicecti

3. Save, publish and launch the process.

17 – Chat Interactions (Optional)

Statement of Work: The purpose of this exercise is for the students to become familiar with the text interactions processing

1. Create a new process; this process converts chat CSV metadata into JSON file
2. Import the New Chat.json located on the NEAT1 server D:\nicetech\JSON File
3. Create and assign the relevant input and output resources

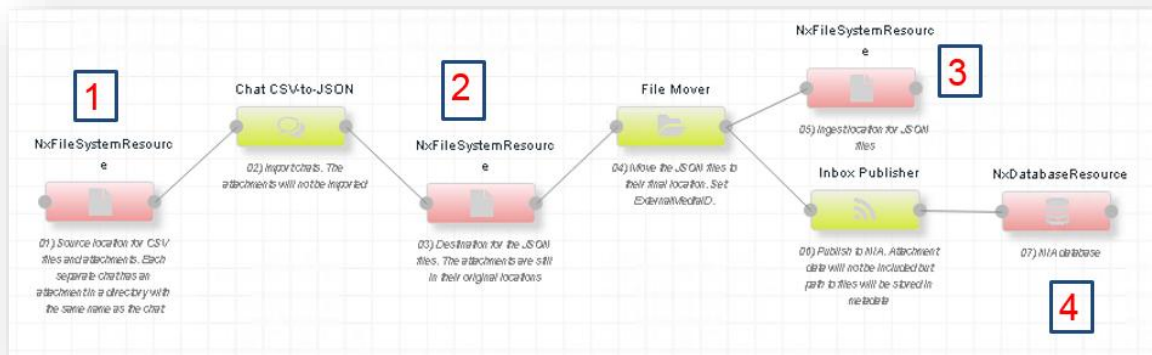

File system Name	Sample File System Path	File System Description
Chat Data 1	E:\Chat Data	Stores the metadata CSV files copy the FILE_e3847692-c8a7-41da-8b35-e7b9fcf78c33.csv And the folder DIR_6651d26c-d1d5-441c-972a-91e4622af044 folder from D:\nicetech\Chat
Chat JSON 2	E:\Chat JSON	Contain the CSV metadata.


Data Source Name	Training lab Connection URL
Nexidia ESI (Inbox table location) 4	jdbc:sqlserver://NXDB1;databaseName=NexidiaESI;integratedSecurity=true;
Production Media 3	\\NXDB1\Production Media

18 – Extract and Prepare Engage Screens(Optional)

Statement of Work: The purpose of this exercise is for the students extract calls with screens from Engage and save the associated metadata.

1. Create a new process and set the Quantum Lower date bound to December 30, 2024.
2. Set the Quantum upper date bound to April 1, 2025.
3. Import the DEF_Extract and prepare screens.JSON file located under NEAT1:
D:\nicetech\JSON file\Screen Recording file as a starting point to your process.
4. Start by creating and assigning the relevant resources for the template. The resource pink color indicates that it is not assigned.

NOTE: This process can take 5-10 minutes to complete

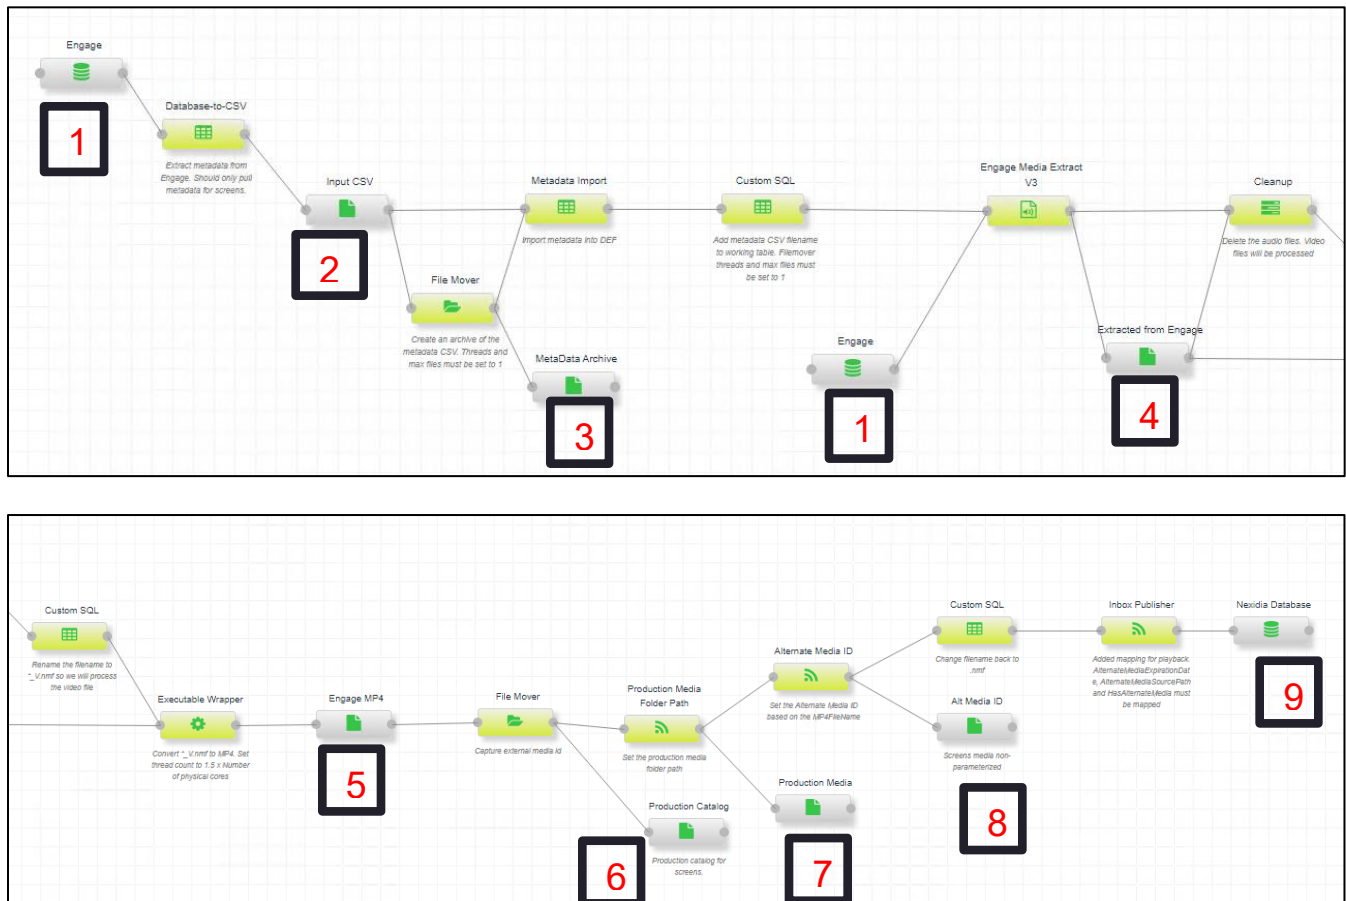

Data Source Name	Training lab Connection URL
Engage DB 1	jdbc:sqlserver://db1;databaseName=nice_interactions;integratedSecurity=true;

Nexidia Database	9	jdbc:sqlserver://nxdb1;databaseName=NexidiaESI;integratedSecurity=true;
Production Media	7	\\NIA\Production Media User ID: nicetraining\niceservices Password: nicecti

Resource Name	Sample File System Path	File System Description
Input CSV	2	E:\Input CSV Local working folder for the CSV data files
MetaData Archive	3	E:\MDArchive Create archive of Metadata
Extracted from Engage	4	E:\ExtractedFromEngage Calls extracted from Engage
Engage MP4	5	E:\EngageMP4 Files in MP4 format
Production Catalog	6	E:\ProdCatalog Production Catalog for Screens
Alt Media ID	8	E:\AltMediaID Identifies the presence of these alternate media files

Actions:

File Mover:

Action - File Mover×

DeleteClose

EditPropertiesLabelsLogs

Process files from metadata	false	?
File filter	*.csv	?
Search directories recursively	true	
Flatten output directory structure	false	?
Apply process quantum	false	?
Overwrite existing output files	true	?
Fail if no files moved	false	?
Delete inputs after move	false	?

Show Advanced

Submit

Fields in bold are required

Metadata Import

Action - Metadata Import

Delete

✖ Close

Edit

Properties

Labels

Logs

Process files from metadata	true ?
File filter	*.csv ?
Import Type	Primary ?
Import file key column	MediaFileName ?
Required metadata	iCompoundID,iInteractionId,dInteractionGM ?
Import only required metadata	false ?
Delete metadata inputs after import?	true ?
Fail if nothing is imported within # minutes	0 ↑ ↓ ?

Submit

Hide Advanced

Fields in bold are required

Engage Media Extract

Action - Engage Media Extract V3

Delete

✖ Close

Edit

Properties

Labels

Logs

Use CTI data	true ?
Skip Invalid Calls	false ?
Failure Threshold	0 ↑ ↓ ?
Packet size maximum (kB)	1,024 ↑ ↓ ?
Extended Storage Type	None ?
Include Screens	true ?
Internal Call Screen Fallback	false ?
Include H264 Screen	false ?

Submit

Hide Advanced

Fields in bold are required

Action - Engage Media Extract V3



Delete
Close

Edit
Properties
Labels
Logs

Force mono (resumable only)	false	?
Allowed Packet Types Audio	1/1, 1/5, 4/0, 4/3	?
Allowed Packet Types Screen	1/1, 4/101, 4/102, 4/103, 4/111	?
Add Audio Packets To Screen	true	?
Remove Duplicate Storage Center Paths	false	?
Remove duplicate internal recordings	false	?
Reconciliation Identifier		?
Default input disposition handling	AND	?
Input Disposition(s)		?

Submit

[Hide Advanced](#)

Fields in bold are required

Clean Up

Action - Cleanup



Delete
Close

Edit
Properties
Labels
Logs

Cleanup type	Files from current disposition	?
File filter	*.*	?
Allow multiple input resources	false	?
Directory cleanup strategy	Recursive	?
Preserve assigned/reserved media	false	?
Failure Threshold	0	?
Reconciliation Identifier		?
Maximum files to process	0	?

Submit

[Hide Advanced](#)

Fields in bold are required

Executable Wrapper

Action - Executable Wrapper

Delete
Close

Edit
Properties
Labels
Logs

Process files from metadata	true	?
File filter	*.*	?
Full path to executable	"D:\nicotech\Batch Files Rev 10.2.3.47\Batch Files\ConvertToMP4.bat"	?
Parameters	%FILE_KEY_BATCH% %INPUT_PATH% ?	?
Number of files to pass to %FILE_BATCH% param in batch	1	?
(min: 1)		
Check exit code for success/failure check	true	?
Success exit code	0	?
Executable success response regex		?

Submit

[Hide Advanced](#)
Fields in bold are required

Full path to executable: "D:\nicotech\Batch Files Rev 10.2.3.47\Batch Files\ConvertToMP4.bat"

Parameters: %FILE_KEY_BATCH% %INPUT_PATH% %OUTPUT_PATH%
"D:\nicotech\Batch Files Rev 10.2.3.47\Batch Files"

File Mover

Action - File Mover

Delete
 Close

Edit
 [Properties](#)
[Labels](#)
[Logs](#)

Process files from metadata	true	?
File filter	-.nmf, *.nmf.mp4	?
File path column name	FileName	?
Flatten output directory structure	false	?
Treat missing files as errors	false	?
Overwrite existing output files	true	?
Fail if no files moved	false	?
Delete inputs after move	false	?

Submit

[Hide Advanced](#)
Fields in bold are required

Production Media Folder Path

Action - Production Media Folder Path

Delete
 Close

Edit
 [Properties](#)
[Labels](#)
[Logs](#)

Production Media Folder Path	{dtInteractionGMTStopTime:yyyy}\{dtInteracti	?
Failure Threshold	0	?
Reconciliation Identifier		?
Default input disposition handling	AND	?
Input Disposition(s)		?
Thread count	0	?
Maximum files to process	0	?
	(max: 10000)	
Terminal action	-	?

Submit

[Hide Advanced](#)
Fields in bold are required

Alternate Media ID

Action - Alternate Media ID

Delete
Close

Edit
Properties
Labels
Logs

Process files from metadata	true	?
File filter	~*.nmf,*.mp4	?
Identify alternate media from	Metadata Field Test	?
Metadata field name	MP4Filename	?
Metadata field value	{not null}	?
Media expiration, in days	30	?
	(min: 1)	
Expire media from metadata field		?
Failure Threshold	0	?

Submit

Hide Advanced

Fields in bold are required

Custom SQL:

Action - Custom SQL

Delete
Close

Edit
Properties
Labels
Logs

SQL	<pre>update {WORKING_TABLE} SET FileName = SUBSTRING(MP4Filename, 1, 100) WHERE {OUTPUT_DISPOSITION} = GETDATE()</pre>	?
	Click here to edit in a larger window	
Fail if nothing is updated	false	?
Execute against working table	true	?
Resolve SQL	<input checked="" type="button"/> Resolve SQL	?
Reconciliation Identifier		?
Default input disposition handling	AND	?
Input Disposition(s)		?

Submit

Hide Advanced

Fields in bold are required

Inbox Publisher

Action - Inbox Publisher

DeleteClose

EditPropertiesLabelsLogs

Metadata Tag RemappingiInteractionId=InteractionId;Alternate?

Export MappingImport Mapping

Include disposition data in output?false?

NIA target version12.1+?

Media TypeAudio?

Media present default flagfalse?

Create index default flagfalse?

Allow Duplicate Mappingfalse?

Has ESMA

Submit

Hide AdvancedFields in bold are required

Check if following NIA fields are mapped correctly

NIA Fields	Value
InteractionID	iInteractionId
UDFdate3	AlternateMediaExpirationDate
UDFvarchar41	AlternateMediaSourcePath
UDF varchar42	HasAlternateMedia