

Interaction Analytics

Data Export Utility Guide



Release: 12.5 FP2

Document Revision: D15

Distribution Status: Published

Publication Date: January 2026

PROPRIETARY AND CONFIDENTIAL INFORMATION

Information herein is proprietary information and trade secrets of NiCE Ltd. and/or its affiliated companies (Affiliates). This document and the information herein is the exclusive property of NiCE and its Affiliates and shall not be disclosed, in whole or in part, to any third party or utilized for any purpose other than the express purpose for which it has been provided.

IMPORTANT NOTICE

Subject always to any existing terms and conditions agreed between you and NiCE or any Affiliate with respect to the products which are the subject matter of this document, neither NiCE nor any of its Affiliates shall bear any responsibility or liability to a client or to any person or entity with respect to liability, loss or damage caused or alleged to be caused directly or indirectly by any product supplied or any reliance placed on the content of this document. This includes, but is not limited to, any interruption of service, loss of business or anticipatory profits or consequential damage resulting from the use or operation of any products supplied or the content of this document. Information in this document is subject to change without notice and does not represent a commitment on the part of NiCE or any Affiliate.

All information included in this document, such as text, graphics, photos, logos and images, is the exclusive property of NiCE or in Affiliate and is protected by United States and international copyright laws. Permission is granted to use, view and photocopy (or print) materials from this document only in connection with the products to which this document relates and subject to the terms of license applicable to such products. Any other use, copying, distribution, retransmission or modification of the information in this document without the express prior written permission of NiCE or an Affiliate is strictly prohibited. In the event of any permitted copying, redistribution or publication of copyrighted material, no changes in, or deletion of, author attribution, trademark legend or copyright notice shall be made.

Products supplied may be protected by one or more of the US patents listed at www.NiCE.com/Patents.

For the full list of trademarks of NiCE and its Affiliates, visit www.NiCE.com/NiCE-Trademarks. All other marks used are the property of their respective proprietors.

All contents of this document are: Copyright © 2026 NiCE Ltd. All rights reserved.

For assistance, contact your local supplier or nearest NiCE Customer Service Center:

EMEA Region (Europe, Middle East, Africa)

Tel: +972-9-775-3800
Fax: +972-9-775-3000
email: support@NiCE.com

The Americas Region (North, Central, South America)

Tel: 1-800-6423-611
Fax: +720-264-4012
email: support.americas@NiCE.com

United Kingdom

Tel: +44-8707-22-4000
Fax: +44-8707-22-4500

APAC Region (Asia/Pacific)

Tel: +852-8338-9818
Fax: +852-2802-1800
email: support.apac@NiCE.com

Israel

Tel: 09-775-3333
Fax: 09-775-3000
email: support@NiCE.com

Germany

Tel: +49-(0)-69-97177-0
Fax: +49-(0)-69-97177-200

North America

Tel: 1-800-663-5601
Fax: +201-356-2197
email: na_sales@NiCE.com

France

Tel: +33-(0)1-41-38-5000
Fax: +33-(0)1-41-38-5001

International

Headquarters-Israel

Tel: +972-9-775-3100
Fax: +972-9-775-3070
email: info@NiCE.com

Hong-Kong

Tel: +852-2598-3838
Fax: +852-2802-1800

NiCE invites you to join the **NiCE User Group (NUG)**.

Visit the NUG Website at www.NiCEusergroup.org and follow the instructions.

All queries, comments, and suggestions are welcome! Please email: NiCEbooks@NiCE.com

For more information about NiCE, visit www.NiCE.com

CONTENTS

1: Introduction	7
Document Revision History	8
Prerequisites	9
Best Practices	9
2: Working with Export Configurations	11
Create a CSV Export Configuration	12
Create a SQL Export configuration	12
Edit an Export Configuration	14
Clone an Export Configuration	15
Run a Data Export	15
Stop a Data Export	16
Reset an Export	16
Delete an Export Configuration	17
Export Configuration Parameters	19
Chat Output Format	44
Export Behavior for Template Answer Keys	46
Result Codes for Phrase Recognition	47
3: Working with the Data Export Utility	53
Running the Data Export Utility	53
Data Delivery	55
Export Modes	55
Export Output Options	55
Batching	55
Data Aging	59
Create the ExportTracking Database	60
System Tables	60

Create the Remote Export Database	62
System Tables	67
Export to a Remote Database	69
Re-export to a Remote Database	70
export.cfgSourceMediaTranscriptExportQueue table	72
Data Entities	73
 4: Data Dictionary Output Structure	 93
_BatchID	94
_FileRowCountSummary	94
_MetadataKeyValueMapping	95
Agent	96
AgentInventory	97
CategoryDefinition	99
CategoryResult	100
ChatParticipant	101
EvalsAgentGroupCoachingAction	102
EvalsAgentGroupCoachingStatus	103
EmailAddress	105
EvalsCalibration	106
EvalsCalibrationCategory	110
EvalsCalibrationQuestion	112
EvalsCalibrationQuestionAnswer	115
EvalsEvaluation	116
EvalsEvaluationCategory	123
EvalsEvaluationCoaching	128
EvalsEvaluationCoachingAction	131
EvalsEvaluationMedia	132
EvalsEvaluationQuestion	133
Question Types	139
Multi-Select Answers	139
Question Type Behavior	140

EvalsEvaluationQuestionAuditAnswer	146
EvalsEvaluationQuestionCurrentAnswer	147
EvalsEvaluationQuestionInitialAnswer	148
EvalsEvaluationQuestionRescoreAnswer	149
EvalsGroupCoaching	150
Configuration Considerations	150
EvalsGroupCoachingAction	152
EvalsKeyToIDMap	153
EvalsSelfEvaluation	154
EvalsSelfEvaluation Population	154
EvalsSelfEvaluationCategory	159
EvalsSelfEvaluationQuestion	161
EvalsSelfEvaluationQuestionCurrentAnswer	163
EvalsSelfEvaluationQuestionInitialAnswer	164
EvalsTemplate	165
EvalsTemplateAnswer	167
EvalsTemplateCategory	169
EvalsTemplateQuestion	170
EvalsUser	171
Experience	172
Hierarchy	175
Interaction	177
InteractionEnlightenScoresAndIntent	179
Configuration Considerations	179
InteractionEvents	193
InteractionMetadata	195
Sentiment Metrics	203
InteractionOutcomes	205
Configuration Considerations	205
InteractionTagDefinitions	206
InteractionTagHits	207
MetricDefinition	208

MetricResultDaily	209
Profiles	210
QueryDefinition	211
QueryGroupDefinition	215
QueryGroupQueries	217
QueryGroupQueryGroups	218
QueryResult	219
SessionPermissions	221
TargetMediaSetDefinition	222
TargetMediaSetMembership	225
TargetMediaSetMustHitQueries	226
TermDefinition	227
TermListDefinition	228
TermListMembershipDefinition	229
TermResult	230
TextualSearchTermListResult	231
Transcript	232
UnformattedTranscripts	234
UserProfileMap	235
Users	236
WorkflowAlert	238
WorkflowFileProgression	239
WorkflowImportAuditLog	241
 <i>A: Frequently Asked Questions</i>	 <i>243</i>
File Management	243
Organizing the Exported Data	252

<i>B: Data Export Utility Relational Diagram</i>	253
<i>C: Data Export Utility Configuration Scenarios</i>	271
Scenario 1 - Pull Data from Specific Target Media Sets	272
Scenario 2 - Pull Data from all Target Media Sets	275
Scenario 3 - Ad Hoc Run to Pull Data from a Specific Date	278
Scenario 4 - Exclude Evaluation Data	281
Scenario 5 - Re-Export Interactions from a Specific Date to Remote Database	284
<i>D: Summary of Changes</i>	285
Version 12.0 Updates	286
Version 12.1 Updates	288
Version 12.1.5 Updates	289
Version 12.1.10 Updates	290
Version 12.1.11 Updates	291
Version 12.1.15 Updates	293
Version 12.1.18 Updates	295
Version 12.2 Updates	297
Version 12.3 Updates	299
Version 12.4 Updates	307
Version 12.5 Updates	318

[This page intentionally left blank]

Introduction

The Data Export Utility (DEU) facilitates the needs of our users wanting to consume data generated by Interaction Analytics in their corporate data warehouse and analytics platforms. The data is exported to the customer from Interaction Analytics in an organized, secure, and consistent way. The output can be either a CSV file or a SQL table transported to a designated database.

The Data Export Utility is available in the Interaction Analytics installer. It is installed to C:\Program Files\Nexidia\Nexidia Analytics\DataExport by default, but you can install it in a different location. The Data Export Utility requires the ExportTracking database to be deployed. It must be on the same SQL Server instance as the NexidiaESI and NexidiaESIDW databases. See the *Interaction Analytics Installation and Maintenance Guide* to learn more.

Important

The application components and options available to individual users vary based on the application license and your profile privileges. Contact your system administrator for assistance.

DOCUMENT REVISION HISTORY

SOFTWARE VERSION	DATE	DESCRIPTION
12.5 FP2	December 2025	- Some fields and objects in Nexidia reporting correspond to those in the Topic AI Editor but use different names. Because Topic AI names cannot be modified, the Nexidia reporting names must be updated to match. In the user interface, you will see the following: - Actions instead of Contact events - Intent L1 (Category) instead of Contact Reason Level1 - Intent L2 (Topic) instead of Contact Reason Level2 - Intent L3 (Subtopic) instead of Contact Reason Level3 - Secondary Intent L1 (Category) instead of Secondary Contact Reason Level1 - Secondary Intent L2 (Topic) instead of Secondary Contact Reason Level2 - Secondary Intent L3 (Subtopic) instead of Secondary Contact Reason Level3 - Tertiary Intent L1 (Category) instead of Tertiary Contact Reason Level1 - Tertiary Intent L2 (Topic) instead of Tertiary Contact Reason Level2 - Tertiary Intent L3 (Subtopic) instead of Tertiary Contact Reason Level3

PREREQUISITES

Important

Refer to the Interaction Analytics System Requirements guide for server specifications. To determine environment sizing, consult with your account team and the Interaction Analytics Information Technology department.

- Either a Windows domain account or a local machine account is required.
- The account must have read, write, and execute permissions to the bin, temp, and publish folders.
- The NexidiaESI, NexidiaESIDW, and NxDiscovery databases must already exist.
- To consume data from the remote database, users will need a login with read-only permissions to it at a minimum.

BEST PRACTICES


Keep these best practices in mind when you are working in the Data Export Utility.

- Set the RequireResourceReservation configuration to "true" so that the Data Export Utility requires a Resource Reservation when it executes.
- The StartMediaDate and EndMediaDate configurations are mutually exclusive with the StartEvaluationPublishDateUTC and EndEvaluationPublishDateUTC configurations. You should never use these settings together.
- You can specify dates as a specific date or a date range. See [CAST and CONVERT \(Transact-SQL\) - SQL Server](#) to learn more.

[This page intentionally left blank]

Working with Export Configurations

The Data Export Utility supports multiple export configurations, each with a different purpose. You can view and manage your export configurations in the Management Console in the Data Export Utility tab.

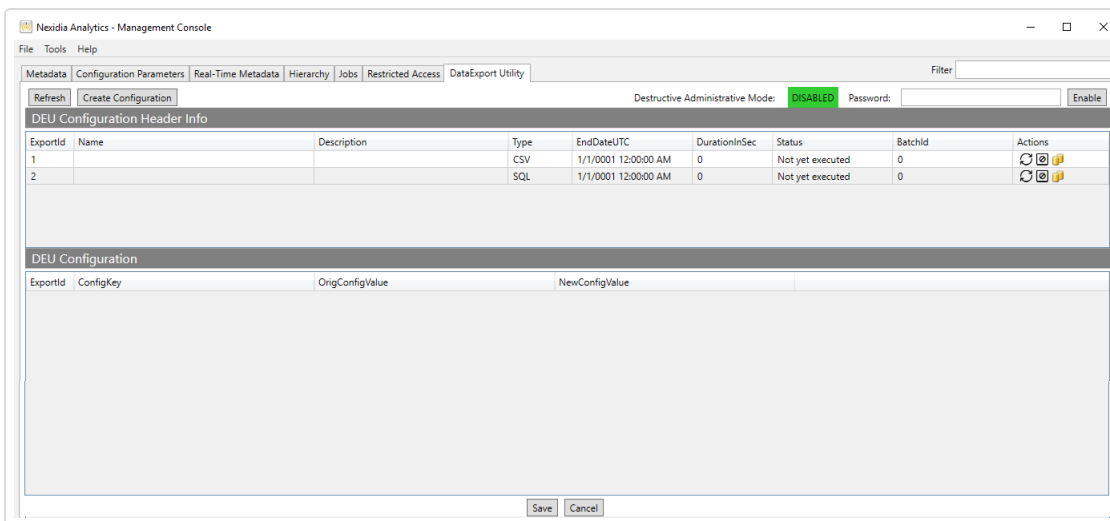

From the Management Console, you can:

- [Create a CSV Export Configuration](#) on the next page
- [Create a SQL Export configuration](#) on the next page
- [Edit an Export Configuration](#) on page 14
- [Clone an Export Configuration](#) on page 15
- [Run a Data Export](#) on page 15
- [Reset an Export](#) on page 16

- [Stop a Data Export](#) on page 16
- [Delete an Export Configuration](#) on page 17

CREATE A CSV EXPORT CONFIGURATION

When you create a CSV export configuration, it is allocated a unique export ID. Each export configuration is created with a set of default settings that determine things like the data to be exported, the batch size, date formats, and so on. Once you have created the export configuration, you can [edit these settings](#) as required. If required, you can also create an export configuration by [cloning an existing configuration](#) and then updating the settings.

→ To create a CSV export configuration:

1. In Management Console, select the Data Export Utility tab, then click **Create Configuration**. The Create Export Configuration dialog box opens.
2. Select the **CSV** radio button then click **OK**. The export configuration is created.
3. Click **Refresh** to update the list of export configurations in Management Console. The new export configuration displays with the status *Not yet executed*.
4. In the DEU Configuration Header Info area, you can give the export configuration a friendly name and description to make it easier to identify the purpose of the export. To do this, click in the **Name** or **Description** field, and enter your text. Your changes are saved automatically.

CREATE A SQL EXPORT CONFIGURATION

When you create a SQL export configuration, it is allocated a unique export ID. After creating the SQL export configuration, you must create the associated Remote Export database.

Each export configuration is created with a set of default settings that determine things like the data to be exported, the batch size, date formats, and so on. Once you have created the export configuration, you can [edit these settings](#) as required. If required, you can also create an export configuration by [cloning an existing configuration](#) and then updating the settings.

→ **To create a SQL export configuration:**

1. In Management Console, select the Data Export Utility tab, then click **Create Configuration**. The Create Export Configuration dialog box opens.
2. Select the **SQL** radio button. The **Export Database Server Instance Name** field is enabled.
3. Enter the instance name of the Export Database server, then click **OK**. A confirmation message displays with instructions for creating the Remote Export database.
4. Click **OK**. The export configuration is created.
5. Click **Refresh** to update the list of export configurations in Management Console. The new export configuration displays with the status *Database not yet created*.
6. [Create the Remote Export Database](#) on page 62.

Tip

The options to run and stop the new export configuration do not appear until you create the Remote Export database.

7. Once you have created the Remote Export database, click **Refresh** to update the list of export configurations in Management Console. The status of the export configuration updates to *Not yet executed*.

EDIT AN EXPORT CONFIGURATION

You can edit the settings for an export configuration. These settings determine things like the data to be exported, the batch size, date formats, and so on. For a full list of the available parameters, see [Export Configuration Parameters](#) on page 19.

Important

Batch size controls performance. You should only change batch size configuration values if there are performance issues. A batch is a single cycle of execution.

→ To edit an export configuration:

1. In Management Console, select the Data Export Utility tab, then select the export configuration you want to edit from the list in the DEU Configuration Header Info area. The settings for the selected export configuration appear in the DEU Configuration area.
2. In the **NewConfigValue** column, edit the parameter values as required. For a full list of the available parameters, see [Export Configuration Parameters](#) on page 19.
3. When you have made all the necessary changes, click **Save**.

CLONE AN EXPORT CONFIGURATION

You can create a new export configuration by cloning an existing configuration and then modifying the settings as required.

→ To clone an export configuration:

1. In Management Console, select the Data Export Utility tab.
2. In the DEU Configuration Header Info area, click **Clone**  to the right of the export configuration you want to clone. The selected export configuration is cloned to create a new export configuration with a unique export ID.
3. Select the cloned export configuration from the list in the DEU Configuration Header Info area. The settings for the cloned export configuration appear in the DEU Configuration area.
4. In the **NewConfigValue** column, edit the parameter values as required. For a full list of the available parameters, see [Export Configuration Parameters](#) on page 19.
5. When you have made all the necessary changes, click **Save**.

RUN A DATA EXPORT

Data exports should be run by the Interaction Analytics Data Exchange Framework or the Extractor in production environments. You can manually run an export from the Management Console if there is a requirement to do a single execution. When you run a data export, the DEU exports all the data from the Interaction Analytics system to the customers' system based on the export configuration. You can only run one export at a time.

→ To run a data export:

1. In Management Console, select the Data Export Utility tab.
2. In the DEU Configuration Header Info area, click **Start**  next to the export configuration you want to run. The export begins.

3. The **DurationInSec**, **BatchID**, and **Status** values are updated as the export progresses. Refresh the tab to monitor the progress.

STOP A DATA EXPORT

You can manually stop a data export that is currently running.

→ To stop a data export:

1. In Management Console, select the Data Export Utility tab.
2. In the DEU Configuration Header Info area, click **Stop**  next to the export configuration you want to stop. The export is stopped.

RESET AN EXPORT

You can manually reset an export to the first batch. Any tracing data associated with the export ID is deleted. The next time the export is run, the Data Export Utility starts over from the first batch.

Warning

This operation cannot be undone. It can only be performed by administrators authorized to enable Destructive Administrative Mode. Please contact NiCE support for the password if you need to perform this operation.

→ **To reset a data export:**

1. In Management Console, select the Data Export Utility tab.
2. At the top of the tab, in the **Password** field, enter the password, then click **Enable**. Destructive Administrative Mode is enabled, and additional options appear to the right of the export configurations in the DEU Configuration Header Info area.
3. In the DEU Configuration Header Info area, click **Reset**  next to the export configuration you want to reset. A confirmation message displays.
4. Click **OK**. The data export is reset to the first batch, and any data that has been exported is deleted.
5. At the top of the tab, click **Disable**. Destructive Administrative Mode is disabled, preventing users from accidentally deleting data.

DELETE AN EXPORT CONFIGURATION

When you delete an export configuration, the export configuration and any tracing data associated with the export ID are deleted. Any data that has already been exported is not deleted.

Warning

This operation cannot be undone. It can only be performed by administrators authorized to enable Destructive Administrative Mode. Please contact NiCE support for the password if you need to perform this operation.

→ **To delete an export configuration:**

1. In Management Console, select the Data Export Utility tab.
2. At the top of the tab, in the **Password** field, enter the password, then click **Enable**. Destructive Administrative Mode is enabled, and additional options appear to the right of the export configurations in the DEU Configuration Header Info area.

3. In the DEU Configuration Header Info area, click **Delete**  next to the export configuration you want to delete. A confirmation message displays.
4. Click **OK**. A second confirmation message displays.
5. Click **OK**. The export configuration and any data that has been exported are deleted.
6. At the top of the tab, click **Disable**. Destructive Administrative Mode is disabled, preventing users from accidentally deleting data.

EXPORT CONFIGURATION PARAMETERS

The **export.cfgExportConfig** table within the Interaction Analytics ExportTracking database contains all the configuration parameters for the Data Export Utility. It is a key/value store per ExportID. Using the Management Console, you can update the values for the configuration parameters to specify what you want to include in the export.

The default installation populates ExportID 1. You can use it as a template or modify it as needed. Some configuration options require that you have database access. Contact your system administrator for help.

See the Backward Compatibility topic for details about the configurations you must modify to maintain backward compatibility for the 12.3 SP3 and 12.3 SP4 versions when upgrading.

Important

Batch size controls performance. You should only change batch size configuration values if there are performance issues. A batch is a single cycle of execution.

AppendTimestampToData

- **Default** - FALSE
- **Description** - Determines if the CSV file name includes a time stamp. The date and time of the export are appended to the file name in yyyyMMddHHmmssffffff format. (CSV file only)

AppendDateTimeStampToMetaOutputFiles

- **Default** - FALSE
- **Description** - Determines if the date and time of the export are appended to the _BatchId, _FileRowSummary, _MetadataKeyValueMapping, and DataExport.config files in yyyyMMddHHmmssffffff format. (CSV file only)

BatchesPerExport

- **Default** -1
- **Description** - Determines the number of batches to export in a Data Export Utility run. Set this to a positive number to export a specific number of batches. Set to a non-positive number to export all batches.

CapitalizeTranscripts

- **Default** - FALSE
- **Description** - Determines the case of returned transcripts. If set to TRUE, all transcript phrases are capitalized before they are exported.

CleanExportFields

- **Default** - FALSE
- **Description** - Determines if control characters are stripped from the CSV output for the Export ID. Control characters include carriage return (CR), line feed (LF), double quotes ("), and the configured CSV Delimiter. This configuration does not apply to transcripts. (CSV file only)

CondenseEvaluationQuestionExport

- **Default** - FALSE
- **Description** - Controls the export output behavior of the EvalsEvaluationQuestion export by condensing (TRUE) or not condensing (FALSE) the number of rows generated for evaluation questions depending on the question type. The available question types are Yes/No, List, Text, Numeric, Bonus, Deduction, and Multi-Select List. See [Question Type Behavior](#) on page 140 for details on how many rows of data to expect for each question type.

CsvBufferSize

- **Default** - 65536
- **Description** - The memory size allocated for processing. (CSV file only)

CsvDelimiter

- **Default** - ,
- **Description** - The character sequence of one or more characters that are used to separate the data items. All combinations of all characters on all Unicode planes are supported, except for the following:
 - The newline\linefeed character (\n)
 - The carriage return character (\r)

- The null character (\0)
- The double quote character (")

Important

The Data Export Utility CSV output conforms to <https://tools.ietf.org/html/rfc4180>. This means data cells with the delimiter character sequence will be enclosed in double-quotes, as will any cells that have any of the restricted characters listed above. Selecting an uncommon delimiter sequence does not ensure it won't appear in a data cell, and your import process must account for this. We advise against using obscure control character sequences like ^A\0x0001 for the delimiter, as it complicates representation in Transact-SQL string literals and may require extra support from your deployment organization. (CSV file only).

CsvHasHeaderRecord

- **Default** - TRUE
- **Description** - Determines if the entities contain header information. (CSV file only)

CsvQuoteAllFields

- **Default** - TRUE
- **Description** - Determines if all entries contain quotes. (CSV file only)

CsvQuoteNoFields

- **Default** - FALSE
- **Description** - Determines if all entries do not contain quotes. (CSV file only)

DateFormat

- **Default** - 126
- **Description** - The Data Export Utility uses a default code for date and time conversion, formatted as yyyy-mm-ddThh:mi:ss.mm. This format can be changed by entering a different code. Refer to the 'Date and Time Styles' section in the following link for valid values and corresponding date formats: [CAST and CONVERT \(Transact-SQL\) - SQL Server](#).

EndEvaluationPublishDateUTC

- **Default** - 2199-01-01
- **Description** - The end date range for published evaluations.

EndMediaDate

- **Default** - 2199-01-01
- **Description** - The end date for media. Media dated later than this date aren't exported. The StartMediaDate and EndMediaDate are required for data export.

EndTranscriptDateUTC

- **Default** - 2199-01-01
- **Description** - Limits the transcript output to only calls that were transcribed before this date. The filtering is applied on the TranscriptCreationDateTimeUTC field in the [NxDiscovery.dbo.SourceMedia](#) table. This only applies if both the StartTranscriptDateUTC and the EndTranscriptDateUTC are specified.

EvalsGroupCoachingBatchSize

- **Default** - 100000
- **Description** - Defines the number of records per batch. Records exceeding this limit roll to the next batch.

EvaluationsBatchSize

- **Default** - 10000
- **Description** - Determines the number of records to include in each batch. Records exceeding this limit roll to the next batch (which picks up where this batch left off).

ExportChatsInOriginalFormat

- **Default** - FALSE
- **Description** - Determines how chats are exported from Text Grid. When TRUE, the chats are exported in their original format. When FALSE, the chats are exported using a tokenized format. See [Chat Output Format](#) on page 44 for examples.

ExportFileEncoding

- **Default** - UTF-8
- **Description** - The encoding used for all CSV files being output. (CSV file only)

ExportFileFormat

- **Default** - CSV
- **Description** - Determines the output file type. CSV is the only supported format. (CSV file only)

ExportOnlyCompletedInteractions

- **Default** - FALSE
- **Description** - Ensures that transcripts are not exported before the interaction metadata is available.

ExportReprocessedQueryResults

- **Default** - TRUE
- **Description** - Determines whether the output data includes reprocessed interaction data for sessions, queries, and search term lists.

ExportReprocessedTSMembershipResults

- **Default** - TRUE
- **Description** - Determines whether the output data includes reprocessed records.

Important

This configuration is ignored if the **TargetMediaSetExportDeltasOnly** configuration is set to True.

FilterOutEvalsUserIdsLessThan

- **Default** - 0
- **Description** - Determines if a range of User IDs are excluded from the EvalsUser export. For instance, entering a value of 10000000 excludes User IDs less than this from the export.

ForceQueryDefinitionExport

- **Default** - FALSE
- **Description** - Determines if the QueryDefinition export is always exported.
 - TRUE - The QueryDefinition export is always exported even if the IncludeEmptyExportFiles configuration is set to FALSE.
 - FALSE - The QueryDefinition export functions as specified by the IncludeEmptyExportfiles setting. If the setting is configured as FALSE, the QueryDefinitionExport behaves the same way as all other exports and adheres to the IncludeEmptyExportFiles rules.

IgnoreHierarchicalUnitForMetricResultDailyExport

- **Default** - FALSE
- **Description** - Determines the data to include in the MetricResultDaily export.
 - TRUE - The export data is solely based on the Agent component of the Hierarchical Unit. Meaning that for a specific target media set, metric, and date, the application combines the earned scores for the agents across all sites and supervisors to which they belong.
 - FALSE - The data included in the export is based on the Hierarchical Unit (Agent, Site, and Supervisor).

IgnoreRowCreationDateMetadata

- **Default** - TRUE
- **Description** - Determines how the RowCreationDate column is populated in the InteractionMetadata output.

- **TRUE** - This field will be empty.
- **FALSE** - The RowCreationDate for the MetadataCC table will be included. This is essentially that date/time that the CC Metadata was last processed.

IncludeAgentInventoryActiveFlag

- **Default** - TRUE
- **Description** - Determines whether the IsActive flag is included in the AgentInventory CSV file/SQL table. Existing exports will continue to behave the same as before the upgrade. For new configurations created after the upgrade, the IncludeAgentInventoryActiveFlag functionality is enabled by default.
 - **TRUE** - IsActive column is included and populated in CSV and Remote exports.
 - **FALSE** - IsActive column is not included in CSV exports. IsActive column is included but is NULL in Remote exports.

IncludeAgentInventoryDataInAllEvaluationExports

- **Default** - FALSE
- **Description** - Determines if the Agent Inventory columns are included in the EvalsCalibration, EvalsCoaching, and EvalsSelfEvaluation CSV Files/SQL Tables.
 - **TRUE** - The Agent Inventory columns are included and populated in the output for CSV exports. The Agent Inventory columns are included with the relevant data and populated in the output for Remote exports.
 - **FALSE** - The Agent Inventory columns are not included in the output for CSV exports. The Agent Inventory columns are included but have no data for Remote exports.

IncludeAgentInventoryLoginMetadata

- **Default** - FALSE
- **Description** - Determines if additional columns ExternalUserID, LastLoginDateUTC, LastModifiedDateUTC, and CreatedDateUTC are included in the AgentInventory CSV file/SQL table.
 - **TRUE** - Four additional columns are included and populated in CSV and Remote exports.

- **FALSE**- Four additional columns are not included in CSV exports. Columns are NULL in Remote exports.

IncludeAgentMetrics

- **Default** - TRUE
- **Description** - Determines if the output data contains agent metrics.

IncludeAINotes

- **Default** - FALSE
- **Description** - Determines if the AINotes column is included in the EvalsEvaluationQuestion export.

IncludeAudioTranscripts

- **Default** - TRUE
- **Description** - Determines if transcript exports include transcripts for audio interactions. This setting is day-forward.

IncludeCalibrationDeadline

- **Default** - TRUE
- **Description** - Determines if the CalibrationDeadlinecolumn is included in the EvalsCalibration export.

IncludeCalibrationDeviationCalculation

- **Default** - FALSE
- **Description** - Determines if the IncludeCalibrationDeviationCalculation export is created.

IncludeCategories

- **Default** - TRUE
- **Description** - Determines if the CategoryDefinition and CategoryResult exports are created. Existing exports will continue to behave the same as before the upgrade. For new configurations created after the upgrade, the IncludeCategories functionality will be enabled by default.

IncludeChatTranscripts

- **Default** - TRUE
- **Description** - Determines if the transcript exports include transcripts for chat interactions. This setting is day-forward.

IncludeCurrentAnswerColumns

- **Default** - TRUE
- **Description** - Determines if the EvaluatorsAnswer, CurrentAnswerContent, and CurrentQuestionNotes columns are included in the EvalsEvaluationQuestion output.

IncludeEmailTranscripts

- **Default** - TRUE
- **Description** - Determines if the Transcript exports include transcripts for e-mail interactions. This setting is day-forward.

IncludeEmptyExportFiles

- **Default** - TRUE
- **Description** - Determines if the output data contains empty export files.
Note: The first batch of an execution will always contain all files. When this configuration is set to FALSE, empty files are excluded from subsequent batches. (CSV file only)

IncludeEnlightenScoresAndIntents

- **Default** - FALSE
- **Description** - Determines if the InteractionEnlightenScoresAndIntents export is created.
 - TRUE - The InteractionEnlightenScoresAndIntents export is created, and the EscalationValue, ResolutionValue, and ConfirmedSaleValue columns are included in the export.
 - FALSE - The CSV file is not generated, and the fields are exported as NULLs for the SQL table output.

IncludeEvalsGroupCoaching

- **Default** - FALSE
- **Description** - Determines if the EvalsGroupCoaching, EvalsGroupCoachingAction, EvalsAgentGroupCoachingAction, and the EvalsAgentGroupCoachingStatus exports are created.

IncludeEvaluations

- **Default** - TRUE
- **Description** - Determines if the output data contains evaluation information.

IncludeEvaluationAllowAgentAccessColumn

- **Default** - TRUE
- **Description** - Determines if the AllowAgentAccess column is included or excluded in the EvalsEvaluation export.
 - TRUE - AllowAgentAccess column is included in the EvalsEvaluation export.
 - FALSE - AllowAgentAccess column is excluded from the EvalsEvaluation export.

IncludeEvaluationCoachingActionCompletedDate

- **Default** - TRUE
- **On Upgrade** - FALSE
- **Description** - Determines if the CompletedDateUTC is included or excluded in the EvalsEvaluationCoachingAction export.

IncludeEvaluationRescoreColumns

- **Default** - TRUE
- **Description** - Determines if the output data includes the evaluation rescore columns.

IncludeEvaluationsWithoutMedia

- **Default** - TRUE
- **Description** - Determines if the output data contains evaluations with no associated media. Set this value to TRUE when upgrading if you want to export evaluations with no associated media.

IncludeEvaluatorReviewData

- **Default** - FALSE
- **Description** - Determines if the output data contains the evaluator review columns in the .EvalsEvaluation, EvalsEvaluationCategory, EvalsEvaluationQuestion, EvalsSelfEvaluation, EvalsSelfEvaluationCategory, and EvalsSelfEvaluationsQuestion exports.

IncludeExperience

- **Default** - FALSE
- **Description** - Determines if the output data contains experience information.

IncludeFailedMedia

- **Default** - FALSE
- **Description** - Determines if the output data contains failed media.

IncludeGeneralTextTranscripts

- **Default** - TRUE
- **Description** - Determines if Transcript exports include transcripts for general text interactions. This setting is day-forward.

IncludeMetadata

- **Default** - TRUE
- **Description** - Determines if the output data includes metadata information.

IncludeNullValuesInSelfEvaluations

- **Default** - TRUE for upgraded installations and FALSE for new installations
- **Description** - Controls the export output behavior of the EvalsSelfEvaluationQuestionCurrentAnswer and EvalsSelfEvaluationQuestionInitialAnswer exports.
 - TRUE - Skipped answers in the EvalsEvaluationQuestionCurrentAnswer and EvalsEvaluationQuestionInitialAnswer will have empty InitialTemplateAnswerKeys.
 - FALSE - Skipped answers in the EvalsEvaluationQuestionCurrentAnswer and EvalsEvaluationQuestionInitialAnswer will have negative values for the InitialTemplateAnswerKeys.

See [Export Behavior for Template Answer Keys](#) on page 46 for example output options.

IncludeOutcomesAndEvents

- **Default** - FALSE
- **Description** - Determines if the InteractionOutcomes and InteractionEvents exports are created. When this value is false, the CSV files are not generated, and the fields are exported as NULLs for the SQL table output.

IncludePhraseRecognitionResultCode

- **Default** - TRUE

After upgrade, the default value is set to FALSE to prevent the new column from breaking downstream consumers of the InteractionMetadata export.
- **Description** - Determines if the PhraseRecognitionResultCode column is included or excluded in the InteractionMetadata export.
 - TRUE - PhraseRecognitionResultCode column is included in the InteractionMetadata export.
 - FALSE - PhraseRecognitionResultCode column is excluded from the InteractionMetadata export.

See [Result Codes for Phrase Recognition](#) for the possible result codes that can be exported.

IncludeProfilesAndUsers

- **Default** - TRUE
- **Description** - Determines if the Profiles, Users, and UserProfileMap exports are included in the Data Export Utility output.

IncludeQueryDefinitionCreationModifiedDate

- **Default** - TRUE
- **On Upgrade** - FALSE
- **Description** - Determines if the output data includes the CreatedBy, CreatedDate, LastModifiedBy and LastModifiedDate columns for the QueryDefinition export.

IncludeQueryGroupDefinitionCreationModifiedDate

- **Default** - TRUE
- **On Upgrade** - FALSE
- **Description** - Determines if the output data includes the CreatedBy, CreatedDate, LastModifiedBy and LastModifiedDate columns for the QueryGroupDefinition export.

IncludeQueryHits

- **Default** - TRUE
- **Description** - Determines if the output data includes query hit information.

IncludeQueryParticipantAndPurposeColumns

- **Default** - TRUE
- **Description** - Determines if the output data includes the query participant and purpose columns.

IncludeSentimentValue

- **Default** - FALSE
- **Description** - Determines if the SentimentValue column is included in the InteractionMetadata export.

IncludeTargetMediaSetMembership

- **Default** - TRUE
- **Description** - Determines if the output data includes target media set membership information.

IncludeTermHits

- **Default** - TRUE
- **Description** - Determines if the output data includes term hit information.

IncludeTMSDefinitionAndMustHitQueriesInMetadataSplit

- **Default** - TRUE
- **Description** - Determines if the TargetMediaSetDefinition and TargetMediaSetMustHitQueries exports are split if metadata splitting is enabled.
 - TRUE - The TargetMediaSetDefinition and TargetMediaSetMustHitQueries exports are split.
 - FALSE - The exports for TargetMediaSetDefinition and TargetMediaSetMustHitQueries won't be split. Instead, they will be included in their entirety at the root export level, along with the other unsplittable files already there. (CSV file only)

IncludeTranscripts

- **Default** - FALSE
- **Description** - Determines if the output data includes transcripts.

IncludeUnformattedTranscripts

- **Default** - FALSE
- **Description** - Determines if the output contains an export that includes all words in the transcript, including the words with less confidence.
 - TRUE - Unformatted transcripts are exported in the UnformattedTranscripts CSV File/SQL Table.

- **FALSE** - The UnformattedTranscript CSV File is not exported. The SQL Table exists in the remote database at all times.

IncludeWorkflows

- **Default** - TRUE
- **Description** - Determines if the output data includes workflow information.

KeepOldDateTimeFormat

- **Default** - FALSE
- **Description** - Controls the output format of the following columns:
 - The DiscoveredDate in the Interaction export.
 - The CreationDate in the TargetMediaSetDefinition export.
 - The LastModificationDate in the TargetMediaSetDefinition export.

Important

- The KeepOldDateTimeFormat configuration for existing export configurations will be set to True after upgrading to 12.4 FP6 or later. The default export configuration created during a fresh install and any export configurations created after the 12.4 FP6 upgrade will have the KeepOldDateTimeFormat configuration set to False. Modifications to this setting on existing upgrades will only occur on the 12.4 FP6 upgrade.
- If you upgrade from 12.4 FP5, you may already have export configurations containing the KeepOldDateTimeFormat setting. In this case, the upgrade should retain the value it previously had. If you upgrade from anything earlier, this setting won't be present. The upgrade will then add the setting to any existing configurations with a value of True.

KeepOldDateTimeFormatGroup2

- **Default** - FALSE
- **Description** - Controls the output format of the following columns:

- The StartTimeUtc and EndTimeUtc in the InteractionMetadata export.
- The AlertDateUtc in the WorkflowAlert export.
- The ProgressionDateUtc in the WorkflowFileProgression export.
- The InitialStatusDateTimeUTC and CurrentStatusDateTimeUTC in the WorkflowImportAuditLog export.

Important

- The KeepOldDateTimeFormatGroup2 configuration for existing export configurations will be set to True after upgrading to 12.4 FP6 or later. The default export configuration created during a fresh install and any export configurations created after the 12.4 FP6 upgrade will have the KeepOldDateTimeFormatGroup2 configuration set to False. Modifications to this setting on existing upgrades will only occur on the 12.4 FP6 upgrade.
- If you upgrade from 12.4 FP6, you may already have export configurations containing the KeepOldDateTimeFormatGroup2 setting. In this case, the upgrade should retain the value it previously had. If you upgrade from anything earlier, this setting won't be present. The upgrade will then add the setting to any existing configurations with a value of True.

MaxRetryExportCount

- **Default** - 4
- **Description** - Determines how many times the Data Export Utility will attempt to load transcripts for export from the Discovery service if any error occurs. The related setting MaxRetryTimeout controls how long in seconds the utility will pause between attempts.

MaxRetryTimeout

- **Default** - 60 seconds
- **Description** - Determines how long to pause between transcript export attempts, in seconds. This is configured in conjunction with the MaxRetryExportCount configuration.

MaxRowsPerExportFile

- **Default** - 1000000
- **Description** - Determines the maximum number of rows allowed in the zip file. If the file exceeds this value, it is split into incremental files. For example, ChatParticipant splits into ChatParticipant and ChatParticipant2. (CSV file only)

MediaMetadataBatchSize

- **Default** - 100000
- **Description** - Determines the number of records to include in each batch. Records exceeding this limit roll to the next batch (which picks up where this batch left off).

MediaSearchBatchSize

- **Default** - 100000
- **Description** - Determines the number of records to include in each batch. Records exceeding this limit roll to the next batch (which picks up where this batch left off).

MetadataValuetoSplit

- **Default** - An empty string (no splitting)
- **Description** - In scenarios with multiple linked or unlinked Engage instances and one Interaction Analytics instance, this splits the output data files based on which Engage system the interaction IDs are from so the Data Exchange Framework can send them back to the correct Engage instance. You specify the values to split for the next export. The export includes individual folders per value in the metadata column (for example, HubId).

The output has multiple sub-folders, identified by the mapping number in the _MetadataKeyValueMapping output, which shows that everything in folder 1 is related to interactions whose UDFVarchar7 value is the value of the configured metadata field. Row count summaries are split, but transcript exports are not.

The output is split for these entities: ChatParticipant, EmailAddress, EvaluationMedia, Interaction, InteractionMetadata, InteractionTagHits, Query Results, TargetMediaSetMembership, TermResult, TextualSearchTermListResult, WorkflowAlert, WorkflowFileProgression, and WorkflowImportAudit.

MetricResultBatchSize

- **Default** - 1000000
- **Description** - Determines the number of records to include in each batch. Records exceeding this limit roll to the next batch (which picks up where this batch left off).

OutputAutoSummarizationLabelNames

- **Default** - FALSE
- **Description** - Determines if you want the application to output the Interaction Analytics label names set in Management Console instead of the default Auto Summarization Enlighten Score field names. (CSV file only)

OutputType

- **Default** - CSV
- **Description** - The output options are:
 - CSV - to export to CSV files.
 - SQL - to export to tables.

OutputUDFLabelName

- **Default** - FALSE
- **Description** - Determines if you want the application to output Interaction Analytics label names instead of the UDF field names. (CSV file only)

OverrideRemoteDbExportId

- **Default** - -1
- **Description** - The ExportId of an existing export which is configured for Remote Export. If configured for re-export, use the Remote Database of OverrideRemoteDbExportId instead of default NxExport<ExportId>. This setting cannot be used for a remote export which is also configured to run in parallel (see RequireExportTrackingResourceReservation).

Important

This should only be used in consultation with NiCE support (See Re-Export to a Remote Database).

PhraseRecognitionResultCode

- **Default** - TRUE
- **Description** - Determines if a transaction result code is available in the export so you can know if the sentiment score for an interaction is real.

PublishPath

- **Default** - C:\Export\Publish
- **Description** - The location where the export results are output. (CSV file only)

RemoteDBExportMaxRetryAttempts

- **Default** - 5
- **Description** - Determines the number of times you want the remote export process to retry a failed export when the connection to the Remote Database encounters a network problem.

RemoteDBExportMaxRowsPerChunk

- **Default** - 1000000
- **Description** - Reserved. You should only change this configuration with guidance from Interaction Analytics Technical Support.

RemoteDBExportWaitForDelayInSeconds

- **Default** - 1 second
- **Description** - The value in seconds for how long the remote export process should wait between retry attempts.

RemoteDBServer

- **Default** - blank
- **Description** - The name of the server where the Remote Export Database exists for this Export ID. This is required when exporting to a remote database.

RequireExportTrackingResourceReservation

- **Default** - TRUE
- **Description** - Determines if this export can run in parallel. For Remote Exports, this also determines whether any export with the OverrideRemoteDbExportId pointing at this export or matching this export's OverrideRemoteDbExportId can run at all.
 - TRUE - Reserves the ExportTracking database for the current export only. Other exports which also have this setting set to TRUE will not be able to run in parallel. Other exports which have this setting set to FALSE will ignore any existing reservation.
 - FALSE - This Export can be run in parallel.

RequireResourceReservation

- **Default** - FALSE
- **Description** - Set this value to TRUE to require a Resource Reservation for the NexidiaESI and NexidiaESIDW databases when the DEU executes. The best practice is to set this to TRUE to remove a resource reservation for any reason (such as a crash), run this stored procedure: export.cspAdminDropResourceReservation.

ResourceReservationExpirationTime

- **Default** - 7200
- **Description** - Determines how long (in seconds) the resource reservation is in place for the NexidiaESI, NexidiaESIDW, and ExportTracking databases.

ResourceReservationPollingTime

- **Default** - 7200
- **Description** - Determines how long (in seconds) the NexidiaESI, NexidiaESIDW, and ExportTracking databases must wait for the resource reservation before polling is stopped.

RetentionInDays

- **Default** - 90 days
- **Description** - Determines when batches get purged. A batch is deleted if the difference (in days) between the current and batch end times exceeds this value.

When the Data Export Utility runs, it copies this value to the DataRetention.RetentionConfigurations table on the remote database. The <RemoteDB>-DataAging.sql job runs weekly on Sunday at 1:00:00 PM and performs these tasks:

- Deletes old batches based on this value.
- Deletes failed batches. These are batches with NULL, 1, and 0 in the BatchEndDateTime, BatchActiveFlag, and BatchSuccessFlag in the cfgExportBatchTracking table.

Note: This is the retention for the Remote Database only. Logging information is available in the DataRetention.Log file. (SQL table only)

SqlCommandTimeout

- **Default** - 3600
- **Description** - The timeout limit for SQL queries (in seconds). If this value is exceeded, execution stops and an error occurs.

StartEvaluationPublishDateUTC

- **Default** - 1900-01-01
- **Description** - The beginning date for publishing evaluations.

StartMediaDate

- **Default** - 1900-01-01
- **Description** - The export start date. Media dated earlier than this date are not exported. The StartMediaDate and EndMediaDate are required for data export.

StartTranscriptDateUTC

- **Default** - 1900-01-01
- **Description** - The transcript output is limited to only calls transcribed after this date. The filtering is applied on the TranscriptCreationDateTimeUTC field in the NxDiscovery.dbo.SourceMedia table, and only applies if you have specified both the StartTranscriptDateUTC and the EndTranscriptDateUTC.

TargetMediaSetBatchSize

- **Default** - 1000000
- **Description** - Determines the number of records per batch. Records exceeding this limit roll to the next batch.

TargetMediaSetDefinitionDatesInLocalTime

- **Default** - FALSE
- **Description** - Converts the TargetMediaSetDefinition CreationDate and LastModificationDate in the TargetMediaSetDefinition export to be exported as local time instead of UTC.

TargetMediaSetExportDeltasOnly

- **Default** - TRUE
- **Description** - Determines if the TargetMediaSetMembership output data contains only the target media set membership delta. The population of the TargetMediaSetStatus column varies based on this setting and is always exported regardless of this setting.
 - TRUE - The TargetMediaSetStatus column has the value of "added/removed" for both CSV and SQL Table outputs.
 - FALSE - The TargetMediaSetStatus column has "NULL" in the SQL Table output, and the CSV output does not include it.

Important

The number of days the application keeps obsolete Target Media Set Bridge records is set in the Interaction Analytics Management Console in the TargetMediaSet.BridgeTargetMediaSetRetentionDays configuration. A value of 0 indicates that they are not kept. The default value is 7.

The ToolBox.InitializeTargetMediaSetDeltasForExport stored procedure initializes the target media set - media tracking information for this configuration by loading all target media set - media tuples up to a specified number of days in the past.

The TargetMediaSetIDsToExportInDeltasMode configuration setting determines the list of TargetMediaSetIDs to be initialized if it is configured.

To use this stored procedure, take these steps:

1. Disable the Core-Update and Data Export Utility system jobs.
2. Set the @ExportID and @UpperBoundsLimitInDays parameters in the stored procedure to the desired values.
 - @ExportID: The ExportID that will use the TargetMediaSetExportDeltasOnly configuration setting.
 - @UpperBoundsLimitInDays: The number of days subtracted from the current date to get TMS-Media tuples for.
3. Run the stored procedure.
4. Update the TargetMediaSetExportDeltasOnly export configuration to TRUE for the ExportID used in the script.
5. Enable the Core-Update and Data Export Utility system jobs.

Note: The ToolBox.InitializeTargetMediaSetDeltasForExport stored procedure was named cspAdminInitializeTargetMediaSetDeltasForExport in previous version that it is supported in.

TargetMediaSetIDsToExportInDeltasMode

- **Default** - An empty string (all TMS are exported)
- **Description** - A comma-delimited list of the target media set IDS to export. This configuration applies only to the Deltas Mode.

TempPath

- **Default** - c:\Export\Temp
- **Description** - The temporary file location. (CSV file only)

TMSFilteringEnabled

- **Default** - TRUE
- **Description** - Determines if historical data is included in the output.
 - TRUE - Any target media sets configured for inclusion in the export (enabled from the Target Media Set window in Interaction Analytics Administration) will have their membership files exported.
 - FALSE - The output includes all data.

These entities are filtered: QueryResult, TargetMediaSetDefinition, and TargetMediaSetMembership.

Important

This configuration setting is ignored if the TargetMediaSetExportDeltasOnly configuration setting is also enabled.

TranscriptsBatchSize

- **Default** - 10000
- **Description** - Determines the amount of source media files per batch for which a transcript is exported. This configuration is only relevant for the Transcripts export.

TranscriptsMaxDegreeOfParallelism

- **Default** - -1
- **Description** - Controls the maximum number of threads that will fetch transcripts at one time.

TranscriptsTargetMediaSetId

- **Default** - 0
- **Description** - Setting this value will only export transcripts for the given TargetMediaSetId, which can be found in Discovery. This configuration is only relevant for the Transcripts export.

UseModalMode

- **Default** - TRUE
- **Description** - Determines if Modal Operation is used.
 - TRUE - The Nexidia.ESI.DataExport.exe waits for the background worker service to complete the export before exiting.
 - FALSE - The Nexidia.ESI.DataExport.exe requests the export to execute and does not wait for the background worker service to complete the data export before exiting.

ZipOutput

- **Default** - TRUE
- **Description** - Determines how the .csv files are output. (CSV file only)
 - TRUE - The files are output in a single ZIP file.
 - FALSE - The individual files are output.

Chat Output Format

This topic provides examples of how the `ExportChatsInOriginalFormat` configuration affects how chats are exported.

Original Format Output

When you set the `ExportChatsInOriginalFormat` configuration to **true**, the chats are exported in their original format.

```
"9993","Agent","0","0","Thank you for contacting APS Cable.","0"
"9993","Agent","0","0","I understand that you have a question about your bill?","0"
"9993","Customer","0","0","I am trying to get the free blender that I was promised when I signed up for DSL service.","0"
"9993","Agent","0","0","Alright. I can help you with that","0"
"9993","Agent","0","0","May I verify your name please","0"
"9993","Customer","0","0","My name is","0"
"9993","Agent","0","0","And your account number?","0"
"9993","Customer","300000","300000","My account number is: ","0"
"9993","Agent","300000","300000","Can you please provide me your PIN for verification of your account","0"
"9993","Customer","300000","300000","My PIN is","0"
"9993","Agent","360000","360000","Thank you","0"
"9993","Agent","420000","420000","Did you fax","0"
"9993","Customer","420000","420000","I didn't order it. I thought it was just come in the mail.","0"
"9993","Agent","420000","420000","OK. I can help you.","0"
"9993","Agent","480000","480000","If you go to http://www.americaphone.com there is an icon in the home page to order the blender.","0"
"9993","Customer","480000","480000","The blender should have just been mailed to me.","0"
"9993","Agent","480000","480000","Sorry","0"
"9993","Customer","540000","540000","Thanks","0"
"9993","Agent","600000","600000","Is there anything else I can assist you with?","0"
"9993","Customer","600000","600000","No","0"
```

"9993","Agent","600000","600000","Thank you for chatting with APS Cable. We value you as a customer.", "0"

Tokenized Format Output

When you set the ExportChatsInOriginalFormat configuration to **false**, the chats are exported using a tokenized format.

"9993","Agent","0","15059","THANK YOU FOR CONTACTING APS CABLE I UNDERSTAND THAT YOU HAVE A QUESTION ABOUT YOUR BILL", "0"

"9993","Customer","16016","34104","I AM TRYING TO GET THE FREE BLENDER THAT I WAS PROMISED WHEN I SIGNED UP FOR DSL SERVICE", "0"

"9993","Agent","35035","47071","ALRIGHT I CAN HELP YOU WITH THAT MAY I VERIFY YOUR NAME PLEASE", "0"

"9993","Customer","48048","50058","MY NAME IS", "0"

"9993","Agent","51051","54074","AND YOUR ACCOUNT NUMBER", "0"

"9993","Customer","55055","58075","MY ACCOUNT NUMBER IS", "0"

"9993","Agent","59059","70126","CAN YOU PLEASE PROVIDE ME YOUR PIN FOR VERIFICATION OF YOUR ACCOUNT", "0"

"9993","Customer","71071","73080","MY PIN IS", "0"

"9993","Agent","74074","78087","THANK YOU DID YOU FAX", "0"

"9993","Customer","79079","91137","I DIDN'T ORDER IT I THOUGHT IT WAS JUST COME IN THE MAIL", "0"

"9993","Agent","92092","113192","OK I CAN HELP YOU IF YOU GO TO [HTTP://WWW.AMERICAPHONE.COM](http://www.americaphone.com) THERE IS AN ICON IN THE HOME PAGE TO ORDER THE BLENDER", "0"

"9993","Customer","114114","122160","THE BLENDER SHOULD HAVE JUST BEEN MAILED TO ME", "0"

"9993","Agent","123123","123128","SORRY", "0"

"9993","Customer","124124","124130","THANKS", "0"

"9993","Agent","125125","133169","IS THERE ANYTHING ELSE I CAN ASSIST YOU WITH", "0"

"9993","Customer","134134","134136","NO", "0"


"9993","Agent","135135","147200","THANK YOU FOR CHATTING WITH APS CABLE WE VALUE YOU AS A CUSTOMER", "0"

Export Behavior for Template Answer Keys

This topic provides examples of how the IncludeNullValuesInSelfEvaluations configuration affects the export behavior for the EvalsSelfEvaluationQuestionCurrentAnswer and EvalsSelfEvaluationQuestionInitialAnswer exports based on whether the export is for a new or upgraded installation.

Upgraded Installation


When you set the IncludeNullValuesInSelfEvaluations configuration to **true**, blank or missing answers for these records are published as an empty string "".

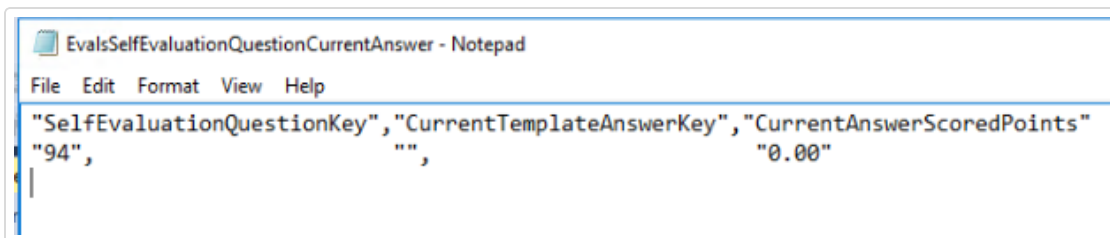

```
EvalsSelfEvaluationQuestionCurrentAnswer - Notepad
File Edit Format View Help
"SelfEvaluationQuestionKey","CurrentTemplateAnswerKey","CurrentAnswerScoredPoints"
"94", "", "0.00"
```

New Installation

When you set the IncludeNullValuesInSelfEvaluations configuration to **false**, blank or missing answers for these records are published as '-1'.

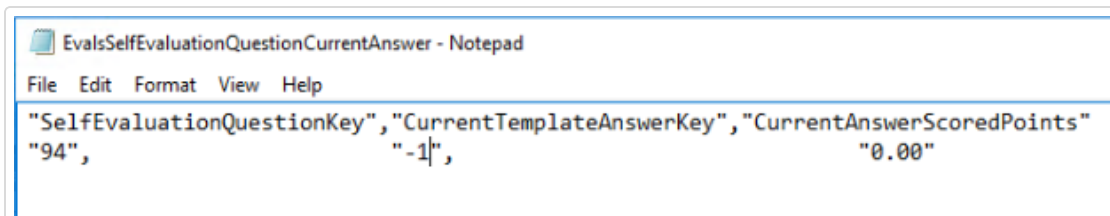

```
EvalsSelfEvaluationQuestionCurrentAnswer - Notepad
File Edit Format View Help
"SelfEvaluationQuestionKey","CurrentTemplateAnswerKey","CurrentAnswerScoredPoints"
"94", "-1", "0.00"
```


Result Codes for Phrase Recognition

The table below shows the possible result codes that can be exported.

RESULT CODE	NAME	DESCRIPTION
0	NoError	If the DiscoveryTick for this media is 0, this result code indicates no error has occurred when processing this media. If the DiscoveryTick for this media is -1, this result code indicates the media has not been processed.
10	UnknownGridOperationFailureForDiscovery	Indicates an unknown error occurred during the phrase recognition process during the Grid phase for the Discovery purpose.
11	GridCannotAccessMediaForDiscovery	Indicates Grid was unable to access a given media file with the supplied URI for the Discovery purpose.

RESULT CODE	NAME	DESCRIPTION
12	GridCannotConvertMediaForDiscovery	Indicates Grid was unable to convert this media into a format suitable for phrase recognition for the Discovery purpose.
15	TextGridTokenStreamRetrievalFailureForDiscovery	Indicates a failure when retrieving a given media's token stream from TextGrid (usually because a node is down or overloaded) for the Discovery purpose.
20	UnknownGridOperationFailureForQueryBuilder	Indicates an unknown error occurred during the phrase recognition process during the Grid phase for the QueryBuilder purpose.
21	GridCannotAccessMediaForQueryBuilder	Indicates Grid was unable to access a given media file with the supplied URI for the QueryBuilder purpose.

RESULT CODE	NAME	DESCRIPTION
22	GridCannotConvertMediaForQueryBuilder	Indicates Grid was unable to convert this media into a format suitable for phrase recognition for the QueryBuilder purpose.
25	TextGridTokenStreamRetrievalFailureForQueryBuilder	Indicates a failure when retrieving a given media's token stream from TextGrid (usually because a node is down or overloaded) for the Discovery purpose.
30	FailurePersistingPhrasesForDiscovery	Indicates a failure in the phrase analysis segment in the discovery pipeline. Specifically, this can occur when persisting individual phrases discovered for media to the Discovery database.
40	BulkProcessingFailureForQueryBuilder	Indicates a failure when persisting phrases or their hits in the Query Builder pipeline.

RESULT CODE	NAME	DESCRIPTION
50	PhraseHitSaveFailureForDiscovery	Indicates a failure when persisting phrase hits in the Discovery pipeline.
60	TranscriptWriteFailure	Indicates a failure when writing the transcript (.nxpr) file to disk.
70	SentimentCalculationFailure	Indicates a failure when calculating a given media's sentiment.
71	SentimentPersistenceFailure	Indicates a failure when persisting a given media's sentiment.
72	UnknownSentimentFailure	Indicates an unknown failure occurred during the sentiment portion of the Discovery pipeline.
80	MediaCorrespondsToMultiplePhrasePacks	Indicates a given media corresponds to multiple phrase packs across a number of Target Media Sets.

RESULT CODE	NAME	DESCRIPTION
90	NoResultsFromAsrOrImport	Indicates there were no results for the media for the ASR process.
100	DoesNotRequireAsr	Indicates the media belongs to a phrase pack when it does not require ASR.
101	FailedToDropFromGrid	Indicates the media was unable to be dropped from Grid after the ASR process was complete. This is a special case, as by the time the media has reached this point in the Discovery pipeline, all other steps have been completed. This includes sentiment persistence, transcript creation, and all other finalization steps.

[This page intentionally left blank]

Working with the Data Export Utility

After you have installed Interaction Analytics, the application creates these folders on the first execution of the Data Export Utility for export:

- Temp - This is the working space for the data export in progress.
- Publish - This is the location for completed export files. You can change this by modifying the PublishPath setting in the **export.cfgExportConfig table**. This is specific to each export.


Multiple export definitions share the same logs. Each export definition must have a private temp and publish folder on the same physical volume. For clustered environments, the folders are on the production media server. The log location is Nexidia\Analytics\Logs. It contains the Nexidia.DataExportLog.txt file.

Execution of the Nexidia.Esi.DataExport.exe fires an export request (it does not perform the actual export). This request is executed inside the Nexidia Background Worker Service based on priority.

RUNNING THE DATA EXPORT UTILITY

You can run the Data Export Utility on the same server as the SQL Server hosting Interaction Analytics or on a different server. A typical schedule is to run either a daily or weekly extract. The user running the Data Export Utility must have Write-access to the export output folder for the CSV Files or the SQL Tables to be output and Write-access to the bin directory for the log files to be output.

You must enable the DEU system job (DEU.DEU) to run for the Data Export Utility. You can verify this in the Interaction Analytics - Management Console.

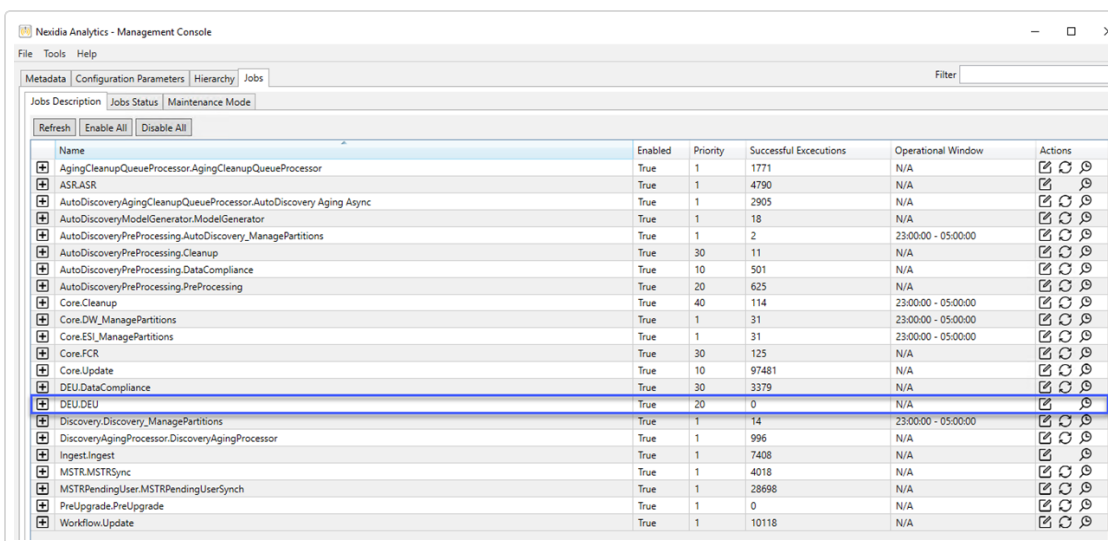

The screenshot shows the 'Nexidia Analytics - Management Console' window. The 'Jobs' tab is selected, and the 'Jobs Description' sub-tab is active. A table lists various system jobs with columns for Name, Enabled, Priority, Successful Executions, Operational Window, and Actions. The job 'DEU.DEU' is highlighted with a blue selection bar.

Name	Enabled	Priority	Successful Executions	Operational Window	Actions
Aging/CleanupQueueProcessor.AgingCleanupQueueProcessor	True	1	1771	N/A	[Icons]
ASR.ASR	True	1	4790	N/A	[Icons]
AutoDiscoveryAgingCleanupQueueProcessor.AutoDiscovery Aging Async	True	1	2905	N/A	[Icons]
AutoDiscoveryModelGenerator.ModelGenerator	True	1	18	N/A	[Icons]
AutoDiscoveryPreProcessing.AutoDiscovery_ManagePartitions	True	1	2	23:00:00 - 05:00:00	[Icons]
AutoDiscoveryPreProcessing.Cleanup	True	30	11	N/A	[Icons]
AutoDiscoveryPreProcessing.DataCompliance	True	10	501	N/A	[Icons]
AutoDiscoveryPreProcessing.PreProcessing	True	20	625	N/A	[Icons]
Core.Cleanup	True	40	114	23:00:00 - 05:00:00	[Icons]
Core.DW_ManagePartitions	True	1	31	23:00:00 - 05:00:00	[Icons]
Core.ESI_ManagePartitions	True	1	31	23:00:00 - 05:00:00	[Icons]
Core.FCR	True	30	125	N/A	[Icons]
Core.Update	True	10	97481	N/A	[Icons]
DEU.DataCompliance	True	30	3379	N/A	[Icons]
DEU.DEU	True	20	0	N/A	[Icons]
Discovery.Discovery_ManagePartitions	True	1	14	23:00:00 - 05:00:00	[Icons]
DiscoveryAgingProcessor.DiscoveryAgingProcessor	True	1	996	N/A	[Icons]
Ingest.Ingest	True	1	7408	N/A	[Icons]
MSTR.MSTRSync	True	1	4018	N/A	[Icons]
MSTRPendingUser.MSTRPendingUserSynch	True	1	28698	N/A	[Icons]
PreUpgrade.PreUpgrade	True	1	0	N/A	[Icons]
Workflow.Update	True	1	10118	N/A	[Icons]

DATA DELIVERY

The Data Export Utility has three export modes and two export output options. You can specify the output type using the `OutputType` setting in the `Export.cfgExportConfig` table.

Export Modes

These export data modes are supported:

- **Full** - Every export includes all data for the entity, including logically deleted entries. An example is the `QueryGroupDefinition` entity, where we include every version of every query group that has ever existed, including those that an administrator has deleted from Interaction Analytics.
- **Full (without past data)** - Every export includes all current data for the entity, excluding logically deleted entries. An example is the `TargetMediaSetDefinition` entity, where every Target Media Set that exists at that time is included but does not include those that an administrator has deleted from Interaction Analytics.
- **Incremental** - Only new entities are exported.

Export Output Options

- **CSV File** - A CSV file is created for each entity. Each exported data entity is a single CSV file with UTF-8 encoding by default. You can specify how the files are output using the `ZipOutput` setting in the `export.cfgExportConfig` table. The default value is to deliver them in a ZIP file. The batch size is configurable but typically comprises up to 500,000 interactions. You can transfer the files using the Nexidia Data Exchange Framework or the Extractor. Refer to the *Nexidia Data Exchange Framework User Guide* to learn more.
- **SQL Tables in a Remote Database** - The export data results are written to SQL database tables. The output follows the same structure and includes the same data as the CSV file output. All the exported data tables in the remote database export are in the `NIAExport` schema, and their names will follow this format: `NiaExport.InteractionMetadata`.

Batching

The DEU output is split into batches because of the large volume of data. Each batch exports a subset of the data instead of exporting all of the data at once. You will specify the number of batches to export by setting the `BatchesPerExport` configuration value in the `Export.cfgExportConfig` table.

The DEU export is driven off the BatchBounds Parameters. The parameters are only considered if their corresponding exports are enabled. The following table lists the BatchBound Parameters and their corresponding exports.

PARAMETER	CORRESPONDING EXPORT
EvalsEtlBatchId	Evaluations
MetadataRowId	Interaction Metadata
SearchExportTrackingKey	Query Results
SourceMediaSentimentRV	Sentiment Data (output in the InteractionMetadata export)
TMSExportTrackingKey	Target Media Sets
WorkflowFileProgressionKey	Workflow
MetricResultEtlBatchId	Metric Results

Each batch delivers up to the maximum batch size values specified in the Export.cfgExportConfig table. These tracking keys are not maintained in the cfgExportConfig table. When you execute the DEU, it displays the BatchBounds as shown below. It indicates that the DEU will keep running until its tracking results of the BatchBounds Parameters are greater or equal to the values displayed for each of them.

```

Administrator: Command Prompt
IncludeWorkflows : true
MaxRowsPerExportFile : 1000000
MediaMetadataBatchSize : 500
MediaSearchBatchSize : 500
MetadataValueToSplit :
MetricResultBatchSize : 500
OutputUDFLabelName : false
PublishPath : C:\Export\Publish
RequireResourceReservation : false
ResourceReservationExpirationTime : 7200
ResourceReservationPollingTime : 7200
SqlCommandTimeout : 3600
StartEvaluationPublishDateUTC : 1900-01-01
StartMediaDate : 1900-01-01
TargetMediaSetBatchSize : 500
TempPath : C:\Export\Temp
IMSFilteringEnabled : true
ZipOutput : false
Parsed values from configuration
ExportID: 1
tempPath: C:\Export\Temp
exportPath: C:\Export\Publish
fileFormat: csv
fileEncoding: System.Text.UTF8Encoding
zipOutput: False
includeMetadata: True
includeTerminals: True
includeQueryHints: True
includeAgentMetrics: True
includeTargetMediaSetMembership: True
includeWorkflows: True
includeEvaluations: True
csvQuoteAllFields: True
csvQuoteNoFields: False
csvDelimiter: ,
csvHasHeaderRecord: True
csvBufferSize: 65536
appendTimestampToData: False
sqlCmdTimeout: 3600
maxRowsPerExportFile: 1000000
metadataValueToSplit:
includeEmptyExportFiles: True
requireResourceReservation: False
resourceReservationPollingTime: 7200

===== BatchBounds =====
** <MaxBatchBounds>
** EvalEtlBatchId : 0
** MetadataRowId : 30,777
** SearchExportTrackingKey : 4,294,998,074
** SourceMediaSentimentRU : 2,169
** IMSExportTrackingKey : 4,294,970,008
** WorkflowFileProgressionKey : 0
** MetricResultEtlBatchId : 1
=====
acquiring export tracking reservation ...
Export tracking reservation acquired!
Deleting old temp files.
Export BatchId: 9 <tracking number in ExportTracking.export.cfgExportBatchTracking>
Running Export.
Finished clearing tables. Time Taken: 00:00:00.0568093
Finished Extracting source data. Time Taken: 00:00:00.1298260
Finished transforming data. Time Taken: 00:00:00.1596751
Finished loading export data. Time Taken: 00:00:00.2222008
Finished extracting data. Time Taken: 00:00:00.3088961
Finished updating results tracking. Time Taken: 00:00:00.3264728
Finished finished cleaning up CSUs. Time Taken: 00:00:00.3325253
Finished summarizing CSUs. Time Taken: 00:00:00.3482474
Time Taken: 00:00:00.3518881
Publishing files.

===== BatchBounds Validator =====
** MetadataRowId : incomplete <304 < 30,777> WORKLEFT = 30,273>
** SourceMediaSentimentRU : COMPLETED <2,169 < 2,169>
** SearchExportTrackingKey : incomplete <4,294,967,800 < 4,294,998,074> WORKLEFT = 30,274>
** IMSExportTrackingKey : incomplete <4,294,967,554 < 4,294,970,008> WORKLEFT = 2,454>
** WorkflowFileProgressionKey : COMPLETED <0 < 0>
** EvalEtlBatchId : COMPLETED <0 < 0>

```

The BatchBounds Validator evaluates the parameters processing progress and lists the status as shown below. The DEU execution is complete when the processing of all the parameters has been completed.

```

Administrator: Command Prompt
TempPath : C:\Export\Temp
TMSFilteringEnabled : true
ZipOutput : false
Parsed values from configuration
ExportID: 1
tempPath: C:\Export\Temp
exportPath: C:\Export\Publish
fileFormat: csv
fileEncoding: System.Text.UTF8Encoding
zipOutput: false
includeMetadata: True
includeTermHits: True
includeQueryHits: True
includeAgentMetrics: True
includeTargetMediaSetMembership: True
includeWorkflows: True
includeEvaluations: True
csvQuoteAllFields: True
csvQuoteNoFields: False
csvDelimiter: ,
csvHasHeaderRecord: True
csvBufferSize: 65536
appendTimestampData: False
ulCmdTimeout: 3600
maxRowsPerExportFile: 1000000
metadataValueToSplit:
includeEmptyExportFiles: True
requireResourceReservation: False
resourceReservationPollingTime: 7200

===== BatchBounds =====
** <MaxBatchBounds>
** EvalEtlBatchId : 0
** MetadataRowId : 30,777
** SearchExportTrackingKey : 4,294,998,074
** SourceMediaSentimentRU : 2,169
** TMSExportTrackingKey : 4,294,970,008
** WorkflowFileProgressionKey : 0
** MetricResultEtlBatchId : 1
=====
Acquiring ExportTracking reservation ...
ExportTracking reservation acquired!
Deleting old temp files.
Export BatchId: 9 <tracking number in ExportTracking.export.cfgExportBatchTracking>
Running Export.
Finished clearing tables. Time Taken: 00:00:00.0568093
Finished Extracting source data. Time Taken: 00:00:00.1290260
Finished transforming data. Time Taken: 00:00:00.1596751
Finished loading export data. Time Taken: 00:00:00.2222000
Finished extracting data. Time Taken: 00:00:00.3088961
Finished updating results tracking. Time Taken: 00:00:00.3264728
Finished finished cleaning up CSUs. Time Taken: 00:00:00.3325253
Finished summarizing CSUs. Time Taken: 00:00:00.3482474
Time Taken: 00:00:00.3518881
Publishing Files.

===== BatchBounds Validator =====
** MetadataRowId : incomplete <504 < 30,777> WORKLEFT = 30,273
** SourceMediaSentimentRU : COMPLETED <2,169 < 2,169>
** SearchExportTrackingKey : incomplete <4,294,967,800 < 4,294,998,074> WORKLEFT = 30,274
** TMSExportTrackingKey : incomplete <4,294,967,554 < 4,294,970,008> WORKLEFT = 2,454
** WorkflowFileProgressionKey : COMPLETED <0 < 0>
** EvalEtlBatchId : COMPLETED <0 < 0>
** MetricResultEtlBatchId : COMPLETED <1 < 1>
** --> DEU Execution incomplete
=====
Acquiring ExportTracking reservation ...
ExportTracking reservation acquired!
Deleting old temp files.
Export BatchId: 10 <tracking number in ExportTracking.export.cfgExportBatchTracking>
Running Export.
Finished clearing tables. Time Taken: 00:00:00.0145571
Finished Extracting source data. Time Taken: 00:00:00.0929517
Finished transforming data. Time Taken: 00:00:00.1395826
Finished loading export data. Time Taken: 00:00:00.2297278
Finished extracting data. Time Taken: 00:00:00.2896144
Finished updating results tracking. Time Taken: 00:00:00.3095346
Finished finished cleaning up CSUs. Time Taken: 00:00:00.3116491

```

You can troubleshoot with these log files:

- ExportUtilLastRun.log
- ExportUtilCumulative.log

DATA AGING

Data aging was added for the Data Export Utility Tracking tables.

The following jobs were added:

- NIA-DEU_Cleanup SQL Agent job - This job is scheduled to run every day in five-minute intervals.
- DEU_Cleanup - This is a continuous system job. The JobPoolName is DEU and the JobstepName is DEU Aging.

The Nexidia.DEU.DataAgingBatchSize reserved Management Console configuration controls the number of Source Media Ids deleted from each table for each job iteration. The default value is 500,000 records.

The Nexidia.DataExport.DataAgingLog.txt file contains all the data aging logging.

Data is aged out of the following tables with Source Media Ids that have been aged out of Interaction Analytics:

- export.cfgSourceMediaSearchTracking
- export.cfgSourceMediaTracking
- export.cfgSourceMediaTargetMediaSetBridgeKeyTracking
- export.cfgSourceMediaTranscriptExportTracking
- export.cfgSourceMediaUnformattedTranscriptExportTracking
- compliance.cfgSourceMediaComplianceId

The process is as follows: The NexidiaESI.dbo.XSouceMediaDEU is populated with source media IDS targeted for data aging. The NexidiaESI.DataAging.DEUCleanupQueue is populated with records from the NexidiaESI.dbo.XSouceMediaDEU at the end of each ETL run. In the background, the NIA-DEU-Cleanup SQL Agent job fires, starts the process, and looks for work in the NexidiaESI.DataAging.DEUCleanupQueue.

When it finds work in the queue, the DEU Aging job looks in the tracking tables, and based on the source media IDs in the queue, it will start purging those source media IDs from the tables. Since this is a continuous job, it constantly looks for work and is always running. The data aging process will pause when a Data Export Utility execution runs and resumes when the execution has finished.

CREATE THE EXPORTTRACKING DATABASE

The ExportTracking Database is created by the Interaction Analytics installer on the same SQL Server instance as the NexidiaESI and NexidiaESIDW databases. It contains three system tables that specify configuration options, get information on exported batches, and track exported media transcripts.

You can create the Nexidia ExportTracking Database at any time. You must name it ExportTracking, and create it on the same SQL Server instance as the NexidiaESI and NexidiaESIDW databases.

→ To create the ExportTracking Database (if not previously created):

1. Launch SQL Server Management Studio.
2. Connect to the SQL Server instance hosting the Interaction Analytics databases.
3. On the server hosting Interaction Analytics databases, go to **Program Files > Nexidia > Nexidia Analytics > DatabaseScripts > DatabaseCreateScripts**.
4. Open the **05_CreateExportTracking.sql** script and update the database file location by replacing **#MergeMdfFolder#** and **#MergeLdfFolder#** with the appropriate values.
5. Save and execute the script.
6. After completion, add the service account as a user to the database.

System Tables

TABLE	DESCRIPTION
cfgExportConfig	This table contains all the Data Export Utility configuration options.


TABLE	DESCRIPTION
cfgExportBatchTracking	This table provides information on the exported batches including the export file name, one row per batch. It keeps track of the Data Export Utility's progress in exporting data. Successful batches will have the BatchActiveFlag equal to 0 and the BatchSuccessFlag equal to 1. The <RemoteDB>-DataAging.sql job handles the retention of failed batches.
cfgSourceMediaTranscriptExportTracking	This table tracks the media transcripts that were exported. Note: Exports can be run in parallel. This table is created separately for each export and each export has a unique schema and a unique set of tables.

CREATE THE REMOTE EXPORT DATABASE

After you create a SQL remote export configuration, use the Interaction Analytics Cumulative Updater to create the remote export database. See the *Interaction Analytics System Requirements guide* for Microsoft SQL Server requirements.

→ **To create the remote export database:**

1. In the Cumulative Updater, click **Install > Modify or Repair Analytics**. The Modify or Repair Options window opens.

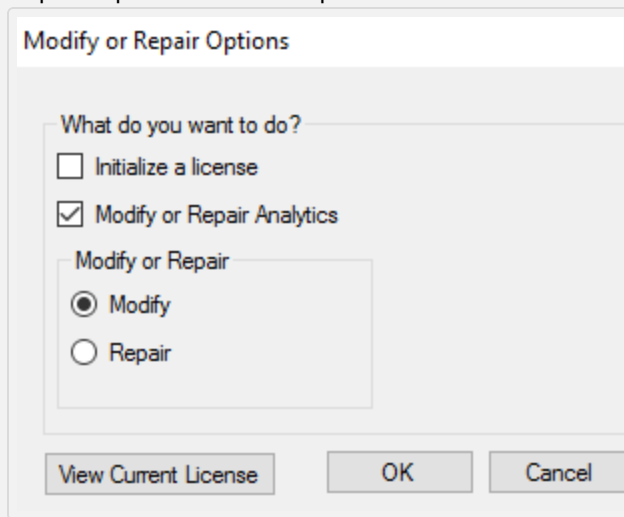

2. Select the **Modify or Repair Analytics** checkbox, then select the **Modify** radio button. The Modify window opens.

Modify

Install Location:

Configuration Service Host Name:

Service Account Login:


Database Server:

License File:

License found in database 'NexidiaESI' on server instance 'vqa-16-dpl06'.

```
{
  "FormatVersion": 1,
  "CustomerName": "Nexidia",
  "InitialNxQcVersion": "Nexidia Analytics 12.4",
  "Environment": "Lab",
  "InitialLicenseFileVersion": 1,
  "UpdatedLicenseFileVersion": 1,
  "SystemSN": "1",
  "NiceSalesOrderNumber": "1",
  "LicenseEndDateUtcText": "9999-12-31T00:00:00Z (Does not expire)",
  "LicensedPackage": "Nexidia Analytics",
  "LicensedPackageOptions": [
    "ESI.Package.Full",
    "ESI.Version.12",
    "ESI.ReportProfessional",
    "ESI.QC",
    "ESI.ComplianceWorkflow",
    "ESI.AutoDiscovery"
  ],
  "CreateDateUtc": "2023-02-08T03:31:50Z",
  "UpdateDateUtc": "2023-02-08T03:31:50Z"
}
```

3. In the **Service Account Login** field, click **Login** and enter the Nexidia Service Account user credentials, then click **OK**.
4. In the **Database Server** field, click **Connect**, enter the SQL server instance containing the ESI database, then click **OK**.
5. Click **Next**. The Modify Interaction Analytics window opens, showing all available components.

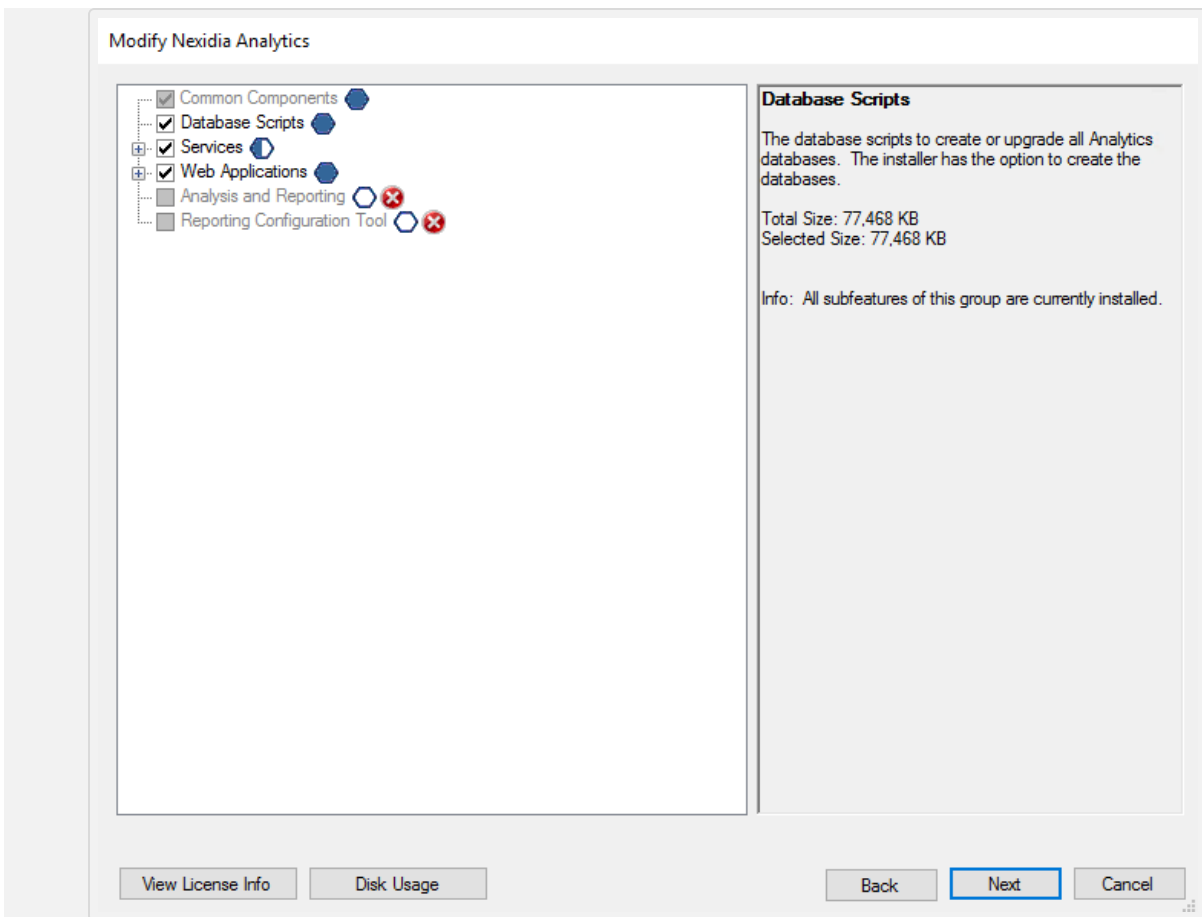

6. Ensure that the **Database Scripts** checkbox is selected, then click **Next**. The Modify Nexidia Analytics - Database Scripts options window opens, listing the database files. The Create databases section lists the remote export database that will be created.

Modify Nexidia Analytics - Database Script Options

Scripts Folder: C:\Program Files\Nexidia\Analytics\DatabaseScripts

NIA Package: Nexidia Analytics

Service Account User: fast-talk\qa1

Database Files: Set path for all selected Select all rows


	Logical Name	Type	Folder	Browse
	NxExport2_Primary	Data	C:\Program Files\Microsoft SQL Server\MSSQL14.MSSQLSERVER\MSSQL\DATA	Browse
▶	NxExport2_ProdData	Data	C:\Program Files\Microsoft SQL Server\MSSQL14.MSSQLSERVER\MSSQL\DATA	Browse
	NxExport2_ProdIndex	Data	C:\Program Files\Microsoft SQL Server\MSSQL14.MSSQLSERVER\MSSQL\DATA	Browse
	NxExport2_Log	Data	C:\Program Files\Microsoft SQL Server\MSSQL14.MSSQLSERVER\MSSQL\DATA	Browse

Create databases

	Create	Type	Server	Connect	Database Create Action
	☒	Discovery	vqa-16-dpl06	Connect	All exist, no work to do: NxDiscovery
	☒	AutoDiscovery	vqa-16-dpl06	Connect	All exist, no work to do: NxAutoDiscovery
	☒	RemoteExport	VQA-16-DPL06		Will create all: NxExport2

View License Info Disk Usage Back Next Cancel

7. (Optional) Customize the location of the database files by clicking **Browse** and selecting the required location.
8. Click **Next**. A configuration message opens.

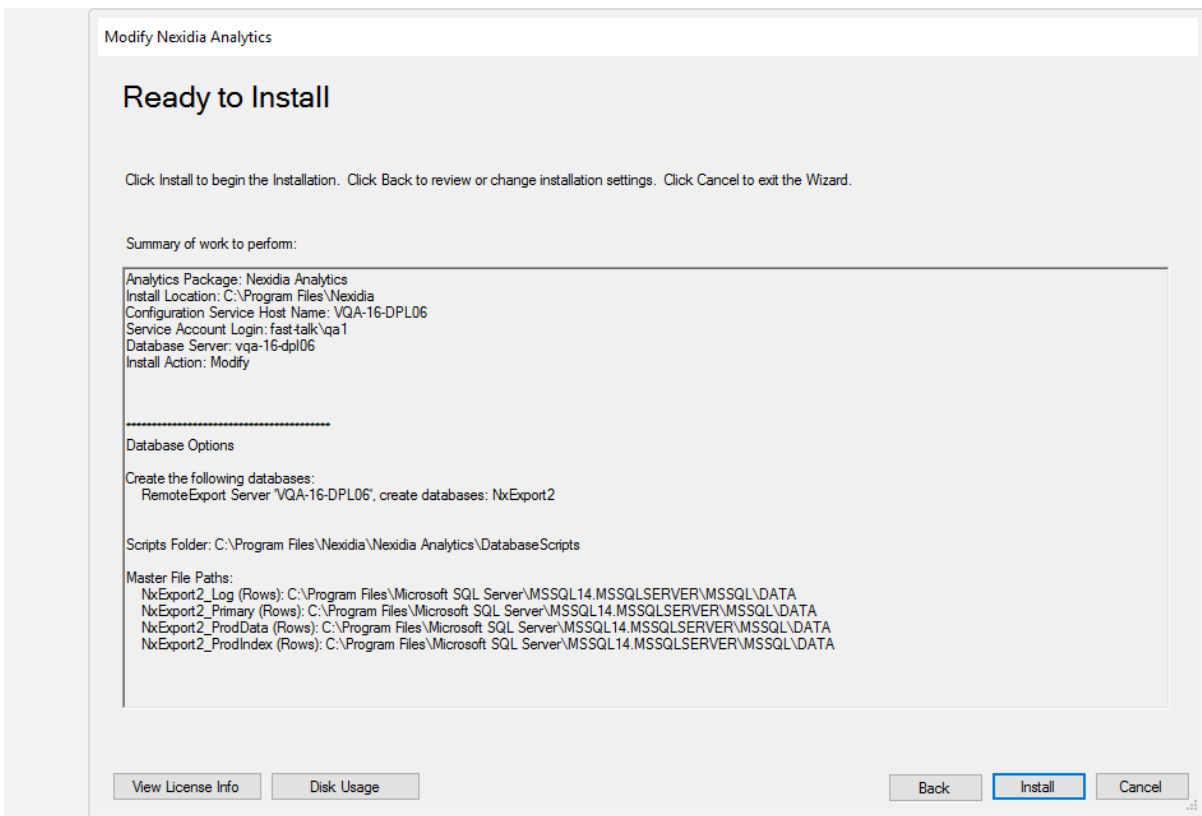

9. Click **Install**. The remote export database is created.
10. Use the Cumulative Updater to apply any updates to the new remote export database. See the *Interaction Analytics Installation and Maintenance Guide* for details on applying updates.

System Tables

TABLE	DESCRIPTION
DataRetention.JobExecutionCounter	This table indicates how many times the DataRetention job was executed.
DataRetention.Logs	This table contains logging for the data retention processing.
DataRetention.RetentionConfigurations	This table contains the current RetentionInDays configuration.
DataRetention.TablesUnderRetention	This table contains all the data tables that are relevant for the retention.
cfgExportBatchTracking	This table provides information on the exported batches and includes the export file name, one row per batch. It keeps track of the Data Export Utility's progress in exporting data. Successful batches will have the BatchActiveFlag equal to 0 and the BatchSuccessFlag equal to 1. The <RemoteDB>-DataAging.sql job handles the retention of failed batches.
RowCountSummary	This table lists how many rows were exported for each table per batch.
InteractionMetadataDisplay View	This table displays the UDF display names instead of the system names. When the display name is changed, you must re-execute the DEU to update the view on the remote database (even if there is no new data for export).

TABLE	DESCRIPTION
NiaExport.HierarchyDisplay View	This table displays the Hierarchy label display names instead of the system names. When the display name is changed, you must re-execute the DEU to update the view on the remote database (even if there is no new data for export).

EXPORT TO A REMOTE DATABASE

→ To export to a remote database:

1. Verify that the OutputType configuration is set to **SQL**.
2. Set the RemoteDBServer configuration with the server name where the Remote Export Database exists.
3. Create the database for remote export (if not already created). See [Create the Remote Export Database](#) on page 62 for instructions.

→ To create a user with read-only permissions on the remote database:

This user will use SQL authentication instead of Windows authentication. Perform this procedure when the Remote database is on a Windows Domain different than the connecting server's Windows Domain.

1. Launch SQL Server Management Studio.
2. Connect to the SQL Server instance where the data will be exported.
3. Go to **Program Files > Nexidia > Nexidia Analytics > DatabaseScripts > RemoteExport**.
4. Open the **CreateNexidiaReadExportDataUser.sql** script and replace the following items with the relevant values:
 - **#READEXPORTDATAUSERNAME#** - Enter the user name login.
 - **#READEXPORTDATAUSERPASSWORD#** - Enter the initial password for the user. The user is prompted to change the password after the initial login.
 - **#DB_name#** - Enter the relevant NxExport<ExportID>.
5. Save the script.
6. Execute the script to create the user. You can use this user to login into the remote database and select data from the NxExport<ExportID> DB.

Important

This procedure applies only for connections to the remote database where data export data results are written. No other Nexidia databases are supported.

RE-EXPORT TO A REMOTE DATABASE

→ To re-export to a remote database:

An export configuration can be cloned and modified to re-export some data to an existing Remote Database rather than a brand new Remote Database. This process should only be done in consultation with NiCE support.

An export configured for re-export will not run if it is also configured to run in parallel (see the `RequireExportTrackingResourceReservation` configuration parameter).

Important

The `OverrideRemoteDBExportId` should be an existing `ExportId` which has been configured for Remote Export and has an existing Remote Database following procedures in this guide. Attempting to use this configuration to export to an arbitrary database is not supported.

1. Verify an existing export configuration is configured for remote export (See Export to a Remote Database).
2. Clone the existing export configuration.
3. In the new export configuration, set the `OverrideRemoteDBExportId` configuration to the `ExportId` of the original export.
4. Modify the new export configuration to target necessary data for re-export.

Warning

The cloned export configuration will not recognize the original export configuration's history. Depending on the original export configuration, there's a risk of re-exporting all prior data so take care to modify the new export configuration to target specific data (see Data Export Utility Configuration Scenarios).

EXPORT.CFGSOURCEMEDIATRANSCRIPTEXPORT QUEUE TABLE

The export.cfgSourceMediaTranscriptExportQueue table prevents transcripts from being exported before the interaction metadata is available.

We get source medias from Discovery and save them into the export.cfgSourceMediaTranscriptExportQueue.

- If the ExportOnlyCompletedInteractions configuration is set to true, we use SourceMediaIds in the cfgSourceMediaTranscriptExportQueue table to check against SourceMediaIds in the cfgSourceMediaTracking table.
- If the ExportOnlyCompletedInteractions configuration is set to false, we use all SourceMediaIds in the cfgSourceMediaTranscriptExportQueue table.

DATA ENTITIES

The Data Export Utility exports the entities listed in the table below. The following export data modes are supported:

- Full - Every export includes all data for the entity, including logically deleted entries. An example is the QueryGroupDefinition entity, where we include every version of every query group that has ever existed, including those that an administrator has deleted from Interaction Analytics.
- Full (without past data) - Every export includes all current data for the entity, excluding logically deleted entries. An example is the TargetMediaSetDefinition entity, where every Target Media Set that exists at that time is included but does not include those that an administrator has deleted from Interaction Analytics.
- Incremental - Only new entities are exported.

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
_BatchID	For CSV exports, we provide the _BatchId.csv file for troubleshooting. This file shows the number of the export batch for both zipped and non-zipped batches.	Run the DEU.	Full (without past data)
_FileRowCountSummary	Lists each entity that was output in the export job run, as well as the number of rows in each.	On every batch for every export, the number of rows about to be written to an export file is stored in memory. The information is then written at the end of execution of the export job.	Full (without past data)

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
_MetadataKeyValueMapping	Maps metadata field values to folders containing relevant output for the <specific value>. This is used in specific Data Export Utility configurations and is not common.	Supports the DEU feature where you can split the output into multiple folders based on a configured metadata field (e.g., Hub ID). This table shows the mapping between a numbered output folder and its metadata value (e.g., 1 -> Hub A, 2 - Hub B, etc.). This can change between exports.	Incremental
Agent	Provides information about the Agents that are detected in the metadata associated with ingested interactions.	Ingest interactions with metadata containing values for Agent.	Incremental
AgentInventory	Provides information about the agents that were created/updated in the Administration > Agent Inventory area of the application.	Create or update agent users in Administration > Agent Inventory.	Incremental
CategoryDefinition	Describes an active set of Nexidia categories applied to media.	Save an Explore search as a category.	Full

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
CategoryResult	The results of Nexidia categories for each interaction / media file.	Add categories to sessions and process / re-process the sessions.	Incremental
ChatParticipant	Provides information about the individual participants (agent or customer) in chats.	Ingest chat interactions.	Incremental
EmailAddress	Provides information about email addresses associated with email interactions (for example, the actual email address and whether it's associated with the sender or the recipient).	Ingest e-mail interactions that have e-mail addresses included.	Incremental
EvalsAgentGroupCoachingAction	Provides information about whether an agent is required to complete a group coaching action.	In Quality Central, add a new group coaching. Then, add a required action to the group coaching and one or more agents to the required action.	Incremental

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
EvalsAgentGroupCoachingStatus	Provides status information about whether an agent has completed a required group coaching action.	Do one of the following: - In Quality Central, add a new group coaching, then add a required action to the group coaching, and add one or more agents to the required action. - In Quality Central, log in as an agent and complete one or more group coaching actions.	Incremental
EvalsCalibration	Provides general/overall information about calibration evaluation forms.	In Quality Central, create a calibration and have evaluators (participants) publish their calibration evaluation forms.	Incremental
EvalsCalibrationCategory	Provides category-level information about calibration evaluation forms	In Quality Central, create a calibration and have evaluators (participants) publish their calibration evaluation forms.	Incremental
EvalsCalibrationQuestion	Provides question-level information about calibration evaluation forms.	In Quality Central, create a calibration and have evaluators (participants) publish their calibration evaluation forms.	Incremental

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
EvalsCalibrationQuestionAnswer	Provides question-level scoring information about calibration evaluation forms.	In Quality Central, create a calibration and have evaluators (participants) publish their calibration evaluation forms.	Incremental
EvalsEvaluation	Provides general/overall information about published evaluation forms.	In Quality Central, publish an Evaluation Form.	Incremental
EvalsEvaluationCategory	Provides category-level information about evaluation forms.	In Quality Central, publish an Evaluation Form.	Incremental
EvalsEvaluationCoaching	Provides information about coaching data that is added to a published evaluation form.	In Quality Central, publish an Evaluation Form and add coaching data to it.	Incremental
EvalsEvaluationCoachingAction	Provides information about any “required actions” added as part of coaching data added to a published evaluation form.	In Quality Central, publish an Evaluation Form and add coaching data to it, and add a one or more required actions to the coaching data.	Incremental
EvalsEvaluationMedia	Provides information about media file(s) associated with published evaluation forms.	In Quality Central, publish an Evaluation Form with at least one associated interaction (media file).	Incremental

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
EvalsEvaluationQuestion	Provides question-level information about published evaluation forms.	In Quality Central, publish an Evaluation Form.	Incremental
EvalsEvaluationQuestionAudit Answer	Provides data (points) earned for an evaluation form question after that form has been audited.	In Quality Central, publish an Evaluation Form and have an auditor perform an audit of that form.	Incremental
EvalsEvaluationQuestionCurrent Answer	Provides data (points) earned based on the current answer for a question provided in a published evaluation form.	In Quality Central, publish an Evaluation Form.	Incremental
EvalsEvaluationQuestionInitial Answer	Provides data (points) earned based on the initial / original answer for a question provided in a published evaluation form.	In Quality Central, publish an Evaluation Form.	Incremental
EvalsEvaluationQuestionRescore Answer	Provides data (points) earned based on the appealed/rescored answer for a question provided in a published evaluation form.	In Quality Central, publish an Evaluation Form and have an appeals judge rule on a rescore request for that specific question.	Incremental

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
EvalsKeyToIDMap	Links exported evaluation data to the TemplateInstanceID, which is the Evaluation ID shown in Quality Central.	Loads Evaluations Keys and corresponding Template Instance IDs for those instances. It also adds AuditInstanceIds if a given instance is an audit or "0" if it is not.	Incremental
EvalsGroupCoaching	Provides information about group coaching.	In Quality Central, add a new group coaching.	Incremental
EvalsGroupCoachingAction	Provides information about any required actions added as part of group coaching.	In Quality Central, add a new group coaching and add a required action to the group coaching.	Incremental
EvalsSelfEvaluation	Provides general / overall information about self-evaluation forms.	In Quality Central, publish an evaluation form with the "Send for Self-Evaluation" checkbox checked. More data is available if the agent completes and publishes the self-evaluation.	Incremental
EvalsSelfEvaluationCategory	Provides category-level information about self-evaluation forms.	In Quality Central, publish an evaluation form with the "Send for Self-Evaluation" checkbox checked. More data is available if the agent completes and publishes the self-evaluation.	Incremental

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
EvalsSelfEvaluationQuestion	Provides question-level information about self-evaluation forms.	In Quality Central, publish an evaluation form with the “Send for Self-Evaluation” checkbox checked. More data is available if the agent completes and publishes the self-evaluation.	Incremental
EvalsSelfEvaluationQuestion CurrentAnswer	Provides answer data (points) earned based on the agent’s own answer for a question in a published self-evaluation form. There is no difference between the current vs. initial answer (points), and this value does not change as a result of an appeal/rescore or other flow.	In Quality Central, publish an evaluation form with the “Send for Self-Evaluation” checkbox checked. When the agent completes and publishes the Self-Evaluation, this data will populate.	Incremental
EvalsSelfEvaluationQuestionInitial Answer	Provides answer data (points) earned based on the agent’s own answer for a question in a published self-evaluation form. There is no difference between the current vs. initial answer (points), and this value does not change as a result of an appeal/rescore or other flow.	In Quality Central, publish an evaluation form with the “Send for Self-Evaluation” checkbox checked. When the agent completes and publishes the Self-Evaluation, this data will populate.	Incremental

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
EvalsTemplate	Provides general/overall information about Evaluation Form Templates.	Create an evaluation form template in the system. More data is available if the template is used for a published evaluation form instance.	Incremental
EvalsTemplateAnswer	Provides information about available answers for a given Evaluation Form Template.	Create an evaluation form template in the system.	Incremental
EvalsTemplateCategory	Provides category-level information about Evaluation Form Templates.	Create an evaluation form template in the system.	Incremental
EvalsTemplateQuestion	Provides question-level information about Evaluation Form Templates.	Create an evaluation form template in the system.	Incremental
EvalsUser	Provides information about users in NiCE Quality Central.	Create users in the system. Tip: This is empty if Quality Central (QC) is not licensed.	Incremental
ExperienceData	Provides experience metrics to use for external tracking, reporting and compliance.	Generate experience metrics.	Incremental

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
Hierarchy	Lists the hierarchy levels associated with an interaction or evaluation. The hierarchy data is always exported. The first row, with hierarchykey = -1 is also exported for systems that do not use the Hierarchy feature. It is used to link to metadata/evaluations prior to the Hierarchy feature availability (their HierarchyKey will be -1). There is no mapping to the UniqueAgentId in this case.	Import or create a Hierarchy in the Administration > Hierarchy area of the application.	Incremental
Interaction	Provides information about Interactions that have been ingested into the system.	Ingest interactions into the system.	Incremental
InteractionEnlightenScoresAndIntents	Provides information about the Enlighten Score filters.	Ingest interactions into the system.	Incremental
InteractionEvents	Provides information about the interaction events.	Ingest interactions into the system.	Incremental

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
InteractionMetadata	Imported metadata associated with the interaction. Generally, this is information extracted from the source system and may be used to correlate back to internal data such as account number. Only displayed UDFs are exported for output to SQL Table. Tip: It is possible for a media file to be included multiple times. For example, a file is processed without metadata and is included in an export. Then, metadata is added to the file. The updated file is ASR'ed and is also included in the export.	Ingest interactions into the system. More data is available if the system is configured with UDFs (User-defined (custom) metadata fields), and still more if the interaction is ASR'ed, and therefore has sentiment data generated for it.	Incremental
InteractionOutcomes	Provides information about the interaction outcomes.	Ingest interactions into the system.	Incremental

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
InteractionTagDefinitions	Desktop tag activity that occurred during each interaction (if any).	Used for "Desktop Tags" integration. Requires NiCE Advanced Process Automation (APA) Solutions product licensed and configured for this to populate.	Full
InteractionTagHits	The set of interactions that contain a Desktop Tag which has occurred.	Used only for specific DEU configurations (not common).	Incremental
MetricDefinition	Provides a list of standard metrics and their identifying keys.	This is the fixed list of available metric types, and does not change. The available metrics are Average non-talk (occurrences per call), Average non-talk (%), Average non-talk (sec), Average duration (sec), Average cross-talk (occurrences per call), Average cross-talk (%), Average offset from start of call, Average offset from end of call, Average sentiment, Average duration between chat turns (sec), Average agent chat turn response time (sec), Min interactions per day, Max interactions per day, Exists, Average chat turns per day, and Average interactions per day.	Full

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
MetricResultDaily	The daily set of scored metric results for agents over Target Media Sets.	Create and save a Scorecard in the Administration area of the application.	Incremental
Profiles	This export contains Security Profile data that can be found in the Administration > Security > Profiles window in the NiCE Interaction Analytics application. Profiles are exported when a new profile is created, or an existing profile is updated in the NiCE Interaction Analytics application. For the first export after an upgrade or a fresh install and the IncludeProfilesAndUsers configuration setting is set to true, all profiles will be exported.	In Interaction Analytics, do one of the following: • Create a new Security Profile . • Edit an existing Security Profile . • Assign a User to a Security Profile. • Modify a User who is already assigned to a Security Profile .	Incremental
QueryDefinition	Describes an active set of Nexidia structured queries applied to media.	Check-in or publish queries into the system.	Full

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
QueryGroupDefinition	Provides data for customers to recreate / maintain the query group hierarchy from Interaction Analytics in the consuming application.	Create one or more query groups in the system.	Full
QueryGroupQueries	Provides data for customers to recreate / maintain the query group hierarchy from Interaction Analytics in the consuming application.	Create one or more (Level 1) query groups in the system and add queries to them.	Full
QueryGroupQueryGroups	Provides data for consumers to recreate / maintain the query group hierarchy from Interaction Analytics in the consuming application.	Create one or more (Level 2-5) query groups in the system. This indicates the parent and child query groups for a given query group.	Full
QueryResult	The results of Nexidia structured queries for each interaction / media file. Provides data for all of the hits for each query / interaction detected by the system using the selected Query purpose / threshold for the specific query.	Add queries to Sessions and process / re-process the sessions. Tip: For a query to be included in this entity output, it must “hit” one or more interactions within the session.	Incremental

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
SessionPermissions	Provides information about which users / profiles have access (and what level of access) to a given Session.	Create sessions in the system and grant users/profiles access to them.	Full (without past data)
TargetMediaSetDefinition	Provides a list of Target Media Sets, their properties (configuration parameters) and their identifying keys.	Create one or more Target Media Sets in the system.	Full (without past data)
TargetMediaSetMembership	Provides information about the media associated with / included in Target Media Sets.	Create Target Media Sets in the system; run ETL and the Populate Media Set jobs.	Full or Incremental (based on the TargetMediaSet ExportDeltasOnly configuration)
TargetMediaSetMustHitQueries	Lists the Query identities for any Target Media Sets that contain "must hit" Nexidia queries in their definition.	Create a Target Media Set that has "must be present" queries in the system.	Full (without past data)

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
TermDefinition	Describes an active set of Search Terms applied to media / interactions.	Create a Term List for any type of media in the system.	Full (without past data)
TermListDefinition	Provides a list and description of existing Term Lists.	Create a Term List for any type of media in the system.	Full (without past data)
TermListMembershipDefinition	Provides association of individual Terms with Term Lists.	Add one or more Term Lists to a session and re-process that Session, or ingest new media / interactions into the Session. Tip: For a Term List to be included in this entity output, it must "hit" one or more interactions within the session.	Incremental
TermResult	Provides the results of search terms for each media file.	Add one or more Term Lists to a session and re-process that Session, or ingest new media / interactions into the Session. Tip: For a Term List to be included in this entity output, it must "hit" one or more interactions within the session.	Incremental

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
TextualSearchTermListResult	Provides search term lists hits for each text interaction type.	Requires a text interaction term list in Interaction Analytics Administration. Apply the term list to a session and re-process that session, or ingest new media / interactions into the Session. Tip: For a Term List to be included in this entity output, it must "hit" one or more interactions within the session.	Incremental
Transcript Note: This export is not included in the Quality Central Insight product.	Contains any filtered transcripts generated since the last execution of the utility.	Process interactions for Discovery, so that they are transcribed by the system.	Incremental
UnformattedTranscripts	Contains any unfiltered transcripts generated since the last execution of the utility.	Process interactions for Discovery, so that they are transcribed by the system.	Incremental

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
Users	This export contains Users data that can be found in the Administration > Security > Users page in the NiCE Interaction Analytics application. Users are exported when a new user is created, or an existing user is updated in the NiCE Interaction Analytics application. For the first export after upgrade / fresh install and the IncludeProfilesAndUsers configuration setting is set to true, all users will be exported.	• Create a new user. • Edit an existing user.	Incremental

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
UserProfileMap	This export contains UserIds and ProfileIds mapping the Users and Profiles exports together. When a user is exported, then the UserProfileMap export will contain the UserId and all ProfileIds associated to that user found in the system. There could be UserIds in the UserProfileMap export that are not found in the User export. When a profile is exported, then the UserProfileMap export will contain the ProfileId and all UserIds associated to that profile found in the system. There could be ProfileIds in the UserProfileMap export that are not found in the Profile export.	• Export a user. • Export a profile.	Incremental

ENTITY	DESCRIPTION	POPULATION	EXPORT MODE
WorkflowAlert	Provides information about workflow Alerts.	Requires a workflow to be configured in Administration > Workflows with an "Alert" step. Tip: Certain license levels do not include the Alert step for workflows.	Incremental
WorkflowFileProgression	Provides information about the progression of a file through a workflow. Each record represents one file move.	Requires an active/running workflow, and the workflow job must be run to consider new interactions versus the previous run. For the most relevant data, workflow queue members should take action on the interaction within the workflow, for example, close, evaluate, etc.	Incremental
WorkflowImportAuditLog	Logs the date/time that each media file is considered for inclusion in any workflow, as well as the result of that consideration.	The system Workflow.Import.AuditLogEnabled configuration in Management Console must be set to "true," an active workflow must be available in the system, there must be interactions in the system that have not yet been considered for each workflow, and the workflow job must be run.	Incremental

Data Dictionary Output Structure

This section lists each data entity in the Data Export utility along with the associated columns, data types, descriptions, and examples.

Important

All string values are NVARCHAR (i.e., ISO-compliant data type of “national character varying”) in the SQL tables and CSV files.

We provide the _BatchId.csv file for troubleshooting CSV exports. This file shows the number of the export batches for both zipped and non-zipped batches.

_BATCHID

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
BatchID	[integer]	The identification number of the export batch. This file is provided for .CSV exports.	6

_FILEROWCOUNTSUMMARY

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
CSV File	[string]	The name of the CSV file that was output. If the output is being split by the Hub ID, this is the path name. Folder names are numbers. If there are multiple versions of a given CSV file, they are listed as separate rows (for example, Agent 100,000; Agent2 5234).	1\TargetMediaSetDefinition
Rows	[Integer]	The number of rows in the CSV file (not including the header).	33

_METADATAKEYVALUEMAPPING

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
MetadataValue	[string(200)]	The metadata output to be split.	Remote Group
MetadataMappingKey	[integer]	Maps sites to folders containing relevant output for the site.	5

AGENT

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
AgentKey	[integer]	The Nexidia identifier used to join to other data.	1
AgentID	[string(100)]	The customer-specific agent id provided in metadata.	12525
AgentName	[string(200)]	The string name for the agent.	Donna Fox
AgentDisplayName	Computed, [string(303)]	The string name for the agent with the agent id in parenthesis.	Donna Fox (12525)

AGENTINVENTORY

Configuration Considerations

- The IncludeAgentInventoryActiveFlag configuration determines if IsActive is included in the AgentInventory export.
- The IncludeAgentInventoryLoginMetadata configuration determines if ExternalUserID, LastLoginDateUTC, LastModifiedDateUTC, and CreatedDateUTC are included in the AgentInventory export.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InventoryUserName	[string(255)]	The agent's user name.	Ruth
InventoryAgentId	[string(255)]	The agent's identification.	11985
InventoryFirstName	[string(255)]	The agent's first name	Ruth
InventoryLastName	[string(255)]	The agent's last name.	Carey
InventoryUserEmail	[string(255)]	The agent's e-mail address.	example@mail.com
InventoryUserSite	[string(255)]	The agent's physical location.	India
InventoryUserSupervisor	[string(255)]	The agent's direct supervisor.	Jim Bush

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
UniqueAgentID	[string(256)]	The unique identifier for the agent. This is used to tie the agent in an import to the actual agent in the Agent Inventory.	12005
InventoryAgentKey	[integer]	The Nexidia identifier used to join to other data.	1
IsActive	Boolean (Bit)	Indicates if agents in the inventory are active or not.	No
ExternalUserID	[string(256)]	User ID from an external system.	userid1234
LastLoginDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the agent last logged in.	yyyy-mmddThh:mi:ss.mm
LastModifiedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the agent was last modified.	yyyy-mmddThh:mi:ss.mm
DateCreatedUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the agent was created.	yyyy-mmddThh:mi:ss.mm

CATEGORYDEFINITION

Configuration Considerations

The **IncludeCategories** configuration determines if the CategoryDefinition and CategoryResult exports are created.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
CategoryID	INT	A surrogate key for the category. This is the primary key of this table.	37
CategoryName	NVARCHAR(80)	The name of the category.	Technical Support Questions - xyz
CategoryDescription	NVARCHAR(260)	A description of the category.	Interactions with technical support questions
CategoryIdentity	UNIQUEIDENTIFIER	A unique identifier for the category which is consistent across versions.	066e7189-2b86-4360-a2bb4cd9499c3992
CategoryVersion	INT	The version of the category	2

CATEGORYRESULT

Configuration Considerations

The **IncludeCategories** configuration determines if the CategoryDefinition and CategoryResult exports are created.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionId	BIGINT	A foreign key to the media file. The CategoryID + InteractionID is the key of this table.	5
CategoryID	INT	A foreign key for the category. The CategoryID + InteractionID is the key of this table.	37
CategoryIdentity	UNIQUEIDENTIFIER	A unique identifier for the category which is consistent across versions.	066e7189-2b86-4360-a2bb4cd9499c3992

CHATPARTICIPANT

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionId	[integer]	A foreign key to the media file.	87715
ParticipantId	[string(400)]	The identification of the participant.	11111
Name	[string(4000)]	The name of the chat participant.	Joe Participant
DisplayName	[string(4000)]	The display name of the chat participant.	JP
Role	[string(4000)]	The role of the chat participant.	Customer

EVALSAGENTGROUPCOACHINGACTION

Configuration Considerations

The **IncludeEvalsGroupCoaching** configuration specifies if the EvalsGroupCoaching, EvalsGroupCoachingAction, EvalsAgentGroupCoachingAction and the EvalsAgentGroupCoachingStatus exports are created.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
AgentGroupCoachingActionKey	[integer] not null	The Nexidia identifier used to join to other data.	1
AgentGroupCoachingActionId	[integer] not null	The identifier for the group coaching required action.	1
GroupCoachingActionKey	[integer] not null	The Nexidia identifier used to join to other data.	1
AgentKey	[integer] not null	The Nexidia identifier used to join to other data.	18
IsCompleted	[bit] not null	Indicates if the required action for group coaching is completed.	FALSE

EVALSAGENTGROUPCOACHINGSTATUS

Configuration Considerations

The IncludeEvalsGroupCoaching configuration specifies if the EvalsGroupCoaching, EvalsGroupCoachingAction, EvalsAgentGroupCoachingAction and the EvalsAgentGroupCoachingStatus exports are created.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
AgentGroupCoachingStatusKey	[integer] not null	The Nexidia identifier used to join to other data.	1
AgentGroupCoachingStatusId	[integer] not null	The identifier for the agent group coaching status.	1
GroupCoachingKey	[integer] not null	The Nexidia identifier used to join to other data.	1
AgentKey	[integer] not null	The Nexidia identifier used to join to other data.	18
AllRequiredActionCompleted	[bit] not null	Indicates if all of the required actions are complete.	FALSE
CoachingDeadlineUTC	[datetime2] null	The date/time the agent group coaching must be completed by.	2023-12-21T17:40:08

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
NextTargetDateUTC	[datetime2] null	The TargetDate on the next required action passed straight through from the database.	2023-12-21T17:40:08
ViewedDateUTC	[datetime2] null	The date/time the agent group coaching was viewed.	2023-12-21T17:40:08
IsVerified	[bit] not null	Indicates if the agent group coaching is verified.	FALSE
VerifiedDateUTC	[datetime2] null	The date and time the agent group coaching was verified.	2023-12-21T17:40:08
VerifiedNotes	[nvarchar(1000)] null	Any notes associated with the agent group coaching status.	User-defined note

EMAILADDRESS

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionId	[integer]	A foreign key to the media file.	8772
EmailAddressType	[string(50)]	Indicates the type of e-mail.	Sender
EmailAddress	[string(400)]	The actual e-mail address.	example@mail.com

EVALSCALIBRATION

Configuration Considerations

- The **IncludeAgentInventoryDataInAllEvaluationExports** configuration determines if the Agent Inventory columns are included in the Calibration, Coaching, and Self-Evaluations CSV Files/SQL Tables. If set to true, the Agent Inventory columns are included and populated in the output for CSV exports. The Agent Inventory columns are included with the relevant data and populated in the output for Remote exports. If set to false, the Agent Inventory columns are not included in the output for CSV exports. The Agent Inventory columns are included but have no data for Remote exports.
- The **IncludeCalibrationDeadline** configuration determines if the CalibrationDeadline is included in the EvalsCalibration export.
- The **IncludeCalibrationDeviationCalculation** configuration determines if the CalibrationDeviation column is included in the export.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
CalibrationKey	[integer]	The Nexidia identifier used to join to other data.	7
LeaderEvaluationKey	[integer]	The Nexidia identifier used to join to other data.	7
TemplateKey	[integer]	The Nexidia identifier used to join to other data.	1
CreatedByUserID	[integer]	The auto-generated user identification number.	1

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
CalibrationState	[string(100)]	The current state of the calibration.	EFI_Published
AgentKey	[integer]	The Nexidia identifier used to join to other data.	6
AvailablePoints	decimal(18,2)	Provides the amount of available points for the calibration. Decimals and negative values are supported.	20
ScoredPoints	decimal(18,2)	Provides the amount of scored points for the calibration. Decimals and negative values are supported.	14
IsCompleted	[boolean]	Indicates if the calibration is complete.	TRUE
IgnoredForAgent Reporting	[boolean]	Indicates if the calibration is ignored for reporting purposes.	FALSE

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
CreationDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the calibration was created.	yyyy-mm-ddThh:mi:ss.mm
ModifiedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the calibration was modified.	yyyy-mm-ddThh:mi:ss.mm
PublishedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the calibration was published.	yyyy-mm-ddThh:mi:ss.mm
IgnoredDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the calibration was ignored.	yyyy-mm-ddThh:mi:ss.mm
StartedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the calibration was started.	yyyy-mm-ddThh:mi:ss.mm
CalibrationNote	[nvarchar (max)]	Any notes associated with the calibration.	User-defined note
HierarchyKey	[integer]	Provides a link back to the Hierarchy file/table.	5
InventoryAgentId	[string(255)]	The agent's identification.	11985

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InventoryFirstName	[string(255)]	The agent's first name	Ruth
InventoryLastName	[string(255)]	The agent's last name.	Carey
InventoryUserName	[string(255)]	The agent's user name.	Ruth
InventoryUserEmail	[string(255)]	The agent's e-mail address.	example@mail.com
InventoryUserSite	[string(255)]	The agent's physical location.	India
InventoryUserSupervisor	[string(255)]	The agent's direct supervisor.	Jim Bush
CalibrationDeviation	decimal(18,2)	This represents the calibration score deviation from the calibration leader score (the original evaluator score when the calibration leader is a participant in the calibration). It is calculated at the calibration (template), category, and question level.	16.83
CalibrationDeadline Note: Configurable by the DateFormat configuration setting.	[datetime]	The date and time that the calibration must be completed.	yyyy-mm-ddThh:mi:ss.mm

EVALSCALIBRATIONCATEGORY

Configuration Considerations

The **IncludeCalibrationDeviationCalculation** configuration specifies if the CalibrationDeviation column is included in the export.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
CalibrationKey	[integer]	The Nexidia identifier used to join to other data.	16
CalibrationCategoryKey	[integer]	The Nexidia identifier used to join to other data.	40
TemplateKey	[integer]	The Nexidia identifier used to join to other data.	11
TemplateCategoryKey	[integer]	The Nexidia identifier used to join to other data.	27
CategoryStatus	[string(50)]	Provides status information about the category.	Skipped
CategoryAnswered	n/a	This column is obsolete and will always contain a NULL value.	n/a
CategoryNotes	[nvarchar(max)]	Any notes associated with the category.	User-defined note

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
CalibrationDeviation	decimal(18,2)	The Calibration Deviation represents the calibration score deviation from the calibration leader score (the original evaluator score when the calibration leader is a participant in the calibration). It is calculated at the calibration (template), category, and question level.	16.83

EVALSCALIBRATIONQUESTION

Configuration Considerations

The **IncludeCalibrationDeviationCalculation** configuration specifies if the CalibrationDeviation column is included in the export.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

Important

If your system is configured to use multi-select questions and answers on evaluations, refer to the EvalsCalibrationQuestionAnswer output for your results.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
CalibrationKey	[integer]	The Nexidia identifier used to join to other data.	16
CalibrationCategoryKey	[integer]	Nexidia identifier used to join to other data.	40
CalibrationQuestionKey	[integer]	Nexidia identifier used to join to other data.	87
TemplateKey	[integer]	Nexidia identifier used to join to other data.	11
TemplateCategoryKey	[integer]	Nexidia identifier used to join to other data.	27
TemplateQuestionKey	[integer]	Nexidia identifier used to join to other data.	53
TemplateAnswerKey	[integer]	Nexidia identifier used to join to other data.	146

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
AnswerAvailable Points	decimal(18,2)	Provides the points that are available for a question. Decimals and negative values are supported.	9
AnswerScored Points	decimal(18,2)	The sum of the points scored for a question (multi-select and non multi-select). Decimals and negative values are supported.	9
AutoFail	[boolean]	Indicates if the agent fails the current category or the entire evaluation based on the evaluators response to the question.	TRUE
AnswerContent	[nvarchar(max)]	The answer that was given for the calibration question. Note: This column is only populated for the Text and Numeric question types.	Yes
AnswerNotes	[nvarchar(max)]	Notes about the answer.	User-defined note

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
CalibrationDeviation	decimal(18,2)	The Calibration Deviation represents the calibration score deviation from the calibration leader score (the original evaluator score when the calibration leader is a participant in the calibration). It is calculated at the calibration (template), category, and question level.	16.83

EVALSCALIBRATIONQUESTIONANSWER

Important

When a Participant Calibration's Answers are updated, the Leader's Calibration Answers are also marked for export, although the Leader's data is only updated if the Leader's Answers are updated. The Leader's fctCalibrationQuestionCurrentAnswerKeys will also be unchanged, but they are exported in the next Data Export Utility batch. The BatchID can be used to indicate which is the most recent value to use. The Data Export Utility cannot append the Batch ID to the CSV file names.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
CalibrationQuestionKey	[integer]	The Nexidia identifier used to join to other data.	22
TemplateAnswerKey	[integer]	The Nexidia identifier used to join to other data.	5
TemplateAnswerScoredPoints	decimal(18,2)	The sum of the points scored for a question (multi-select and non multi-select). Decimals and negative values are supported. Note: For multi-select questions, multiple rows display the points for each individual answer.	9

EVALSEVALUATION

Configuration Considerations

The **IncludeEvaluatorReviewData configuration** specifies if the output data contains the evaluator review columns.

The **IncludeEvaluationAllowAgentAccessColumn** specifies if the AllowAgentAccess column is included or excluded in the EvalsEvaluation export.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
EvaluationKey	[integer]	The Nexidia identifier used to join to other data.	1
TemplateKey	[integer]	The Nexidia identifier used to join to other data.	1
FilesEvaluated	[Integer]	The number of media files evaluated.	3
CreatedByUserID	[Integer]	The auto-generated user identification number for the evaluation creator.	2
AuditedByUserID	[Integer]	The auto-generated user identification number for the evaluation auditor.	3

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
RescoredByUserID	[Integer]	The auto-generated user identification number for the evaluation rescore user.	4
EvaluationState	[string(100)]	The current state of the evaluation.	EFI-Pending
AgentKey	[integer]	The Nexidia identifier used to join to other data.	6
InitialAvailablePoints	decimal(18,2)	The available points from when the evaluation is first published. Decimals and negative values are supported.	• 9.25 • -0.75
InitialScoredPoints	decimal(18,2)	The scored points from when the evaluation is first published. Decimals and negative values are supported.	• 9.25 • -0.75
AuditAvailablePoints	decimal(18,2)	The points available for the evaluation audit. Decimals and negative values are supported.	• 9.25 • -0.75

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
AuditScoredPoints	decimal(18,2)	The points scored in the evaluation audit. Decimals and negative values are supported.	9.25 -0.75
RescoreAvailablePoints	decimal(18,2)	The available points for the evaluation rescore. Decimals and negative values are supported.	9.25 -0.75
RescoreScoredPoints	decimal(18,2)	The points that were scored in the evaluation rescore. Decimals and negative values are supported.	9.25 -0.75
CurrentAvailablePoints	decimal(18,2)	The points that are currently available for the evaluation. Decimals and negative values are supported.	9.25 -0.75
CurrentScoredPoints	decimal(18,2)	The points that are currently scored in the evaluation. Decimals and negative values are supported.	9.25 -0.75
RescoreIsActive	[boolean]	Indicates if re-score is currently active.	FALSE

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
IsCompleted	[boolean]	Indicates if this evaluation is completed.	TRUE
IgnoredForAgent Reporting	[boolean]	Indicates if this evaluation is ignored for reporting purposes.	FALSE
CreationDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the evaluation was created.	yyyy-mm-ddThh:mi:ss.mm
ModifiedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the evaluation was modified.	yyyy-mm-ddThh:mi:ss.mm
PublishedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the evaluation was published.	yyyy-mm-ddThh:mi:ss.mm
AuditedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the evaluation was audited.	yyyy-mm-ddThh:mi:ss.mm
IgnoredDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the evaluation was ignored.	yyyy-mm-ddThh:mi:ss.mm

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
StartedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the evaluation was started.	yyyy-mm-ddThh:mi:ss.mm
NumberOfQuestions Appealed	[integer]	The number of questions appealed for this evaluation.	4
InitialEvaluationNote	[nvarchar (max)]	Notes about the initial evaluation.	User-defined note
AuditEvaluationNote	[nvarchar (max)]	Notes about the audited evaluation.	User-defined note
IsDeleted	[boolean]	Indicates if an evaluation has been deleted.	FALSE
DeletedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the evaluation was deleted.	yyyy-mm-ddThh:mi:ss.mm
AcknowledgedOnUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the evaluation was acknowledged.	yyyy-mm-ddThh:mi:ss.mm
InventoryAgentId	[string(255)]	The agent's identification.	11985
InventoryFirstName	[string(255)]	The agent's first name.	Ruth

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InventoryLastName	[string(255)]	The agent's last name.	Carey
InventoryUserName	[string(255)]	The agent's user name.	Ruth
InventoryUserEmail	[string(255)]	The agent's e-mail address.	example@mail.com
InventoryUserSite	[string(255)]	The agent's physical location.	India
InventoryUserSupervisor	[string(255)]	The agent's direct supervisor.	Jim Bush
HierarchyKey	[integer]	Provides a link back to the Hierarchy file/table.	5
ReviewedEvaluationKey	[Integer]	The integer identifier for the reviewed evaluation.	1
ReviewedOnUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the reviewer performed the evaluator review.	yyyy-mm-ddThh:mi:ss.mm
IsReview	[boolean]	Indicates if an evaluator review was performed on the published evaluation.	TRUE
ScoreDifference	[decimal]	The score difference between the original evaluator and the reviewer.	-7.65

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
AllowAgentAccess	[boolean]	The Allow Agent Access checkbox on the evaluation form.	TRUE

EVALSEVALUATIONCATEGORY

Configuration Considerations

The **IncludeEvaluatorReviewData** configuration specifies if the output data contains the evaluator review columns.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
EvaluationKey	[integer]	The Nexidia identifier used to join to other data.	12
EvaluationCategoryKey	[integer]	The Nexidia identifier used to join to other data.	28
TemplateKey	[integer]	The Nexidia identifier used to join to other data.	16
TemplateCategoryKey	[integer]	The Nexidia identifier used to join to other data.	42
InitialCategoryStatus	[string(50)]	Provides status information for the initial category.	Finished
AuditCategoryStatus	[string(50)]	Provides status information for the audit category.	None

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
CurrentCategoryStatus	[string(50)]	Provides status information for the current category.	Finished
InitialCategoryAvailablePoints	decimal(18,2)	Provides the available points for the initial category. Decimals and negative values are supported.	9.25
InitialCategoryScoredPoints	decimal(18,2)	Provides the score for the initial category. Decimals and negative values are supported.	-0.75
AuditCategoryAvailablePoints	decimal(18,2)	Provides the available points for the category audit. Decimals and negative values are supported.	9.25
AuditCategoryScoredPoints	decimal(18,2)	Provides the score for the category audit. Decimals and negative values are supported.	-0.75

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
RescoreCategoryAvailablePoints	decimal(18,2)	Provides the available points for the category rescore. Decimals and negative values are supported.	9.25
RescoreCategoryScoredPoints	decimal(18,2)	Provides the score for the category rescore. Decimals and negative values are supported.	-0.75
CurrentCategoryAvailablePoints	decimal(18,2)	Provides the available points for the current category. Decimals and negative values are supported.	9.25
CurrentCategoryScoredPoints	decimal(18,2)	Provides the score for the current category. Decimals and negative values are supported.	-0.75
RescoreIsActive	[boolean]	Indicates if the re-score request is active.	FALSE
CategoryAnswered	n/a	This column is obsolete and will always contain a NULL value.	n/a

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
CategoryInitialNotes	[nvarchar (max)]	Initial notes about the category.	User-defined note
CategoryAuditNotes	[nvarchar (max)]	Audit notes about the category.	User-defined note
RequestedRescoreKey	[integer]	Nexidia identifier used to join to other data. Note: This value is populated with a positive number if the evaluation is associated with a rescore. If it is not associated with a rescore, it is populated with -1.	7
RescoreRequestDate UTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time of the re-score request.	yyyy-mm-ddThh:mi:ss.mm
RescoreAnswerDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time of the re-score answer date.	yyyy-mm-ddThh:mi:ss.mm
RescoreContestingNotes	[nvarchar (max)]	Notes regarding the re-score being contested.	User-defined note
RescoreResponseNotes	[nvarchar (max)]	Notes regarding the re-score response.	User-defined note

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
ScoreDifference	[decimal]	The difference between the original evaluator and the reviewer score.	-7.65

EVALSEVALUATIONCOACHING

Configuration Considerations

The **IncludeAgentInventoryDataInAllEvaluationExports** specifies if the Agent Inventory columns are included in the Calibration, Coaching, and Self-Evaluations CSV Files/SQL Tables. If set to true, the Agent Inventory columns are included and populated in the output for CSV exports. The Agent Inventory columns are included with the relevant data and populated in the output for Remote exports. If set to false, the Agent Inventory columns are not included in the output for CSV exports. The Agent Inventory columns are included but have no data for Remote exports.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
EvaluationKey	[integer]	The Nexidia identifier used to join to other data.	5
AgentKey	[integer]	The Nexidia identifier used to join to other data.	6
TemplateCategoryKey	[integer]	The Nexidia identifier used to join to other data.	21
CoachingRequestNotes	[string(3000)]	Notes regarding the coaching request.	User-defined note
CoachingRequestDateUTC Note: Configurable by the DateFormat configuration setting	[datetime]	The date/time the coaching request was made.	yyyy-mm-ddThh:mi:ss.mm

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
CoachUserID	[integer]	The auto-generated user identification number.	5
CoachingNotes	[nvarchar (max)]	Notes from the user provided in conjunction with coaching.	User-defined note
CoachingDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the coaching took place.	yyyy-mm-ddThh:mi:ss.mm
IsVerified	[boolean]	Indicates if the coaching has been verified.	FALSE
VerifiedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the agent acknowledged the coaching.	yyyy-mm-ddThh:mi:ss.mm
CoachingVerifiedAgentNotes	[nvarchar (max)]	Notes from the agent about the coaching.	User-defined note
InventoryAgentId	[string(255)]	The agent's identification.	11985
InventoryFirstName	[string(255)]	The agent's first name	Ruth
InventoryLastName	[string(255)]	The agent's last name.	Carey

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InventoryUserName	[string(255)]	The agent's user name.	Ruth
InventoryUserEmail	[string(255)]	The agent's email address.	example@mail.com
InventoryUserSite	[string(255)]	The agent's physical location.	India
InventoryUserSupervisor	[string(255)]	The agent's direct supervisor.	Jim Bush

EVALSEVALUATIONCOACHINGACTION

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
EvaluationKey	[integer]	The Nexidia identifier used to join to other data.	5
CoachingActionKey	[integer]	The Nexidia identifier used to join to other data.	1
RequireAction	[string]	Includes the text of the required action.	Action 1
TargetDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The due date/time that this action must be completed by.	yyyy-mm-ddThh:mi:ss.mm
CompletedDateUTC	[datetime]	Stores the date and time (in UTC) when the coaching action is marked as completed. If the action has not been completed, the column will contain a NULL value.	2024-10-02T11:59:59

EVALSEVALUATIONMEDIA

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
EvaluationKey	[integer]	The Nexidia identifier used to join to other data.	1
SourceMediaID	[integer]	The identification generated for the media in Interaction Analytics.	237
IsPrimary	[boolean]	Indicates if this is the primary media file used for the evaluation.	1

EVALSEVALUATIONQUESTION

Configuration Considerations

- The **IncludeCurrentAnswerColumns** configuration determines if the EvaluatorsAnswer, CurrentAnswerContent, and CurrentQuestionNotes columns are included in the EvalsEvaluationQuestion output.
- The **IncludeEvaluatorReviewData** configuration determines if the output data contains the evaluator review columns.
- The **IncludeAINotes** configuration determines if the AINotes column is included in the EvalsEvaluationQuestion export.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
EvaluationKey	[integer]	The Nexidia identifier used to join to other data.	1
EvaluationCategoryKey	[integer]	The Nexidia identifier used to join to other data.	1
EvaluationQuestionKey	[integer]	The Nexidia identifier used to join to other data.	1
TemplateKey	[integer]	The Nexidia identifier used to join to other data.	1
TemplateCategoryKey	[integer]	The Nexidia identifier used to join to other data.	1

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
TemplateQuestionKey	[integer]	The Nexidia identifier used to join to other data.	1
InitialTemplateAnswer Key	[integer]	The Nexidia identifier used to join to other data.	1
AuditTemplateAnswer Key	[integer]	The Nexidia identifier used to join to other data.	1
RescoreTemplate Answer Key	[integer]	The Nexidia identifier used to join to other data.	1
CurrentTemplate Answer Key	[integer]	The Nexidia identifier used to join to other data.	1
CurrentRescoreState	[string(100)]	The current rescore state question.	Question_ Overturned
AnswerAvailablePoints	decimal(18,2)	Provides the points available for the question. Decimals and negative values are supported.	9

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InitialAnswerScored Points	decimal(18,2)	The sum of the initial answer points scored for the question (multi-select and non multi-select). Decimals and negative values are supported.	9
AuditAnswerScored Points	decimal(18,2)	The sum of the audit answer points scored for a question (multi-select and non multi-select). Decimals and negative values are supported.	9
RescoreAnswerScored Points	decimal(18,2)	The sum of the rescore answer points scored for a question (multi-select and non multi-select). Decimals and negative values are supported.	9
CurrentAnswerScored Points	decimal(18,2)	The sum of the current answer points scored for a question (multi-select and non multi-select). Decimals and negative values are supported.	9

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
AutoFail	[boolean]	Indicates if the agent fails the current question or the entire evaluation based on the evaluators response to the question.	True
IsActive	[boolean]	Indicates if the evaluation is active.	True
RescoreIsActive	[boolean]	Indicates if re-scoring is active.	False
RescoreAccepted Answer	[boolean]	Indicates if the rescore answer was accepted.	False
AppealCount	[integer]	The number of appeals.	2
AnswerContent	[nvarchar (max)]	The answer that was given. Note: This column is only populated for the Text and Numeric question types.	Yes
AnswerNotes	[nvarchar (max)]	Notes regarding the answer.	User-defined note

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
AuditAnswerContent	[nvarchar (max)]	The audit answer that was given. Note: This column is only populated for the Text and Numeric question types.	No
AuditAnswerAuditNotes	[nvarchar (max)]	Notes regarding the answer audit.	User-defined note
RequestedRescore QuestionKey	[integer]	Nexidia identifier used to join to other data.	2
RequestedRescoreKey	[integer]	Nexidia identifier used to join to other data.	2
RescoreState	[string(100)]	Indicates the state of the re-score request.	Question_ Discarded
RescoreAnswerScore	decimal(18,2)	Provides scoring information. Decimals and negative values are supported.	9
RescoreAnswerContent	[nvarchar (max)]	The answer content for rescored evaluations. Note: This column is only populated for the Text and Numeric question types.	Yes
AnswerRescoreNotes	[nvarchar (max)]	The answer notes for rescored evaluations.	Yes

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
EvaluatorsAnswer	[nvarchar (max)]	This is the most current evaluators answer. Note: This column is only populated for these question types: • Yes, No, N/A • List • Bonus • Deduction • Multi-Select List	Yes
CurrentAnswerContent	[nvarchar (max)]	This is the most current answer content. Note: This column is only populated for the Text and Numeric question types.	Yes
CurrentQuestionNotes	[nvarchar (max)]	This is the most current question notes.	User-defined note
ScoreDifference	[decimal]	The difference between the original evaluator and the reviewer score.	-7.65
AINotes	[nvarchar (max)]	The AI-generated notes at the question level.	

Question Types

The following table lists the available question types for Evaluations.

TYPE	REFERENCE ID	DESCRIPTION
Yes, No, N/A	2	Evaluators provide a <i>Yes</i> , <i>No</i> , or <i>n/a</i> score for this question type.
List	6	Evaluators select from a list of options provided for this question type.
Text	10	Evaluators enter free-form text for this question type.
Numeric	14	Evaluators enter a numeric answer for this question type.
Bonus	18	Evaluators grant some number of bonus points (added to the overall score) for this question type.
Deduction	22	Evaluators remove some number of points (deducted from the overall score) for this question type.
Multi-Select List	26	Evaluators can select multiple values for this question type.

Multi-Select Answers

These answer keys are exported in the Answer exports and the EvalsEvaluationQuestion export.

Note: This does not currently apply to EvalsCalibration or EvalsSelfEvaluation exports.

Question Type Behavior

This topic explains how the `CondenseEvaluationQuestionExport` configuration affects the `EvalsEvaluationQuestion` export output behavior.

The `EvalsEvaluationQuestion` export contains data for evaluation questions with identifying values to a question's initial answers, audit answers, rescore answers, current answers, and requested rescore questions.

The initial answer represents the answer(s) the evaluation was published with. The audit answer represents the answer(s) selected during the evaluation audit. The rescore answer represents the answer(s) selected during the appeal of the evaluation. The current answer represents the current answer(s) on the evaluation now.

The `EvaluationQuestionKey`, `InitialTemplateAnswerKey`, `AuditTemplateAnswerKey`, `RescoreTemplateAnswerKey`, `CurrentTemplateAnswerKey`, and `RequestedRescoreQuestionKey` are the names of the columns that form the primary key and make a row unique amongst other rows in the export. These columns can be populated with negative values representing a NULL value found in the database from which the data is sourced in the NexidiaESIDW database.

The `EvalsEvaluationQuestion` export can produce different numbers of rows depending on the `CondenseEvaluationQuestionExport` configuration, which controls the output behavior by condensing the amount of data generated from the evaluation question to question answers.

Condensed Output

When you set the `CondenseEvaluationQuestionExport` configuration to **true**, the number of rows generated for each question type is as follows for the initial evaluation, evaluation audit, and evaluation rescore.

- Yes, No Questions - One row per available answer (including a "NA" answer).
 - Example: For a Yes, No Question with no "NA" answer, then two rows are generated.
 - Example: For a Yes, No Question with a "NA" answer, then three rows are generated.
- List Questions - One row per available answer (including a "NA" answer).
 - Example: For a List Question with no "NA" answer, then two rows are generated.
 - Example: For a List Question with a "NA" answer, then three rows are generated.
- Text Questions - One row per available answer (including a "NA" answer).

- Example: For a Text Question with no “NA” answer, then two rows are generated.
- Example: For a Text Question with a “NA” answer, then three rows are generated.
- Numeric Questions - One row per available answer (including a “NA” answer).
 - Example: For a Numeric Question with no “NA” answer, then two rows are generated.
 - Example: For a Numeric Question with a “NA” answer, then three rows are generated.
- Bonus Questions - One row per available answer (including a “NA” answer).
 - Example: For a Bonus Question with no “NA” answer, then two rows are generated.
 - Example: For a Bonus Question with a “NA” answer, then three rows are generated.
- Deduction Questions - One row per available answer (including a “NA” answer).
 - Example: For a Deduction Question with no “NA” answer, then two rows are generated.
 - Example: For a Deduction Question with a “NA” answer, then three rows are generated.
- Multi-Select List Questions - One row per available answer (including a “NA” answer).
 - Example: For a Multi-Select List Question with four available answers and no “NA” answer, then four rows are generated.
 - Example: For a Multi-Select List Question with four available answers and a “NA” answer, then five rows are generated.

Non-condensed Output

When you set the `CondenseEvaluationQuestionExport` configuration to **false**, the number of rows generated for each question type is as follows for the initial evaluation, evaluation audit, and evaluation rescore.

- Yes, No Questions - One row per selected answer.
 - Example: For a Yes, No Question, then one row is generated.
- List Questions - One row per selected answer.
 - Example: For a List Question, then one row is generated.
- Text Questions - One row per selected answer.
 - Example: For a Text Question, then one row is generated.

- Numeric Questions - One row per selected answer.
 - Example: For a Numeric Question, then one row is generated.
- Bonus Questions - One row per selected answer.
 - Example: For a Bonus Question, then one row is generated.
- Deduction Questions - One row per selected answer.
 - Example: For a Deduction Question, then one row is generated.
- Multi-Select List Questions - Depending on what stage the evaluation is in (Initial, Audit, Rescore).
 - Initial: Initial Selected Answer(s) * Current Selected Answer(s) (use the number of Initial Selected Answer(s)).
 - Audit: Initial Selected Answer(s) * Audit Selected Answer(s) * Current Selected Answer(s) (use the number of Audit Selected Answer(s)).
 - Rescore: Initial Selected Answer(s) * Audit Selected Answer(s) * Rescore Selected Answer(s) * Current Selected Answer(s) (use the number from Audit Selected Answer(s)).
 - Example: An evaluation has a Multi-Select List Question with four available answers.
 - Four of those answers are selected, and the evaluation is published, then sixteen rows would be generated (four Initial Selected Answers * four Current Selected Answers) See Multi-Select List Question Example: Initial answers selected below.
 - The evaluation is audited where three answers are selected and is published, then thirty six rows would be generated (four Initial Selected Answers * three Audit Selected Answers * three Current Selected Answers) See Multi-Select List Question Example: Audit answers selected below.
 - The evaluation is appealed where the audit selected answers are chosen and is published, then one hundred forty four rows would be generated (four Initial Selected Answers * three Audit Selected Answers * three Rescore Selected Answers * three Current Selected Answers). See Multi-Select List Question Example: Rescore answers selected below.

[illegible]

Multi-Select List Question Example: Audit Answers Selected

EvaluationQuestionKey	Templid	Templid	TemplateQuestionKey	InitialTemplateAnswerKey	AuditTemplateAnswerKey	RescoreTemplateAnswerKey	CurrentTemplateAnswerKey
7	1	1	7	18	18	-1	18
7	1	1	7	18	19	-1	18
7	1	1	7	18	20	-1	18
7	1	1	7	19	18	-1	18
7	1	1	7	19	19	-1	18
7	1	1	7	19	20	-1	18
7	1	1	7	20	18	-1	18
7	1	1	7	20	19	-1	18
7	1	1	7	20	20	-1	18
7	1	1	7	21	18	-1	18
7	1	1	7	21	19	-1	18
7	1	1	7	21	20	-1	18
7	1	1	7	18	18	-1	19
7	1	1	7	18	19	-1	19
7	1	1	7	18	20	-1	19
7	1	1	7	19	18	-1	19
7	1	1	7	19	19	-1	19
7	1	1	7	19	20	-1	19
7	1	1	7	20	18	-1	19
7	1	1	7	20	19	-1	19
7	1	1	7	20	20	-1	19
7	1	1	7	21	18	-1	19
7	1	1	7	21	19	-1	19
7	1	1	7	21	20	-1	19
7	1	1	7	18	18	-1	20
7	1	1	7	18	19	-1	20
7	1	1	7	18	20	-1	20
7	1	1	7	19	18	-1	20
7	1	1	7	19	19	-1	20
7	1	1	7	19	20	-1	20
7	1	1	7	20	18	-1	20
7	1	1	7	20	19	-1	20
7	1	1	7	20	20	-1	20
7	1	1	7	21	18	-1	20
7	1	1	7	21	19	-1	20
7	1	1	7	21	20	-1	20

Audit

Rescore

Accessibility: Good to go

Average: 7 Count: 36 Score: 252

Evaluation	QuestionKey	Template	Template	TemplateQuestionKey	InitialTemplateAnswerKey	AuditTemplateAnswerKey	ResourceTemplateAnswerKey	CurrentTemplateAnswerKey
7	1	1	7	18	18	18	-1	
7	1	1	7	18	18	19	-1	
7	1	1	7	18	18	20	-1	
7	1	1	7	18	18	21	-1	
7	1	1	7	19	18	18	-1	
7	1	1	7	19	18	19	-1	
7	1	1	7	19	18	20	-1	
7	1	1	7	19	18	21	-1	
7	1	1	7	20	18	18	-1	
7	1	1	7	20	18	19	-1	
7	1	1	7	20	18	20	-1	
7	1	1	7	20	18	21	-1	
7	1	1	7	21	18	18	-1	
7	1	1	7	21	18	19	-1	
7	1	1	7	21	18	20	-1	
7	1	1	7	21	18	21	-1	
7	1	1	7	18	19	18	-1	
7	1	1	7	18	19	19	-1	
7	1	1	7	18	19	20	-1	
7	1	1	7	18	19	21	-1	
7	1	1	7	19	19	18	-1	
7	1	1	7	19	19	19	-1	
7	1	1	7	19	19	20	-1	
7	1	1	7	19	19	21	-1	
7	1	1	7	20	19	18	-1	
7	1	1	7	20	19	19	-1	
7	1	1	7	20	19	20	-1	
7	1	1	7	20	19	21	-1	
7	1	1	7	21	19	18	-1	
7	1	1	7	21	19	19	-1	
7	1	1	7	21	19	20	-1	
7	1	1	7	21	19	21	-1	
7	1	1	7	18	20	18	-1	
7	1	1	7	18	20	19	-1	
7	1	1	7	18	20	20	-1	
7	1	1	7	18	20	21	-1	
7	1	1	7	19	20	18	-1	
7	1	1	7	19	20	19	-1	
7	1	1	7	19	20	20	-1	
7	1	1	7	19	20	21	-1	
7	1	1	7	20	20	18	-1	
7	1	1	7	20	20	19	-1	
7	1	1	7	20	20	20	-1	
7	1	1	7	20	20	21	-1	
7	1	1	7	21	20	18	-1	
7	1	1	7	21	20	19	-1	
7	1	1	7	21	20	20	-1	
7	1	1	7	21	20	21	-1	
7	1	1	7	18	18	18	-2	
7	1	1	7	18	18	19	-2	
7	1	1	7	18	18	20	-2	
7	1	1	7	18	18	21	-2	
7	1	1	7	19	18	18	-2	
7	1	1	7	19	18	19	-2	
7	1	1	7	19	18	20	-2	
7	1	1	7	19	18	21	-2	
7	1	1	7	19	18	18	-2	
7	1	1	7	19	18	19	-2	
7	1	1	7	19	18	20	-2	
7	1	1	7	19	18	21	-2	
7	1	1	7	19	18	18	-2	
7	1	1	7	19	18	19	-2	
7	1	1	7	19	18	20	-2	
7	1	1	7	19	18	21	-2	
7	1	1	7	19	18	18	-2	
7	1	1	7	19	18	19	-2	
7	1	1	7	19	18	20	-2	
7	1	1	7	19	18	21	-2	
7	1	1	7	19	18	18	-2	
7	1	1	7	19	18	19	-2	
7	1	1	7	19	18	20	-2	
7	1	1						

EVALSEVALUATIONQUESTIONAUDITANSWER

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
EvaluationQuestionKey	[integer]	The Nexidia identifier used to join to other data.	22
AuditTemplateAnswerKey	[integer]	The Nexidia identifier used to join to other data.	5
AuditAnswerScoredPoints	decimal(18,2)	Provides the score for the audit answer. Decimals and negative values are supported. For multi-select questions, multiple rows display the points for each individual answer.	9

EVALSEVALUATIONQUESTIONCURRENTANSWER

Configuration Considerations

The **IncludeNullValuesInSelfEvaluations** configuration Controls the export output behavior of the EvalsSelfEvaluationQuestionCurrentAnswer and EvalsSelfEvaluationQuestionInitialAnswer exports. If set to true, blank or missing answers for these records are published as an empty string "". If set to false, blank or missing answers for these records are published as '-1'.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
EvaluationQuestionKey	[integer]	The Nexidia identifier used to join to other data.	25
CurrentTemplateAnswerKey	[integer]	The Nexidia identifier used to join to other data.	15
CurrentAnswerScoredPoints	decimal(18,2)	Provides the score for the current answer. Decimals and negative values are supported. For multi-select questions, multiple rows display the points for each individual answer.	9

EVALSEVALUATIONQUESTIONINITIALANSWER

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
EvaluationQuestionKey	[integer]	The Nexidia identifier used to join to other data.	23
InitialTemplateAnswerKey	[integer]	The Nexidia identifier used to join to other data.	8
InitialAnswerScoredPoints	decimal(18,2)	Provides the score for the initial answer. Decimals and negative values are supported. For multi-select questions, multiple rows display the points for each individual answer.	9

EVALSEVALUATIONQUESTIONRESCOREANSWER

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
EvaluationQuestionKey	[integer]	The Nexidia identifier used to join to other data.	23
RescoreTemplateAnswerKey	[integer]	The Nexidia identifier used to join to other data.	8
RescoreAnswerScoredPoints	decimal(18,2)	Provides the score for the rescore answer. Decimals and negative values are supported. For multi-select questions, multiple rows display the points for each individual answer.	9.25

EVALSGROUPCOACHING

Configuration Considerations

The IncludeEvalsGroupCoaching configuration specifies if the EvalsGroupCoaching, EvalsGroupCoachingAction, EvalsAgentGroupCoachingAction and the EvalsAgentGroupCoachingStatus exports are created.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
GroupCoachingKey	[integer] not null	The Nexidia identifier used to join to other data.	1
GroupCoachingId	[integer] not null	The auto-generated group coaching identification number.	1
Name	[nvarchar(500)] not null	The name of the group coaching.	Greeting
Description	[nvarchar(1000)] null	The group coaching description.	Best practices on how to greet the customer
Notes	[nvarchar(max)] null	Notes regarding the group coaching.	User-defined note
IsPublished	[bit] not null	Indicates if the group coaching is published.	TRUE
PublishedDateUTC	[datetime2] null	The date/time the group coaching was published.	2023-12-14T17:40:46.5247471

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
TotalSentTo	[integer] not null	The total number of agents the group coaching request was sent to.	3
TotalAcknowledged	[integer] not null	The total number of agents that acknowledged the group coaching request.	0
CreatedByUserId	[integer] not null	The auto-generated user identification number of the user that created the group coaching.	1
CreatedDateUTC	[datetime2] not null	The date/time the group coaching was created.	2023-12-14T17:40:46.5931198
LastModifiedByUserId	[integer] not null	The auto-generated user identification number of the person who made the last modification to the group coaching.	1
LastModifiedDateUTC	[datetime2] not null	The date/time the group coaching was last modified.	2023-12-14T17:46:42.7525053

EVALSGROUPCOACHINGACTION

Configuration Considerations

The IncludeEvalsGroupCoaching configuration specifies if the EvalsGroupCoaching, EvalsGroupCoachingAction, EvalsAgentGroupCoachingAction and the EvalsAgentGroupCoachingStatus exports are created.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
GroupCoachingActionKey	[integer] not null	The Nexidia identifier used to join to other data.	1
GroupCoachingActionId	[integer] not null	The auto-generated group coaching action identification number.	1
GroupCoachingKey	[integer] not null	The Nexidia identifier used to join to other data.	1
CoachingActionTypeKey	[integer] not null	The Nexidia identifier used to join to other data.	108
RequiredAction	[nvarchar(max)]	The action that the agents are required to take for the group coaching.	Read the escalation procedure
TargetDateUTC	[datetime2] null	The target date/time for the required action to be completed.	2023-12-21T17:40:08
KnowledgeBaseArticleKey	[integer] null	The Nexidia identifier used to join to other data.	0

EVALSKEYTOIDMAP

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
Key	[integer]	The Nexidia identifier used to join to other data. This key covers EvaluationKey, SelfEvaluationKey, and CalibrationKey.	1
TemplateInstancelId	[integer]	The identification generated for the template instance in Interaction Analytics. This is equivalent to the Evaluation ID shown in Interaction Analytics.	1
AuditInstancelId	[integer]	The identification generated for the audit instance in Quality Central.	1

EVALSSELF EVALUATION

Configuration Considerations

- The **IncludeAgentInventoryDataInAllEvaluationExports** specifies if the Agent Inventory columns are included in the Calibration, Coaching, and Self-Evaluations CSV Files/SQL Tables. If set to true, the Agent Inventory columns are included and populated in the output for CSV exports. The Agent Inventory columns are included with the relevant data and populated in the output for Remote exports. If set to false, the Agent Inventory columns are not included in the output for CSV exports. The Agent Inventory columns are included but have no data for Remote exports.
- The **IncludeEvaluatorReviewData** configuration specifies if the output data contains the evaluator review columns.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

EvalsSelfEvaluation Population

The supervisor-initiated part of a self-evaluation is exported in the Evaluations export, and the agent's self-evaluation is exported in the Self Evaluations export.

You can join these two exports on the EvalsEvaluation.EvaluationKey = EvalsSelfEvaluation.SupervisorEvaluationKey. Both exports will be presented in the user interface with an "S-" prefix, for example, "S-123456".

The exception to this rule is if an agent initiates a self-evaluation independently of a supervisor. In this case, the same evaluation will be in both the EvalsEvaluation and EvalsSelfEvaluation exports with identical EvaluationKeys. For agent-initiated self-evaluations, the EvalsSelfEvaluation.SupervisorEvaluationKey = -1.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
SelfEvaluationKey	[integer]	The Nexidia identifier used to join to other data.	1

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
SupervisorEvaluationKey	[integer]	The Nexidia identifier used to join to other data.	1
TemplateKey	[integer]	The Nexidia identifier used to join to other data.	1
CreatedByUserID	[integer]	The auto-generated user identification number.	1
SelfEvaluationState	[string(100)]	The current state of the self-evaluation.	EFI_Published
AgentKey	[integer]	The Nexidia identifier used to join to other data.	1
CurrentAvailablePoints	decimal(18,2)	Provides the points that are currently available for the self-evaluation. Decimals and negative values are supported.	9.25
CurrentScoredPoints	decimal(18,2)	Provides the points that are currently scored in the self-evaluation. Decimals and negative values are supported.	-0.75

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
IsCompleted	BIT	Indicates if this self-evaluation is complete.	TRUE
IgnoredForAgent Reporting	BIT	Indicates if the self-evaluation is ignored for reporting purposes.	FALSE
CreationDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the self-evaluation was created.	yyyy-mm-ddThh:mi:ss.mm
ModifiedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the self-evaluation was modified.	yyyy-mm-ddThh:mi:ss.mm
PublishedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the self-evaluation was published.	yyyy-mm-ddThh:mi:ss.mm
IgnoredDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the self-evaluation was ignored.	yyyy-mm-ddThh:mi:ss.mm
StartedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the self-evaluation was started.	yyyy-mm-ddThh:mi:ss.mm

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
RequestDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the self-evaluation was requested.	yyyy-mm-ddThh:mi:ss.mm
AgentPublishedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the agent published the self-evaluation.	yyyy-mm-ddThh:mi:ss.mm
SupervisorPublishedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the supervisor published the self-evaluation.	yyyy-mm-ddThh:mi:ss.mm
SelfEvaluationNote	[nvarchar (max)]	Notes about the self-evaluation.	User-defined note
HierarchyKey	[integer]	Provides a link back to the Hierarchy file/table.	5
InventoryAgentId	[string(255)]	The agent's identification.	11985
InventoryFirstName	[string(255)]	The agent's first name	Ruth
InventoryLastName	[string(255)]	The agent's last name.	Carey
InventoryUserName	[string(255)]	The agent's user name.	ruth

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InventoryUserEmail	[string(255)]	The agent's email address.	example@mail.com
InventoryUserSite	[string(255)]	The agent's physical location.	India
InventoryUserSupervisor	[string(255)]	The agent's direct supervisor.	Jim Bush
ReviewedSelfEvaluationKey	[Integer]	The integer identifier for the reviewed evaluation.	1
ReviewedOnUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time the reviewer performed the evaluator review.	yyyy-mm-ddThh:mi:ss.mm
IsReview	[boolean]	Indicates if an evaluator review was performed on the published evaluation.	TRUE
ScoreDifference	[decimal]	The difference between the original evaluator and the reviewer score.	-7.65

EVALSSELFEVALUATIONCATEGORY

Configuration Considerations

The **IncludeEvaluatorReviewData** configuration specifies if the output data contains the evaluator review columns.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
SelfEvaluationKey	[integer]	Nexidia identifier used to join to other data.	1
SelfEvaluationCategory Key	[integer]	Nexidia identifier used to join to other data.	1
TemplateKey	[integer]	Nexidia identifier used to join to other data.	1
TemplateCategoryKey	[integer]	Nexidia identifier used to join to other data.	1
CurrentCategoryStatus	[string(50)]	Provides status information about the current category.	Finished
CurrentCategory AvailablePoints	decimal(18,2)	Provides the available points for the current category. Decimals and negative values are supported.	9
CurrentCategoryScored Points	decimal(18,2)	Provides the scored points for the current category. Decimals and negative values are supported.	9

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
CategoryAnswered	n/a	This column is obsolete and will always contain a NULL value.	n/a
CategoryInitialNotes	[nvarchar(max)]	The initial notes about the category.	User-defined note
ScoreDifference	[decimal]	The difference between the original evaluator and the reviewer score.	-7.65

EVALSSELF EVALUATION QUESTION

Configuration Considerations

The **IncludeEvaluatorReviewData** configuration specifies if the output data contains the evaluator review columns.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

If your system is configured to use multi-select questions and answers on evaluations, refer to the EvalsSelfEvaluationQuestionCurrentAnswer and the EvalsSelfEvaluationQuestionInitialAnswer for your results.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
SelfEvaluationKey	[integer]	Nexidia identifier used to join to other data.	1
SelfEvaluationCategoryKey	[integer]	Nexidia identifier used to join to other data.	1
SelfEvaluationQuestionKey	[integer]	Nexidia identifier used to join to other data.	1
TemplateKey	[integer]	Nexidia identifier used to join to other data.	1
TemplateCategoryKey	[integer]	Nexidia identifier used to join to other data.	1
TemplateQuestionKey	[integer]	Nexidia identifier used to join to other data.	1
InitialTemplateAnswerKey	[integer]	Nexidia identifier used to join to other data.	1
CurrentTemplateAnswerKey	[integer]	Nexidia identifier used to join to other data.	1

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
AnswerAvailablePoints	decimal(18,2)	Provides the available points for a question. Decimals and negative values are supported.	9
CurrentAnswerScored Points	decimal(18,2)	The sum of the points scored for a question (multi-select and non multi-select). Decimals and negative values are supported.	9
CurrentAnswerState	[string(10)]	The state of the current answer.	0
AutoFail	[boolean]	Indicates if the agent fails the current category or the entire evaluation based on the response to the question.	TRUE
IsActive	[boolean]	Indicates if the question is active.	TRUE
AnswerContent	[nvarchar(max)]	The answer provided in the self-evaluation. Note: This column is only populated for the Text and Numeric question types.	Yes
AnswerNotes	[nvarchar(max)]	Notes about the answer.	User-defined note
ScoreDifference	[decimal]	The difference between the original evaluator and the reviewer score.	-7.65

EVALSSELF EVALUATION QUESTION CURRENT ANSWER

Configuration Considerations

The IncludeNullValuesInSelfEvaluations controls the export output behavior of the EvalsSelfEvaluationQuestionCurrentAnswer and EvalsSelfEvaluationQuestionInitialAnswer exports. If set to true, blank or missing answers for these records are published as an empty string "". If set to false, blank or missing answers for these records are published as '-1'.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
SelfEvaluationQuestionKey	[integer]	Nexidia identifier used to join to other data.	1
CurrentTemplateAnswerKey	[integer]	Nexidia identifier used to join to other data.	1
CurrentAnswerScoredPoints	decimal(18,2)	Provides the score for the current answer. Decimals and negative values are supported. For multi-select questions, multiple rows display the points for each individual answer.	9

EVALSSELF EVALUATION QUESTION INITIAL ANSWER

Configuration Considerations

The IncludeNullValuesInSelfEvaluations controls the export output behavior of the EvalsSelfEvaluationQuestionCurrentAnswer and EvalsSelfEvaluationQuestionInitialAnswer exports. If set to true, blank or missing answers for these records are published as an empty string ''. If set to false, blank or missing answers for these records are published as '-1'.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
SelfEvaluationQuestion Key	[integer]	Nexidia identifier used to join to other data.	1
InitialTemplateAnswer Key	[integer]	Nexidia identifier used to join to other data.	1
InitialAnswerScored Points	decimal(18,2)	Provides the score for the initial answer. Decimals and negative values are supported. For multi-select questions, multiple rows display the points for each individual answer.	9

EVALSTEMPLATE

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
TemplateKey	[integer]	Nexidia identifier used to join to other data.	1
FirstUsedByUserID	[integer]	The auto-generated user identification number.	6
LastModifiedByUserID	[integer]	The auto-generated user identification number.	7
TemplateName	[string(255)]	The template name.	Template_Auto-Suggest
TemplateVersion	[integer]	The version of the template.	1
TemplateIdentity	[guid]	The template identification.	92e3b9be-82ab-48ba-84ca-29451e5abb9f
TemplateCreationDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time this template was created.	yyyy-mm-ddThh:mi:ss.mm
VersionCreationDate UTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time this version of the template was created.	yyyy-mm-ddThh:mi:ss.mm

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
FirstUsedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time this template was initially used.	yyyy-mm-ddThh:mi:ss.mm
LastUsedDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time that this template was last used.	yyyy-mm-ddThh:mi:ss.mm
ActivateOnDateUTC Note: Configurable by the DateFormat configuration setting.	[datetime]	The date/time that this template was activated.	yyyy-mm-ddThh:mi:ss.mm
IsActive	[boolean]	Indicates if this template is active.	TRUE
CategoryWeighted	[boolean]	Indicates if this template is weighted by category.	TRUE
Notes	[string(3000)]	Notes regarding the template.	User-defined note

EVALSTEMPLATEANSWER

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
TemplateKey	[integer]	Nexidia identifier used to join to other data.	1
TemplateCategoryKey	[integer]	Nexidia identifier used to join to other data.	1
TemplateQuestionKey	[integer]	Nexidia identifier used to join to other data.	1
TemplateAnswerKey	[integer]	Nexidia identifier used to join to other data.	1
TemplateAnswer	[nvarchar (max)]	The answer provided in the template.	Yes
AvailablePoints	decimal(18,2)	Provides the points available for the template question. Decimals and negative values are supported.	9
Position	[integer]	Indicates the position.	1
IsAutoFail	[boolean]	Indicates if the agent fails the current category/question, or the entire evaluation based on the evaluators response to the question.	TRUE
AutoFailStatus	[string(50)]	Indicates which component fails if the IsAutoFail value is TRUE.	Category_Only

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
IsDefault	[boolean]	Indicates if this is the default.	FALSE
TemplateAnswerIdentity	[guid]	The unique template answer identification.	65f3c265-b71d-4034-bf0a-1ab7372b75e8

EVALSTEMPLATECATEGORY

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
TemplateKey	[integer]	Nexidia identifier used to join to other data.	1
TemplateCategoryKey	[integer]	Nexidia identifier used to join to other data.	1
TemplateCategory Name	[string(255)]	The category name.	Category One
CategoryWeight	[integer]	The weight associated with the category.	50
Position	[integer]	The position of the category in the template.	3
TemplateCategoryIdentity	[guid]	The unique template category identification.	1df6a14d-e330-4980-8e60-cf2b544bdf6a

EVALSTEMPLATEQUESTION

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
TemplateKey	[integer]	Nexidia identifier used to join to other data.	1
TemplateCategoryKey	[integer]	Nexidia identifier used to join to other data.	1
TemplateQuestionKey	[integer]	Nexidia identifier used to join to other data.	1
TemplateQuestionType	[integer]	This column represents a reference to the Question component of a template, and specifically corresponds to one of the available question types.	3
TemplateQuestion Content	[nvarchar(max)]	The actual content of the question.	Did the agent greet the customer?
Position	[integer]	The position of the question in the template.	2
NaAllowed	[boolean]	Indicates if the N/A option is allowed for this question.	TRUE
TemplateQuestionIdentity	[guid]	The unique template question identification.	161d0360-ae12-4460-b50f- ebe681123f60
Hint	[nvarchar(max)]	This field is populated in the DEU output with text from the hint field on the Evaluation Form.	Standard greeting

EVALSUSER

Configuration Considerations

The **FilterOutEvalsUserIdsLessThan** configuration specifies if a range of User IDs are filtered out of the EvalsUser export. For example, if you enter a value of 10000000, then User IDs less than this value are not included in the EvalsUser export.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
UserID	[integer]	The auto-generated user identification number.	8
UserName	[string(255)]	The user name of the Evaluations user.	JDoe
FirstName	[string(255)]	The first name of the Evaluations user.	John
LastName	[string(255)]	The last name of the Evaluations user.	Doe
IsActive	[boolean]	Indicates if this is an active user.	TRUE

EXPERIENCE

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
ExperienceId	[string]	A unique identifier of an Experience.	1 - Experience1 - c9b87d8c-c148-4a09-81a6-57e3036e6a11
IsMature	[boolean]	Indicates if an Experience is still in progress or not.	False
StartDateTime Note: Configurable by the DateFormat configuration setting.	[datetime]	The date and time that the Experience started.	yyyy-mm-ddThh:mi:ss.mm
EndDateTime Note: Configurable by the DateFormat configuration setting.	[datetime]	The date and time that the experience ended.	yyyy-mm-ddThh:mi:ss.mm
ElapsedDurationMs	[bigint]	The elapsed duration of the experience in milliseconds	6,139,530,480
TotalDurationMs	[bigint]	The total duration of the interactions in the experience in milliseconds.	6,139,530,480

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionCount	[integer]	The number of interactions in the experience.	3
AgentCount	[integer]	The number of agents that were involved in the Experience.	1
MediaTypeCount	[integer]	The number of media types that were in the Experience.	1
AvgInteractionDurationMs	[bigint]	The average duration of the interactions in the Experience in milliseconds.	5,980,059,872
AvgTimeBetweenInteractionsMs	[bigint]	The average time between the interactions in the Experience in milliseconds.	5,980,059,872
SentimentScore	decimal(15,2)	The post Experience overall sentiment score.	20
EtlBatchIdOfInsert	[integer]	The ETL batch when the Experience was initially processed.	100837

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
EtlBatchIdOfUpdate	[integer]	The ETL batch of the last update for this Experience.	100837

HIERARCHY

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
HierarchyKey	[bigint]	This key links back to the EvalsCalibration, EvalsEvaluation, EvalsSelfEvaluation, and InteractionMetadata files/tables. The first key of the Hierarchy export is -1, which is mapped to metadata before the hierarchy is set up. The exported UniqueAgentId is "00000000-0000-0000-0000-000000000000", which shows that there is no mapping to the UniqueAgentId in the database. For all the interactions and evaluations before setting up the hierarchy, they will point to the "-1" hierarchy version.	15
UniqueagentId	[nvarchar(256)]	The unique identifier for the agent. This is the lowest level in the hierarchy and is used to tie the agent in an import to the actual agent in the Agent Inventory. It is linked to the Agent Inventory file/table.	SS12222
HierarchyL1	[nvarchar(256)]	Level one of the hierarchy.	Tabulator Support
HierarchyL2	[nvarchar(256)]	Level two of the hierarchy.	Tabulators

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
HierarchyL3	[nvarchar(256)]	Level three of the hierarchy.	Business Machines
HierarchyL4	[nvarchar(256)]	Level four of the hierarchy.	Maintenance Machines
HierarchyL5	[nvarchar(256)]	Level five of the hierarchy.	Production_TeamA
HierarchyL6	[nvarchar(256)]	Level six of the hierarchy.	Production_TeamB
HierarchyL7	[nvarchar(256)]	Level seven of the hierarchy.	Production_TeamC
Hierarchy L8	[nvarchar(256)]	Level eight of the hierarchy.	Production_TeamD
HierarchyL9	[nvarchar(256)]	Level nine of the hierarchy.	North America_N
HierarchyL10	[nvarchar(256)]	Level ten of the hierarchy.	North America_S
HierarchyL11	[nvarchar(256)]	Level eleven of the hierarchy.	North America_E
HierarchyL12	[nvarchar(256)]	Level twelve of the hierarchy.	North America_W
HierarchyL13	[nvarchar(256)]	Level thirteen of the hierarchy.	Manufacturing-1A
HierarchyL14	[nvarchar(256)]	Level fourteen of the hierarchy.	Manufacturing-1B
HierarchyL15	[nvarchar(256)]	Level fifteen of the hierarchy. This is the enterprise level of the hierarchy.	Enterprise

INTERACTION

Configuration Considerations

The **KeepOldDateTimeFormat** configuration controls the output of the DiscoveredDate column.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionId	[integer]	Nexidia identifier used to join to other data.	10
ExternalInteractionId	[string(260)]	The external identifier for media provided in metadata. If not provided, this contains the ingest file path.	\\Box9\Media\Bankx\2018.wav
SearchGridId	[integer]	The internal ID used to represent the interaction in the Search Grid platform.	12
IngestFilePath	[string(260)]	The file path the file was ingested from.	\\Box9\Media\Bankx\2018.wav
DurationInMs	[integer]	The media file duration in milliseconds.	136640

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionDateTime Note: Configurable by the DateFormat configuration setting.	[datetime]	The date the call started as provided by metadata, or the file system created date if it was not provided by metadata.	yyyy-mm-ddThh:mi:ss.mm
NonspeechTotalDurationInMs	[integer]	The total duration in milliseconds of detected non-speech segments.	4770
NonspeechTotalSegments	[integer]	The total number of detected non-speech segments.	1
CrosstalkTotalDurationInMs	[integer]	The total duration in milliseconds of detected cross-talk.	0
CrosstalkTotalSegments	[integer]	The total number of detected cross-talk segments.	0
DiscoveredDate Note: Configurable by the DateFormat configuration setting.	[datetime]	The date and time that the interaction was discovered in the application.	yyyy-mm-ddThh:mi:ss.mm
IngestResultCode	[integer]	The result code of the ingested media.	0

INTERACTIONENLIGHTENScoresANDINTENTS

Configuration Considerations

- The **IncludeEnlightenScoresAndIntents** configuration specifies if the InteractionEnlightenScoresAndIntents export is created. . If set to true, the InteractionEnlightenScoresAndIntents export is created, and the EscalationValue, ResolutionValue, and ConfirmedSaleValue columns are included in the export. If set to false, the CSV file is not generated, and the fields are exported as NULLs for the SQL table output.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

Important

The Model35-50Raw and Model35-50Index data columns are placeholders for a future release.

The Secondary and Tertiary intent data columns are placeholders for a future release and will not be populated in this version.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionId	integer	A foreign key to the media file	5
AcknowledgeLoyaltyRaw	decimal (18,5)	The Acknowledge Loyalty Raw score from the enlighten model.	12.12345
AcknowledgeRequestRaw	decimal (18,5)	The Acknowledge Request Raw score from the enlighten model.	12.12345
ActiveListeningRaw	decimal (18,5)	The Active Listening Raw score from the enlighten model.	12.12345
AskForTheSaleRaw	decimal (18,5)	The Ask For The Sale Raw score from the enlighten model.	12.12345

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
BeEmpatheticRaw	decimal (18,5)	The Be Empathetic Raw score from the enlighten model.	12.12345
BuildRapportRaw	decimal (18,5)	The Build Rapport Raw score from the enlighten model.	12.12345
ChurnRaw	decimal (18,5)	The Churn Raw score from the enlighten model.	12.12345
ComplaintsRaw	decimal (18,5)	The Complaints Raw score from the enlighten model.	12.12345
ConfirmedOrderRaw	decimal (18,5)	The Confirmed Order Raw score from the enlighten model.	12.12345
ConfirmedSaleRaw	decimal (18,5)	The Confirmed Sale Raw score from the enlighten model.	12.12345
DemonstrateEmpathyRaw	decimal (18,5)	The Demonstrate Empathy Raw score from the enlighten model.	12.12345
DemonstrateOwnership Raw	decimal (18,5)	The Demonstrate Ownership Raw score from the enlighten model.	12.12345
EffectiveQuestioningRaw	decimal (18,5)	The Effective Questioning Raw score from the enlighten model.	12.12345
EscalationRaw	decimal (18,5)	The Escalation Raw score from the enlighten model.	12.12345
FinancialDistressRaw	decimal (18,5)	The Financial Distress Raw score from the enlighten model.	12.12345
FraudsterDetectionRaw	decimal (18,5)	The Fraudster Detection Raw score from the enlighten model.	12.12345

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
HighRiskTransactionRaw	decimal (18,5)	The High Risk Transaction Raw score from the enlighten model.	12.12345
InappropriateActionRaw	decimal (18,5)	The Inappropriate Action Raw score from the enlighten model.	12.12345
LikelihoodToBuyRaw	decimal (18,5)	The Likelihood To Buy Raw score from the enlighten model.	12.12345
MakeAConnectionRaw	decimal (18,5)	The Make A Connection Raw score from the enlighten model.	12.12345
OvercomeObjectionsRaw	decimal (18,5)	The Overcome Objections Raw score from the enlighten model.	12.12345
PresumptiveSellingRaw	decimal (18,5)	The Presumptive Selling Raw score from the enlighten model.	12.12345
PromoteSelfServiceRaw	decimal (18,5)	The Promote Self Service Raw score from the enlighten model.	12.12345
ResolutionRaw	decimal (18,5)	The Resolution Raw score from the enlighten model.	12.12345
SetExpectationsRaw	decimal (18,5)	The Set Expectations Raw score from the enlighten model.	12.12345
SpeechVelocityRaw	decimal (18,5)	The Speech Velocity Raw score from the enlighten model.	12.12345
UncoverNeedsRaw	decimal (18,5)	The Uncover Needs Raw score from the enlighten model.	12.12345
IssueResolvedRaw	decimal (18,5)	The Issue Resolved Raw score from the enlighten model.	12.12345

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
BrokenPromisesFailedRaw	decimal (18,5)	The Broken Promises Failed Raw score from the enlighten model.	12.12345
BrokenPromisesRepeat Raw	decimal (18,5)	The Broken Promises Repeat Raw score from the enlighten model.	12.12345
CommitmentCreateTicket Raw	decimal (18,5)	The Commitment Create Ticket Raw score from the enlighten model.	12.12345
CommitmentCreditRaw	decimal (18,5)	The Commitment Credit Raw score from the enlighten model.	12.12345
CommitmentCallbackRaw	decimal (18,5)	The Commitment Callback Raw score from the enlighten model.	12.12345
TransferRaw	decimal (18,5)	The Transfer Raw score from the enlighten model.	12.12345
Model35Raw	decimal (18,5)	The Model35 Raw score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelName s configuration is set to TRUE; otherwise, the field name is used.	12.12345
Model36Raw	decimal (18,5)	The Model36 Raw score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelName s configuration is set to TRUE; otherwise, the field name is used.	12.12345

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
Model37Raw	decimal (18,5)	The Model37 Raw score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	12.12345
Model38Raw	decimal (18,5)	The Model38 Raw score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	12.12345
Model39Raw	decimal (18,5)	The Model39 Raw score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	12.12345
Model40Raw	decimal (18,5)	The Model40 Raw score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	12.12345
Model41Raw	decimal (18,5)	The Model41 Raw score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	12.12345

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
Model42Raw	decimal (18,5)	The Model42 Raw score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	12.12345
Model43Raw	decimal (18,5)	The Model43 Raw score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	12.12345
Model44Raw	decimal (18,5)	The Model44 Raw score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	12.12345
Model45Raw	decimal (18,5)	The Model45 Raw score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	12.12345
Model46Raw	decimal (18,5)	The Model46 Raw score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	12.12345

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
Model47Raw	decimal (18,5)	The Model47 Raw score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	12.12345
Model48Raw	decimal (18,5)	The Model48 Raw score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	12.12345
Model49Raw	decimal (18,5)	The Model49 Raw score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	12.12345
Model50Raw	decimal (18,5)	The Model50 Raw score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	12.12345
AcknowledgeLoyaltyIndex	short	The Acknowledge Loyalty Index score from the enlighten model.	1
AcknowledgeRequestIndex	short	The Acknowledge Request Index score from the enlighten model.	1
ActiveListeningIndex	short	The Active Listening Index score from the enlighten model.	1

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
AskForTheSaleIndex	short	The Ask For The Sale Index score from the enlighten model.	1
BeEmpatheticIndex	short	The Be Empathetic Index score from the enlighten model.	1
BuildRapportIndex	short	The Build Rapport Index score from the enlighten model.	1
ChurnIndex	short	The Churn Index score from the enlighten model.	1
ComplaintsIndex	short	The Complaints Index score from the enlighten model.	1
ConfirmedOrderIndex	short	The Confirmed Order Index score from the enlighten model.	1
ConfirmedSaleIndex	short	The Confirmed Sale Index score from the enlighten model.	1
DemonstrateEmpathy Index	short	The Demonstrate Empathy Index score from the enlighten model.	1
DemonstrateOwnership Index	short	The Demonstrate Ownership Index score from the enlighten model.	1
EffectiveQuestioningIndex	short	The Effective Questioning Index score from the enlighten model.	1
EscalationIndex	short	The Escalation Index score from the enlighten model.	1
FinancialDistressIndex	short	The Financial Distress Index score from the enlighten model.	1

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
FraudsterDetectionIndex	short	The Fraudster Detection Index score from the enlighten model.	1
HighRiskTransactionIndex	short	The High Risk Transaction Index score from the enlighten model.	1
InappropriateActionIndex	short	The Inappropriate Action Index score from the enlighten model.	1
LikelihoodToBuyIndex	short	The Likelihood To Buy Index score from the enlighten model.	1
MakeAConnectionIndex	short	The Make A Connection Index score from the enlighten model.	1
OvercomeObjectionsIndex	short	The Overcome Objections Index score from the enlighten model.	1
PresumptiveSellingIndex	short	The Presumptive Selling Index score from the enlighten model.	1
PromoteSelfServiceIndex	short	The Promote Self Service Index score from the enlighten model.	1
ResolutionIndex	short	The Resolution Index score from the enlighten model.	1
SetExpectationsIndex	short	The Set Expectations Index score from the enlighten model.	1
SpeechVelocityIndex	short	The Speech Velocity Index score from the enlighten model.	1
UncoverNeedsIndex	short	The Uncover Needs Index score from the enlighten model.	1

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
IssueResolvedIndex	short	The Issue Resolved Index score from the enlighten model.	1
BrokenPromisesFailed Index	short	The Broken Promises Failed Index score from the enlighten model.	1
BrokenPromisesRepeat Index	short	The Broken Promises Repeat Index score from the enlighten model.	1
CommitmentCreateTicket Index	short	The Commitment Create Ticket Index score from the enlighten model.	1
CommitmentCreditIndex	short	The Commitment Credit Index score from the enlighten model.	1
CommitmentCallback Index	short	The Commitment Callback Index score from the enlighten model.	1
TransferIndex	short	The Transfer Index score from the enlighten model.	1
Model35Index	short	The Model35 Index score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelName s configuration is set to TRUE; otherwise, the field name is used.	1
Model36Index	short	The Model36 Index score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelName s configuration is set to TRUE; otherwise, the field name is used.	1

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
Model37Index	short	The Model37 Index score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	1
Model38Index	short	The Model38 Index score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	1
Model39Index	short	The Model39 Index score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	1
Model40Index	short	The Model40 Index score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	1
Model41Index	short	The Model41 Index score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	1

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
Model42Index	short	The Model42 Index score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	1
Model43Index	short	The Model43 Index score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	1
Model44Index	short	The Model44 Index score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	1
Model45Index	short	The Model45 Index score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelNames configuration is set to TRUE; otherwise, the field name is used.	1
Model46Index	short	The Model46 Index score from the enlighten model. The label name can be used if OutputAutoSummarizationLabelNames is set to TRUE; otherwise, the field name is used.	1

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
Model47Index	short	The Model47 Index score from the enlighten model. The label name can be used if OutputAutoSummarizationLabelName is set to TRUE, otherwise the field name is used.	1
Model48Index	short	The Model48 Index score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelName configuration is set to TRUE; otherwise, the field name is used.	1
Model49Index	short	The Model49 Index score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelName configuration is set to TRUE; otherwise, the field name is used.	1
Model50Index	short	The Model50 Index score from the enlighten model. The label name can be used if the OutputAutoSummarizationLabelName configuration is set to TRUE; otherwise, the field name is used.	1
EscalationValue	nvarchar (10)	String representation of boolean Escalation Outcome from enlighten model.	Yes
ResolutionValue	nvarchar (10)	String representation of boolean Escalation Outcome from enlighten model.	No

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
ConfirmedSaleValue	nvarchar (10)	String representation of boolean Escalation Outcome from enlighten model.	Yes
PrimaryIntentCategory	string [200]	The primary level 1 categorization of the customer's intent.	BILLING
PrimaryIntentTopic	string [200]	The primary level 2 categorization of the customer's intent	Payment Method
PrimaryIntentSubtopic	string [200]	The primary level 3 categorization of the customer's intent.	Pay with Card
SecondaryIntentCategory	string [200]	The secondary level 1 categorization of the customer's intent.	BILLING
SecondaryIntentTopic	string [200]	The secondary level 2 categorization of the customer's intent.	Payment Method
SecondaryIntentSubtopic	string [200]	The secondary level 3 categorization of the customer's intent.	Pay with Card
TertiaryIntentCategory	string [200]	The tertiary level 1 categorization of the customer's intent.	BILLING
TertiaryIntentTopic	string [200]	The tertiary level 2 categorization of the customer's intent.	Payment Method
TertiaryIntentSubtopic	string [200]	The tertiary level 3 categorization of the customer's intent.	Pay with Card
Summary	string [1024]	The textual summary of an interaction to support analysis and reporting.	This is an example summary for an interaction

INTERACTIONEVENTS

Configuration Considerations

The **IncludeOutcomesAndEvents** configuration specifies if the InteractionOutcomes and InteractionEvents exports are created. When this value is false, the CSV files are not generated, and the fields are exported as NULLs for the SQL table output.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

Important

In the user interface you will see Intents instead of Events.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionId	[integer]	Nexidia identifier used to join to other data.	1284
InteractionEventId	[string]	A unique identifier of an event.	1
ContactName	[string]	A short title that describes this snippet of the interaction.	General Transfers
ContactType	[string]	Indicates whether the Interaction Event is an Agent Task or an Interaction Summary. The ContactType is an internal designation and is used for troubleshooting purposes only.	Task or Summary

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
Speaker	[string]	Identifies the speaker. The valid values are Agent and Customer.	Agent
StartOffsetInMs	[integer]	The starting offset in milliseconds.	1234
EndOffsetInMs	[integer]	The ending offset in milliseconds.	5050
Category	[string]	The category of the interaction.	Authentication
Topic	[string]	The topics under the category.	Account Verification
Subtopic	[string]	The subtopics of the topics under the category.	Authenticate Name
CallDriver	[string]	The reason for the call to the contact center.	Payment
Snippet	[string]	This is a snippet from the transcript.	I want to pay my bill
Score	[integer]	The score for the interaction event.	17.5

INTERACTIONMETADATA

Configuration Considerations

- The **IgnoreRowCreationDateMetadata** configuration specifies how the RowCreationDate column is populated in the InteractionMetadata output. If set to true, the RowCreationDate column is populated with empty values. If set to false, the RowCreationDate column is populated with non-empty values.
- The **IncludeSentimentValue** configuration specifies if the SentimentValue column is included in the InteractionMetadata export.
- The **IncludePhraseRecognitionResultCode** configuration determines if the PhraseRecognitionResultCode column is included or excluded in the InteractionMetadata export.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

Important

The Discovery.Sentiment.CalculateTransitionLast configuration in the Nexidia Management Console determines whether to calculate the sentiment transition at the end of the sentiment calculation process or not. The available values are True or False.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionId	[integer]	A foreign key to the media file.	5
InteractionDirection	[string(100)]	The direction of the interaction. Typically in or out.	inbound
InteractionType	[string(200)]	The type of interaction. Possible values are audio, chat, e-mail, or general text.	General Text

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
UserInteractionType	[string(260)]	The user-defined type of interaction. This allows additional granularity beyond the MediaType. For example, if the Media Type is General Text, the UserInteractionType could be Case Notes.	Case Notes
MediaType	[string(20)]	The type of media. The valid values are audio, chat, e-mail, or general text.	General Text
DNIS	[long]	Where appropriate, this is the dialed number identification service (DNIS) number.	2277
CustomerID	[string(200)]	The customer identification.	156718
CustomerCity	[string(200)]	The city of this customer.	Atlanta
CustomerState	[string(200)]	The state of this customer.	GA
AgentExtension	[integer]	The extension of the agent.	2939
AgentName	[string(200)]	The agent's name.	Donna Fox
AgentId	[string(100)]	The agent's identification.	11990
AgentGroup	[string(200)]	The agent's group.	East
AgentSupervisor	[string(200)]	The agent's supervisor.	Jane Doe
SiteName	[string(200)]	The site location of the agent.	Atlanta

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
SentimentScore	[integer]	The post-call overall sentiment score. If this data is not present for a call, this is blank.	20
MinimumSentimentScore	[integer]	The post call minimum sentiment score. This is blank if this data is not present for the interaction.	10
MaximumSentimentScore	[integer]	The post call maximum sentiment score. This is blank if this data is not present for the interaction.	15
SentimentTransition	[string(20)]	Information about the relative emotion of the content of the interaction.	good > bad
ChatID	[string(255)]	The identification of the chat.	51022fe0-ee53-4e55-935c-3c80031991f8
IsExcerpted	[boolean]	Indicates if the chat was excerpted into the chat from another source.	FALSE
ExcerptSourceId	[string(4000)]	The identification of the source of the chat content that was excerpted.	17d14aa4-7614-4402-8d12-e3221421bbe2
StartTimeUtc	[UTC Datetime] (unformatted)	The beginning time of the chat.	9/20/2015 9:03:00 AM

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
EndTimeUtc	[UTC Datetime] (unformatted)	The ending time of the chat.	9/20/2015 9:19:45 AM
AverageDuration BetweenTurnsInMs	[integer]	The average time between chat turns in the conversation in milliseconds.	51336
AverageAgent ResponseTimeInMs	[integer]	The average agent response time in milliseconds.	43125
TurnCount	[integer]	The number of messages in the parsed chat.	21
RowCreationDate Note: Configurable by the DateFormat configuration setting.	[datetime]	The date and time the InteractionMetadata time stamp was inserted or updated.	yyyy-mm-ddThh:mi:ss.mm
EmailMessageId	[string(255)]	The identification of the email.	
EmailInReplyTo	[string(4000)]	The subject of the email this is in reply to.	
EmailReferences	[string(4000)]	Contents of the reference if one exists.	
EmailSubject	[string(4000)]	The subject of the email.	
SiteId	[string(260)]	The site identification.	1202
HubId	[nvarchar (260)]	The hub identifier for an interaction.	01

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
UDFVarchar	[string] Each of these fields can be up to 200 characters in length.	135 user-defined string fields (1-60, 91-165).	User-defined
UDFNumeric	[numeric]	40 user-defined numeric fields (1-20, 31-50).	User-defined
UDFInt	[integer]	40 user-defined integer fields (1-40).	User-defined
UDFDate	[datetime]	30 user-defined date/time fields (1-15, 31-45).	User-defined
FirstQuarterSentiment	[decimal(18,2)]	The sentiment value that occurs in the first ¼ of the call.	Any positive or negative value rounded to 2 decimal places. (1.6, -3.56).
SecondQuarter Sentiment	[decimal(18,2)]	The sentiment value that occurs in the 2nd quarter of the call Calculation: sentiment value ½ way through the call <minus> sentiment value of the first ¼ of the call.	Any positive or negative value rounded to 2 decimal places. (1.6, -3.56).

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
ThirdQuarterSentiment	[decimal(18,2)]	The sentiment value that occurs in the 3rd quarter of the call Calculation: sentiment value $\frac{3}{4}$ way through the call <minus> sentiment value $\frac{1}{2}$ way through the call.	Any positive or negative value rounded to 2 decimal places. (1.6, -3.56).
FourthQuarter Sentiment	[decimal(18,2)]	The sentiment value that occurs in the 4th quarter of the call Calculation: sentiment value at end of call <minus> sentiment value $\frac{3}{4}$ way through the call.	Any positive or negative value rounded to 2 decimal places. (1.6, -3.56).
OneHalfSentiment	[decimal(18,2)]	The sentiment value $\frac{1}{2}$ way through the call.	Any positive or negative value rounded to 2 decimal places. (1.6, -3.56).
ThreeFourthsSentiment	[decimal(18,2)]	The sentiment value $\frac{3}{4}$ way through the call.	Any positive or negative value rounded to 2 decimal places. (1.6, -3.56).
HighPrecisionSentiment Score	[decimal(18,2)]	The overall sentiment score as a decimal with 2 digits of precision. Note: Sentiment scores as an integer remain in the Data Export Utility for backward compatibility.	Any positive or negative value rounded to 2 decimal places. (1.6, -3.56).

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
HighPrecisionMinimumSentimentScore	[decimal(18,2)]	Presents the minimum sentiment score as a decimal with 2 digits of precision.	Any positive or negative value rounded to 2 decimal places. (1.6, -3.56).
HighPrecisionMaximumSentimentScore	[decimal(18,2)]	Presents the maximum sentiment score as a decimal with 2 digits of precision.	Any positive or negative value rounded to 2 decimal places. (1.6, -3.56).
HierarchyKey	[integer]	Provides a link back to the Hierarchy file/table.	5
ExperienceID	[string]	The identifier of the experience this interaction is a part of.	Experience1
ExperienceRoleName	[string]	The Experience Role Name is tagged to interactions in an experience as follows: - FirstInteraction - this is tagged to the first interaction in the experience. - OtherInteraction - this is tagged to the additional interactions with an Experience ID in the experience. - NonExperienceInteraction - this is tagged to interactions that do not have an Experience ID.	Member


COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
ExperienceSequence	[int null]	The position of the interaction in the experience. For example, there are three interactions in the experience. The first was on Monday, the second on Tuesday, and the third on Wednesday. For this example, the ExperienceSequence values are: - Monday interaction: 1 - Tuesday interaction: 2 - Wednesday interaction: 3	3
SentimentValue	[nvarchar (200)]	The descriptive value of the generated sentiment score.	Positive
PhraseRecognitionResult Code	[integer]	The result codes indicating the status or outcome of media processing in the ASR (Automatic Speech Recognition) pipeline. For a full list of result codes and their meanings see section Phrase Recognition Result Codes on page X. Refer Result Codes for Phrase Recognition for the possible result codes that can be exported.	0

Sentiment Metrics

Sentiment is calculated continuously throughout the call. The following metrics are calculated.

Quarter Metrics:

- First Quarter Sentiment – This is the sentiment value that occurs in the first ¼ of the call.
- Second Quarter Sentiment – This is the sentiment value that occurs in the 2nd quarter of the call Calculation: sentiment value ½ way through the call <minus> sentiment value of the first ¼ of the call.
- Third Quarter Sentiment – This is the sentiment value that occurs in the 3rd quarter of the call Calculation: sentiment value ¾ way through the call <minus> sentiment value ½ way through the call.
- Fourth Quarter Sentiment – This is the sentiment value that occurs in the 4th quarter of the call Calculation: sentiment value at end of call <minus> sentiment value ¾ way through the call.
- One-Half Sentiment –This is the sentiment value ½ way through the call.
- Three-Fourths Sentiment- This is the sentiment value ¾ way through the call.
- Overall Sentiment –This is the sentiment value at the end of the call (integer).

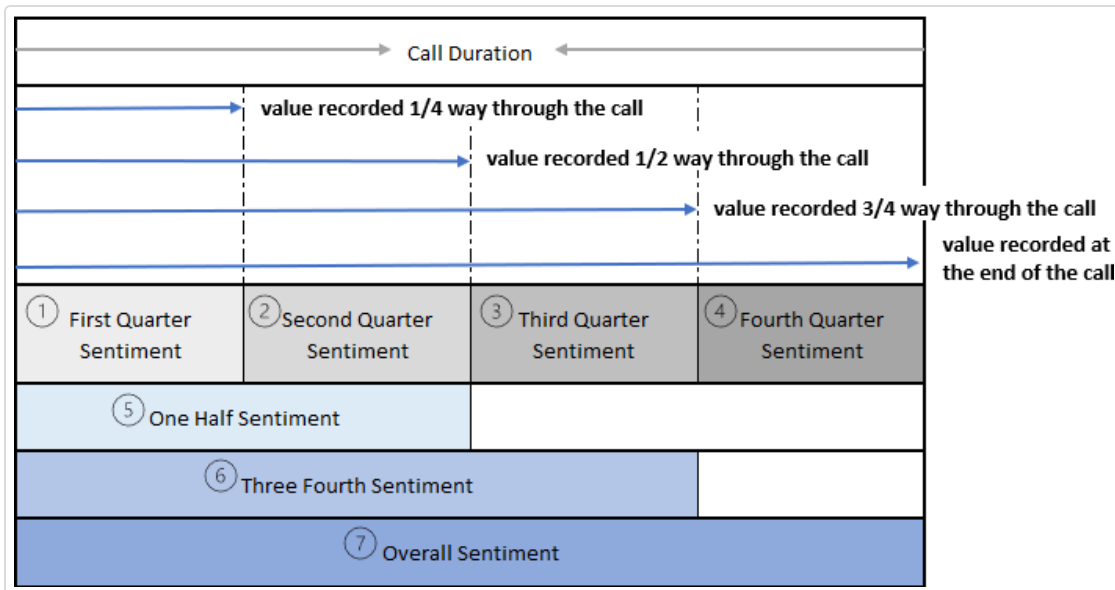

Other Metrics:

- High Precision Sentiment – The overall sentiment score is a decimal with 2 digits of precision.
Note: Sentiment scores as an integer remain in the Data Export Utility for backward compatibility.
- Good to Bad Sentiment Transition – Calls where the sentiment value is positive $\frac{1}{4}$ way through the call but ended with a negative sentiment score.
- Bad to Good Sentiment Transition – Calls where the sentiment value is negative $\frac{1}{4}$ way through the call but ended with a positive sentiment score.

Examples

4 minute call

- First Quarter Sentiment: sentiment value occurs between 0 and 1 minute of the call.
- Second Quarter Sentiment: sentiment value occurs between 1 and 2 minutes of the call.
- Third Quarter Sentiment: sentiment value occurs between 2 and 3 minutes of the call.
- Fourth Quarter Sentiment: sentiment value occurs between 3 and 4 minutes of the call.
- One-Half Sentiment: sentiment value occurs between 0 and 2 minutes of the call.
- Three-Fourths Sentiment: sentiment value occurs between 0 and 3 minutes of the call.
- Overall Sentiment: sentiment value at the end of the call.

10 minute call

- First Quarter Sentiment: sentiment value occurs between 0 and 2.5 minutes of the call.
- Second Quarter Sentiment: sentiment value occurs between 2.5 and 5 minutes of the call.
- Third Quarter Sentiment: sentiment value occurs between 5 and 7.5 minutes of the call.
- Fourth Quarter Sentiment: sentiment value occurs between 7.5 and 10 minutes of the call.
- One-Half Sentiment: sentiment value occurs between 0 and 5 minutes of the call.
- Three-Fourths Sentiment: sentiment value occurs between 0 and 7.5 minutes of the call.
- Overall Sentiment: sentiment value at the end of the call.

INTERACTIONOUTCOMES

Configuration Considerations

The **IncludeOutcomesAndEvents** configuration specifies if the InteractionOutcomes and InteractionEvents exports are created. When this value is false, the CSV files are not generated, and the fields are exported as NULLs for the SQL table output.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionId	[integer]	Nexidia identifier used to join to other data.	1284
InteractionOutcomeld	[string]	A unique identifier of an Outcome.	1
Speaker	[string]	Identifies the speaker. The valid values are Agent and Customer.	Agent
Annotation	[string]	This is a snippet from the transcript.	I want to cancel my service.
StartOffsetInMs	[integer]	The starting offset in milliseconds.	4534
EndOffsetInMs	[integer]	The ending offset in milliseconds.	5050
Category	[string]	The category of the interaction.	Authentication

INTERACTIONTAGDEFINITIONS

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionTagId	[integer]	A foreign key to the tag.	1
Name	[string(260)]	The name of the tag.	Customer Complaint
Description	[string(260)]	Additional descriptive information regarding the tag.	Account Closure Request
InteractionTagType	[string(100)]	Indicates that this originated from desktop data.	Desktop

INTERACTIONTAGHITS

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionId	[integer]	The Nexidia identifier used to join to other data.	1
InteractionTagId	[integer]	A foreign key to the tag.	1
StartOffsetInMs	[integer]	The starting offset in milliseconds.	6436
EndOffsetInMs	[integer]	The ending offset in milliseconds.	6436
DataItems	[string] The length is arbitrary.	Displays the value hit for the tag.	<DataItems><DataItem Name="Location" Value="California"/></DataItems>

METRICDEFINITION

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
MetricKey	[integer]	The Nexidia identifier used to join to other data.	11
MetricName	[string(50)]	The display name for the metric.	Average Calls Per Day

METRICRESULTDAILY

Configuration Considerations

The **IgnoreHierarchicalUnitForMetricResultDailyExport** configuration specifies the data to include in the MetricResultDaily export. . If set to true, the export data is based only on the Agent component of the Hierarchical Unit. Meaning that for a specific target media set, metric, and date, the application combines the earned scores for the agents across all sites and supervisors to which they belong. If set to false, the data included in the export is based on the Hierarchical Unit (Agent, Site, and Supervisor).

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
DayKey	[integer]	A natural date key represented as an integer.	20051201
AgentKey	[integer]	The foreign key to the Agent CSV data.	6
TargetMediaSetKey	[integer]	The foreign key to the TargetMediaSetDefinition CSV data.	3
MetricKey	[integer]	The foreign key to the MetricDefinition CSV data.	4
Score	numeric(19,5)	The metric score.	101.00000
MediaFileCount	[integer]	The count of files matching the TMS definition for the current day.	3
TotalFileCount	[integer]	The count of all files for this agent for the current day.	14

PROFILES

Configuration Considerations

The **IncludeProfilesAndUsers** configuration determines if the Profile export is created.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
ProfileID	GUID	The unique identifier for the Profile. This is the primary key of this table.	3F910C36-62BF-4F22-AD1B-9B8356E5EB9F
ProfileName	STRING(256)	The name of the profile.	SuperUser

QUERYDEFINITION

Configuration Considerations

- The **ForceQueryDefinitionExport** configuration specifies if the QueryDefinition export is always exported. If set to true, the QueryDefinition export is always exported even if the IncludeEmptyExportFiles configuration is set to false. If set to false, the QueryDefinition export functions as specified by the IncludeEmptyExportfiles setting. If the setting is configured as false, the QueryDefinitionExport behaves the same way as all other exports and adheres to the IncludeEmptyExportFiles rules.
- The **IncludeQueryDefinitionCreationModifiedData** configuration determines if the output data includes the CreatedBy, CreatedDate, LastModifiedBy and LastModifiedDate columns for the QueryDefinition export.

Refer to the [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
QueryId	[integer]	A surrogate key for the structured query.	26
QueryName	[string(80)]	The name of the structured query.	Billing Questions-d8.2.3.115207
QueryDescription	[string(260)]	A description of the query.	Files with a billing question.
QueryIdentity	[guid]	A unique identifier for the query which is consistent across versions.	066e7189-2b86-4360-a2bb-4cd9499c3992
QueryVersion	[integer]	The version of the query.	1
LowThreshold	[decimal(9,7)]	The low threshold query. This is typically not used.	12.2869991

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
MediumThreshold	[decimal(9,7)]	The medium threshold query. This is the default unless the Custom Threshold is used.	12.2869991
HighThreshold	[decimal(9,7)]	The high threshold query. This is used for the highest precision results.	12.2869991
CustomThreshold	[decimal(9,7)]	A custom threshold. This is a user-defined threshold for special cases.	12.2869991
LanguagePack	[string(80)]	The name of the language pack the query is associated with.	NAEnglish TeleUniversal 8.2.3.115207
MediaType	[string(20)]	The type of media. The valid values are audio, chat, e-mail, or general text.	Audio
IsLive	[boolean]	Indicates if the query is still live. If it is, you should check if there is a newer version. The valid values are 0 (false) or 1 (true).	1

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
Participant	[nvarchar(100)) not null	The participant in the query. The possible values are Either, Customer, Agent, Neither, and Unknown. The default value is Either. The export is a 100-byte string.	Either
QueryPurpose	[nvarchar(100)) null	Indicates which threshold the query was checked in as. The possible values are Custom, Low, Medium, and High. These values are only valid for phonetic structured queries. For text, email, and chat queries, the default value is an empty string.	Low
Createdby	NVARCHAR(255)	The user name of the user responsible for creating the query definition.	jbush
CreationDate	Datetime2	The date and time the query definition was created.	2024-10-24T16:56:48.9749746
LastModifiedBy	NVARCHAR(255)	The user name of the user responsible for the latest modifications to the query definition.	jbush

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
LastModifiedDate	Datetime2	The date and time the query definition was last modified.	2024-10-24T16:56:48.9749746

QUERYGROUPDEFINITION

Configuration Considerations

The **IncludeQueryGroupDefinitionCreationModifiedData** configuration determines if the output data includes the CreatedBy, CreatedDate, LastModifiedBy and LastModifiedDate columns for the QueryGroupDefinition export.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
QueryGroupId	[integer]	A surrogate key for the structured query group.	1
QueryGroupName	[string(160)]	The name of the query group.	Upset Customer
QueryGroupDescription	[string(520)]	A description of the query group.	Customers who are over billed.
QueryGroupIdentity	[guid]	A unique identifier for the query group which is consistent across versions.	c3b7510e-9c36-430e-898f-a073f58689ab
QueryGroupVersion	[integer]	The version number of this query group.	1
LanguagePack	[string(80)]	The name of the language pack the query group is associated with.	NAEnglish TeleUniversal 8.0.1.91034
LevelNumber	[integer]	The level of this query group in the hierarchy.	4

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
IsLive	[boolean]	Indicates if the query group is still live. If it is, you should check if there is a newer version. The valid values are 0 (false) or 1 (true).	1
CreatedBy	NVARCHAR (255)	The user name of the user responsible for creating the query group definition.	jbush
CreationDate	Datetime2	The date and time the query group definition was created.	2024-10-24T16:56:48.9749746
LastModifiedBy	NVARCHAR (255)	The user name of the user responsible for the latest modifications to the query group definition.	jbush
LastModifiedDate	Datetime2	The date and time the query group definition was last modified.	2024-10-24T16:56:48.9749746

QUERYGROUPQUERIES

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
QueryGroupId	[integer]	A foreign key for the query group.	1
StructuredQueryIdentity	[guid]	A unique identified for the query which is consistent across versions.	40668a33-4fad-41e1-b338-3b7249e75ac5

QUERYGROUPQUERYGROUPS

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
ParentQueryGroupId	[integer]	A foreign key for the parent query group.	6
ChildQueryGroupId	[integer]	A foreign key for the child query group.	4

QUERYRESULT

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionId	[Integer]	A foreign key to the media file.	1
QueryId	[integer]	A foreign key for structured query.	8
Score	[decimal(10,7)]	A floating point score result of search (0.01 - 100).	3.563377
StartOffsetInMs	[integer]	The starting offset in milliseconds for audio interactions. This column is NULL for all text interactions.	42200
EndOffsetInMs	[integer]	The ending offset in milliseconds for audio interactions. This column is NULL for all text interactions.	42780
SpeakerRole	[char(1)]	The speaker role can be one of the following: B - both agent or customer C - customer A - agent U - unknown (not defined) N - neither Note: N indicates a hit that occurred outside of an agent/customer speech segment and does not occur frequently.	C

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
QueryIdentity	[guid]	A unique identifier for the query which is consistent across versions.	066e7189-2b86-4360-a2bb-4cd9499c3992
SpeakerID	[integer]	The identification of the speaker. For audio interactions, the SpeakerID will always be NULL. The following five values are available for the SpeakerID: 1 - Either 2 - Customer 3 - Agent 4 - Neither 5 - Unknown	2

SESSIONPERMISSIONS

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
SessionName	[string(80)]	The name of the session associated with the target media set.	Agent Behavior
PrincipalName	[string(300)]	The owner of the session.	Report Viewer, Manager - (manager)
AccessLevelName	[string(100)]	The access level granted.	Read-Only

TARGETMEDIASETDEFINITION

Configuration Considerations

- The **TargetMediaSetDefinitionDatesInLocalTime** configuration converts the TargetMediaSetDefinition CreationDate and LastModificationDate in the TargetMediaSetDefinition export to be exported as local time instead of UTC.
- The **KeepOldDateTimeFormat** configuration controls the output of the CreationDate and LastModificationDate columns.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
TargetMediaSetKey	[integer]	The Nexidia identifier used to join to other data.	1
TargetMediaSetID	[integer]	A key in the database representing the Target Media Set ID.	1
MediaType	[string(50)]	A list of all media types present in the target media set.	Audio Email Chat
TargetMediaSetName	[string(50)]	The display name for the target media set.	Telco Stereo - All Calls
TargetMediaSet Identity	[guid]	The globally unique identifier for the target media set.	11663901-ebdc-44c0-a058-a9a9f895d4ce
CreationDate Note: Configurable by the DateFormat configuration setting.	[datetime]	The created date and time for the target media set.	yyyy-mm-ddThh:mi:ss.mm

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
LastModificationDate Note: Configurable by the DateFormat configuration setting.	[datetime]	The last modification date and time for the target media set.	yyyy-mm-ddThh:mi:ss.mm
Description	[nvarchar(max)]	A description of the target media set.	_Call Categorization_QM
SessionName	[string(80)]	The name of the session associated with the target media set.	Agent Behavior
IngestSessionIdentity	[guid]	The globally unique identifier for the session. This maps to the [IngestSessionIdentity] column in the[NexidiaESI].[dbo].[tIngestSession] table.	98769f98-d1dc-4c97-8822-915d6e4d09b0

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
PredicateList	[nvarchar (max)]	The predicate and purpose information pertaining to the target media set. When you open the export output, the first available predicate is displayed. To view all the associated predicates, double-click in the PredicateList column. All of the metadata filters and queries that are listed in the "Include files matching any of" and "Exclude files matching any of" areas of the Target Media Sets window in Interaction Analytics are displayed.	MustHitOperator : Any
MustHitQuery Operator	[string(4)]	Indicates how many queries specified for the media set must hit an interaction for it to be a member of the set.	• None • Any • All

TARGETMEDIASETMEMBERSHIP

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionId	[integer]	A foreign key for the interaction.	1
TargetMediaSetKey	[integer]	The Nexidia identifier used to join to other data. This field can be used to correlate data with the TargetMediaSetDefinition TargetMediaSetKey.	1
TargetMediaSetID	[integer]	A key in the database representing the Target Media Set ID.	1
TargetMediaSetName	[string (50)]	The name associated with the target media set.	Agent_Behavior
ExternalInteractionId	[string (260)]	The external identifier for media provided in metadata. If not provided, this contains the ingest file path.	\\DEV99\Media\XBANK\Media\version1\20040901-044.wav
TargetMediaSetStatus	[string (50)]	Indicates if the output data contains the files that have been added to and removed from target media sets.	added / removed

TARGETMEDIASETJUSTHITQUERIES

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
TargetMediaSetKey	[integer]	The Nexidia identifier used to join to other data. This field can be used to correlate data with the TargetMediaSetDefinition TargetMediaSetKey.	1
QueryIdentity	[guid]	A unique identifier for the query which is consistent across versions. This field can be used to correlate data with the QueryDefinition QueryIdentity.	066e7189-2b86-4360-a2bb-4cd9499c3992

TERMDEFINITION

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
TermID	[integer]	A surrogate key for the search term.	1
SearchTerm	[string(80)]	A search phrase or term.	Wireless Phones
LanguagePack	[string(80)]	The name of the language pack the SearchTerm is associated with.	NA English Tele 8kHz
MediaType	[string(20)]	The type of media. The valid values are audio, chat, e-mail, or general text.	General Text

TERMLISTDEFINITION

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
TermListID	[integer]	A key in the database representing the term list identification.	1
SearchTermList	[string(80)]	The name of the search term list.	Customer Service
LanguagePack	[string(80)]	The name of the language pack the search term list is associated with.	NA English Tele 6kHz 7.0.0.51076

TERMLISTMEMBERSHIPDEFINITION

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
TermListID	[integer]	A key in the database representing the term list identification.	1
TermID	[integer]	A surrogate key for the search term.	1

TERMRESULT

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionId	[integer]	A foreign key for the interaction.	1
TermId	[integer]	A foreign key for the search term.	2
Score	[decimal(9,7)]	The floating point score result of the search (0.01-98).	71.93893
StartOffsetInMs	[integer]	The starting offset in milliseconds.	14980
EndOffsetInMs	[integer]	The ending offset in milliseconds.	15660
SpeakerRole	[char(1)]	One of the following: B - both agent or customer C - customer A - agent U - unknown (not defined)	U

TEXTUALSEARCHTERMLISTRESULT

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionId	[integer]	A foreign key for the interaction.	1
TermListID	[integer]	A foreign key for the term list.	13

TRANSCRIPT

Configuration Considerations

- The **IncludeChatTranscripts** configuration specifies if the Transcript exports include transcripts for chat interactions. This setting is day-forward.
- The **IncludeEmailTranscripts** configuration specifies if the Transcript exports include transcripts for e-mail interactions. This setting is day-forward.
- The **IncludeGeneralTextTranscripts** configuration specifies if Transcript exports include transcripts for general text interactions. This setting is day-forward.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

The Data Export Utility uses the Discovery.Transcripts.ApplyPunctuation Management Console configuration to determine if exported transcripts contain punctuation if it is available. There is no impact on transcripts that are created prior to activating this configuration.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
SourceMediaID	[integer]	The internal media identifier. The SourceMediaId is equal to the InteractionId in the Data Export Utility Interactions.	1374
Party	[string]	Identifies the speaker. The valid values are Agent and Customer.	Agent
StartOffset	[integer]	The turn start offset in milliseconds.	950
EndOffset	[integer]	The turn end offset in milliseconds.	4860
Phrase	[string]	The content of the phrase.	I need to pay my wireless bill.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
OverallSentimentScore	[integer]	The sentiment value at the end of the call (integer). Note: This column supports NULL values.	2

UNFORMATTEDTRANSCRIPTS

Configuration Considerations

The **IncludeUnformattedTranscripts** configuration specifies if the output contains an export that includes all words in the transcript, including the words with less confidence. If set to true, unformatted transcripts are exported in the UnformattedTranscripts CSV File/SQL Table. If set to false, the UnformattedTranscript CSV File is not exported. The SQL Table exists in the remote database at all times.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
SourceMediaID	[integer]	The internal media identifier. The SourceMediaId is equal to the InteractionId in the Data Export Utility Interactions.	1374
Party	[string]	Identifies the speaker. The valid values are Agent and Customer.	Agent
StartOffset	[integer]	The turn start offset in milliseconds.	620
EndOffset	[integer]	The turn end offset in milliseconds.	860
Phrase	[string]	The content of the phrase.	Problem

USERPROFILEMAP

Configuration Considerations

The **IncludeProfilesAndUsers** configuration determines if the UserProfileMap export is created.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
UserID	GUID	The unique identifier for the User account. The ProfileID + UserID is the key of this table.	0CABF1A5-91B7-48A0-9E3D-350D9DA588B2
ProfileId	GUID	The unique identifier for the Profile. The ProfileID + UserID is the key of this table.	3F910C36-62BF-4F22-AD1B-9B8356E5EB9F

USERS

Configuration Considerations

The **IncludeProfilesAndUsers** configuration determines if the Users export is created.

Refer to [Export Configuration Parameters](#) on page 19 for details about all the configuration parameters available in the export.cfgExportConfig table.

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
UserID	GUID	The unique identifier for the User account. This is the primary key of this table.	0CABF1A5-91B7-48A0-9E3D-350D9DA588B2
UserName	STRING(256)	The username for the User account.	superuser
FirstName	STRING(256)	The first name for the User account.	Default
LastName	STRING(256)	The last name for the User account.	Administrator
Active	COMPUTED, BOOLEAN	When the NexidiaESI.dbo.aspnet_Membership.DeleteDate is NULL then "true", else then "false".	False
Email	STRING(256)	The email address for the User account.	superuser@nexidia.com
ExternalUserID	STRING(256)	The ExternalUserId for the User account.	superuser

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
LastLogin	DATETIME	The datetime the User account last logged into the Nexidia Analytics application. The date format is governed by the configuration setting DateFormat.	1900-01-01 00:00:00.000
DateCreated	DATETIME	The datetime the User account was created in the Nexidia Analytics application. The date format is governed by the configuration setting DateFormat.	1900-01-01 00:00:00.000
LastModifiedDate	DATETIME	The datetime the User account was modified in the Nexidia Analytics application. The date format is governed by the configuration setting DateFormat.	1900-01-01 00:00:00.000

WORKFLOWALERT

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionId	[integer]	A foreign key for the interaction.	1
AlertDateUTC	[UTC Datetime] (unformatted)	The date/time the alert occurred.	3/15/2023 10:49:38 PM
WorkflowIdentifier	[guid]	The identifier associated with the workflow.	f961a77d-0eff-4d48-b454-be5635cb0fd2
WorkflowName	[string(200)]	The name associated with the workflow.	Benchmark Interest Rate Malfeasance #1
WorkflowAlertType Identity	[string(200)]	The identity associated with the workflow alert type.	post escalate alert
WorkflowAlertIdentity	[string(200)]	The identity associated with the workflow alert.	post escalate alert-20160323184211-1

WORKFLOWFILEPROGRESSION

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
InteractionId	[integer]	A foreign key for the interaction.	1
ProgressionDateUTC	[UTC Datetime] (unformatted)	The date/time the file progressed in the workflow.	3/15/2023 10:49:38 PM
WorkflowIdentifier	[guid]	The identifier associated with the workflow.	f961a77d-0eff-4d48-b454-be5635cb0fd2
WorkflowName	[nvarchar(200)]	The name assigned to the workflow.	Legal
SourceQueueName	[string(300)]	The name of the queue the file started in before it progressed in the workflow.	Not in Queue A value of "Not in Queue" indicates that this is a new file.
TargetQueueName	[string(300)]	The name of the queue the file moved to after it progressed in the workflow.	Level 1 Queue
SourceUser	[string(300)]	The user associated with the file before it progressed in the workflow.	Unassigned
TargetUser	[string(300)]	The user associated with the file after it progressed in the workflow.	Superuser

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
SourceStatus	[string(200)]	The status of the file before it progressed in the workflow.	Open
TargetStatus	[string(200)]	The status of the file after it progressed in the workflow.	In-progress
ProgressionReason	[string(200)]	The reason the file was progressed in the workflow.	Escalated
SourcePriority	[integer]	The priority of the file before it progressed in the workflow.	1
TargetPriority	[integer]	The priority of the file after it progressed in the workflow.	5
SourceScore	[integer]	The score of the file within the workflow before it progressed.	0
TargetScore	[integer]	The score of the file within the workflow after it progressed.	0

WORKFLOWIMPORTAUDITLOG

COLUMN	DATA TYPE	DESCRIPTION	EXAMPLE
WorkflowId	[integer]	The identifier associated with the workflow.	2
SourceMediaId	[integer]	The identification generated for the media in Interaction Analytics.	15258
InitialStatusDescription	[string(200)]	The initial status of the workflow.	Met entry criteria – not selected per sampling configuration
InitialStatusDateTime UTC	[UTC Datetime] (unformatted)	The date/time that the file was considered for inclusion in a workflow.	3/15/2023 10:49:38 PM
CurrentStatusDescription	[string(200)]	The current status of the workflow.	Met entry criteria – not selected per sampling configuration
CurrentStatusDateTime UTC	[UTC Datetime] (unformatted)	The date/time of the result of the consideration.	3/15/2023 10:49:38 PM

[This page intentionally left blank]

Frequently Asked Questions

FILE MANAGEMENT

Question: How is the Data Export Utility scheduled to run?

Answer: Interaction Analytics does not include a job scheduler for the Data Export Utility. Instead, it is commonly scheduled to run using external tools such as the Task Scheduler, Extractor, or Data Exchange Framework. When using the Extractor or the Data Exchange Framework, these tools often include a 'sweep' process that automatically copies the CSV files to another location.

Question: Where does the Data Export Utility service execute from?

Answer: The Data Export Utility is a set of task threads that runs from the [Nexidida.Esi.BackgroundWorkerService](#).

Question: How often will I receive CSV Files or SQL Table output?

Answer: The Delivery output schedule is customer-specific and depends on your business needs and data processing ability. There will either be an Extractor process or a Data Exchange Framework process that makes a call to the Data Export Utility on the schedule you arrange. You will decide on the schedule with your Nexidia representative. If you need to change it, work with your representative to discuss the options based on your deployment.

Question: How many CSV file outputs should I expect?

Answer: The output amount is specific to each customer and depends on factors such as the type of data being exported and the system's number of files and actions. For example, reprocessing a session will generate more files than you did in the previous days. The export type for some objects (Full, Full (without past data), Incremental) also affects the number of files. Configuration settings such as [MaxRowsPerExportFile](#) and [BatchesPerExport](#) can also contribute to additional files.

For example, suppose you have set the **BatchesPerExport** configuration to 1000000, the **MaxRowsPerExportFile** configuration to 100000, and you are exporting 1000000 interaction records. In that case, there will be ten CSV files for the interactions in the batch. If both configurations are set to 1000000, then there will be one CSV file for the interactions in the batch.

The following informational files are provided with the CSV export:

- **_BatchId.csv** - This file shows the number of the export batch for both zipped and non-zipped batches.
- **_FileRowCountSummary.csv** - This file lists each entity that was output in the export job run and the number of rows in each.
- **DataExport.config.txt** - This file lists all the configurations for the export.
- **Nexidia.DataExportLog.txt** file - The log location is Nexidia\Analytics\Logs.

Question: How do I interpret the .zip file naming convention?

Answer: You can configure the .CSV .zip file name to contain an appended time stamp using the **AppendTimestampToData** configuration. When you set this configuration to **"true,"** the date and time of the export are added to the CSV file name in yyyyMMddHHmmssffffff format.

Question: Why do I sometimes get files from different dates in the same export?

Answer: In some cases, the .zip files may need to be encrypted, and if so, one .zip file might contain files from multiple batches with different dates.

Question: Why might I get multiple records for an interaction?

Answer: For the InteractionMetadata entity, a media file can be included multiple times. For example, the interaction is included when it is first ingested. If you add metadata later or reprocess metadata, another record is sent to the Data Export Utility with all the metadata, not just what has changed.

Subsequent processing, such as Enlighten data or sentiment, may cause the file to be included again. Session reprocessing may also result in updates to Query Results, TMS Membership, and so on, and this would cause the file to be included again and could occur days, weeks, or months later, depending on the retention period.

Question: If an export ID runs and there is no data for a specific CSV file, will that file still be generated?

Answer: The **IncludeEmptyExportFiles** configuration determines if the output data contains empty export files. Empty export files are always included in the first batch of every run. Set this value to **false** to exclude them in later batches.

Question: How long does the data persist in the Data Export Utility database if the importing application is down?

Answer: For CSV Files, Nexidia puts the files on the SFTP, and it is the customer's responsibility to download and delete them once they process the files. In On-Premise environments, we place the files in a particular folder. The customer is responsible for processing and deleting them from the folder when they finish processing them.

For SQL Tables, the **RetentionInDays** configuration is typically configured to keep the data for 30 days, and you can change it as needed.

Question: Is there a way to identify which batch of data corresponds to each Data Export Utility output?

Answer: For CSV Files, Nexidia puts the files on the SFTP, and it is the customer's responsibility to download and delete them once they process the files. In On-Premise environments, we place the files in a particular folder. The customer is responsible for processing them and deleting them from the folder when they finish processing them.

For SQL Tables, the **cfgExportBatchTracking** table shows which batches were successfully exported. Successful batches will have this flag: == true && endtime != null. The <RemoteDB>-DataAging.sql job handles the retention of failed batches. The cfgExportBatchTracking is not visible for On-Demand environments. On-Demand customers can contact their Nexidia representative and request an e-mail be sent to a designated address when an export completes with details about what was included in the export.

The BatchesPerExport**GIVE FEEDBACK** configuration determines how many batches to export in a Data Export Utility run. Set this to a positive number to export that number of batches. Set this to a non-positive number to export all batches.

Question: How do I see my Data Export Utility configurations?

Answer: We provide the DataExport.config.txt file for the .CSV output and the **cfgExportConfig** table for SQL Tables.

Question: Are there additional files that provide information about the CSV export itself?

Answer: The following informational files are available:

- **_BatchId.csv** - This file shows the number of the export batch for both zipped and non-zipped batches.
- **_FileRowCountSummary.csv** - This file lists each entity that was output in the export job run and the number of rows in each.

- DataExport.config.txt - This file lists all the configurations for the export.
- Nexidia.DataExportLog.txt file - The log location is Nexidia\Analytics\Logs.

Question: The WorkflowFileProgression entity has a primary key that consists of the IntegrationID, WorkflowIdentifier, SourceQueueName, and TargetQueueName columns, according to the documentation, but I occasionally see duplicates (primary key violations) using those columns. Is there a way to work around this?

Answer: If files are re-added to the workflow after being closed out, it is possible to get duplicate keys. If your workflows allow files to be re-added, include the ProgressionDateUTC column in the composite key (along with the four columns listed above).

Question: We see orphan data in some files. For example, Interaction IDs metadata was present in one file but not the Interaction file.

Answer: Records for interactions appear in the Interaction.csv only once when the system first processes them. However, the record for the interaction in the InteractionMetadata.csv may appear multiple times, sometimes days later. This scenario happens when the metadata is updated for that interaction.

In this case, the customer saw interactions from several prior events appear in the InteractionMetadata.csv, which resulted from metadata updates happening in the Extractor to correct the missing or mismapped fields. The original entry in the Interaction.csv was in an export from several months before that. Once the customer knew where to look, they could find the data. This behavior is expected.

Question: Interaction IDs appear in the EvalsEvaluation export but are not in the Interaction export and vice versa. Why does that happen?

Answer: Evaluations appear in the **EvalsEvaluation** export based on two factors: the Evaluation Publish date and the evaluated interaction's Interaction date. Interactions, however, appear in the Interaction export based solely on the Interaction date.

Evaluations are filtered using both PublishDateUTC StartEvaluationPublishDateUTC and EndEvaluationPublishDateUTC) and the evaluated interaction's InteractionDateTime (StartMediaDate and EndMediaDate). To be exported, evaluations must meet **both** criteria. Similarly, interactions are filtered by StartMediaDate and EndMediaDate settings in the cfgExportConfig table.

If these date ranges are configured differently, interactions might be excluded while their evaluations remain—or vice versa. Additionally:

- Interactions are exported only after they have been ETL'd to the data warehouse.
- Evaluations are exported only after they are published and then ETL'd to the data warehouse.

If the Data Export Utility runs after interactions have been ETL'd but before their evaluations are published, the evaluations and interactions will appear in different export batches.

Question: If I lost my Data Export Utility exported file, how can I get it again?

Answer: You can set up a temporary second export for that channel and choose a specific time window to export the data again.

Question: If the Data Export Utility doesn't run at the scheduled time, will it miss any data when it tries to export data the next time?

Answer: No, it will not miss exporting any data because of the tracking database. If it can't export the first time, it will include that data when it runs the next time.

Question: In some entities, I see "SourceMediaID," and in others, I see "InteractionID." Is there a difference?

Answer: No, those are the same. For example, if you want to match a Transcript with an Interaction, you would match the SourceMediaID from the Transcripts entity with the Interaction ID from the Interaction entity.

Question: Why do I see more query-related data in the Data Export than I do in reports within the Interaction Analytics user interface?

Answer: Each Interaction Analytics phonetic (audio) query is checked in with a designated purpose, selected by the query creator or editor during the query's creation or update:

- Targeted Listening (High threshold) – maximizes precision, so the results are almost all true hits for the query. Using the targeted listening purpose for a query will cause reports to undercount the number of hits for this query in your calls. A typical use case is to find representative examples of your query/topic for general investigation or to feed into Quality Central for evaluation.
- Compliance (Low threshold) – maximizes recall, so you find almost all true hits for your query but also get more false positives returned. Using the compliance purpose for a query will cause reports to over-count the number of hits for this query in your calls. A typical use case is for compliance purposes (e.g., fraud), where you must find these calls if they exist in your system.

- Categorization / Reporting (Medium threshold) – mixes precision and recall to get the most accurate number on a report. Using the Categorization / Reporting threshold will cause the reports to accurately count the number of hits for this query in your calls. As such, this is the most commonly used query purpose.
- Custom – used on some occasions – the person building the query enters the desired threshold manually based on what they see in the results.
- The Data Export Utility presents query hits in the QueryResult output, based on query storage rules noted here:
 - If the query purpose is low / compliance, the application stores all hits at or exceeding that low threshold.
 - If the query purpose is High / Targeted Listening – the application stores all hits at or exceeding the medium/categorization threshold.
 - If the query purpose is Medium / Categorization – the application stores all hits at or exceeding that medium threshold.
 - If the query purpose is Custom – the application stores all hits at and above the lower of that custom threshold or the medium/categorization threshold.

When you run a report in Interaction Analytics, the application may prompt you to select the query purpose (threshold) for the report. For example, if you choose the Targeted Listening purpose, the system reports only those query hits that met or exceeded the Targeted Listening / High threshold. The Data Export Utility provides all the hits the system has stored in the database (per the rules above), some of which may have scored below the Targeted Listening threshold.

Question: How do I determine a Quality Score from the Data Export Utility output?

Answer: Go to the EvalsEvaluation export where the CurrentScoredPoints and the CurrentAvailablePoints represent the evaluation form score and available points.

Question: Is there a tool or report that will check if there is missing data between the ExportTracking database and other Nexidia databases?

Answer: No such tool or report exists.

Question: How can I re-export missing Data Export Utility data when it writes to SQL?

Answer: You will need to manually create the database for the specific ExportID following the steps in the [Create the Remote Export Database](#) on page 62. Once it is created, you can run the Data Export Utility for the specific ExportID to export the desired data.

Question: Is there a configuration that would strip out Unicode characters from the Data Export Utility output?

Answer: No such configuration exists.

Question: What is the best practice to do the incremental load? Is it through the Batch ID or Row ID?

Answer: The BatchID. The BatchID is a tracking field for each batch the Data Export Utility produces.

Question: When I do an incremental load on the Query Results table on BatchID, I get duplicate Query IDs from the same InteractionID and same BatchID. Should I concatenate the RowID and the BatchID together?

Answer: It is possible to have multiple hits on one InteractionID; you will need to factor in the StartOffsetInMs, which determines when the query was hit in that interaction.

Question: Can an interaction get the same query ID hit at different times along the duration of an interaction?

Answer: Yes. For example, if you have a structured query that hits on the word ACCOUNT, it will generate a hit each time the word is mentioned. A single interaction may contain multiple hits with the same query ID. Each of these hits is exported, and you can differentiate them with their time Offset.

Question: After adding or removing metadata for an interaction, how do you get the Data Export Utility to export that data?

Answer: Interactions with updated or modified metadata need to be re-inboxed and reprocessed by ETL to ensure the Data Export Utility can export the updated metadata.

Question: Yesterday, it displays a set of data for December 26th was resent. Based on file sizes and timestamps of the zip file entries, the file Extract.zip sent on 01/24 has the same content as the file Extract.zip sent on 12/26. Why was this data resent?

Answer: Any attempt to update a multi-select question (including a manual reprocess) will result in the same records being exported again and will keep happening if there are any updates to a multi-select question.

Question: Who is responsible for cleaning up and removing files from the FTP drop location?

Answer: The Data Export Utility publishes the file to the configured PublishPath. Later, the Data Exchange Framework or Extractor will relocate the file, making the export file available to the customers' processes.

Question: How do I clone an existing export configuration (ExportID)?

Answer: You can do this in the Interaction Analytics Management Console Data Export Utility tab. See [Working with Export Configurations](#) on page 11 to learn more.

Question: How do I delete an existing export configuration (ExportID)?

Answer: You can do this in the Interaction Analytics Management Console Data Export Utility tab. See [Working with Export Configurations](#) on page 11 to learn more.

Question: I am missing evaluations that should have been exported. Why are they missing?

Answer: A common occurrence is for an export to be misconfigured.

Administrators might use the same date for 'StartMediaDate' and 'StartEvaluationPublishDateUTC' when setting up a new export. Since Evaluations are created on previously existing media (usually on an earlier date), those evaluations would be excluded. For example:

- Interactions with a CallDateTime of 2023-12-30 are ingested into the system.
- Evaluations are created using those interactions and published on 2024-01-03.
- A data export is configured with:
 - StartMediaDate = 2024-01-01
 - EndMediaDate = 2199-01-01
 - StartEvaluationPublishDateUTC = 2024-01-01
 - EndEvaluationPublishDateUTC = 2199-01-01

The Data Export Utility would not export any of those evaluations in the EvalsEvaluation export entity because the interactions associated to the evaluation has a CallDateTime that is before the configured StartMediaDate of 2024-01-01. The configuration setting `StartMediaDate` needs to be updated to 2023-12-30 or earlier to include these evaluations in the EvalsEvaluation export entity.

To avoid this scenario, it's best to configure only one of these fields (StartMediaDate or StartEvaluationPublishDateUTC), not both, and set the other to an extreme upper or lower boundary (e.g. 'StartMediaDate' set to '1900-01-01' and 'StartEvaluationPublishDateUTC' set to '2024-01-01').

Question: What do the negative answer keys mean in the EvalsEvaluation export?

Answer: Negative answer keys, i.e., answer keys with a value of less than zero, indicate an available multi-select answer that was skipped.

Question: Can you explain how the system treats published Evaluations versus Calibrations?

Answer: The initial Evaluation in a Calibration (Leader Calibration) is always exported into EvalsEvaluation regardless of the Data Export Utility timing and regardless of whether the calibration EFI is created by copying or transforming from a regular EFI into a Calibration (C-EFI). The Participants Calibration Forms can only be created as Calibrations and will only ever be exported to EvalsCalibration with a reference to the Leader Calibration.

If a published Evaluation is subsequently transformed into a calibration, the subsequent run of the Data Export Utility will include it in EvalsCalibration. The original record in EvalsEvaluation will remain in place.

If a User publishes an evaluation form (Form 456) and subsequently copies it into a Calibration EFI:

- Form 456 will appear in EvalsEvaluation in the next DEU run after it is published.
- The (new) calibration EFI (for example, C-477) will appear in EvalsCalibration in the next Data Export Utility run after that calibration is created.

To return all non-calibrations from EvalsEvaluation, filter out all EvaluationKeys which exist in the EvalsCalibration.

Question: Is the RowID in a remote export table always unique every time that it is sent?

Answer: It is possible for the RowID to not be unique.

A RowID will only be duplicated if a remote export table has no records at any point, and the RowID will reset to 1. A remote export table will have no records only if all the data in that table is aged out of the system or if someone happens to delete all the data from the table manually.

The RowID in the remote export tables is not a true database identity column where it would auto-increment after each insert into the table.

The RowID is controlled by the Data Export Utility executable code itself. Before pushing data to a remote export table, the Data Export Utility will get the last RowID found in that table using this query "SELECT TOP(1) RowID FROM NiaExport.{tableName} ORDER BY RowID DESC;". That LastRowID will be used as the starting point and for each new record to be inserted into the remote export table, the last RowID is incremented by 1.

The RowID on the remote export tables is the primary key. If an insert is attempted with a duplicate RowID, the Data Export Utility will fail when the new records are pushed to the remote export table with a primary key violation.

ORGANIZING THE EXPORTED DATA

Question: How do the Data Export Utility entities relate to each other?


Answer: The relational diagram describes the logical data model of the Data Export Utility exported data. See [Appendix B: Data Export Utility Relational Diagram](#) to learn more.


Data Export Utility Relational Diagram


The relational diagram describes the logical data model of the Data Export Utility exported data.


Important


Explicit foreign keys are not present in the remote database. The following relational diagram provides the logical relationships.

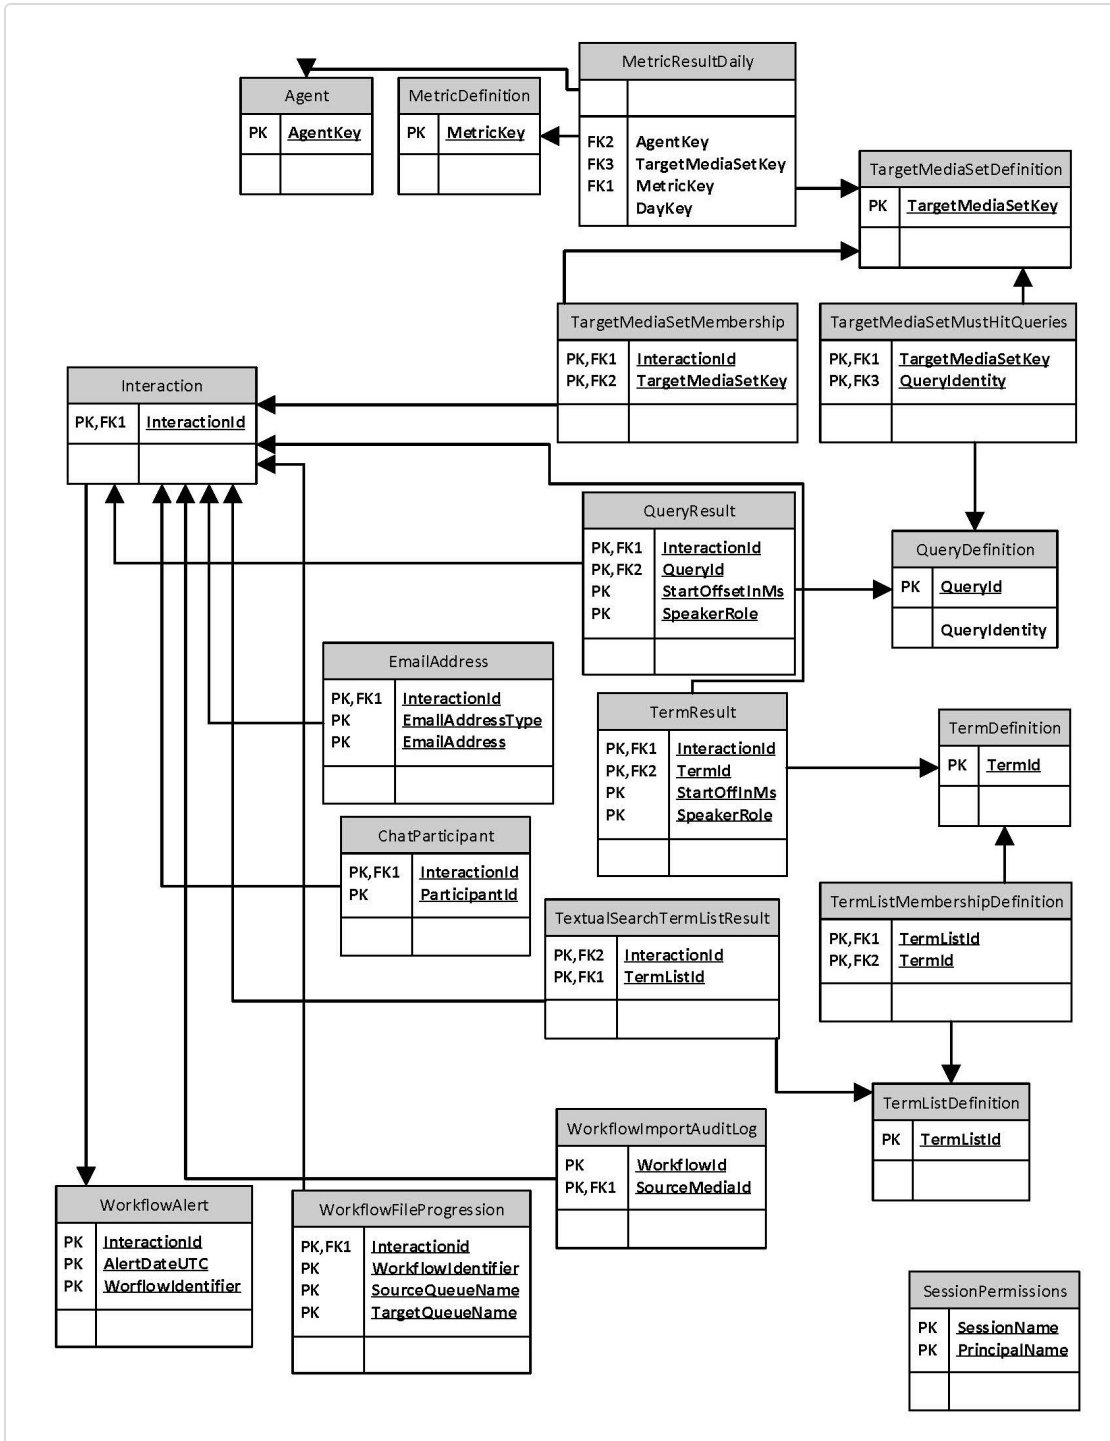

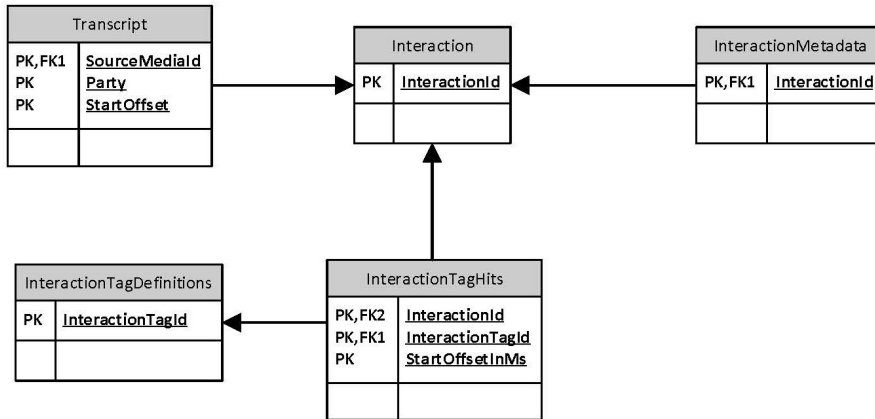


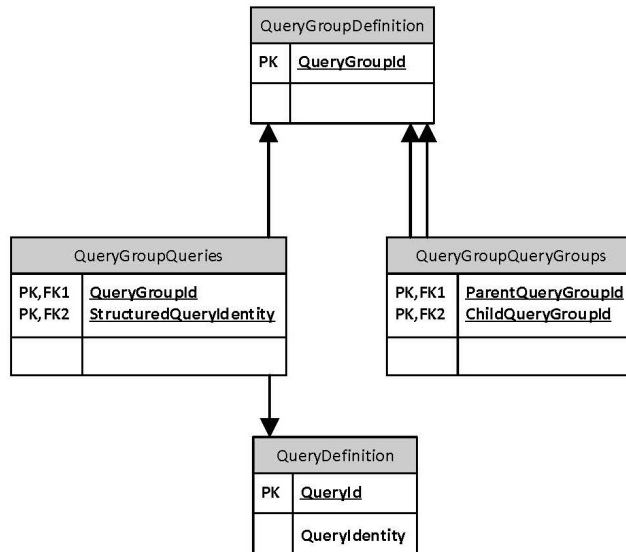


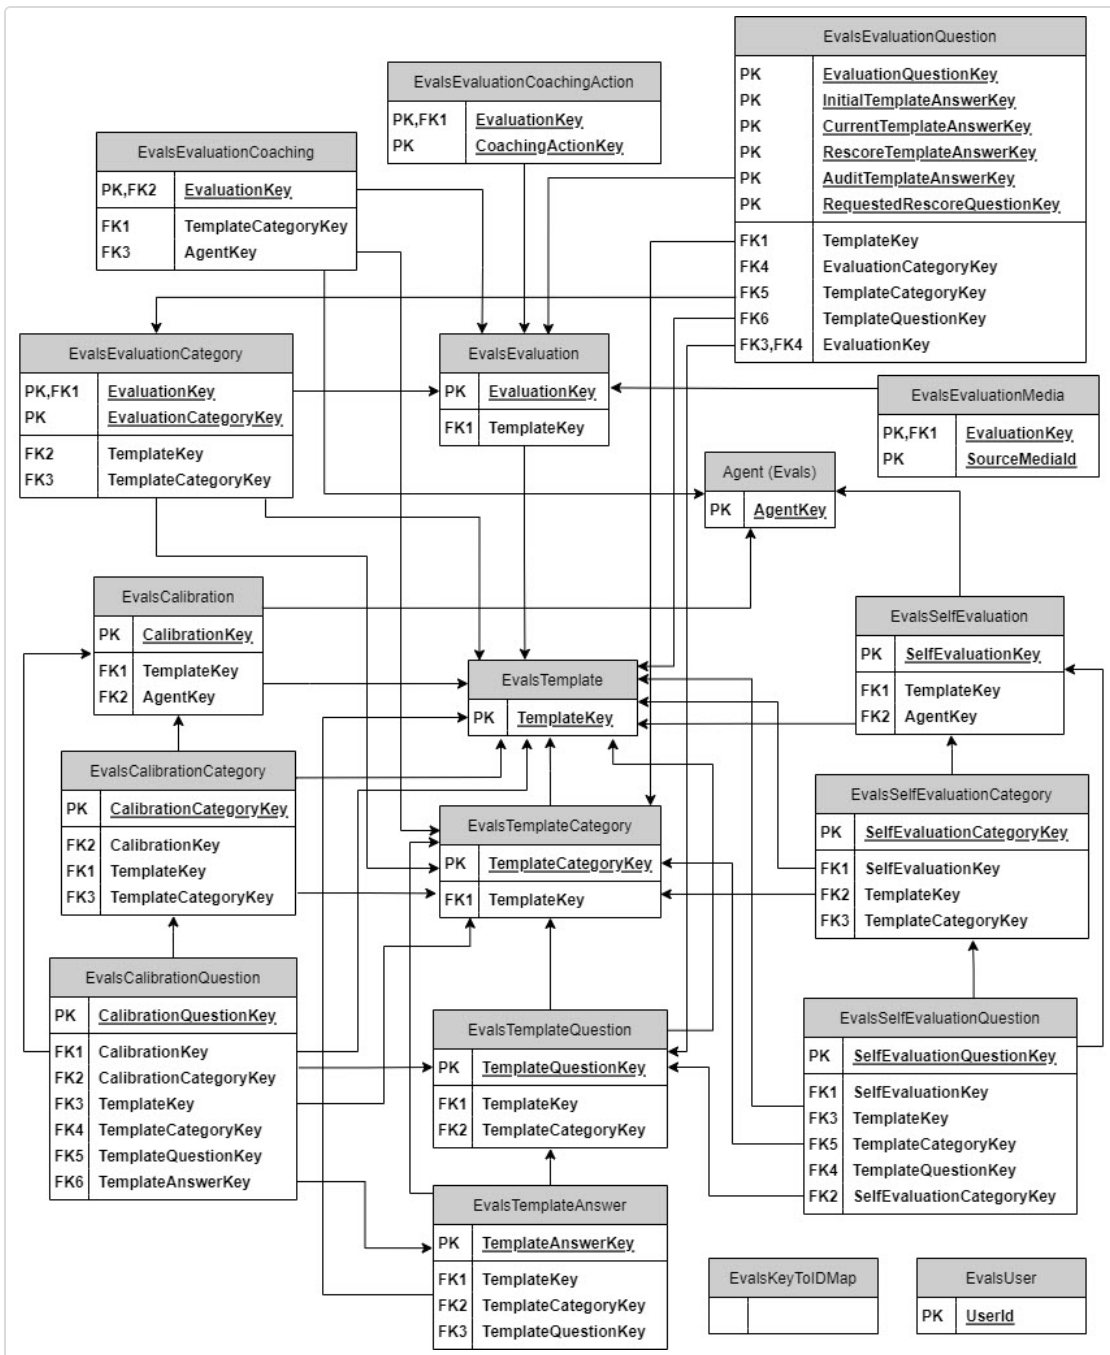


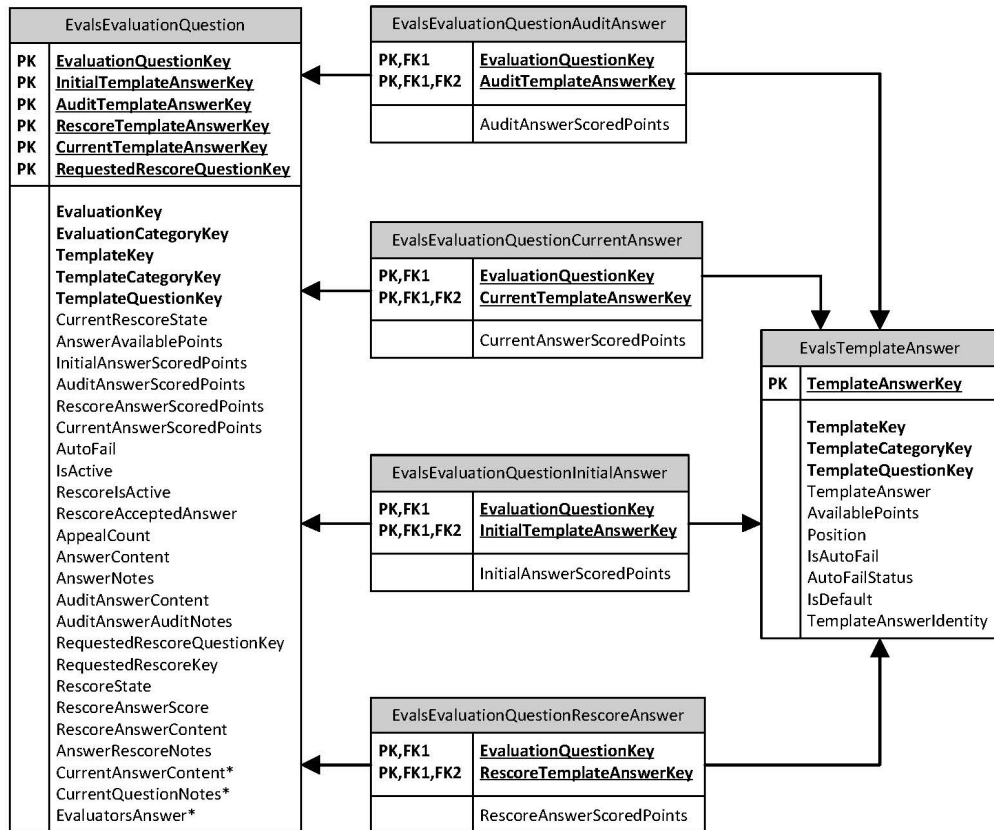



*Indicates a configurable field. For csv exports, these fields are not included unless the IncludeCurrentAnswerColumns setting is enabled. For remote exports, these values are set to NULL unless the IncludeCurrentAnswerColumns setting is enabled.

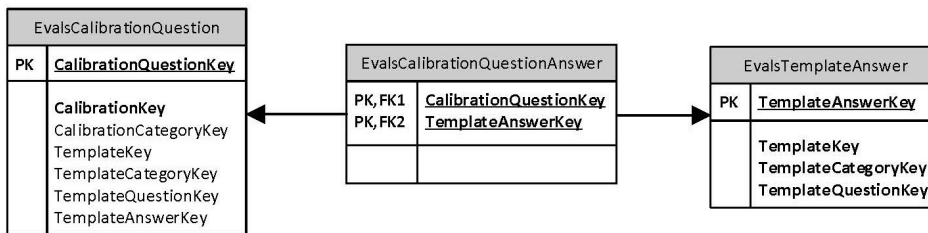


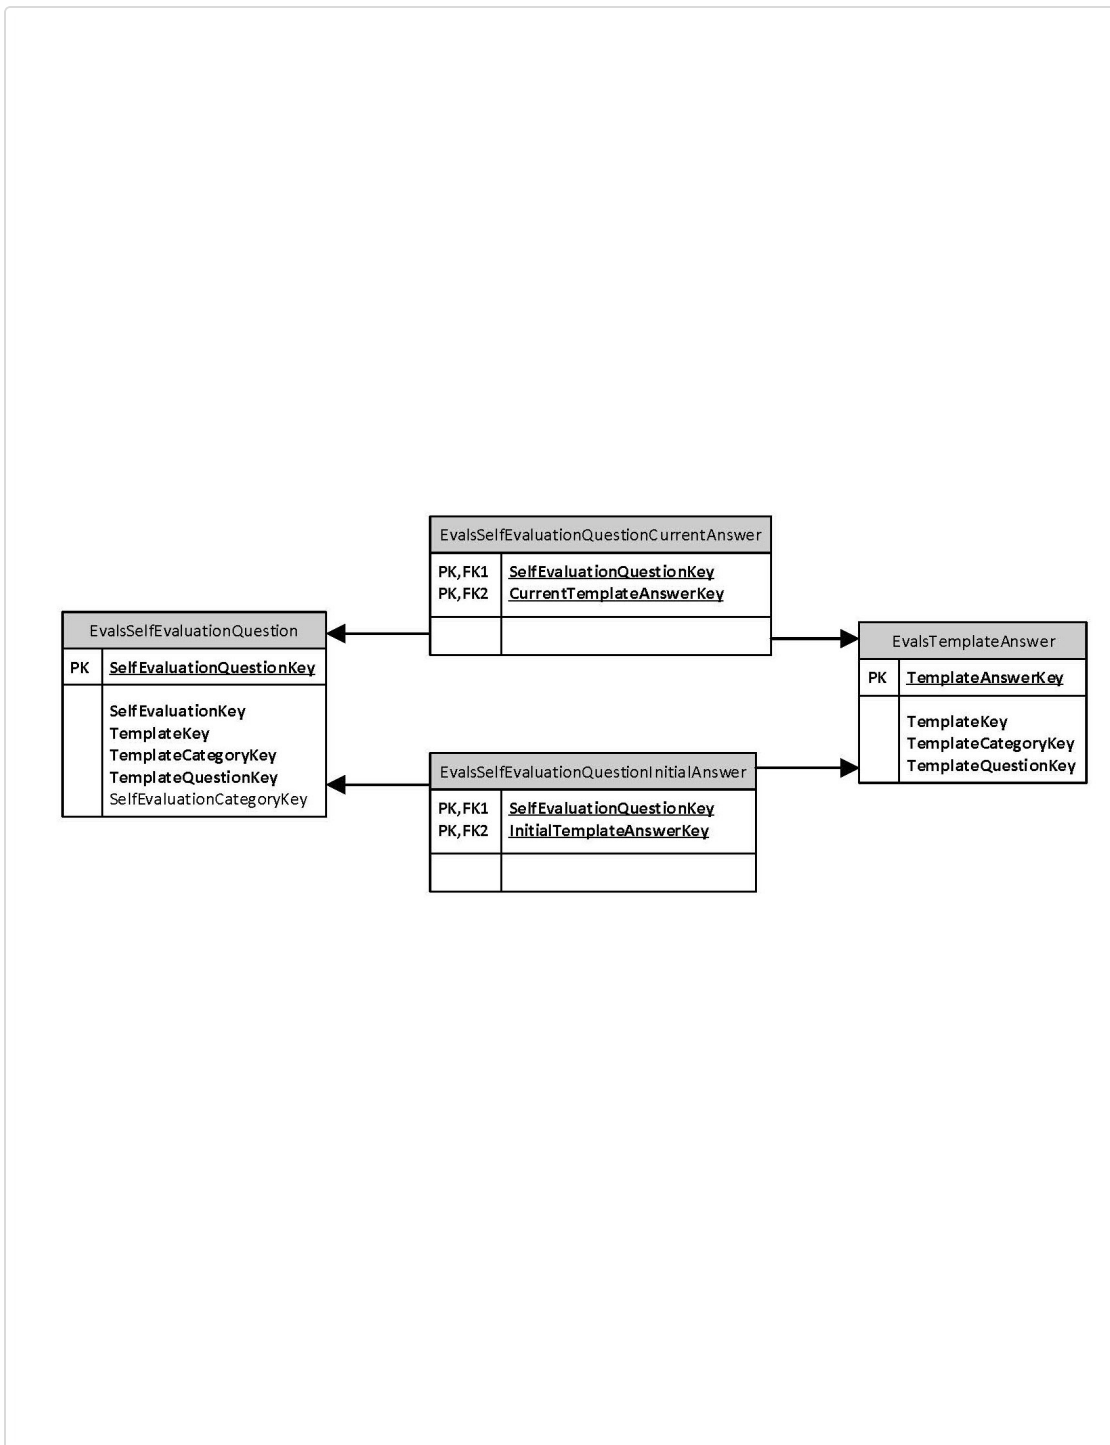


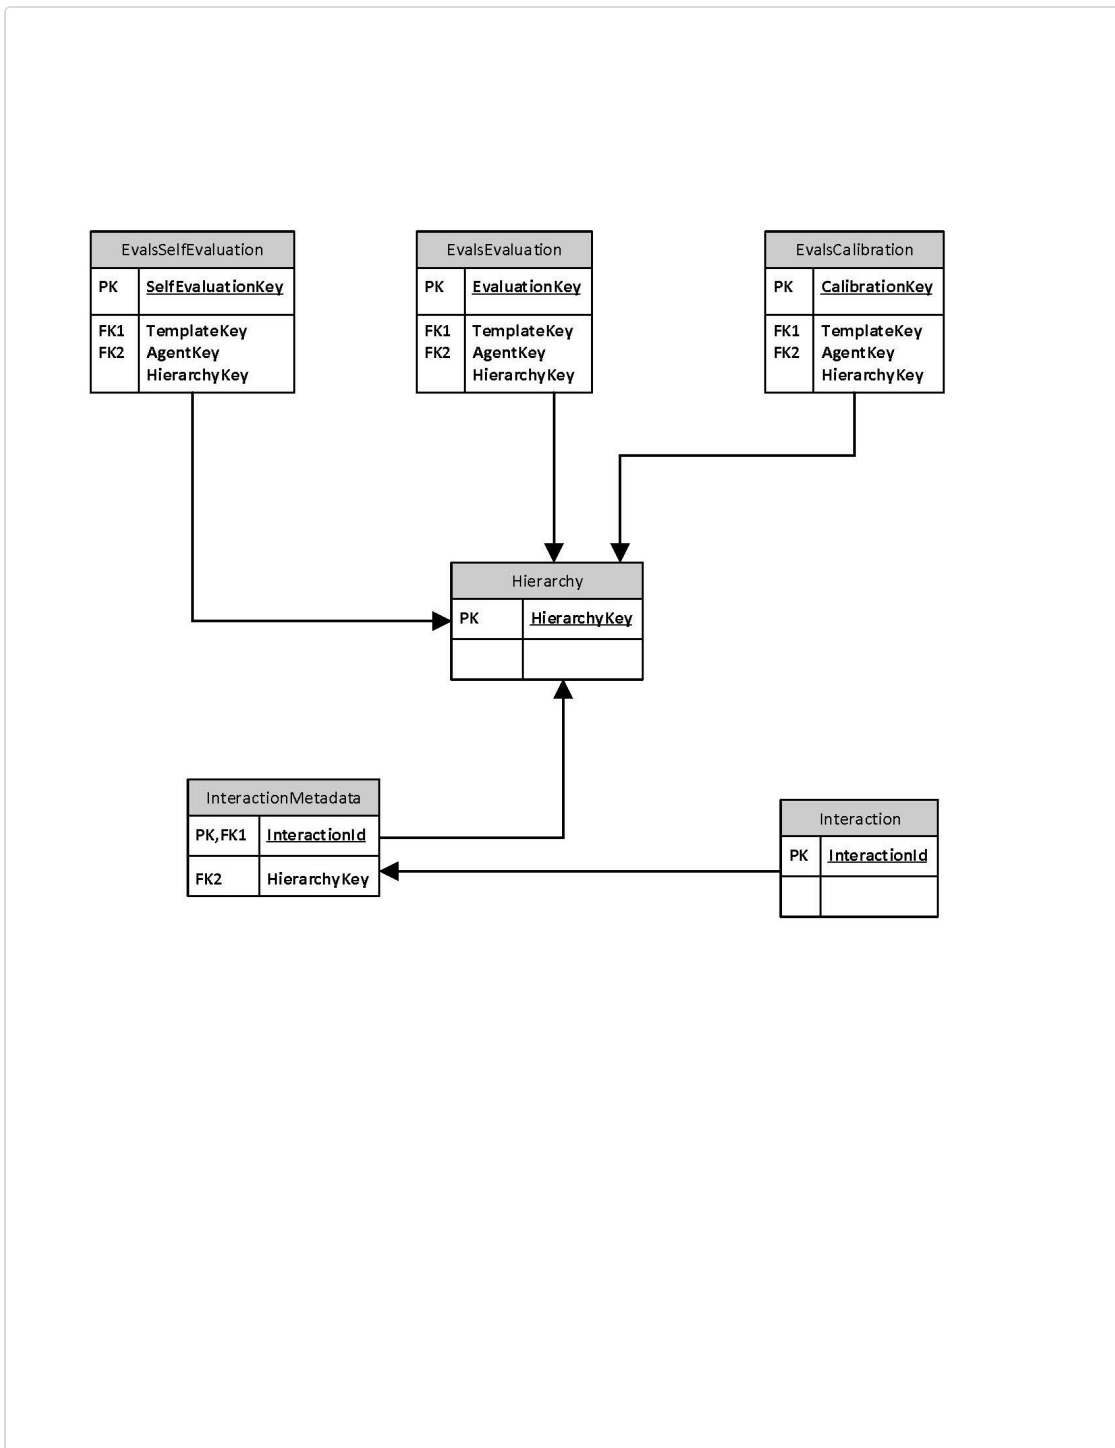


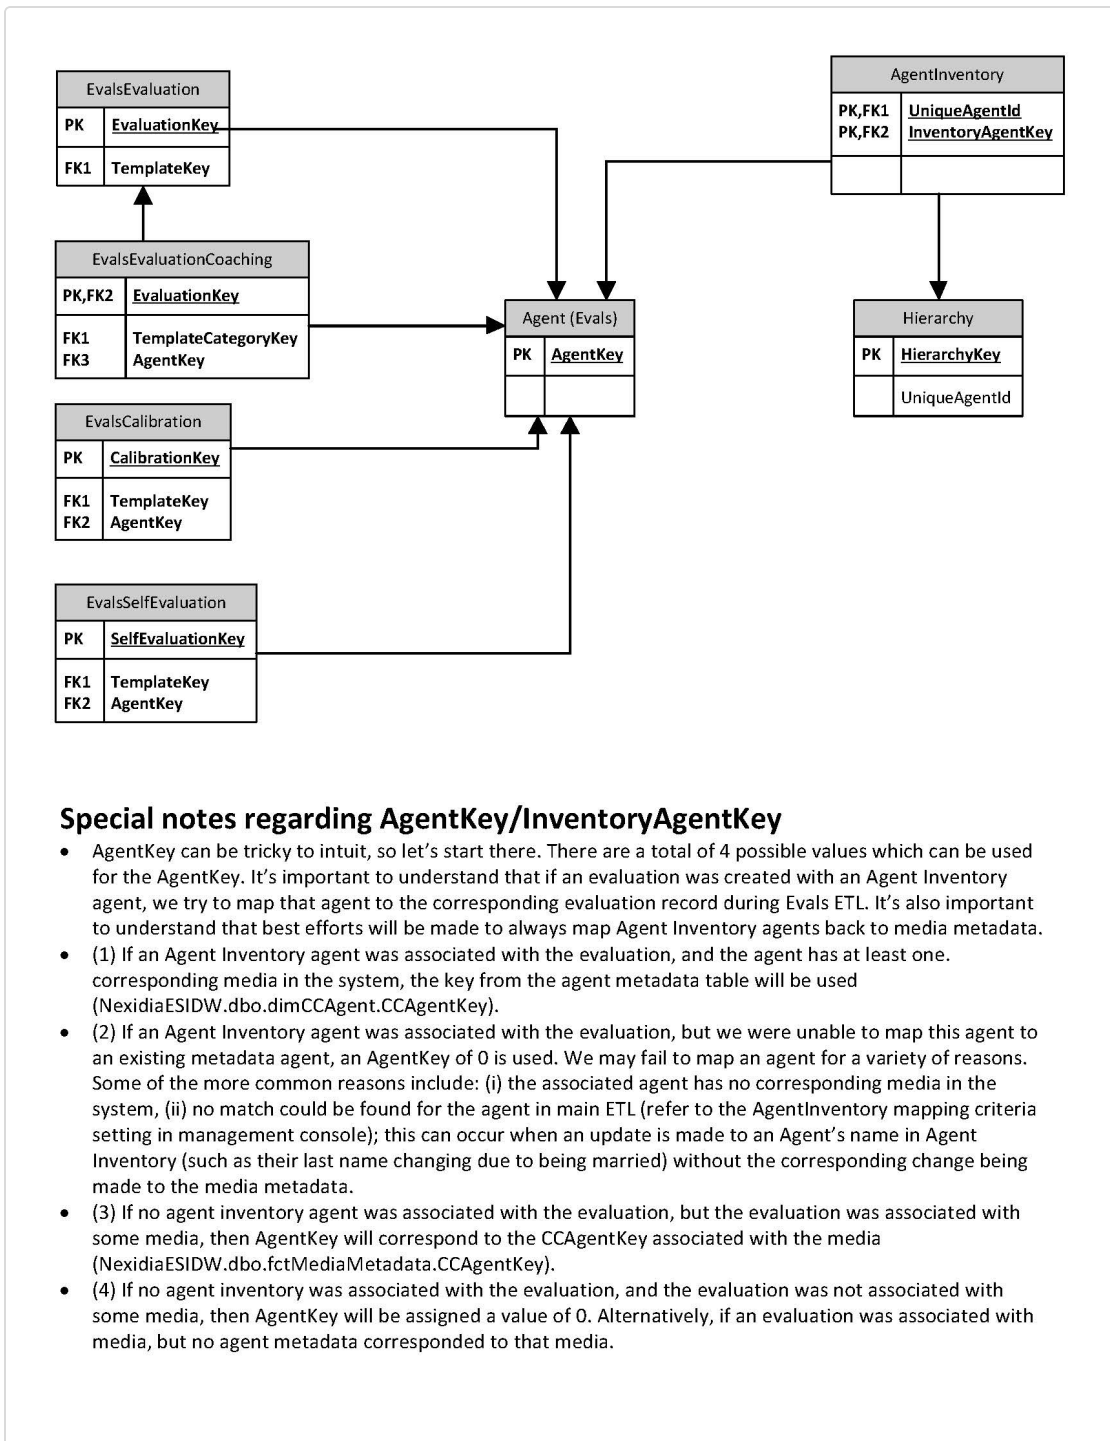


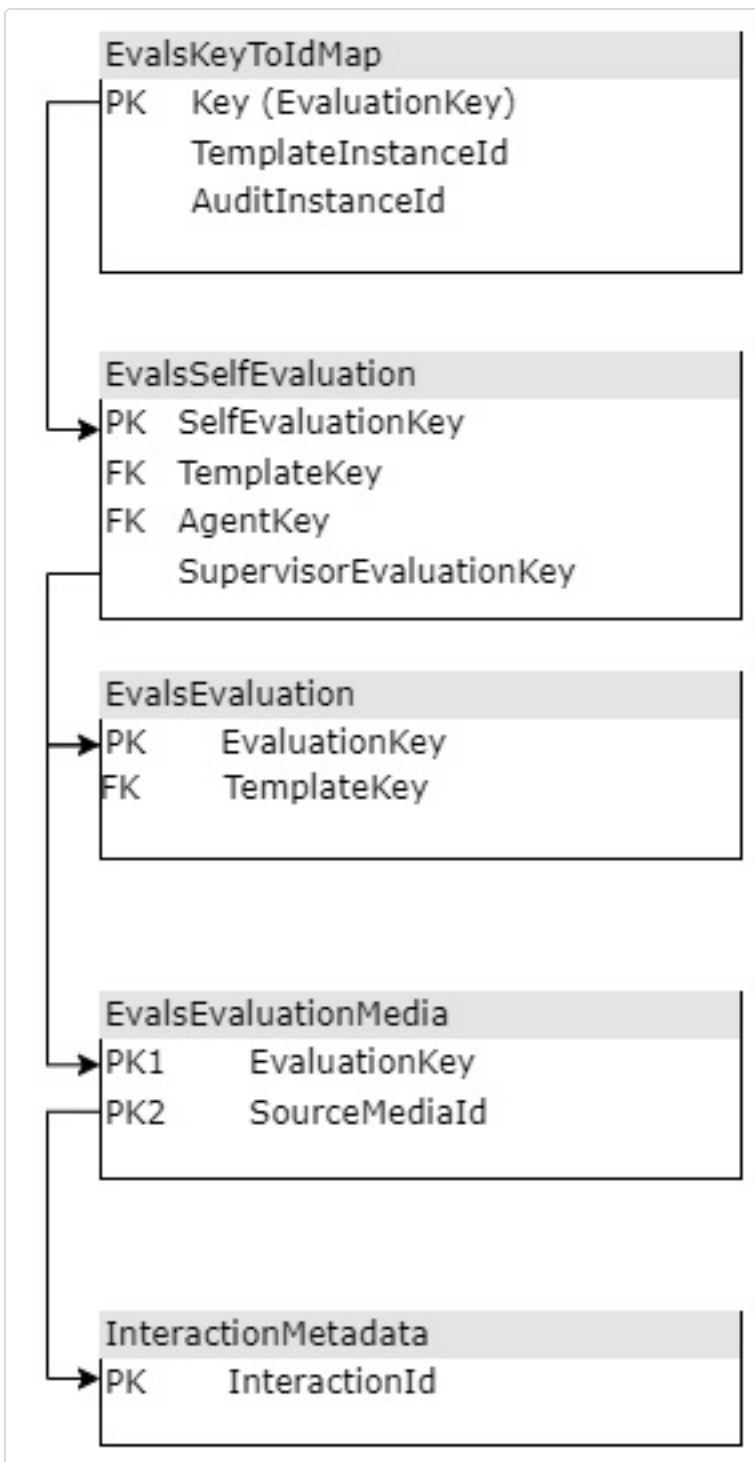


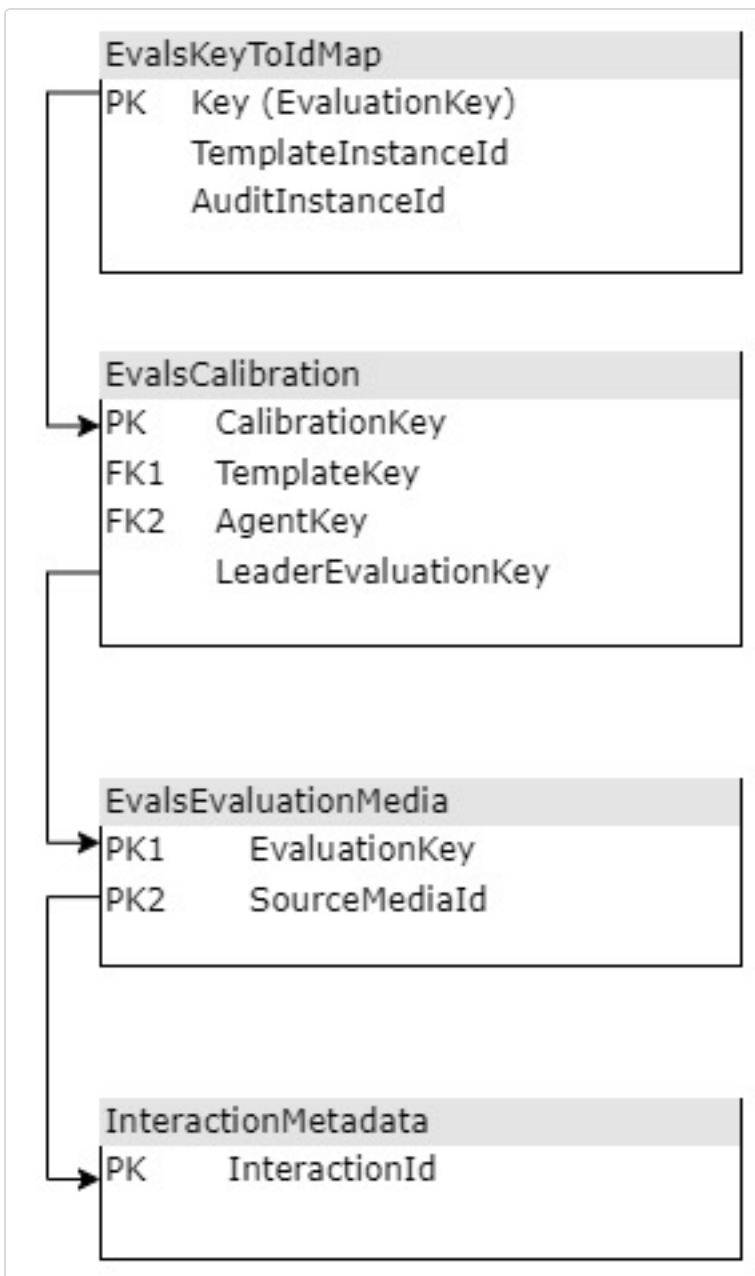


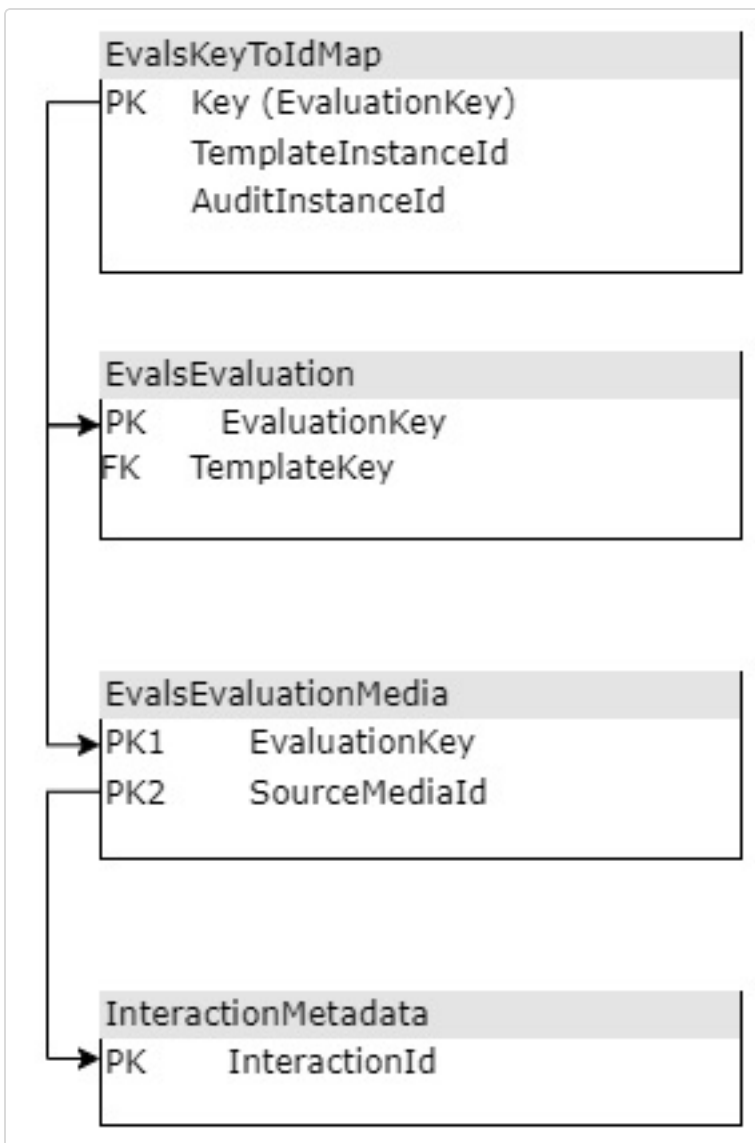

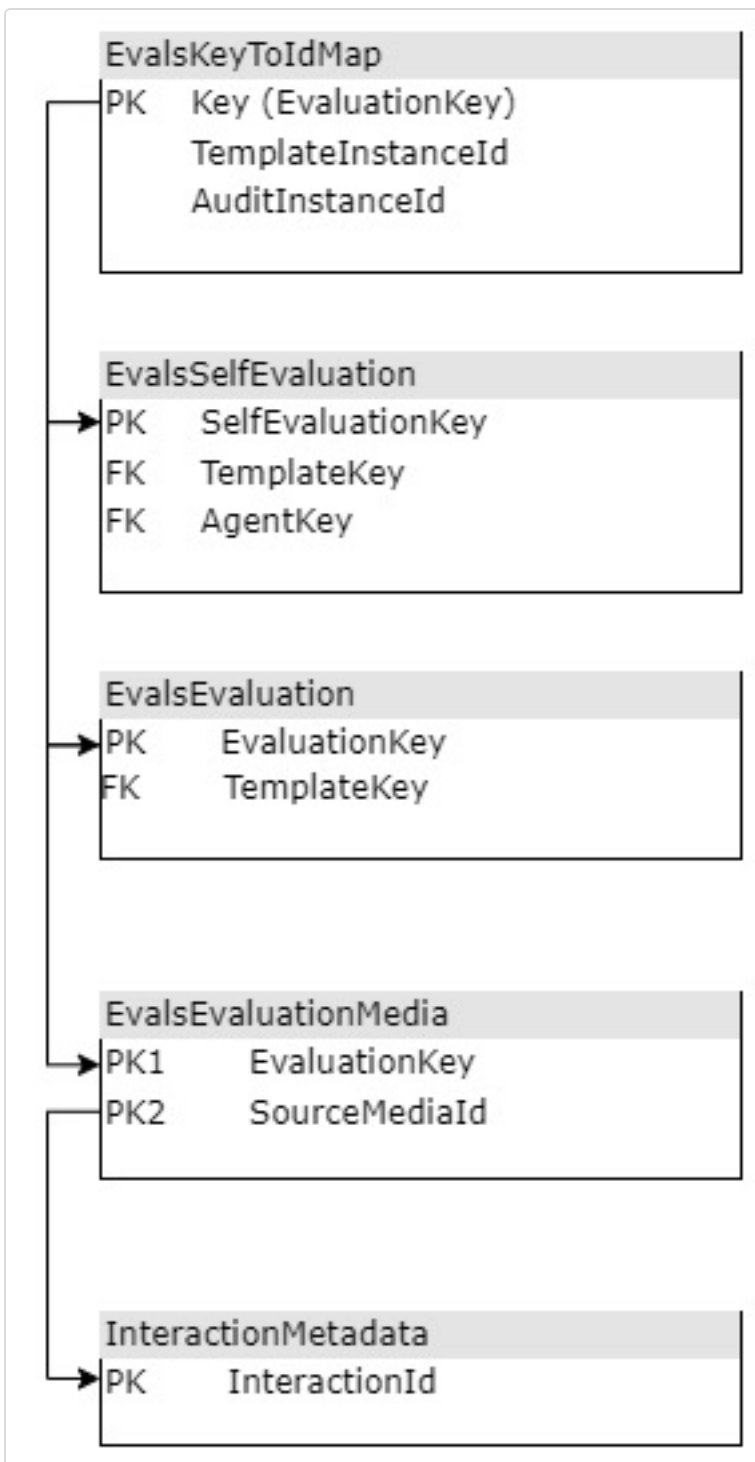

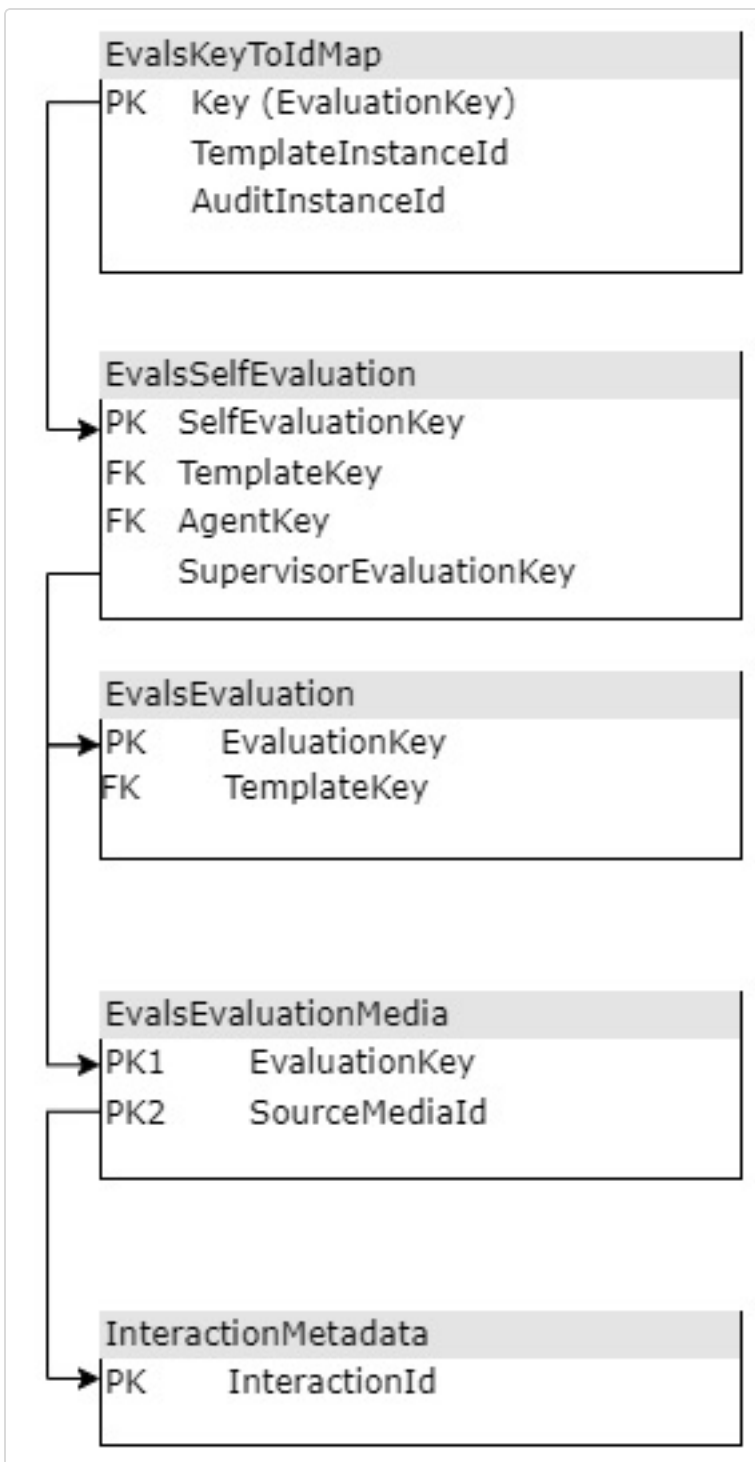

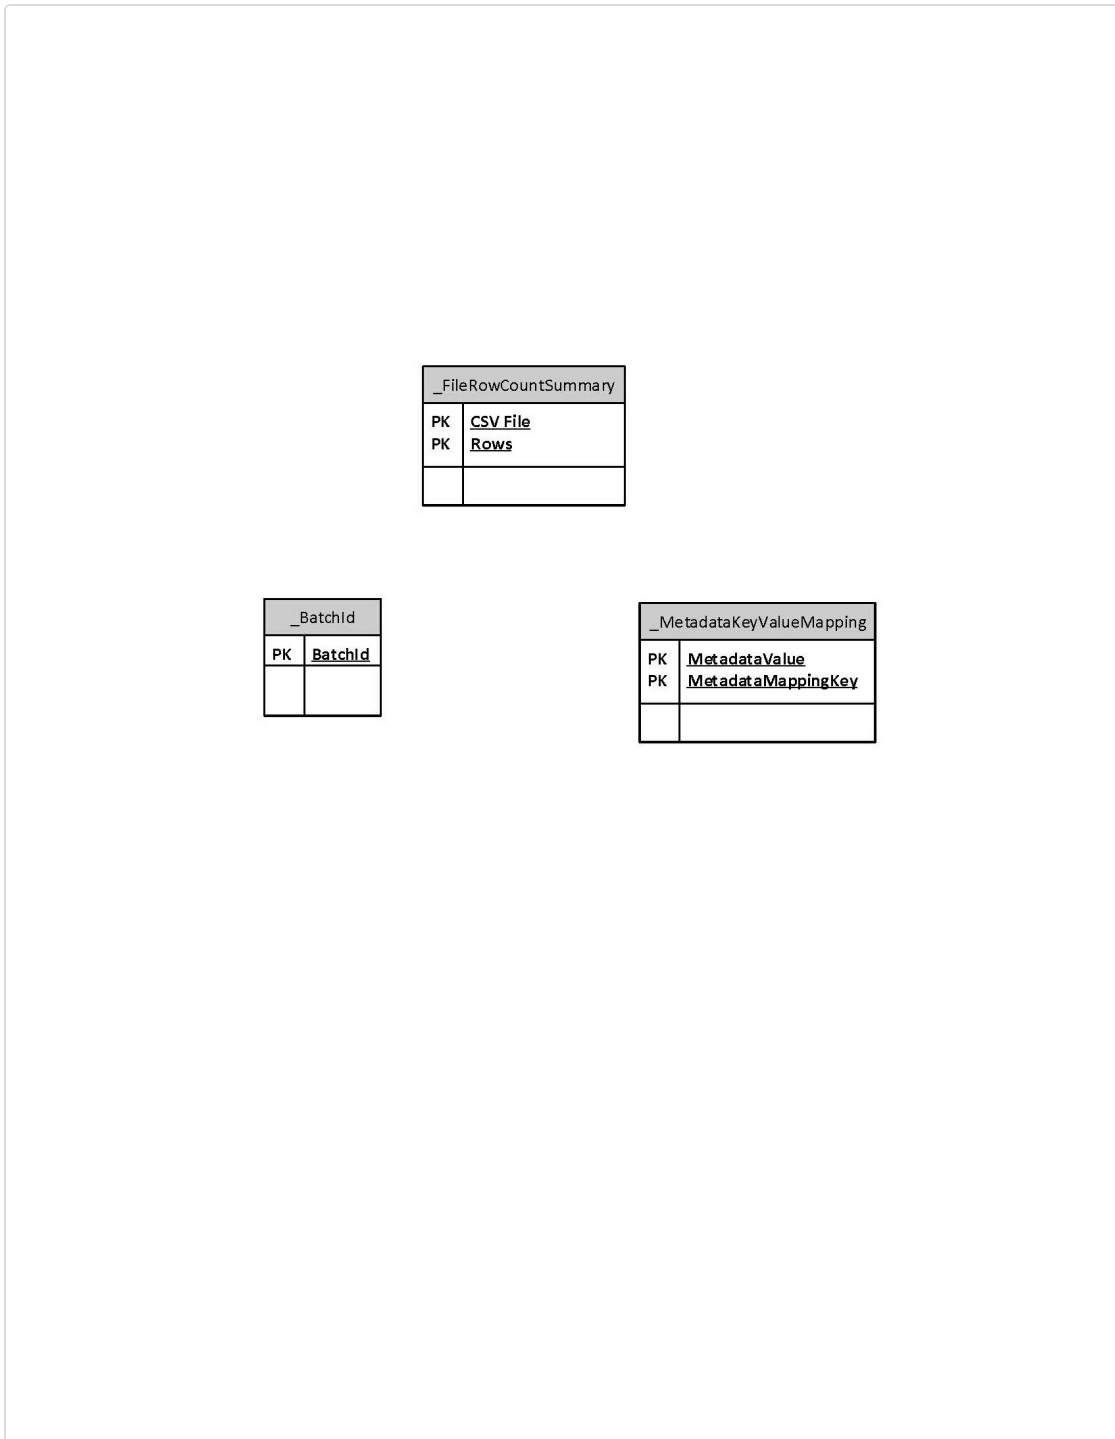

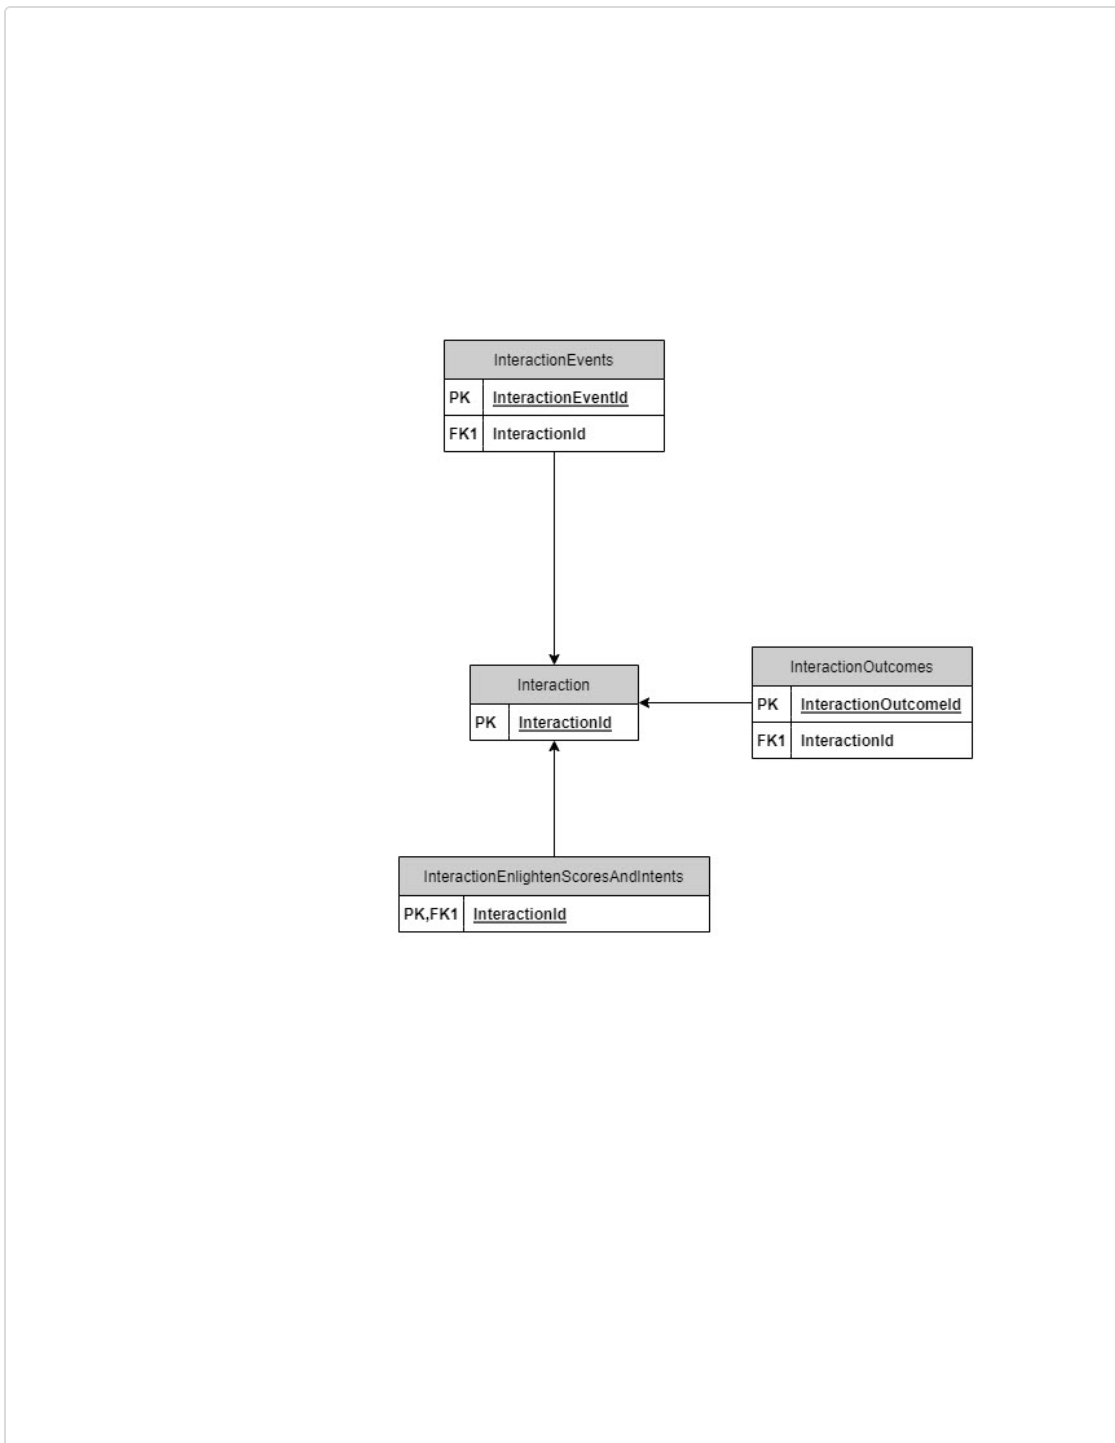

[This page intentionally left blank]



Data Export Utility Configuration Scenarios

The following tables provide configuration examples for these scenarios:

- Pull Data from Specific Target Media Sets
- Pull Data from all Target Media Sets
- Ad Hoc Run to Pull Data from a Specific Date
- Exclude Evaluation Data

Refer to the Backward Compatibility topic for instructions on how to configure the Data Export Utility to maintain backward compatibility with version 12.3 SP3 or 12.3 SP4.

SCENARIO 1 - PULL DATA FROM SPECIFIC TARGET MEDIA SETS

Use Case Example: This configuration scenario is used to gather information for a specific line of business.

CONFIGURATION KEY	VALUE
AppendTimestampToData	FALSE
CsvBufferSize	65536
CsvDelimiter	
CsvHasHeaderRecord	TRUE
CsvQuoteAllFields	TRUE
CsvQuoteNoFields	FALSE
DateFormat	126 This is the code that the Data Export Utility uses when it converts dates and times. The date format for the default code is yyyy-mm-ddThh:mi:ss.mm. You can change the date format by entering a different code. Refer to the Date and Time Styles section in the following link for a list of valid values and examples of the associated date format. CAST and CONVERT (Transact-SQL) - SQL Server
DoNotExportHistoricalData	FALSE
EndEvaluationPublishDateUTC	1/1/2199
EndMediaDate	1/1/2199
EvaluationsBatchSize	10000
ExportFileEncoding	UTF-8

CONFIGURATION KEY	VALUE
ExportFileFormat	CSV
IncludeAgentMetrics	TRUE
IncludeEmptyExportFiles	TRUE
IncludeEvaluations	TRUE
IncludeEvaluationsWithoutMedia	TRUE
IncludeFailedMedia	FALSE
IncludeMetadata	TRUE
IncludeQueryHits	TRUE
IncludeTargetMediaSetMembership	TRUE
IncludeTermHits	TRUE
IncludeWorkflows	TRUE
MaxRowsPerExportFile	50000000
MediaMetadataBatchSize	250000
MediaSearchBatchSize	250000
MetadataValueToSplit	
OutputUDFLabelName	FALSE
PublishPath	Insert your path
RequireResourceReservation	FALSE
SqlCommandTimeout	3600
StartEvaluationPublishDateUTC	8/24/2018

CONFIGURATION KEY	VALUE
StartMediaDate	8/24/2018
TargetMediaSetBatchSize	1000000
TempPath	Insert your path
TMSFilteringEnabled	TRUE
ZipOutput	TRUE

SCENARIO 2 - PULL DATA FROM ALL TARGET MEDIA SETS

Use Case Example: This configuration scenario is a standard scenario where all of the data is pulled from Interaction Analytics.

CONFIGURATION KEY	VALUE
AppendTimestampToData	FALSE
CsvBufferSize	65536
CsvDelimiter	
CsvHasHeaderRecord	TRUE
CsvQuoteAllFields	TRUE
CsvQuoteNoFields	FALSE
DateFormat	126 This is the code that the Data Export Utility uses when it converts dates and times. The date format for the default code is yyyy-mm-ddThh:mi:ss.mm. You can change the date format by entering a different code. Refer to the Date and Time Styles section in the following link for a list of valid values and examples of the associated date format. CAST and CONVERT (Transact-SQL) - SQL Server
DoNotExportHistoricalData	FALSE
EndEvaluationPublishDateUTC	1/1/2199
EndMediaDate	1/1/2199
EvaluationsBatchSize	10000
ExportFileEncoding	UTF-8

CONFIGURATION KEY	VALUE
ExportFileFormat	CSV
IncludeAgentMetrics	TRUE
IncludeEmptyExportFiles	TRUE
IncludeEvaluations	TRUE
IncludeEvaluationsWithoutMedia	TRUE
IncludeFailedMedia	FALSE
IncludeMetadata	TRUE
IncludeQueryHits	TRUE
IncludeTargetMediaSetMembership	TRUE
IncludeTermHits	TRUE
IncludeWorkflows	TRUE
MaxRowsPerExportFile	50000000
MediaMetadataBatchSize	250000
MediaSearchBatchSize	250000
MetadataValueToSplit	
OutputUDFLabelName	FALSE
PublishPath	Insert your path
RequireResourceReservation	FALSE
SqlCommandTimeout	3600
StartEvaluationPublishDateUTC	1/1/1900

CONFIGURATION KEY	VALUE
StartMediaDate	1/1/1900
TargetMediaSetBatchSize	1000000
TempPath	Insert your path
TMSFilteringEnabled	FALSE
ZipOutput	TRUE

SCENARIO 3 - AD HOC RUN TO PULL DATA FROM A SPECIFIC DATE

Use Case Example: This configuration scenario can be used to pull data for a support call that occurred on or around a specific date.

CONFIGURATION KEY	VALUE
AppendTimestampToData	FALSE
CsvBufferSize	65536
CsvDelimiter	
CsvHasHeaderRecord	TRUE
CsvQuoteAllFields	TRUE
CsvQuoteNoFields	FALSE
DateFormat	126 This is the code that the Data Export Utility uses when it converts dates and times. The date format for the default code is yyyy-mm-ddThh:mi:ss.mm. You can change the date format by entering a different code. Refer to the Date and Time Styles section in the following link for a list of valid values and examples of the associated date format. CAST and CONVERT (Transact-SQL) - SQL Server
DoNotExportHistoricalData	FALSE
EndEvaluationPublishDateUTC	9/2/2018
EndMediaDate	9/2/2018
EvaluationsBatchSize	10000
ExportFileEncoding	UTF-8

CONFIGURATION KEY	VALUE
ExportFileFormat	CSV
IncludeAgentMetrics	TRUE
IncludeEmptyExportFiles	FALSE
IncludeEvaluations	TRUE
IncludeEvaluationsWithoutMedia	TRUE
IncludeFailedMedia	FALSE
IncludeMetadata	TRUE
IncludeQueryHits	TRUE
IncludeTargetMediaSetMembership	TRUE
IncludeTermHits	TRUE
IncludeWorkflows	TRUE
MaxRowsPerExportFile	50000000
MediaMetadataBatchSize	250000
MediaSearchBatchSize	250000
MetadataValueToSplit	
OutputUDFLabelName	FALSE
PublishPath	Insert your path
RequireResourceReservation	FALSE
SqlCommandTimeout	3600
StartEvaluationPublishDateUTC	8/30/2018

CONFIGURATION KEY	VALUE
StartMediaDate	8/30/2018
TargetMediaSetBatchSize	1000000
TempPath	Insert your path
TMSFilteringEnabled	TRUE
ZipOutput	TRUE

SCENARIO 4 - EXCLUDE EVALUATION DATA

Use Case Example: This configuration scenario is used when evaluation data is not needed.

CONFIGURATION KEY	VALUE
AppendTimestampToData	FALSE
CsvBufferSize	65536
CsvDelimiter	
CsvHasHeaderRecord	TRUE
CsvQuoteAllFields	TRUE
CsvQuoteNoFields	FALSE
DateFormat	126 This is the code that the Data Export Utility uses when it converts dates and times. The date format for the default code is yyyy-mm-ddThh:mi:ss.mm. You can change the date format by entering a different code. Refer to the Date and Time Styles section in the following link for a list of valid values and examples of the associated date format. CAST and CONVERT (Transact-SQL) - SQL Server
DoNotExportHistoricalData	TRUE
EndEvaluationPublishDateUTC	1/1/2199
EndMediaDate	1/1/2199
EvaluationsBatchSize	2500000
ExportFileEncoding	UTF-8
ExportFileFormat	CSV

CONFIGURATION KEY	VALUE
IncludeAgentMetrics	TRUE
IncludeEmptyExportFiles	TRUE
IncludeEvaluations	FALSE
IncludeEvaluationsWithoutMedia	FALSE
IncludeFailedMedia	FALSE
IncludeMetadata	TRUE
IncludeQueryHits	TRUE
IncludeTargetMediaSetMembership	TRUE
IncludeTermHits	TRUE
IncludeWorkflows	TRUE
MaxRowsPerExportFile	2500000
MediaMetadataBatchSize	2500000
MediaSearchBatchSize	2500000
MetadataValueToSplit	
OutputUDFLabelName	FALSE
PublishPath	Insert your path
RequireResourceReservation	FALSE
SqlCommandTimeout	3600
StartEvaluationPublishDateUTC	1/1/1900
StartMediaDate	1/1/1900

CONFIGURATION KEY	VALUE
TargetMediaSetBatchSize	2500000
TempPath	Insert your path
TMSFilteringEnabled	TRUE
ZipOutput	FALSE

SCENARIO 5 - RE-EXPORT INTERACTIONS FROM A SPECIFIC DATE TO REMOTE DATABASE

Use Case Example: This configuration scenario is used if there is a need to re-export a date range of interactions to a remote database without the need to reprocess any interactions in Nexidia Analytics. This use case is unique because it requires cloning the original Export configuration.

Only notable configurations are listed below.

Original Export

CONFIGURATION KEY	VALUE
OverrideRemoteDbExportId	-1
RequireExportTrackingResourceReservation	true

Cloned Export

CONFIGURATION KEY	VALUE
EndMediaDate	3/10/2025
OutputType	SQL
OverrideRemoteDbExportId	<Original Export's ExportID>
RemoteDbServer	<Original Export's RemoteDbServer>
RequireExportTrackingResourceReservation	true
StartMediaDate	3/17/2025



Summary of Changes

This appendix provides a summary of the changes made to the Data Export Utility beginning with version 12.0.

VERSION 12.0 UPDATES

VERSION	COMPONENT	CHANGE
12.0	SessionPermissions.csv	New file
12.0	TargetMediaSetMustHit Queries.csv	New file
12.0	TermListDefinition.csv	New file
12.0	TermListMembership.csv	New file
12.0	MetadataKeyValueMapping .csv	New file
12.0	WorkflowImportAuditLog.csv	New file
12.0	Export.cfgExportConfig table	New Configurations: • IncludeFailedMedia • MaxRowsPerExportFile • MetadataValueToSplit • TMSFilteringEnabled • DoNotExportHistoricalData
12.0	Interaction.csv	New Column: InteractionType
12.0	InteractionMetadata.csv	New Columns • SentimentTransition • InteractionType • SiteID Renamed Column • Sentiment renamed to SentimentScore
12.0	QueryResult.csv	New Column: QueryIdentifier

VERSION	COMPONENT	CHANGE
12.0	TargetMediaSetDefinition.csv	New Columns: • CreationDate • LastModificationDate • TargetMediaSetIdentity • Description • SessionName PredicateList • MustHitQueryOperator • MediaType
12.0	TargetMediaSetDefinition.csv	Renamed Columns: • SessionName renamed to Name • SessionIdentity renamed to IngestSessionIdentity
12.0	QueryDefinition.csv	New Column: IsLive
12.0	TermListMembership.csv	Rename File: TermListMembershipDefinition.csv
12.0	MetadataKeyValueMapping.csv	Renamed File: _MetadataKeyValueMapping.csv
12.0	TermDefinition.csv	New Column: MediaType
12.0	Miscellaneous Updates	Restructuring and content updates.
12.0	Transcript.csv	Updated the SourceMediaID description.

VERSION 12.1 UPDATES

VERSION	COMPONENT	CHANGE
12.1	QueryGroupDefinition.csv	New file
12.1	QueryGroupQueries.csv	New file
12.1	QueryGroupQueryGroups.csv	New file
12.1	InteractionTagDefinitions.csv	New file
12.1	InteractionTagHits.csv	New file
12.1	InteractionMetadata.csv	Updated UDF field values
12.1	Nexidia.Discovery.ExportFile Mode export option	Updated description

VERSION 12.1.5 UPDATES

VERSION	COMPONENT	CHANGE
12.1.5	InteractionMetadata.csv	New Columns: - FirstQuarterSentiment - SecondQuarterSentiment - ThirdQuarterSentiment - FourthQuarterSentiment - OneHalfSentiment - ThreeFourthsSentiment
12.1.5	EvalsEvaluationCoachingAction.csv	Correction: Changed the Require Action column to NVARCHAR.
12.1.5	Miscellaneous Update	New CSV File Population table. This table explains how the .csv files are populated.
12.1.5	Nexidia.Esi.Discovery.Transcript Exporter.exe.config file	New configuration: Nexidia.Discovery.ExportInclude Headers

VERSION 12.1.10 UPDATES

VERSION	COMPONENT	CHANGES
12.1.10	Export.cfgExportConfig table	New configuration: OutputUDFLabelName
12.1.10	_FileRowCountSummary.csv	New file
12.1.10	_TranscriptExport ExpectedRowCounts.csv	New file

VERSION 12.1.11 UPDATES

VERSION	COMPONENT	CHANGE
12.1.11	EvalsCalibration.csv	Updated the point and scoring columns descriptions and examples to reflect that decimals and negative values are now supported.
12.1.11	EvalsCalibrationQuestion.csv	Updated the point and scoring columns descriptions and examples to reflect that decimals and negative values are now supported.
12.1.11	EvalsEvaluation.csv	Updated the point and scoring columns descriptions and examples to reflect that decimals and negative values are now supported.
12.1.11	EvalsEvaluationCategory.csv	Updated the point and scoring columns descriptions and examples to reflect that decimals and negative values are now supported.
12.1.11	EvalsEvaluationQuestion.csv	Updated the point and scoring columns descriptions and examples to reflect that decimals and negative values are now supported.
12.1.11	EvalsSelfEvaluation.csv	Updated the point and scoring columns descriptions and examples to reflect that decimals and negative values are now supported.
12.1.11	EvalsSelfEvaluationCategory.csv	Updated the point and scoring columns descriptions and examples to reflect that decimals and negative values are now supported.
12.1.11	EvalsSelfEvaluationQuestion.csv	Updated the point and scoring columns descriptions and examples to reflect that decimals and negative values are now supported.

VERSION	COMPONENT	CHANGE
12.1.11	EvalsTemplateAnswer.csv	Updated the point column descriptions and examples to reflect that decimals and negative values are now supported.
12.1.11	Export.cfgExportConfig table	• New DoNotExportHistoricalData configuration • Corrected the RequireResourceReservation configuration default value
12.1.11	Export.cfgExportConfig table	Updated the TMSFilteringEnabled description.

VERSION 12.1.15 UPDATES

VERSION	COMPONENT	CHANGE
12.1.15	EvalsCalibrationQuestionAnswer.csv	New file to support multi-select questions and answers.
12.1.15	EvalsEvaluationQuestionAuditAnswer.csv	New file to support multi-select questions and answers.
12.1.15	EvalsEvaluationQuestionCurrentAnswer.csv	New file to support multi-select questions and answers.
12.1.15	EvalsEvaluationQuestionInitialAnswer.csv	New file to support multi-select questions and answers.
12.1.15	EvalsEvaluationQuestionRescoreAnswer.csv	New file to support multi-select questions and answers.
12.1.15	EvalsSelfEvaluationQuestionCurrentAnswer.csv	New file to support multi-select questions and answers.
12.1.15	EvalsSelfEvaluationQuestionInitialAnswer.csv	New file to support multi-select questions and answers.
12.1.15	EvalsCalibrationQuestion.csv	Updated AnswerScoredPoints description.
12.1.15	EvalsEvaluationQuestion.csv	Updated Initial, Audit, Rescore, Current and AnswerScoredPoints descriptions.
12.1.15	EvalsSelfEvaluationQuestion.csv	Updated CurrentAnswerScored Points description.
12.1.15 CU2	TMSFilteringEnabled configuration	Updated description.

VERSION	COMPONENT	CHANGE
12.1.15 CU3	CSV File Population	Updated how the MetricResultDaily.csv is populated.
12.1.15 CU4	Configuration Scenarios	New appendix.
12.1.15 CU4	InteractionMetadata.csv	New Columns: • HighPrecisionSentimentScore • HighPrecisionMinimumSentimentScore • HighPrecisionMaximumSentimentScore
12.1.15 CU4	Export.cfgExportConfig table	New configuration: IncludeHighPrecisionSentimentScores
12.1.15 CU7	Export.cfgExportConfig table	New configurations: • ResourceReservationExpirationTime • ResourceReservationPollingTime • MetricResultBatchSize

VERSION 12.1.18 UPDATES

VERSION	COMPONENT	CHANGE
12.1.18	Export.cfgExportConfig table	Removed configuration: IncludeHighPrecisionSentimentScores By removing this configuration, the high precision sentiment columns are always present in the InteractionMetadata.csv.
12.1.18	Nexidia.Esi.Discovery.Transcript Exporter.exe.config file	New configurations: - Nexidia.Discovery.ExportFileDelimiter - Nexidia.Discovery.ExportFileFormat - Nexidia.Discovery.ZipOutput - Nexidia.Discovery.PublishPath - Nexidia.DiscoveryMaxRowsPerExportFile
12.1.18	EvalsTemplateCategory.csv	New column: TemplateCategoryIdentity
12.1.18	EvalsTemplateQuestion.csv	New columns: - TemplateQuestionIdentity - Hint
12.1.18	EvalsTemplateAnswer.csv	New column: TemplateAnswerIdentity
12.1.18	EvalsEvaluation.csv	New column: AcknowledgedOnUTC
12.1.18	EvalsEvaluationCoaching.csv	New column: VerifiedDateUTC

VERSION	COMPONENT	CHANGE
12.1.18	EvalsEvaluationCoachingAction.csv	New column: TargetDateUTC
12.1.18 (SP2)	Relational Diagram	General clarifications.
12.1.18 (SP2)	Relational Diagram	Added missing primary key columns for the Transcript entity.
12.1.18 (SP4)	Export.cfgExportConfig table	Renamed configuration: DoNotExportHistoricalRecords is now Export Reprocessed Query Results
12.1.18 (SP4)	Export.cfgExportConfig table	New configuration: Export Reprocessed TMS Membership Results
12.1.18 (SP5)	Export Update	All coaching data is now exported (not just coaching records where the request was initiated by the agent).

VERSION 12.2 UPDATES

VERSION	COMPONENT	CHANGE
12.2	Data Export Utility	- The Transcript Export Utility is incorporated into the Data Export Utility. During the upgrade to version 12.2, the export may not include all the transcripts. To export transcripts from a missing date range, create a second export limited to those days. - Functionality was added to support the export of Data Export Utility results to tables.
12.2	Export.cfgExportConfig table	New configurations: - OutputType - RetentionDays - SourceLinkedServer - TargetLinkedServer - IncludeTranscripts - TranscriptsBatchSize - TranscriptsTargetMediaSetId
12.2	InteractionMetadata entity	Only displayed UDFs are exported for SQL Table output.
12.2	New Script	CreateNXExportDB.sql
12.2	New Table	cfgExportBatchTracking
12.2	New View	InteractionMetadataDisplay
12.2	Encryption	TDE and Vormetric have been certified.
12.2 (SP1)	Creating the Database for Remote Export topic	Modified instructions to include upgrade support for the remote database.

VERSION	COMPONENT	CHANGE
12.2 (SP1)	Export.cfgExportConfig table	New configurations: - UseModalMode - EnableBatchMode - BatchesPerExport
12.2 (SP2)	ExportTracking and Remote Export	ExportTracking and Remote Export clarifications.
12.2 (SP2)	EvalsEvaluation entity	Added Agent Inventory columns.
12.2 (SP2)	Export.cfgExportConfig table	New configuration: IncludeAgentInventoryForEvaluations
12.2 (SP3)	Export.cfgExportConfig table	New configurations: - StartTranscriptDateUTC - EndTranscriptDateUTC
12.2 (SP4)	TargetMediaSetMembership entity	New column: Status
12.2 (SP4)	Export.cfgExportConfig table	New Configuration: TargetMediaSetExportDeltasOnly
12.2 (SP5)	Data Delivery	Export mode clarifications.

VERSION 12.3 UPDATES

VERSION	COMPONENT	CHANGE
12.3	AgentInventory entity	New CSV File/SQL Table.
12.3	Export.cfgExportConfig table	Removed configuration: IncludeAgentInventoryForEvaluations
12.3	Hierarchy entity	New CSV File/SQL Table.
12.3	EvalsSelfEvaluation entity	New column: HierarchyKey
12.3	EvalsEvaluation entity	New column: HierarchyKey
12.3	EvalsCalibration entity	New column: HierarchyKey
12.3	InteractionMetadata entity	New column: HierarchyKey
12.3	EvalsEvaluationCoaching entity	New column: CoachingVerifiedAgentNotes Note: In addition, agent-initiated requests that the supervisor has not yet responded to are also included in the exported coaching data.
12.3	Appendix B	Updated Data Export Utility Relational Diagram.
12.3	CSV Troubleshooting	For CSV exports, we added the _BatchId.csv for troubleshooting. This file shows the number of the export batch for both zipped and non-zipped batches.
12.3	CsvDelimiter Configuration	Additional details were added for the usage of this configuration option.

VERSION	COMPONENT	CHANGE
12.3 (SP2)	Data Compliance	New topic: Data Compliance
12.3 (SP3)	Export.cfgExportConfig table	New configurations: - IgnoreHierarchicalUnitForMetricResultDailyExport - RemoteDBExportMaxRetryAttempts - RemoteDBExportWaitForDelayInSeconds
12.3 (SP3)	AgentInventory entity	Updated the order of the AgentInventory entity fields and added the InventoryAgentKey column.
12.3 (SP3)	Export.cfgExportConfig table	Noted that TMSFilteringEnabled is ignored when the TargetMediaSetExportDeltasOnly configuration option is also enabled.
12.3 (SP4)	EvalsEvaluationQuestion entity	New columns: - RescoreAnswerContent - AnswerRescoreNotes
12.3 (SP4)	Remote Export	Linked servers are no longer required.
12.3 (SP4)	Export.cfgExportConfig table	Removed configuration: - SourceLinkedServer Renamed configuration: - TargetLinkedServer was renamed RemoteDbServer. New reserved configuration: - RemoteDbExportMaxRowsPerChunk
12.3 (SP4)	Export.cfgExportConfig table	Clarification of the DateFormat configuration usage.
12.3 (SP4)	Transcript entity	Noted that the Transcript export is not included in the Quality Central Insight product.

VERSION	COMPONENT	CHANGE
12.3 (SP4)	_BatchID, _FileRowCountSummary, _ and MetadataKeyValueMapping entities	These files were moved to the beginning of the Data Dictionary Output Structure content. The _BatchID entity was previously provided but was not included in the Data Dictionary Output Structure chapter. It is exported for .CSV exports and provides the number of the export batch.
12.3 (SP4)	EvalsEvaluationQuestion	The RescoreAnswerNotes column name was corrected and renamed AnswerRescoreNotes. Note: The renaming was limited to the documentation only.
12.3 (SP4) Update 11	Export.cfgExportConfig table	New configuration: • IncludeAgentInventoryDataInAllEvaluationExports
12.3 (SP4) Update 11	Calibrations, Coaching, and Self-Evaluations entities	New columns: • InventoryAgentId • InventoryFirstName • InventoryLastName • InventoryUserName • InventoryUserEmail • InventoryUserSite • InventoryUserSupervisor
12.3 (SP4) Update 17	Export.cfgExportConfig table	New configuration: • IncludeCalibrationDeviationCalculation
12.3 (SP4) Update 17	EvalsCalibration, EvalsCalibrationCategory, and EvalsCalibrationQuestion entities	New column: • CalibrationDeviation

VERSION	COMPONENT	CHANGE
12.3 (SP4) Update 18	Export.cfgExportConfig table	New configuration: IgnoreRowCreationDateMetadata A defect was fixed that results in the RowCreationDate populating correctly. It previously may have exported <null>.
12.3 (SP4) Update 20	EvalsSelfEvaluationCategory, EvalsCalibrationCategory, EvalsEvaluation Category, entities	Obsolete column: CategoryAnswered This column will always contain a NULL value.
12.3 (SP4) Update 20	Export.cfgExportConfig table	New configurations: - ExportChatsInOriginalFormat - CleanExportFields - TranscriptsMaxDegreeOfParallelism
12.3 (SP4) Update 20	EvalsEvaluationCategory entity	Population of the RequestedRescoreKey in the EvalsEvaluationCategory export was modified. If the evaluation is associated with a rescore, this value is populated with a positive number. If it is not associated with a rescore, it is populated with -1. The relational diagram was updated to reflect this.
12.3 (SP4) Update 20	Appendix A	Added the Frequently Asked Questions appendix.

VERSION	COMPONENT	CHANGE
12.3 (SP4)	Miscellaneous updates from documentation review. Note: These updates apply only to the documentation.	- Steps for running the DEU manually were added. - The cfgExportBatchTracking table description was updated. - The Export.cfgSourceMediaTranscriptExportTracking table description was updated. - The Create Database for Remote Export topic was updated. - The export mode for the ChatParticipant and EmailAddress exports were corrected to be Incremental. - In the Configure the Data Export Utility topic, documented that the cspAdminCloneExportId stored procedure for cloning was deprecated. - Noted in the AnswerContent description in the EvalsCalibrationQuestion extract that it is only populated for the Text and Numeric question types.
		- Noted in the AuditAnswerContent, RescoreAnswerContent, AnswerContent and CurrentAnswerContent column descriptions in the EvalsEvaluationQuestion extract that they are only populated for the Text and Numeric question types. - Noted in the EvaluatorsAnswercolumn description in the EvalsEvaluationQuestion extract that it is only populated for the Yes, No, N/A, List, Bonus, Deduction and Multi-Select List question types. - The InventoryAgentKey data type in the AgentInventory Extract was corrected to be integer. - In the EvalsEvaluationQuestion extract the Multi-Select Answers content was updated.

VERSION	COMPONENT	CHANGE
12.3 (SP4) Update 22	TargetMediaSetExport DeltasOnly configuration	New stored procedure: The ExportTracking_InitializeTargetMediaSetDeltasExport stored procedure initializes the target media set - media tracking information for the TargetMediaSetExport DeltasOnly configuration.
12.3 (SP4) Update 22	Interaction entity	The InteractionDateTime column in the Interaction entity was corrected to be [UTC datetime]. Note: This change was limited to the documentation only.
12.3 (SP4) Update 23	Export.cfgExportConfig table	New configuration: CondenseEvaluationQuestionExport
12.3 (SP6)	Export.cfgExportConfig table	New configurations: - IncludeUnformattedTranscripts - TranscriptsMaxDegreeOfParallelism
12.3 (SP6)	Transcript entity	The Data Export Utility uses the Discovery.Transcripts.ApplyPunctuation Management Console configuration to determine if exported transcripts contain punctuation if it is available. There is no impact on transcripts that are created prior to activating this configuration.
12.3 (SP6)	UnformattedTranscripts entity	New CSV File/SQL Table.
12.3 (SP6)	Data Compliance	Unformatted Transcripts were added to the items removed from the ExportTracking Database.

VERSION	COMPONENT	CHANGE
12.3 (SP6)	Export.cfgExportConfig table	New configurations: • IncludeAudioTranscripts • IncludeChatTranscripts • IncludeEmailTranscripts • IncludeGeneralTextTranscripts
12.3 (SP6)	EvalsEvaluationQuestion entity	New columns: • EvaluatorsAnswer • CurrentAnswerContent • CurrentQuestionNotes
12.3 (SP6)	Export.cfgExportConfig table	New configuration: • IncludeCurrentAnswerColumns
12.3 (SP7)	Appendix A	Added the new Frequently Asked Questions appendix.

VERSION	COMPONENT	CHANGE
12.3 (SP7)	Miscellaneous updates from documentation review. Note: These updates apply only to the documentation.	- Steps for running the DEU manually were added. - The cfgExportBatchTracking table description was updated. - The Export.cfgSourceMediaTranscriptExportTracking table description was updated. - The Create Database for Remote Export topic was updated. - The export mode for the ChatParticipant and EmailAddress exports were corrected to be Incremental. - In the Configure the Data Export Utility topic documented that the cspAdminCloneExportId stored procedure for cloning was deprecated. - Noted in the AnswerContent column description in the EvalsCalibrationQuestion extract that it is only populated for the Text and Numeric question types.
12.3 (SP7)	Miscellaneous updates from documentation review cont.	- Noted in the AuditAnswerContent, RescoreAnswerContent, AnswerContent and CurrentAnswerContent column descriptions in the EvalsEvaluationQuestion extract that they are only populated for the Text and Numeric question types. - Noted in the EvaluatorsAnswercolumn description in the EvalsEvaluationQuestion extract that it is only populated for the Yes, No, N/A, List, Bonus, Deduction and Multi-Select List question types. - The InventoryAgentKey data type in the AgentInventory Extract was corrected to be integer. - In the EvalsEvaluationQuestion extract the Multi-Select Answers content was updated.
12.3 (SP7) Update 2	Relational Diagram	The primary key for the EvalsEvaluationQuestion export was corrected in the Relational Diagram.

VERSION 12.4 UPDATES

VERSION	COMPONENT	CHANGE
12.4	QueryDefinition entity	New columns: - Participant - QueryPurpose
12.4 FP2	Working with the Data Export Utility	The following updates were made based on review: - The Windows Task Scheduler instructions were removed. The DEU should be run by the Data Exchange Framework. - Modified the "To run the DEU manually" instructions to include the connection string.
12.4 FP2	Export.cfgExportConfig table	New configuration: TargetMediaSetDefinitionDatesInLocalTime
12.4 FP3	Running the Data Export Utility	- The InventoryAgentKey data type in the AgentInventory Extract was corrected to be integer. - In the EvalsEvaluationQuestion extract the Multi-Select Answers content was updated.
12.4 FP3	EvalsCalibration entity	New column: CalibrationDeadline

VERSION	COMPONENT	CHANGE
12.4 FP3	Export.cfgExportConfig table	New configurations: • IncludeExperience • IncludeCalibrationDeadline • TargetMediaSetIdsToExportInDeltas Mode • IncludeEvaluationRescoreColumns • IncludeQueryParticipantAndPurpose Columns
12.4 FP3	InteractionMetadata entity	New columns: • ExperienceID • ExperienceRoleName
12.4 FP3	Experience entity	New CSV File/SQL Table.
12.4 FP3	Backward Compatibility	Backward compatibility instructions were added for upgrades from 12.3 SP3 and 12.3 SP4.

VERSION	COMPONENT	CHANGE
12.4 FP3	Miscellaneous updates from documentation review. Note: These updates apply only to the documentation.	• Added steps to run the DEU manually. • The cfgExportBatchTracking table description was updated. • The Export.cfgSourceMediaTranscriptExport Tracking table description was updated. • The Create Database for Remote Export topic was updated. • The export mode for the ChatParticipant and EmailAddress exports were corrected to be Incremental. • In the Configure the Data Export Utility topic documented that the cspAdminCloneExportId stored procedure for cloning was deprecated. • Noted in the AnswerContent column description in the EvalsCalibrationQuestion extract that it is only populated for the Text and Numeric question types.

VERSION	COMPONENT	CHANGE
		- Noted in the AuditAnswerContent, RescoreAnswerContent, AnswerContent and CurrentAnswerContent column descriptions in the EvalsEvaluationQuestion extract that they are only populated for the Text and Numeric question types. - Noted in the EvaluatorsAnswer description in the EvalsEvaluationQuestion extract that it is only populated for the Yes, No, N/A, List, Bonus, Deduction and Multi-Select List question types. - The InventoryAgentKey data type in the AgentInventory Extract was corrected to be integer. - In the EvalsEvaluationQuestion extract the Multi-Select Answers content was updated.
12.4 FP4	Interaction Analytics Configuration Wizard	Functionality was added in the Interaction Analytics Configuration Wizard to support creating an export configuration.
12.4 FP4	Interaction Analytics Cumulative Updater	Functionality was added in the Cumulative Updater to support creating the remote export database.
12.4 FP4	EvalsEvaluation entity	New columns: - ScoreDifference - ReviewedEvaluationKey - ReviewedOnUTC - isReview
12.4 FP4	EvalsEvaluationCategory entity	New column: ScoreDifference

VERSION	COMPONENT	CHANGE
12.4 FP4	EvalsEvaluationQuestion entity	New column: ScoreDifference
12.4 FP4	EvalsSelfEvaluation entity	New columns: - ScoreDifference - ReviewedEvaluationKey - ReviewedOnUTC - isReview
12.4 FP4	EvalsSelfEvaluationCategory entity	New column: ScoreDifference
12.4 FP4	EvalsSelfEvaluationQuestion entity	New column: ScoreDifference
12.4 FP4	Transcript entity	The OverallSentimentScore was updated to accept NULL values.
12.4 FP4	Relational Diagram	The Relational Diagram was updated to correct the primary key for the EvalsEvaluationQuestion export.
12.4 FP4	Data Aging	This topic provides details about the new data aging process for the Data Export Utility Tracking tables.

VERSION	COMPONENT	CHANGE
12.4 FP4	Some export column data types related to UTC ISO and Server Time decimal places were updated. These updates apply only to the documentation.	• EvalsCalibration (CalibrationDeadlineUTC was renamed to CalibrationDeadline) • Interaction (DiscoveredDate) • InteractionMetadata (StartTimeUtc, EndTimeUtc, RowCreationDate, FirstQuarterSentiment, SecondQuarterSentiment, ThirdQuarterSentiment, FourthQuarterSentiment, OneHalfSentiment, ThreeFourthsSentiment, HighPrecisionSentimentScore, HighPrecisionMinimumSentimentScore and HighPrecisionMaximumSentimentScore) • QueryDefinition (LowThreshold, MediumThreshold, HighThreshold and CustomThreshold) • QueryResult (Score) • TermResult (Score) • TargetMediaSetDefinition (CreationDate and LastModificationDate) • WorkflowAlert (AlertDateUTC) • WorkflowFileProgression (ProgressionDateUTC) • WorkflowImportAuditLog (InitialStatusDateTimeUTC and CurrentStatusDateTimeUTC [UTC Datetime])
12.4 FP4	Export.cfgExportConfig table	• IncludeEvaluatorReviewData

VERSION	COMPONENT	CHANGE
12.4 FP5	InteractionMetadata entity	The Experience role names were updated in the InteractionMetadata entity. New column: ExperienceSequence
12.4 FP5	QueryResult entity	The SpeakerRole column description was updated to include the N result.
12.4 FP5	- InteractionEvents entity - InteractionOutcomes entity - InteractionEnlightenScoresAnd Intents entity	New CSV Files/SQL Tables.
12.4 FP5	Export.cfgExportConfig table	New configurations: - AppendDateTimeStampToMetaOutput Files - CondenseEvaluationQuestionExport (Note: This was initially added in 12.3 SP4 Update 23). - IncludeEnlightenScoresAndIntents - IncludeOutcomesAndEvents - OutputAutoSummarizationLabelNames - TargetMediaSetDefinitionDatesInLocal Time (Note: This was initially added in 12.4 FP2).
12.4 FP5	Relational Diagram	- The EvalsEvaluationCategory connections were updated. - The Relational Diagram was updated to include the InteractionEvents, InteractionOutcomes and InteractionEnlightenScoresAndIntents.

VERSION	COMPONENT	CHANGE
12.4 FP5	The data type and default value were modified for all the columns that are configurable by the DateFormat configuration setting. The affected Exports and columns are listed.	- EvalsCalibration - CreationDateUTC, ModifiedDateUTC, PublishedDateUTC, IgnoredDateUTC, StartedDateUTCand CalibrationDeadline - EvalsEvaluation - CreationDateUTC, ModifiedDateUTC, PublishedDateUTC, AuditedDateUTC, IgnoredDateUTC, StartedDateUTC - DeletedDateUTC, AcknowledgedOnUTC, ReviewedOnUTC - EvalsEvaluationCategory - RescoreRequestedDateUTC, ResocreAnswerDateUTC - EvalsEvluationCoaching - CoachingRequestDateUTC, CoachingDateUTC. VerifiedDateUTC, VerifiedDateUTC. - EvalsEvaluationCoachingAction - TargetDateUTC - EvalsSelfEvaluation - ModifiedDateUTC, PublishedDateUTC, IgnoredDateUTC, StartedDateUTC, RequestDateUTC, AgentPublishedDateUTC, SupervisorPublishedDateUTC, ReviewedOnUTC - EvalsTemplate - TemplateCreationDateUTC, VersionCreationDateUTC, FirstUsedDateUTC, LastUsedDateUTC, ActivateOnDateUTC - Experience - StartDateTime, EndDateTime - Interaction - InteractionDateTime, DiscoveredDate

VERSION	COMPONENT	CHANGE
		- InteractionMetadata - RowCreationDate - TargetMediaSetDefinition - CreationDate, LastModificationDate
12.4 FP5	Interaction Analytics Management Console	New configuration: Discovery.Sentiment.CalculateTransitionLast Note: See InteractionMetadata on page 195 to learn more.
12.4 FP5	Experience Entity	Updated column data type and example for the following columns: - ElapsedDurationMS - TotalDurationMs - AvgInteractionDurationMs - AvgTimeBetweenInteractionsMs - SentimentScore This only affects the documentation.
12.4 FP6	Data Compliance	Removed topic. This process is now handled via Data Aging.
12.4 FP6	Frequently Asked Questions	Several new questions and answers were added in the FAQ appendix.
12.4 FP6	cfgExportBatchTracking table	This table was updated to include the export file name.
12.4 FP6	InteractionEnlightenScoresAndIntent entity	New columns: - EscalationValue - ResolutionValue - ConfirmedSaleValue

VERSION	COMPONENT	CHANGE
12.4 FP6	- EvalsGroupCoaching entity - EvalsGroupCoachingAction entity - EvalsAgentGroupCoachingAction entity - EvalsAgentGroupCoachingStatus entity	New CSV Files/SQL Tables.
12.4 FP6	Export.cfgExportConfig table	New configurations: - CapitalizeTranscripts - EvalsGroupCoachingBatchSize - FilterOutEvalsUserIdsLessThan - ForceQueryDefinitionExport - IncludeEvalsGroupCoaching - IncludeNullValuesInSelfEvaluations - KeepOldDateTimeFormat
12.4 FP6	Export.cfgExportConfig table	- The QueryDefinition entity was removed from the list of entities filtered by the TMSFilteringEnabled configuration. It was mistakenly listed. - The IgnoreRowCreationDateMetadata configuration was updated.
12.4 FP6	InteractionEnlightenScoresAndIntent entity	New column: Summary
12.4 FP6	TargetMediaSetExport DeltasOnly configuration	New stored procedure: The ToolBox.InitializeTargetMediaSetDeltasForExport stored procedure initializes the target media set - media tracking information for the TargetMediaSetExport DeltasOnly configuration.

VERSION	COMPONENT	CHANGE
12.4 FP6	• EvalSelfEvaluationQuestionCurrent Answer • EvalSelfEvaluationQuestionInitial Answer	The IncludeNullValuesInSelfEvaluations configuration controls the export output behavior for these exports.
12.4 FP6	Working with Export Configurations chapter	Procedures for managing data exports from the Management Console were added.
12.4 FP6	Export verification	At the end of a DEU DB batch, verify the counts in the INFO. Rows table to the actual counts in the DEUDB for that batch, • A verification query is executed at the end of the export. • The query compares the number of rows in a given export table (with a given BatchId) to data in the Info.RowCountSummary. If the number doesn't match, the batch fails. • In case of failure, the reason for the failure is logged (which pieces of data don't match) in the log file and log table.
12.4 FP6	Various entities	Configuration considerations were detailed in the relevant entities.
12.4 FP6 QF	Export.cfgExportConfig table	The KeepOldDateTimeFormat configuration was updated to cover upgrade scenarios.

VERSION 12.5 UPDATES

VERSION	COMPONENT	CHANGE
12.5	AgentInventory entity	New column: IsActive
12.5	EvalsEvaluation entity	New column: AllowAgentAccess
12.5	EvalsEvaluationCoachingAction entity	New column: CompletedDateUTC
12.5	InteractionMetadata entity	New column: - SentimentValue - PhraseRecognitionResultCode
12.5	QueryDefinition	New column: - Createdby - CreationDate - LastModifiedBy - LastModifiedDate Corrected column name: - CreatedDate was updated to Creationdate
12.5	QueryGroupDefinition	New column: - Createdby - CreationDate - LastModifiedBy - LastModifiedDate Corrected column name: - CreatedDate was updated to Creationdate

VERSION	COMPONENT	CHANGE
12.5	Export.cfgExportConfig table	New configurations: • ExportOnlyCompletedInteractions • IncludeAgentInventoryActiveFlag • IncludeCategories • IncludePhraseRecognitionResultCode • IncludeEvaluationAllowAgentAccessColumn • IncludeQueryDefinitionCreationModifiedData • IncludeQueryGroupDefinitionCreationModifiedData • IncludeSentimentValue • KeepOldDateTimeFormatGroup2 • MaxRetryExportCount • MaxRetryTimeout • RequireExportTrackingResourceReservation
12.5	EvalsCalibrationQuestionAnswer entity	A note was added in the EvalsCalibrationQuestionAnswer export topic to explain why a Calibration's Question Current Answers could be exported within a single DEU export but across multiple batches.

VERSION	COMPONENT	CHANGE
12.5	FAQ	The answers to the following questions were modified to clarify how the StartMediaDate and EndMediaDate configurations can filter exported evaluations. - Interaction IDs appear in the EvalsEvaluation export but are not in the Interaction export and vice versa. Why does that happen? - I am missing evaluations that should have been exported. Why are they missing? Added a new FAQ explaining the system's approach to handling published Evaluations versus Calibrations.
12.5	ExportN.cfgSourceMedia TranscriptExportTracking	Exports can be run in parallel. This table is created separately for each export and each export has a unique schema and a unique set of tables.
12.5	- CategoryDefinition - CategoryResult	New CSV Files/SQL Tables.
12.5	Relational Diagram	New relational diagrams: - SelfEvaluationToInteractionMetadata-SupervisorInitiated - SelfEvaluationToInteractionMetadata-AgentInitiated - EvaluationToInteractionMetadata - CalibrationParticipantToInteractionMetadata - CalibrationLeaderToInteractionMetadata
12.5 FP1	Re-export to a Remote Database	New topic.

VERSION	COMPONENT	CHANGE
12.5 FP1	Export.cfgExportConfig table	New configurations: • IncludeAINotes • OverrideRemoteDbExportId • IncludeProfilesAndUsers • IncludeAgentInventoryLoginMetadata
12.5 FP1	EvalsEvaluationQuestion export	The AINotes column was added.
12.5 FP1	RequireExportTrackingResource Reservation configuration	Updated configuration usage.
12.5 FP1	Data Export Utility Configuration Scenarios	Scenario 5 (Re-export interactions from a specific date to a remote database) was added.
12.5 FP1	TranscriptsTargetMediaSetId configuration	The configuration description was updated.
12.5 FP1	Profiles export	New CSV File/SQL Table.
12.5 FP1	Users export	New CSV File/SQL Table.
12.5 FP1	UserProfileMap export	New CSV File/SQL Table.
12.5 FP1	IncludeAgentInventoryActiveFlag configuration	The configuration description was updated.
12.5 FP1	AgentInventory export	The ExternalUserID, LastLoginDateUTC, LastModifiedDateUTC, and DateCreatedUTC columns were added in the CSV File/SQL Table.
12.5 FP1	IncludeCategories	The default value was changed to TRUE.
12.5 FP1	IncludeAgentInventoryActiveFlag	The default value was changed to TRUE.
12.5 FP1	I am missing evaluations that should have been exported. Why are they missing?	The answer to this question was updated in the Frequently Asked Questions section of the guide.

VERSION	COMPONENT	CHANGE
12.5 FP1	Export.cfgExportConfig table	New configuration: IncludeEvaluationCoachingActionCompletedDate
12.5 FP1	- CategoryDefinition - CategoryResult - Profiles - Users - UserProfileMap	The primary key column is identified for these tables.
12.5 FP1	InteractionEvents export	The ContactType description was updated.
12.5 FP1	DEU Guide branding.	Updated NiCE branding.
12.5 FP2	Several fields and objects in Nexidia reporting align with those in the Topic AI Editor, but they use different names. Since the names in Topic AI are fixed and cannot be changed, the corresponding names in Nexidia reporting must be updated to match. In the user interface, you will see the content listed in the right column.	- Actions instead of Contact events - Intent L1 (Category) instead of Contact Reason Level1 - Intent L2 (Topic) instead of Contact Reason Level2 - Intent L3 (Subtopic) instead of Contact Reason Level3 - Secondary Intent L1 (Category) instead of Secondary Contact Reason Level1 - Secondary Intent L2 (Topic) instead of Secondary Contact Reason Level2 - Secondary Intent L3 (Subtopic) instead of Secondary Contact Reason Level3 - Tertiary Intent L1 (Category) instead of Tertiary Contact Reason Level1 - Tertiary Intent L2 (Topic) instead of Tertiary Contact Reason Level2 - Tertiary Intent L3 (Subtopic) instead of Tertiary Contact Reason Level3