

# Einführung in R und RStudio

## [Termine 1 & 2]

Miguel Alvarez

18. & 20. Oktober 2022

**▶ Termin 1 & 2**

- ▶ Grundlagen
- ▶ Datentypen

**▶ Termin 3 & 4**

- ▶ Objekten
- ▶ Lesen und Schreiben

**▶ Termin 5 & 6**

- ▶ Statistiken
- ▶ Grafiken

**▶ Termin 7 & 8**

- ▶ Fortgeschrittenes Programmieren
- ▶ Erstellen von Dokumenten
- ▶ Abschluss


18:00 – 20:30

Pause 19:15 – 19:30

▶ Methoden

- ▶ Vortrag
- ▶ Life-Codierung
- ▶ Übungen

<https://kamapu.github.io/RKurs-VHS-2022/>

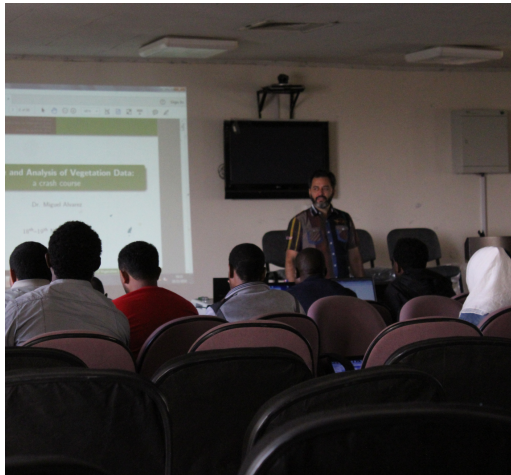


## Miguel Alvarez



- ▶ Vegetationsökologist
- ▶ Begeisterter R-Nutzer
- ▶ R-Programmierer
  - ▶ Umwelt und Biodiversität
  - ▶ Geographische Informationssysteme
  - ▶ Datenbanken
  - ▶ Reproduzierbarkeit

## Die Teilnehmer?

- ▶ Warum R?
- ▶ Erwartung von dem Kurs

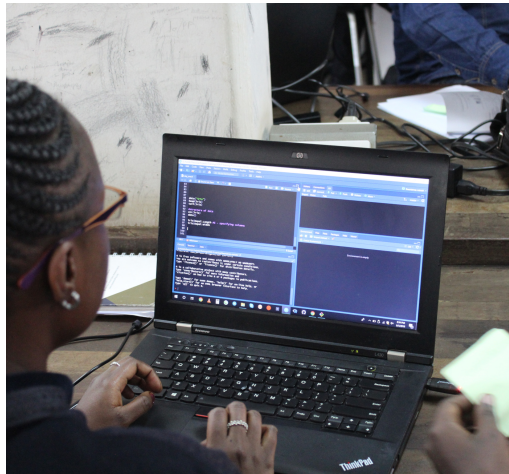

## Geschichte

- ▶ S (1975)
  - ▶ S-PLUS
  - ▶ TIBCO Spotfire S+
- ▶ R (1992)

**R** ist die kostenlose Alternative zu **S**

**Ross Ihaka**

**Robert Gentleman**



## Was ist R?

- ▶ Programmiersprache
  - ▶ Open Source (offene Quelle)
  - ▶ Freeware (kostenlos)
- ▶ Statistische Umgebung
  - ▶ Interface
  - ▶ Terminal
  - ▶ Editoren

<https://www.r-project.org/>


[\[Home\]](#)
[Download](#)
[CRAN](#)
[R Project](#)
[About R](#)
[Logo](#)
[Contributors](#)
[What's New?](#)
[Reporting Bugs](#)
[Conferences](#)
[Search](#)
[Get Involved: Mailing Lists](#)
[Get Involved: Contributing](#)
[Developer Pages](#)
[R Blog](#)
[R Foundation](#)
[Foundation](#)
[Board](#)
[Members](#)
[Donors](#)
[Donate](#)
[Help With R](#)
[Getting Help](#)
[Documentation](#)
[Manuals](#)
[FAQs](#)
[The R Journal](#)
[Books](#)
[Certification](#)

## The R Project for Statistical Computing

### Getting Started

R is a free software environment for statistical computing and graphics. It compiles and runs on a wide variety of UNIX platforms, Windows and MacOS. To [download R](#), please choose your preferred [CRAN mirror](#).



If you have questions about R like how to download and install the software, or what the license terms are, please read our [answers to frequently asked questions](#) before you send an email.

### News

- [R version 4.2.2 \(Innocent and Trusting\) prerelease versions](#) will appear starting Friday 2022-10-21. Final release is scheduled for Monday 2022-10-31.
- [R version 4.2.1 \(Funny-Looking Kid\)](#) has been released on 2022-06-23.
- [R version 4.1.3 \(One Push-Up\)](#) was released on 2022-03-10.
- Thanks to the organisers of useR! 2020 for a successful online conference. Recorded tutorials and talks from the conference are available on the [R Consortium YouTube channel](#).
- You can support the R Foundation with a renewable subscription as a [supporting member](#)

### News via Twitter

 The R Foundation Retweeted

 [R Contributo...](#) @R\_Contributo... · Oct 10   
 R Contribution Working Group meeting Oct 18, 18:30 - 19:30 UTC

We'll discuss progress on current issues ([github.com/r-devel/rcontr-](https://github.com/r-devel/rcontr-)), including

- Translation hackathons (LatinR, AsiaR)
- Office hours
- Code of conduct

All welcome. Zoom registration: [us02web.zoom.us/j/84401204401](https://us02web.zoom.us/j/84401204401)

## Was ist R?

- ▶ Schwerpunkt
  - ▶ Mathematik
  - ▶ Grafiken
- ▶ Kommandozeilen
- ▶ REPL (Read-Eval-Print-Schleife)

```
(5 + 100) * 25
```

```
## [1] 2625
```

```
50/10
```


```
## [1] 5
```

```
60 > 15
```


```
## [1] TRUE
```




```
plot(iris[ , c("Sepal.Length",
              "Petal.Length")],
     pch = 16, col = iris$Species)
```

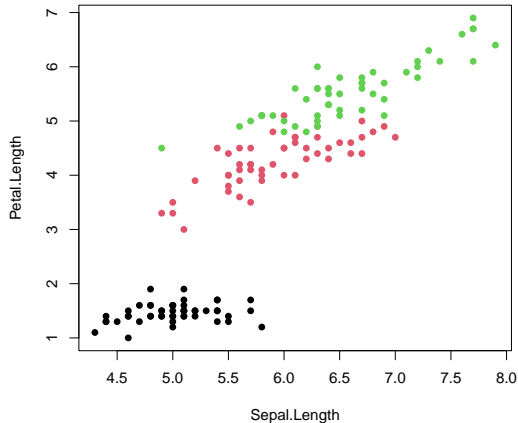

```
boxplot(Sepal.Length ~ Species,  
        data = iris)
```

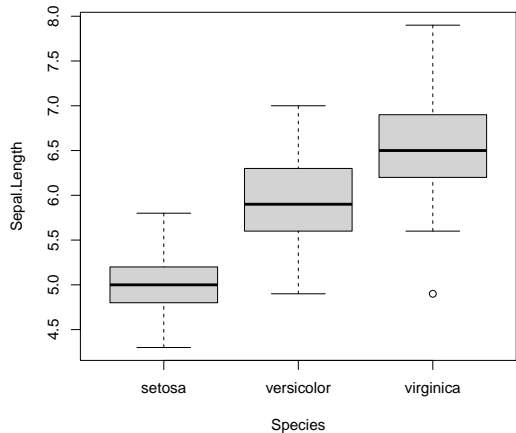

```
library(ggplot2)
ggplot(iris,
  aes(x = Sepal.Length,
      y = Petal.Length,
      color = Species)) +
  geom_point()
```

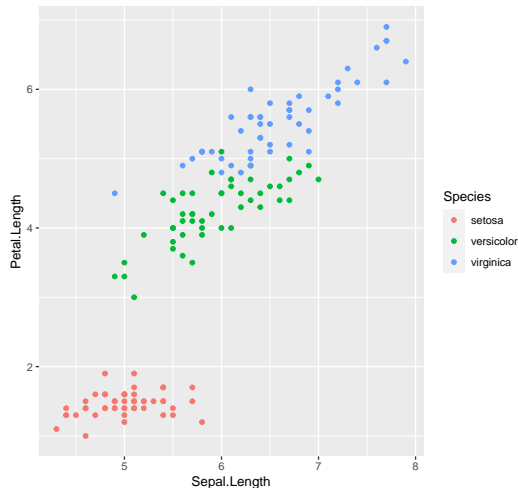


## Warum R?

- ▶ Kostet nichts
- ▶ Steuerung von Analysen
- ▶ Skripten
  - ▶ Protokolle
  - ▶ Reproduzierbarkeit
- ▶ Vielseitig


## Jargon


- ▶ Konsole
- ▶ Sitzung
- ▶ Workspace (Environment)
- ▶ Arbeitsverzeichnis (working directory)
- ▶ Skript
- ▶ Paket (Package)

- ▶ Text Editor
- ▶ IDE (integrated development environment)

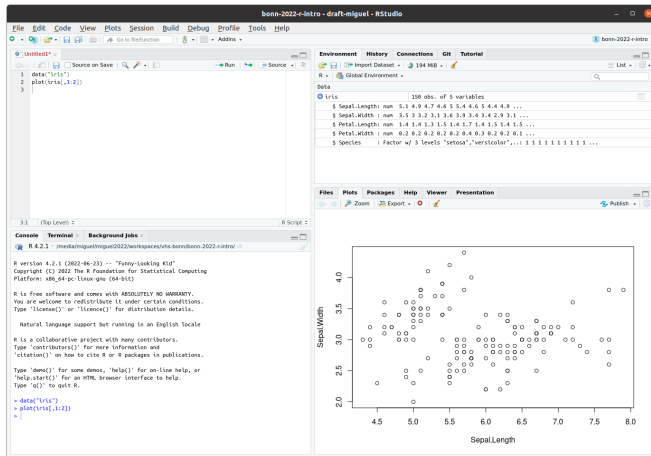

## h1&gt;eclipse (StatET)

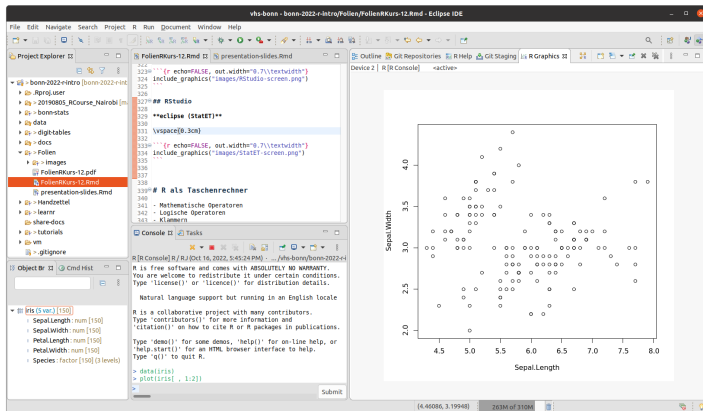

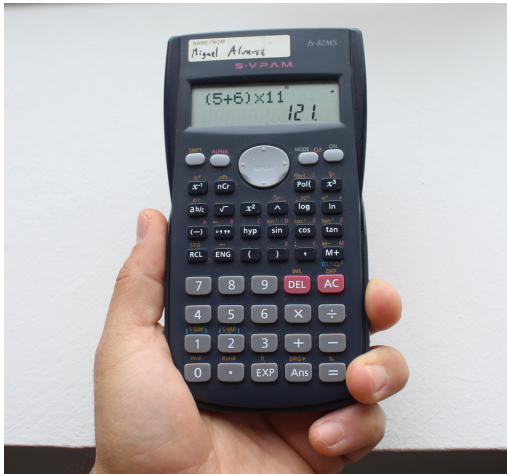

- ▶ Mathematische Operatoren
- ▶ Klammern

$5+6*11$

## [1] 71

$(5+6)*11$

## [1] 121

$(5-6)/11$

## [1] -0.09090909



## Zuweisung

`<-`

Zuweisung von einem Wert zu einem Objekt.

## Konvention

- ▶ Nutze `<-` anstatt `->`
- ▶ Reserviere `=` für Argumente in Funktionen
- ▶ Nutze Leerzeichen für eine bessere Übersicht in Quellcode
- ▶ Nutze Einrückungen für gebrochene Kommandozeilen

## Logische Operatoren

==

!=

>

>=

<

<=

&

|

%in%

!

any()

all()

```
10 > 15
```

```
## [1] FALSE
```

```
10 < 15
```

```
## [1] TRUE
```

## Vektoren

Der Vektor ist die grundlegende Datenstruktur in **R**

- ▶ Länge `length()`
- ▶ Typ `class()`
- ▶ Evtl. Namen `names()`

```
c(1:10)
```

```
## [1] 1 2 3 4 5 6 7 8 9 10
```

```
rep(5, times = 10)
```

```
## [1] 5 5 5 5 5 5 5 5 5 5
```

```
LETTERS[1:5]
```

```
## [1] "A" "B" "C" "D" "E"
```

## Indexieren

- ▶ Eckige Klammern
- ▶ Index
  - ▶ integer
  - ▶ logical (Bedingung)
  - ▶ character (Namen)

```
# Mit integer
```

```
letters[15]
```

```
## [1] "o"
```

```
# Mit logischen Werten
```

```
letters[!letters %in% c("a", "b", "c")]
```

```
## [1] "d" "e" "f" "g" "h" "i" "j" "k" "l" "m"
```

```
## [20] "w" "x" "y" "z"
```

```
# Mit Namen
```

```
names(letters) <- letters
```

```
letters["m"]
```

```
## m
```

```
## "m"
```

## Datentypen

- ▶ integer
- ▶ numeric
- ▶ logical
- ▶ factor
- ▶ character

```
A <- c(1:10)
is.numeric(A)
## [1] TRUE
```

```
B <- as.character(A)
B
## [1] "1" "2" "3" "4" "5" "6" "7" "8"
is.numeric(B)
## [1] FALSE
```

## Sonderklassen

- ▶ NA
- ▶ NaN
- ▶ NULL
- ▶ Inf
- ▶ -Inf

```
5/0
```

```
## [1] Inf
```

```
log(0)
```

```
## [1] -Inf
```

```
sqrt(-1)
```

```
## Warning in sqrt(-1): NaNs produced
```

```
## [1] NaN
```

## Rückmeldungen

- ▶ Konsolenoutput
- ▶ Nachricht (message)
- ▶ Warnung (warning)
- ▶ Fehlermeldung (error)

Eine Warnung ist nicht zwingend ein Fehler.

```
sqrt(-1)
```

```
## Warning in sqrt(-1): NaNs produced  
## [1] NaN
```

```
5 + "B"
```

```
## Error in 5 + "B": non-numeric argument to bi
```

## Fehlerbehebung

- ▶ Dokumentation
- ▶ Foren
- ▶ Programfehler melden

```
# help()
?mean
# help.search()
??"multinomial"
RSiteSearch("Import")
```



## Regeln für Hilfeanfrage

- ▶ Recherchiere vorher
- ▶ KESS (*keep it simple stupid*)
- ▶ Zeige ein **minimales Beispiel**
- ▶ Bleibe höflich
- ▶ Melde die Endlösung
- ▶ Lerne **markdown**

<https://stackoverflow.com/questions>  
<https://www.markdowntutorial.com/>

stackoverflow Products Search ...

Home

PUBLIC

Questions

Tags

Users

Companies

COLLECTIVES

Explore Collectives

TEAMS

Stack Overflow for Teams – Start collaborating and sharing organizational knowledge.

Create a free team

Why Teams?

### P-values from aov in R

Asked 7 years, 1 month ago Modified 6 years, 10 months ago Viewed 2k times

Take this month's Pulse Survey

I'm conducting a simulation study in R. Basically, I generate fake data sets and then run an ANOVA on the data using the aov function. But I'm having difficulty extracting p-values. Previous questionss do not help ([Extract p-value from aov](#)) -- I am running a mixed ANOVA.

First I have an ANOVA:

```
results <- summary(aov(dv~(A*B*C*D+E)+Error(subj/(A*B*C*D)), data = mdata)) # con
```

which generate this output:

```
Error: subj
  Df Sum Sq Mean Sq F value Pr(>F)
E   1 1839157 1839157    0.95  0.334
Residuals 58 63428816 1093586

Error: subj:A
  Df Sum Sq Mean Sq F value Pr(>F)
A   1 1996    1996    0.228  0.641
A:E   1 2294    2294    0.253  0.617
Residuals 58 526389    9076

...
```

I'm truncating the output for space. What I want list of p-values with the effect name (A or A:E). I have halfway succeeded, but it's messy. I can extract the p-values using this get\_p function that I made.

```
#Function
get_p = function(results,head){
```

## Weitere Dokumente

- ▶ Demos
  - ▶ `demo()`
- ▶ Beispielssitzungen
  - ▶ `browsevignette()`
  - ▶ `vignette()`
- ▶ Zahlreiche Tutorials

```
demo("graphics")  
vignette("ggplot2-specs")
```

Vielen Dank!