


EXPERIMENT 15:

Design a C program to organise the file using a two level directory structure.

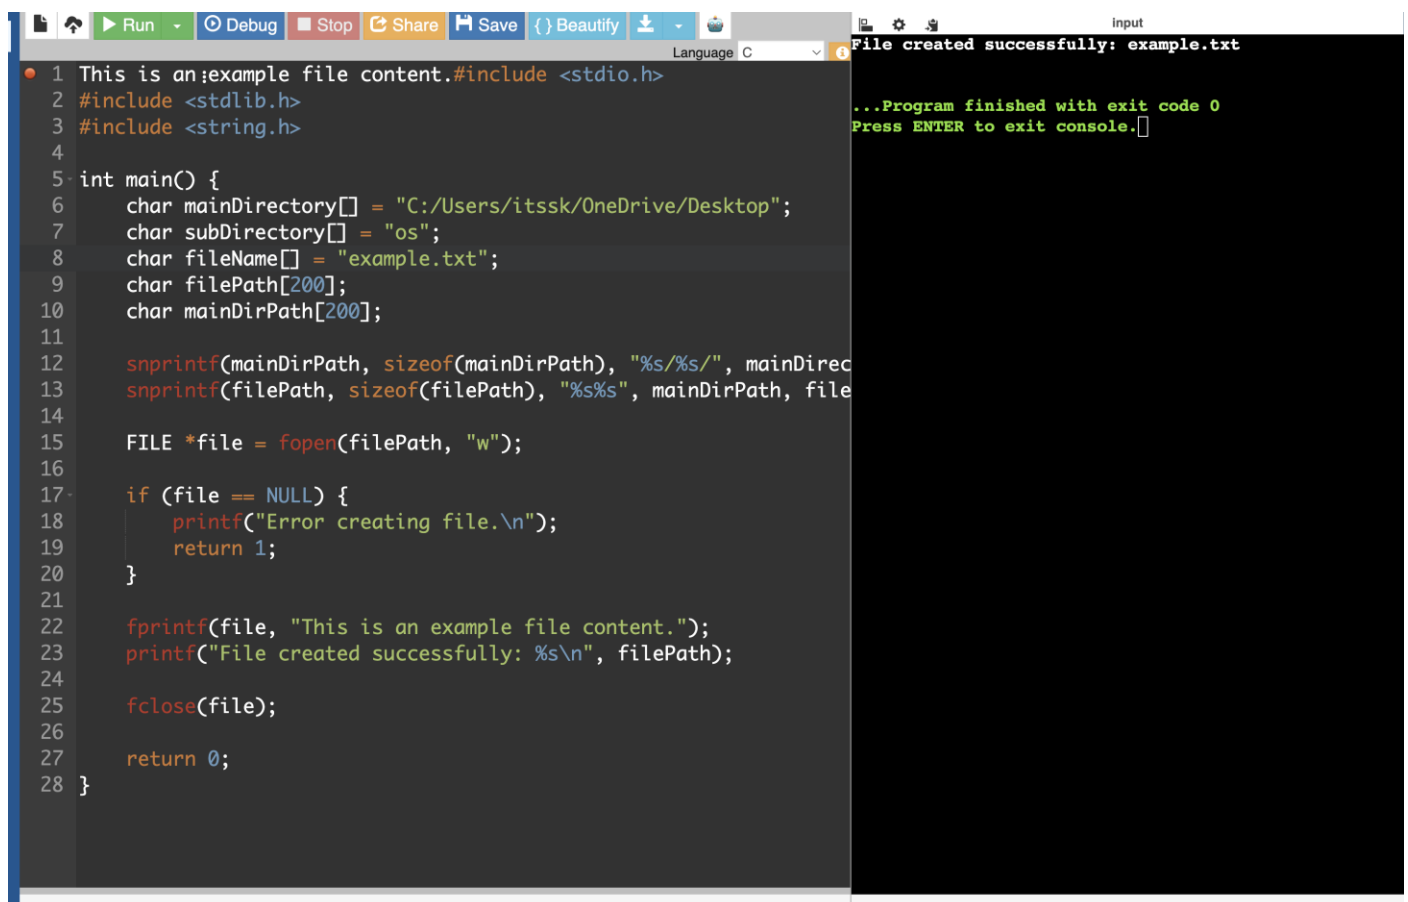

The image shows a code editor window with a C program and a console window displaying the program's output. The code editor has a menu bar with options: Run, Debug, Stop, Share, Save, Beautify, and a download icon. The language is set to C. The code is as follows:

```
1 This is an example file content. #include <stdio.h>
2 #include <stdlib.h>
3 #include <string.h>
4
5 int main() {
6     char mainDirectory[] = "C:/Users/itssk/OneDrive/Desktop";
7     char subDirectory[] = "os";
8     char fileName[] = "example.txt";
9     char filePath[200];
10    char mainDirPath[200];
11
12    snprintf(mainDirPath, sizeof(mainDirPath), "%s/%s/", mainDirectory, subDirectory);
13    snprintf(filePath, sizeof(filePath), "%s%s", mainDirPath, fileName);
14
15    FILE *file = fopen(filePath, "w");
16
17    if (file == NULL) {
18        printf("Error creating file.\n");
19        return 1;
20    }
21
22    fprintf(file, "This is an example file content.");
23    printf("File created successfully: %s\n", filePath);
24
25    fclose(file);
26
27    return 0;
28 }
```

The console window shows the following output:

```
File created successfully: example.txt
...Program finished with exit code 0
Press ENTER to exit console.
```