

3-c Monkey Banana in Prolog

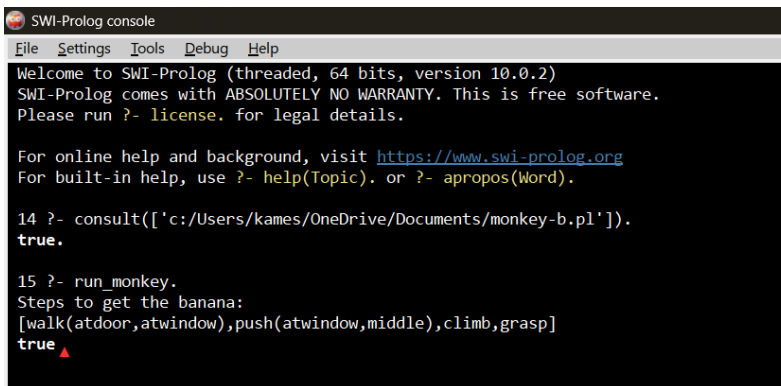
PROGRAM:

```
move(state(middle,onbox,middle,hasnot), grasp, state(middle,onbox,middle,has)).
move(state(P,onfloor,P,hasnot), climb, state(P,onbox,P,hasnot)).
move(state(P1,onfloor,P1,H), push(P1,P2), state(P2,onfloor,P2,H)).
move(state(P1,onfloor,B,H), walk(P1,P2), state(P2,onfloor,B,H)).
```

```
canget(state(_,_,_,has)).
canget(State1) :- move(State1,_,State2), canget(State2).
```

```
run_monkey :-
    canget(state(atdoor,onfloor,atwindow,hasnot)).
```

OUTPUT:

A screenshot of the SWI-Prolog console window. The title bar says "SWI-Prolog console". The menu bar includes "File", "Settings", "Tools", "Debug", and "Help". The console text shows a welcome message for SWI-Prolog version 10.0.2, followed by instructions on how to use help. Then, two Prolog queries are entered: 14 ?- consult(['c:/Users/kames/OneDrive/Documents/monkey-b.pl']). which returns true., and 15 ?- run_monkey. which returns the steps to get the banana: [walk(atdoor,atwindow),push(atwindow,middle),climb,grasp] and true. A red cursor is visible at the end of the second query's output.

```
SWI-Prolog console
File Settings Tools Debug Help
Welcome to SWI-Prolog (threaded, 64 bits, version 10.0.2)
SWI-Prolog comes with ABSOLUTELY NO WARRANTY. This is free software.
Please run ?- license. for legal details.

For online help and background, visit https://www.swi-prolog.org
For built-in help, use ?- help(Topic). or ?- apropos(Word).

14 ?- consult(['c:/Users/kames/OneDrive/Documents/monkey-b.pl']).
true.

15 ?- run_monkey.
Steps to get the banana:
[walk(atdoor,atwindow),push(atwindow,middle),climb,grasp]
true ▲
```