

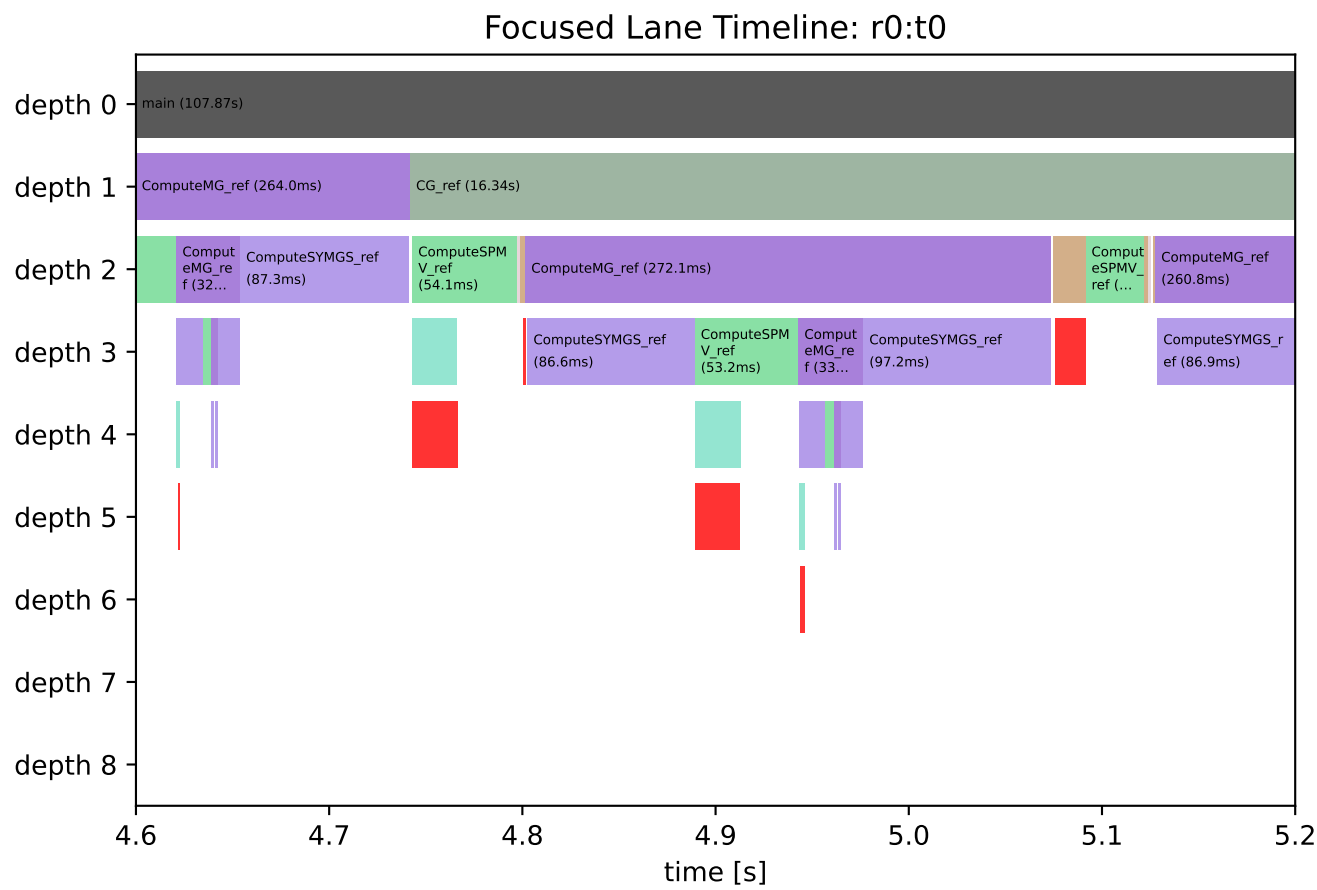
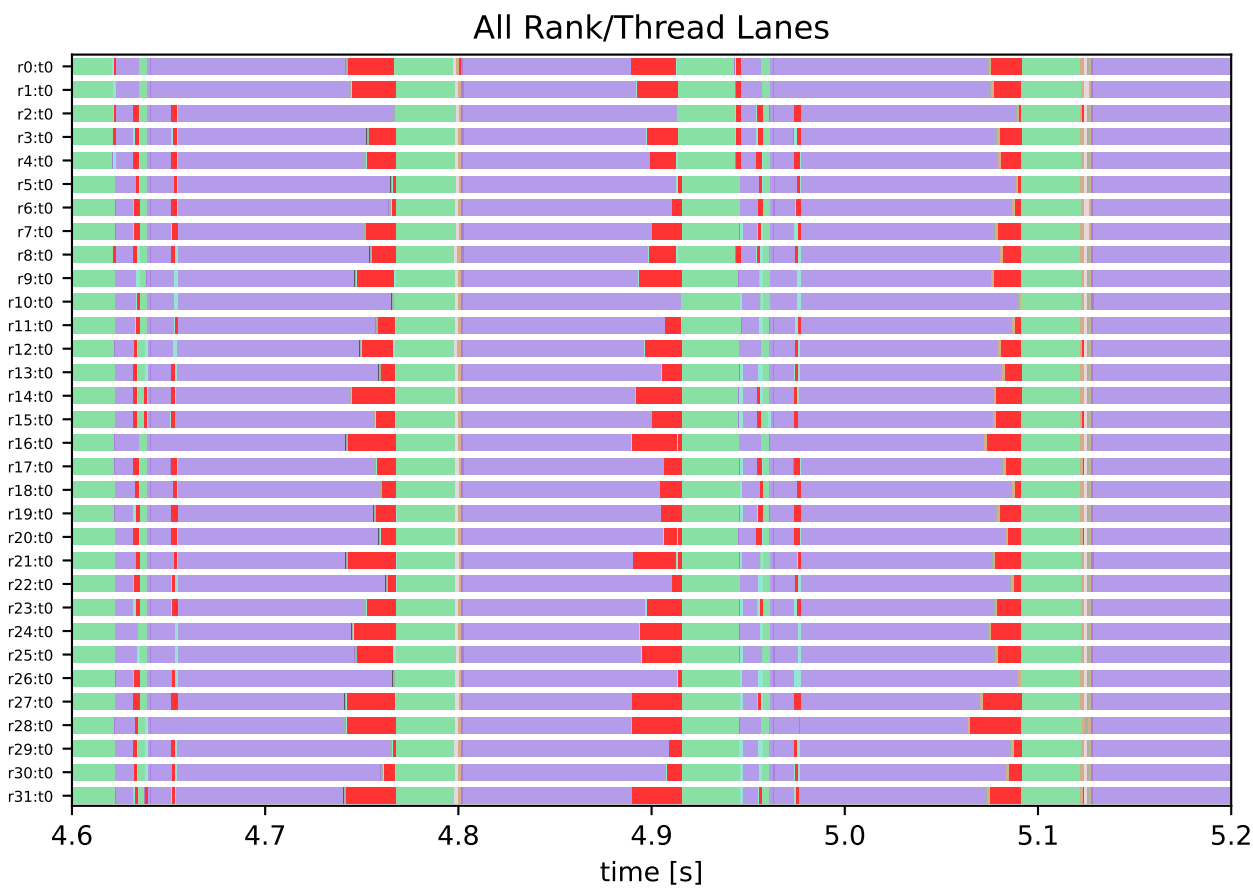


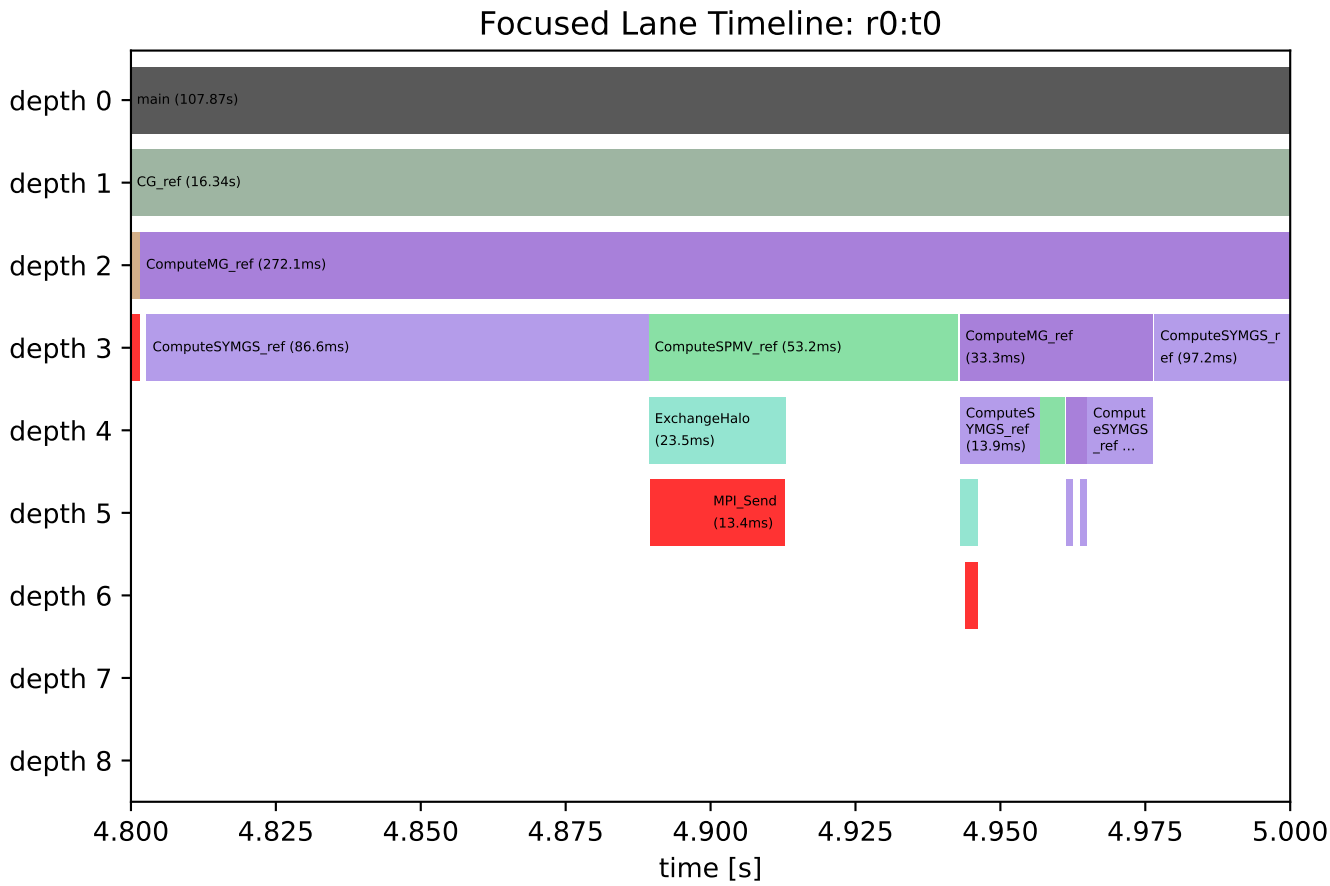

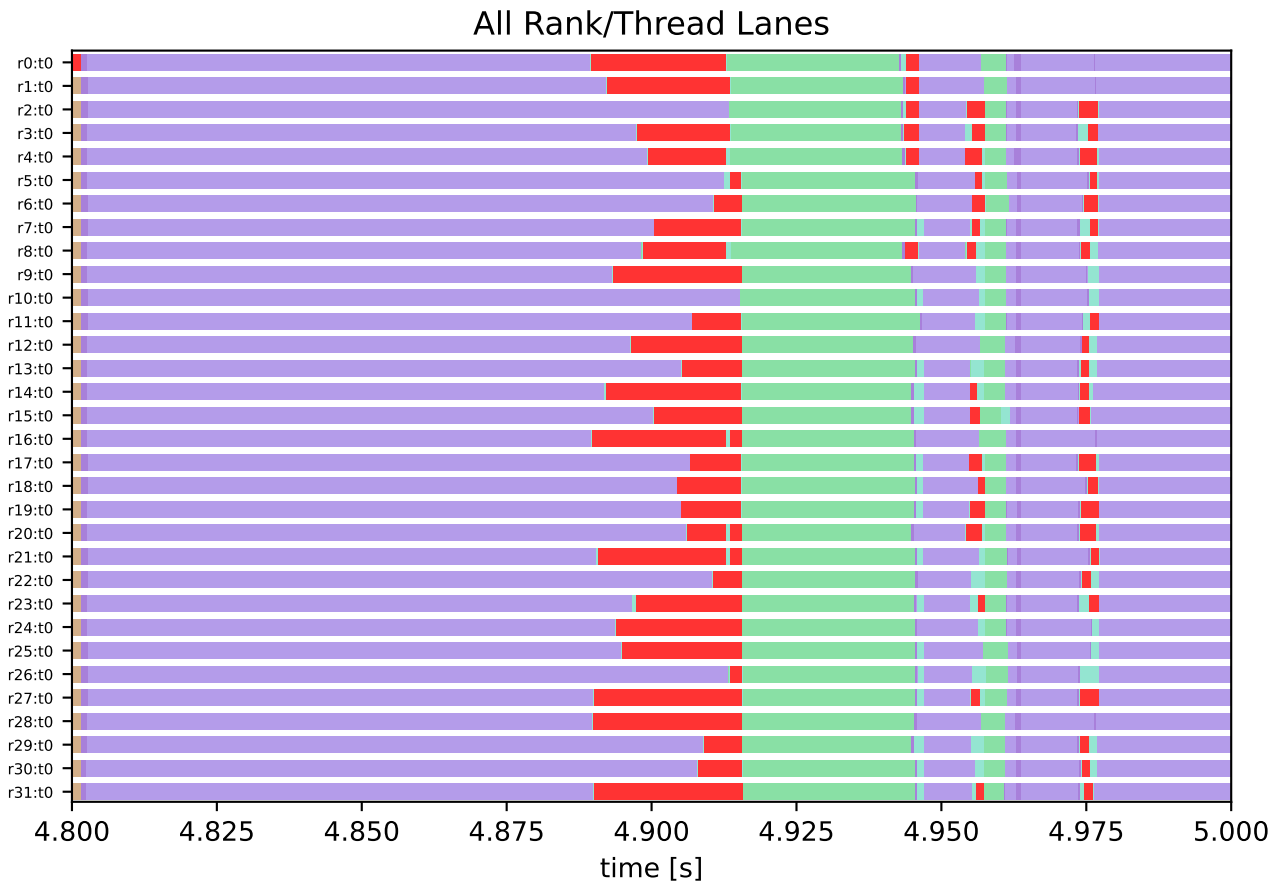

Legend (All Regions)

■ MPI_Allreduce

■ MPI_Finalize

■ MPI_Init

■ MPI_Send

■ MPI_Wait

■ int CG(const SparseMatrix&, CGData&, const Vector&, Vector&, int, double, int&, double&, double&, double*, bool)

■ int CG_ref(const SparseMatrix&, CGData&, const Vector&, Vector&, int, double, int&, double&, double&, double*, bool)

■ int ComputeDotProduct(local_int_t, const Vector&, const Vector&, double&, double&, bool&)

■ int ComputeDotProduct_ref(local_int_t, const Vector&, const Vector&, double&, double&)

■ int ComputeMG(const SparseMatrix&, const Vector&, Vector&)

■ int ComputeMG_ref(const SparseMatrix&, const Vector&, Vector&)

■ int ComputeResidual(local_int_t, const Vector&, const Vector&, double&)

■ int ComputeSPMV(const SparseMatrix&, Vector&, Vector&)

■ int ComputeSPMV_ref(const SparseMatrix&, Vector&, Vector&)

■ int ComputeSYMGS_ref(const SparseMatrix&, const Vector&, Vector&)

■ int ComputeWAXPBY(local_int_t, double, const Vector&, double, const Vector&, Vector&, bool&)

■ int ComputeWAXPBY_ref(local_int_t, double, const Vector&, double, const Vector&, Vector&)

■ int TestCG(SparseMatrix&, CGData&, Vector&, Vector&, TestCGData&)

■ int TestSymmetry(SparseMatrix&, Vector&, Vector&, TestSymmetryData&)

■ int main(int, char**)

■ void CheckProblem(SparseMatrix&, Vector*, Vector*, Vector*)

■ void ExchangeHalo(const SparseMatrix&, Vector&)

■ void GenerateCoarseProblem(const SparseMatrix&)

■ void GenerateProblem(SparseMatrix&, Vector*, Vector*, Vector*)

■ void GenerateProblem_ref(SparseMatrix&, Vector*, Vector*, Vector*)

■ void ReportResults(const SparseMatrix&, int, int, int, int, double*, const TestCGData&, const TestSymmetryData&, const TestNormsData&, int, bool)

■ void SetupHalo(SparseMatrix&)

■ void SetupHalo_ref(SparseMatrix&)