


Lesson:

Operators

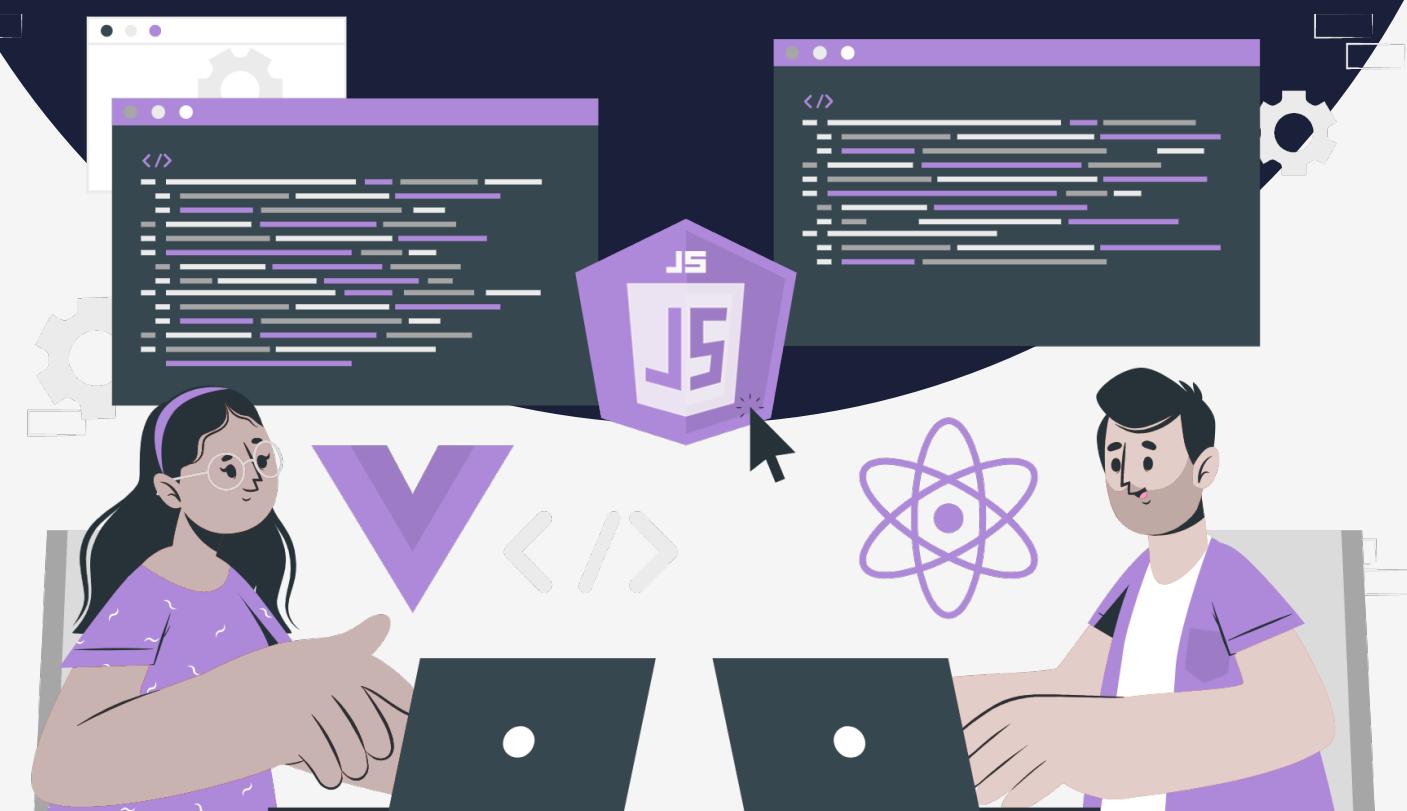

Topics Covered :

1. Introduction to operators.
2. Operators & Operands.
3. Operators in JavaScript.

Basically, programming is done for a variety of reasons and one of the important reasons why programming is done is to operate on the values in the variables with high accuracy and faster speed. To perform these operations we need operators.

What are operators and operands?

$$5 + 3 = 8$$

Here, we have to add 5 and 3 to get the final value. So we are using + to add these two values. And the final value is 8.

In the above example, the + sign performs an arithmetic operation to add these two values. So this + sign is the operator here. In modern programming languages, we use this + sign to add two values.

An operand is a data value that the operator will carry out the actions. It is the values on which we operate. So, in the above example, 4 and 3 are operands.

Operators are used in programming to perform operations on variables and values.

Operators in JavaScript.

1. Assignment Operators
2. Arithmetic Operators
3. Comparison (Relational) Operators
4. Logical Operators
5. Bitwise Operators

Assignment Operators:

Assignment operators are used to assign values to variables.

Example:

```
var name = "PW Skills";
// Assignment Operators//
```

1. Assign

```
var name = "PW Skills"; // name = "PW Skills"//
```

2. Add & Assign

```
var students = 100; // students = 100
students += 50; // students = 150
```

```

// 3. Subtract & Assign
var students = 100; // students = 100
students -= 50; // students = 50

// 4. Multiply & Assign
var students = 100; // students = 100
students *= 50; // students = 5000

// 5. Divide & Assign
var students = 100; // students = 100
students /= 50; // students = 2

// 6. Modulus & Assign
var students = 100; // students = 100
students %= 50; // students = 0

// 7. Exponential & Assign
var students = 100; // students = 100
students **= 2; // students = 10000

```

The commonly used assignment operator is `=`. We will understand other assignment operators such as `+=`, `-=`, `*=`, etc. once we learn arithmetic operators.

Arithmetic Operators

We use arithmetic operators to do mathematical operations like addition, subtraction, multiplication, division, etc. It simply takes numerical values as operands, performs an arithmetic operation, and returns a numerical value.

- Addition (+): Adds two values together.
- Subtraction (-): Subtracts one value from another.
- Multiplication (*): Multiplies two values together.
- Division (/): Divides one value by another.
- Modulus(%): Returns the remainder of a division operation.
- Exponentiation(**): raises to the power of.
- Increment Operator(++): Increases the value by 1.
- Decrement Operator(--): Decreases the value by 1.

In JavaScript, the "`++`" operator is used for both pre-increment and post-increment operations. Pre increment operator increments the value and returns the incremented value immediately. Post increment operator increments the value but returns the original value itself. The same follows with Pre decrement and Post decrement operators.

```
// Arithmetic Operators

var num1 = 100;
var num2 = 2;

// 1. Addition
var result = num1 + num2; // 102

// 2. Subtraction
var result = num1 - num2; // 98

// 3. Multiplication
var result = num1 * num2; // 200

// 4. Division
var result = num1 / num2; // 50

// 5. Modulus
var result = num1 % num2; // 0

// 6. Exponential
var result = num1 ** num2; // 10000

// 7. Pre Increment
var num = 10;
var result = ++num; // num = 11 ; result = 11

// 8. Post Increment
var num = 10;
var result = num++; // result = 10 ; num = 11

// 9. Pre Decrement
var num = 10;
var result = --num; // num = 9 ; result = 9

// 10. Post Decrement
var num = 10;
var result = num--; // result = 10 ; num = 9
```

Adding two numbers, will return the sum, but adding a number and a string will return a string:

```
// Adding Two Numbers

num1 = 10;
num2 = 5;
result = num1 + num2; // 15
result_type = typeof result; // number

// Adding A Number and a string
num1 = 100;
str1 = "Welcome ";
result = str1 + num1; // Welcome 100
result_type = typeof result; // string

// Adding A Number and a string
num1 = 100;
str1 = "10";
result = str1 + num1; // 10100
result_type = typeof result; // string
```

Comparison (Relational) Operators

Comparison operators compare two values and return a boolean value, either true or false.

The following are the comparison operators in javascript:

- **Equal (==):** Compares two values for equality, returns true if they are equal and false if they are not.
- **Strict equal (===):** Compares two values for equality and type, returns true if they are equal and of the same type, and false if they are not.
- **Not equal (!=):** Compares two values for inequality, returns true if they are not equal and false if they are.
- **Strict not equal (!==):** Compares two values for inequality or type, returns true if they are not equal or not of the same type, and false if they are.
- **Greater than (>):** Compares two values, returns true if the left operand is greater than the right operand, and false otherwise.
- **Greater than or equal to (>=):** Compares two values, returns true if the left operand is greater than or equal to the right operand and false otherwise.
- **Less than (<):** Compares two values, returns true if the left operand is less than the right operand and false otherwise.
- **Less than or equal to (<=):** Compares two values, returns true if the left operand is less than or equal to the right operand and false otherwise.

// Comparison Operators

```
var num1 = 10;
var num2 = 20;
var num3 = 10;

var str1 = "10";
var str2 = "20";
```

```

// 1. Equal to
var result = num1 == num2; // false
var result = num1 == num3; // true

// 2. Strict Equal
var result = num1 === num3; // true
var result = num1 === str1; // false

// 3. Not equal
var result = num1 != num2; // true
var result = num1 != num3; // false

// 4. Strict Not Equal
var result = num1 !== num3; // false
var result = num1 !== str1; // true

// 5. Greater than
var result = num1 > num3; // false
var result = num2 > num3; // true

// 6. Greater than or Equal to
var result = num1 ≥ num3; // true
var result = num2 ≥ num3; // true

// 7. Lesser than
var result = num1 < num3; // false
var result = num2 < num3; // false

// 8. Lesser than or Equal to
var result = num1 ≤ num3; // true
var result = num2 ≤ num3; // false

```

Logical Operators:

Logical operators perform logical operations and return a boolean value, either true or false.

Logical operators in javascript:

- **Logical AND (&&):** This operator returns true if both operands are true, and false otherwise. It is a logical first operator, meaning that if the first operand is false, the second operand is not evaluated.
- **Logical OR (||):** This operator returns true if at least one of the operands is true, and false otherwise. Like && operator, it is also a short-circuit operator.
- **Logical NOT (!):** This operator inverts the Boolean value of the operand. If the operand is true, the operator returns false, and if the operand is false, the operator returns true

These logical operators can be used to perform a variety of tasks, such as testing multiple conditions or combining multiple conditions in a single expression. They are often used with other techniques and operations to perform more complex tasks, such as flow control and data validation. We will be looking at their applications in further lectures.

```
// Logical Operators

var num1 = 10;
var num2 = 20;
var num3 = 10;

// 1. Logical AND
var result = num1 ≥ num3 && num1 == num3; // true
var result = num1 ≥ num2 && num1 == num3; // false

// 2. Logical OR
var result = num1 ≥ num3 || num1 == num3; // true
var result = num1 ≥ num2 || num1 == num3; // true
var result = num1 ≥ num2 || num1 > num3; // false

// 3. Logical NOT
var result = num1 == num3; // true
var result = !(num1 == num3); // false
```

Bitwise Operators:

Bitwise operators perform operations on binary representations of numbers. Bitwise operators are particularly useful in low-level programming [programming that deals with the underlying hardware of a computer] and optimization, but they can also be used in a wide range of other areas, including data compression, encryption, and game development.

Bitwise operators in JavaScript are:

- **Bitwise AND (&):** This operator compares each bit of the first operand to the corresponding bit of the second operand, and if both bits are 1, the corresponding result bit is set to 1. Otherwise, the corresponding result bit is set to 0.
- **Bitwise OR (|):** This operator compares each bit of the first operand to the corresponding bit of the second operand, and if at least one of the bits is 1, the corresponding result bit is set to 1.
- **Bitwise XOR (^):** This operator compares each bit of the first operand to the corresponding bit of the second operand, and if the bits are different, the corresponding result bit is set to 1. Otherwise, the corresponding result bit is set to 0.
- **Bitwise NOT (~):** This operator inverts all the bits of the operand, effectively swapping 1s for 0s and 0s for 1s.
- **Left Shift («):** This operator shifts the bits of the operand to the left by the specified number of places, adding zeroes to the right.
- **Right Shift (»):** This operator shifts the bits of the operand to the right by the specified number of places, discarding the bits shifted out.