



# A critical analysis of design flaws in the Death Star

by

Luke Skywalker

Thesis presented in fulfilment of the requirements for the degree of Master of Engineering (Electronic) in the Faculty of Engineering at Stellenbosch University

Supervisor: Dr Obi W. Kenobi Co-supervisor: Prof Minch Yoda

December 2099

#### **Declaration**

By submitting this thesis electronically, I declare that the entirety of the work contained therein is my own, original work, that I am the sole author thereof (save to the extent explicitly otherwise stated), that reproduction and publication thereof by Stellenbosch University will not infringe any third party rights and that I have not previously in its entirety or in part submitted it for obtaining any qualification.

_	December 2099	
Date:		

Copyright © 2099 Stellenbosch University All rights reserved

### **Abstract**

The English abstract.

### **Uittreksel**

Die Afrikaanse uittreksel.

## Acknowledgements

I would like to thank my dog, Muffin. I also would like to thank the inventor of the incubator; without him/her, I would not be here. Finally, I would like to thank Dr Herman Kamper for this amazing report template.

### **Contents**

De	eclaration	1
Ab	ostract	ii
Ор	osomming	iii
No	omenclature	vi
1.	Introduction	1
	1.1. Section heading	1
	1.2. Contributions	2
2.	Summary and Conclusion	3
Bik	bliography	4
A.	Project Planning Schedule	5
В.	Outcomes Compliance	6

### **Nomenclature**

#### Variables and functions

p(x) Probability density function with respect to variable x.

P(A) Probability of event A occurring.

 $\varepsilon$  The Bayes error.

 $\varepsilon_u$  The Bhattacharyya bound.

B The Bhattacharyya distance.

s An HMM state. A subscript is used to refer to a particular state, e.g.  $s_i$  refers

to the  $i^{\mathrm{th}}$  state of an HMM.

S A set of HMM states.

F A set of frames.

 $\mathbf{o}_f$  Observation (feature) vector associated with frame f.

 $\gamma_s(\mathbf{o}_f)$  A posteriori probability of the observation vector  $\mathbf{o}_f$  being generated by

HMM state s.

 $\mu$  Statistical mean vector.

 $\Sigma$  Statistical covariance matrix.

L(S) Log likelihood of the set of HMM states S generating the training set

observation vectors assigned to the states in that set.

 $\mathcal{N}(\mathbf{x}|\mu,\Sigma)$  Multivariate Gaussian PDF with mean  $\mu$  and covariance matrix  $\Sigma$ .

The probability of a transition from HMM state  $s_i$  to state  $s_i$ .

N Total number of frames or number of tokens, depending on the context.

D Number of deletion errors.

I Number of insertion errors.

S Number of substitution errors.

Nomenclature vii

#### **Acronyms and abbreviations**

AE Afrikaans English

AID accent identification

ASR automatic speech recognition

AST African Speech Technology

CE Cape Flats English

DCD dialect-context-dependent

DNN deep neural network

G2P grapheme-to-phoneme

GMM Gaussian mixture model

HMM hidden Markov model

HTK Hidden Markov Model Toolkit

IE Indian South African English

IPA International Phonetic Alphabet

LM language model

LMS language model scaling factor

MFCC Mel-frequency cepstral coefficient

MLLR maximum likelihood linear regression

00V out-of-vocabulary

PD pronunciation dictionary

PDF probability density function

SAE South African English

SAMPA Speech Assessment Methods Phonetic Alphabet

### **Chapter 1**

### Introduction

The last few years have seen great advances in speech recognition. Much of this progress is due to the resurgence of neural networks; most speech systems now rely on deep neural networks (DNNs) with millions of parameters [1, 2]. However, as the complexity of these models has grown, so has their reliance on labelled training data. Currently, system development requires large corpora of transcribed speech audio data, texts for language modelling, and pronunciation dictionaries. Despite speech applications becoming available in more languages, it is hard to imagine that resource collection at the required scale would be possible for all 7000 languages spoken in the world today.

I really like apples.

#### 1.1. Section heading


This is some section with two table in it: Table 1.1 and Table 1.2.

**Table 1.1:** Performance of the unconstrained segmental Bayesian model on TIDigits1 over iterations in which the reference set is refined.

Metric	1	2	3	4	5
WER (%)	35.4	23.5	21.5	21.2	22.9
Average cluster purity (%)	86.5	89.7	89.2	88.5	86.6
Word boundary $F$ -score (%)	70.6	72.2	71.8	70.9	69.4
Clusters covering 90% of data	20	13	13	13	13

**Table 1.2:** A table with an example of using multiple columns.

Model	Intermediate	Output	— Bitrate
Baseline	27.5	26.4	116
VQ-VAE	26.0	22.1	190
CatVAE	28.7	24.3	215

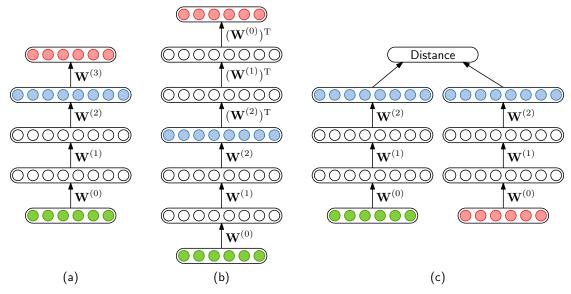

**Figure 1.1:** (a) The cAE as used in this chapter. The encoding layer (blue) is chosen based on performance on a development set. (b) The cAE with symmetrical tied weights. The encoding from the middle layer (blue) is always used. (c) The siamese DNN. The cosine distance between aligned frames (green and red) is either minimized or maximized depending on whether the frames belong to the same (discovered) word or not. A cAE can be seen as a type of DNN [1].

This is a new page, showing what the page headings looks like, and showing how to refer to a figure like Figure 1.1.

The following is an example of an equation:

$$P(\mathbf{z}|\boldsymbol{\alpha}) = \int_{\boldsymbol{\pi}} P(\mathbf{z}|\boldsymbol{\pi}) p(\boldsymbol{\pi}|\boldsymbol{\alpha}) d\boldsymbol{\pi} = \int_{\boldsymbol{\pi}} \prod_{k=1}^{K} \pi_k^{N_k} \frac{1}{B(\boldsymbol{\alpha})} \prod_{k=1}^{K} \pi_k^{\alpha_k - 1} d\boldsymbol{\pi}$$
(1.1)

which you can subsequently refer to as (1.1) or Equation 1.1. But make sure to consistently use the one or the other (and not mix the two ways of referring to equations).

#### 1.2. Contributions

The following papers resulted from the work presented here:

#### Conference paper 1:

L. Skywalker, D. Vadar, and O. W. Kenobi, "A comparison between father-son and master-apprentice relationships in space conflict situations," in *Proceedings of the International Conference on Action, Space and Star Politics (ICASSP)*, 2020.

#### Journal paper 1:

L. Skywalker, and L. Organa, "Identifying weaknesses in large evil corporations," *IEEE Transactions* on the Exploration of the Outer Rim, vol. 21, pp. 154–174, 2021.

# **Chapter 2**

# **Summary and Conclusion**

### **Bibliography**

- [1] G. E. Dahl, D. Yu, L. Deng, and A. Acero, "Context-dependent pre-trained deep neural networks for large-vocabulary speech recognition," *IEEE Trans. Audio, Speech, Language Process.*, vol. 20, no. 1, pp. 30–42, 2012.
- [2] G. Hinton, L. Deng, D. Yu, G. E. Dahl, A.-R. Mohamed, N. Jaitly, A. Senior, V. Vanhoucke, P. Nguyen, T. N. Sainath, and B. Kingsbury, "Deep neural networks for acoustic modeling in speech recognition: The shared views of four research groups," *IEEE Signal Process. Mag.*, vol. 29, no. 6, pp. 82–97, 2012.

# **Appendix A**

# **Project Planning Schedule**

This is an appendix.

# **Appendix B**

# **Outcomes Compliance**

This is another appendix.