




Centred chars in default char set (ISO Latin1)

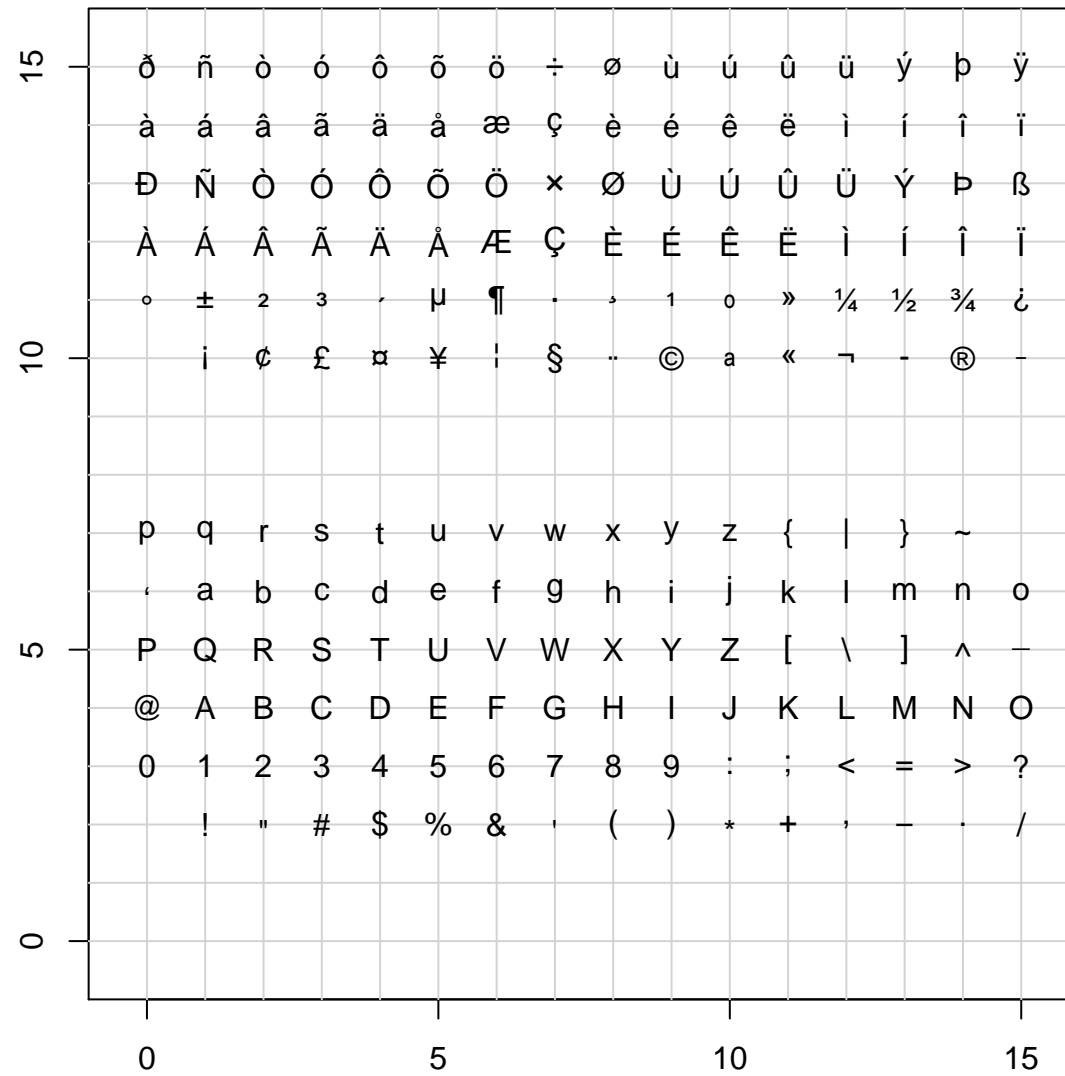



Death Rates in Virginia – 1940

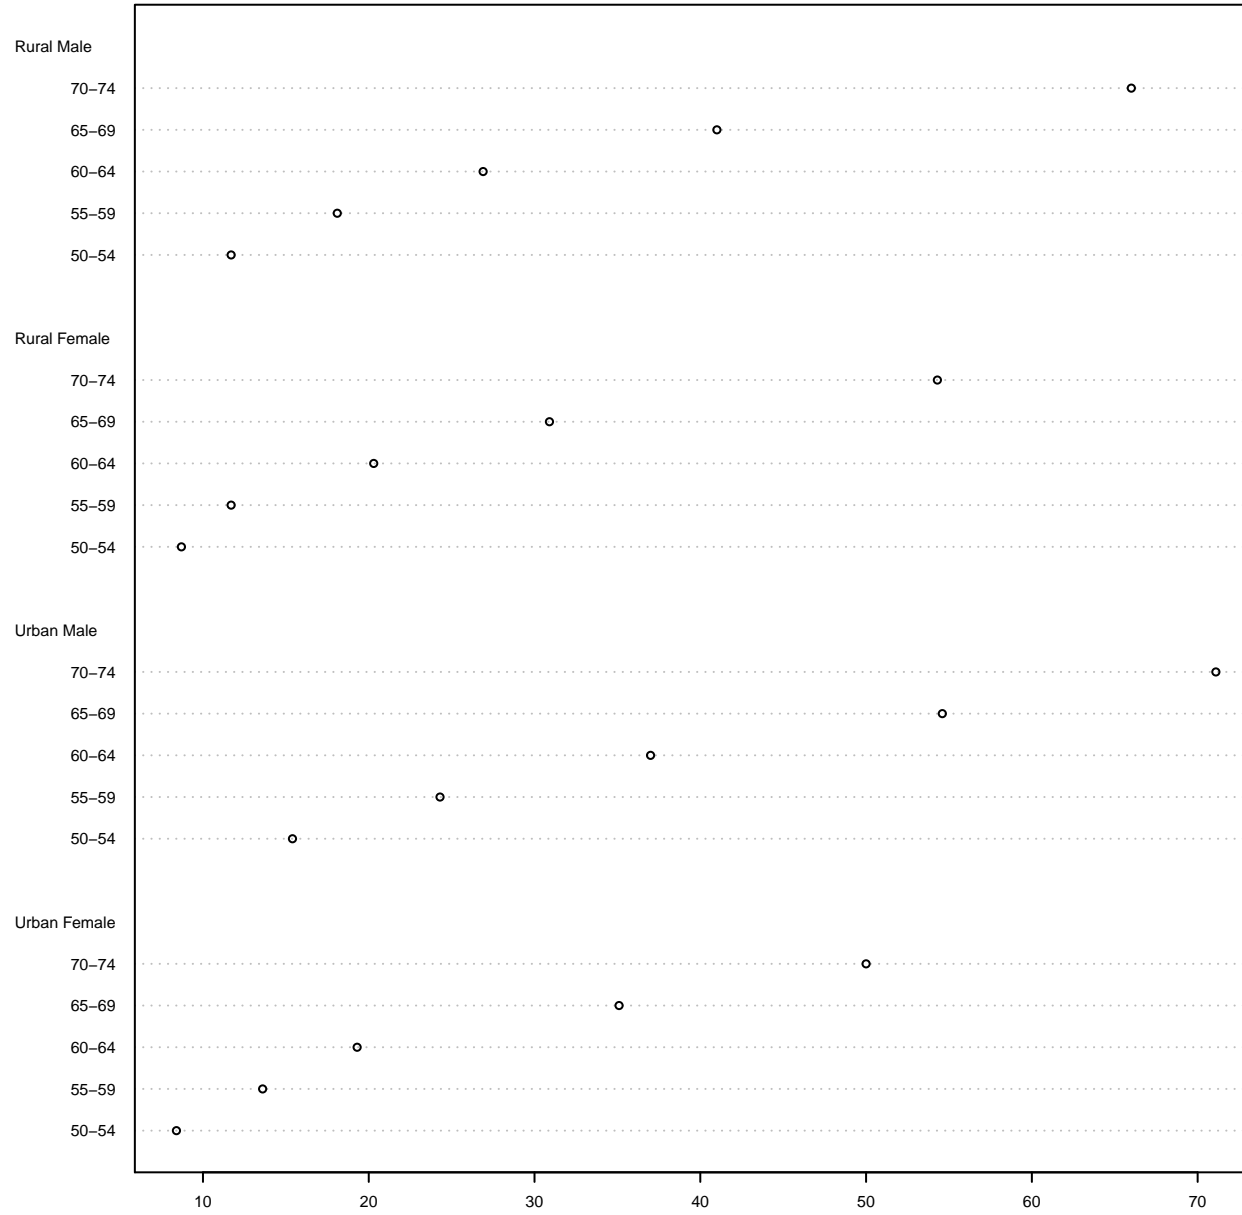



Death Rates in Virginia – 1940

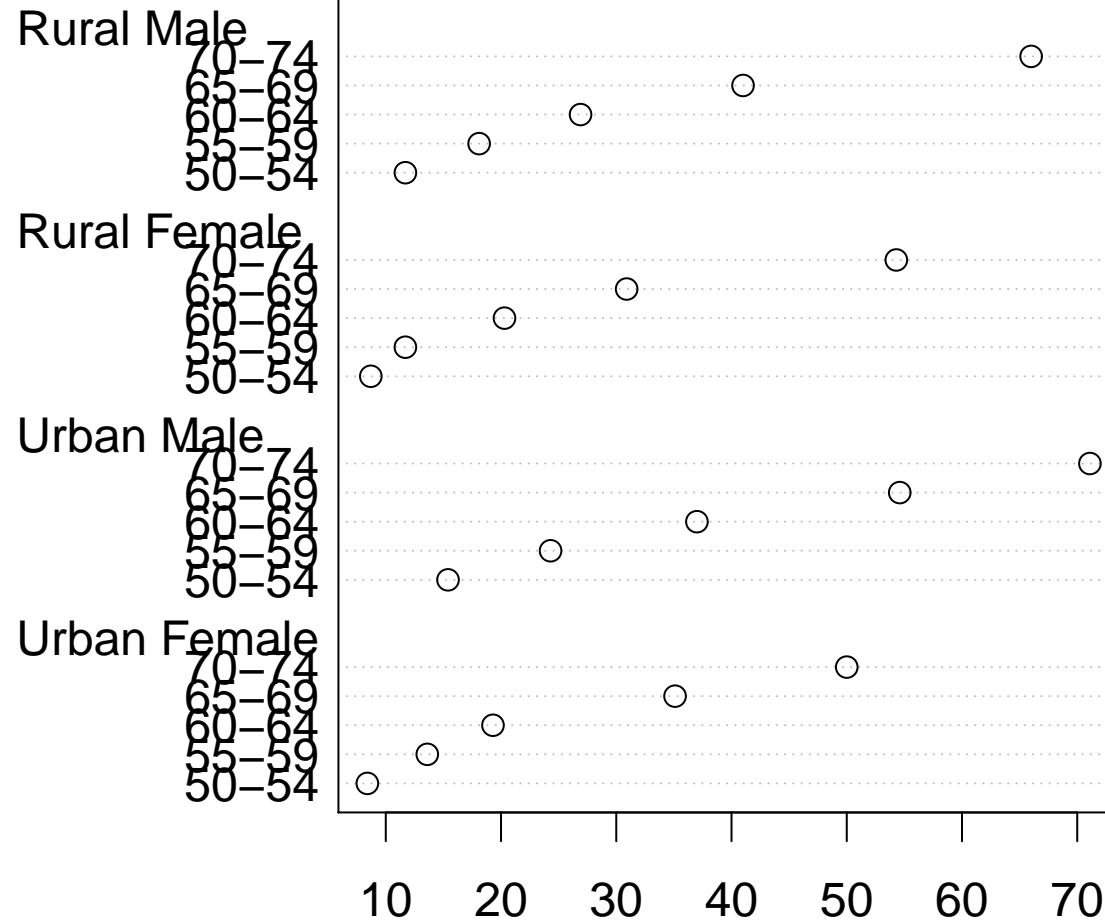

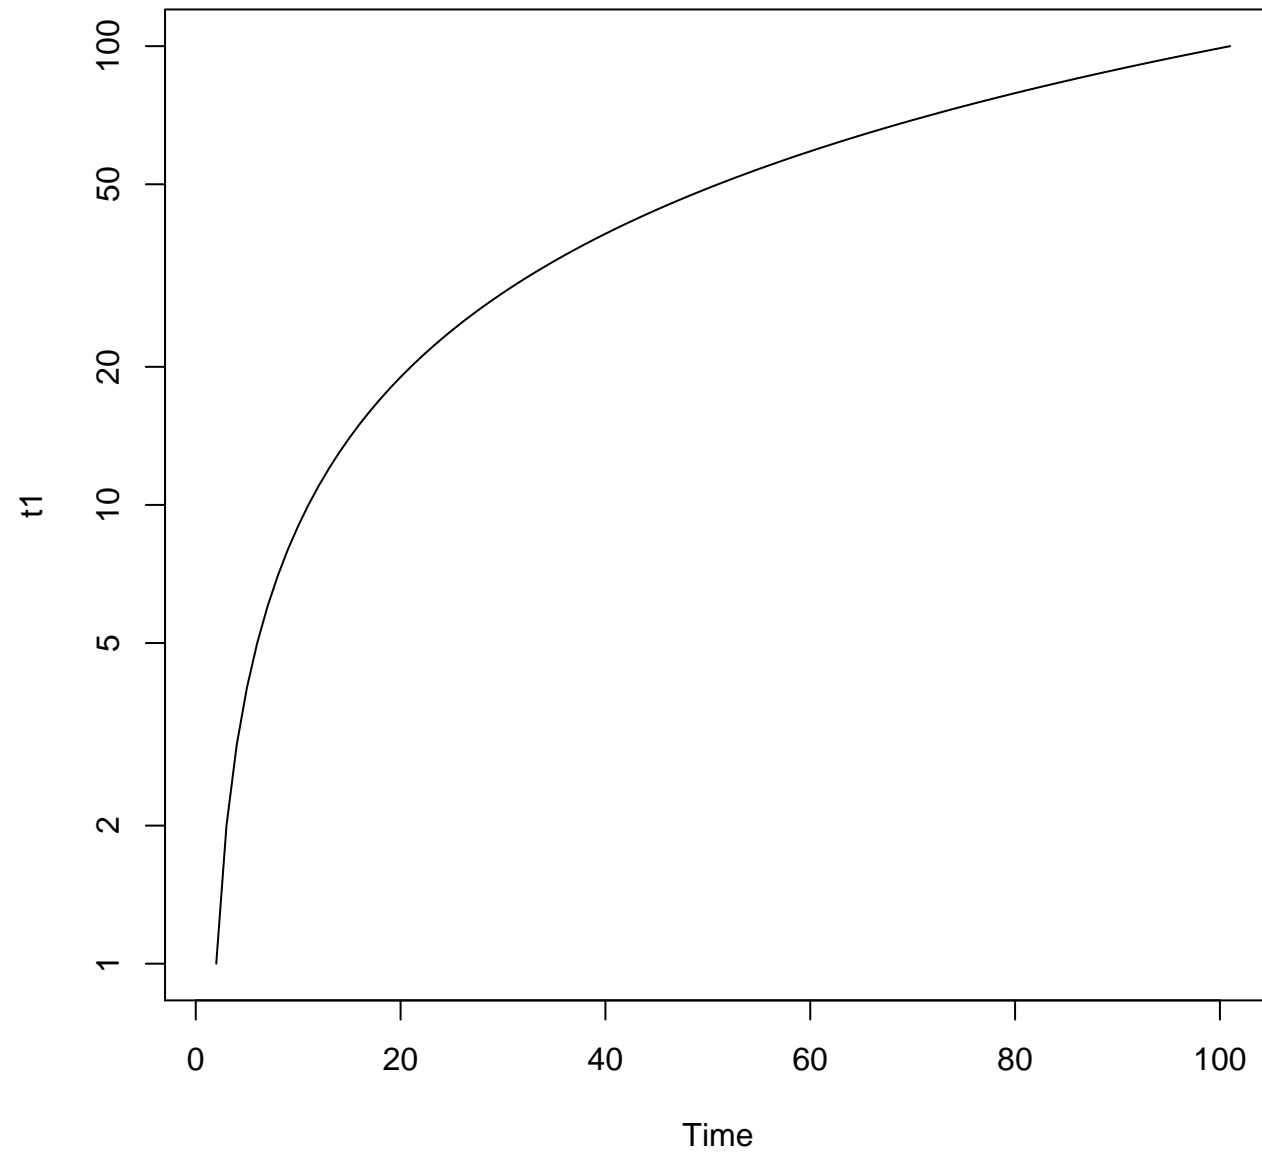


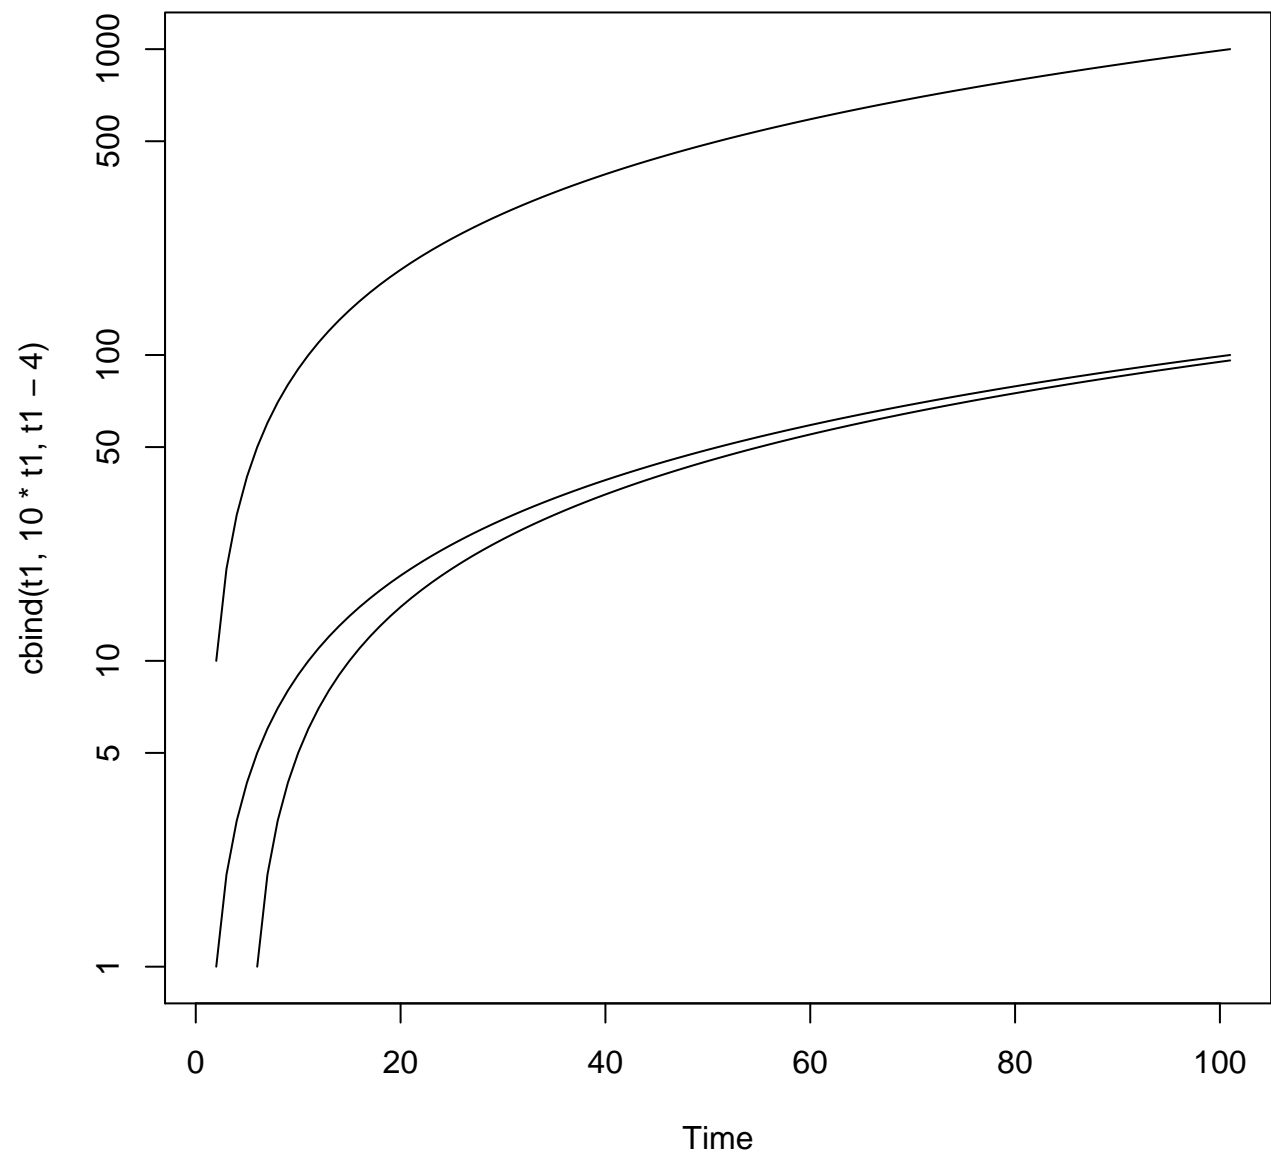

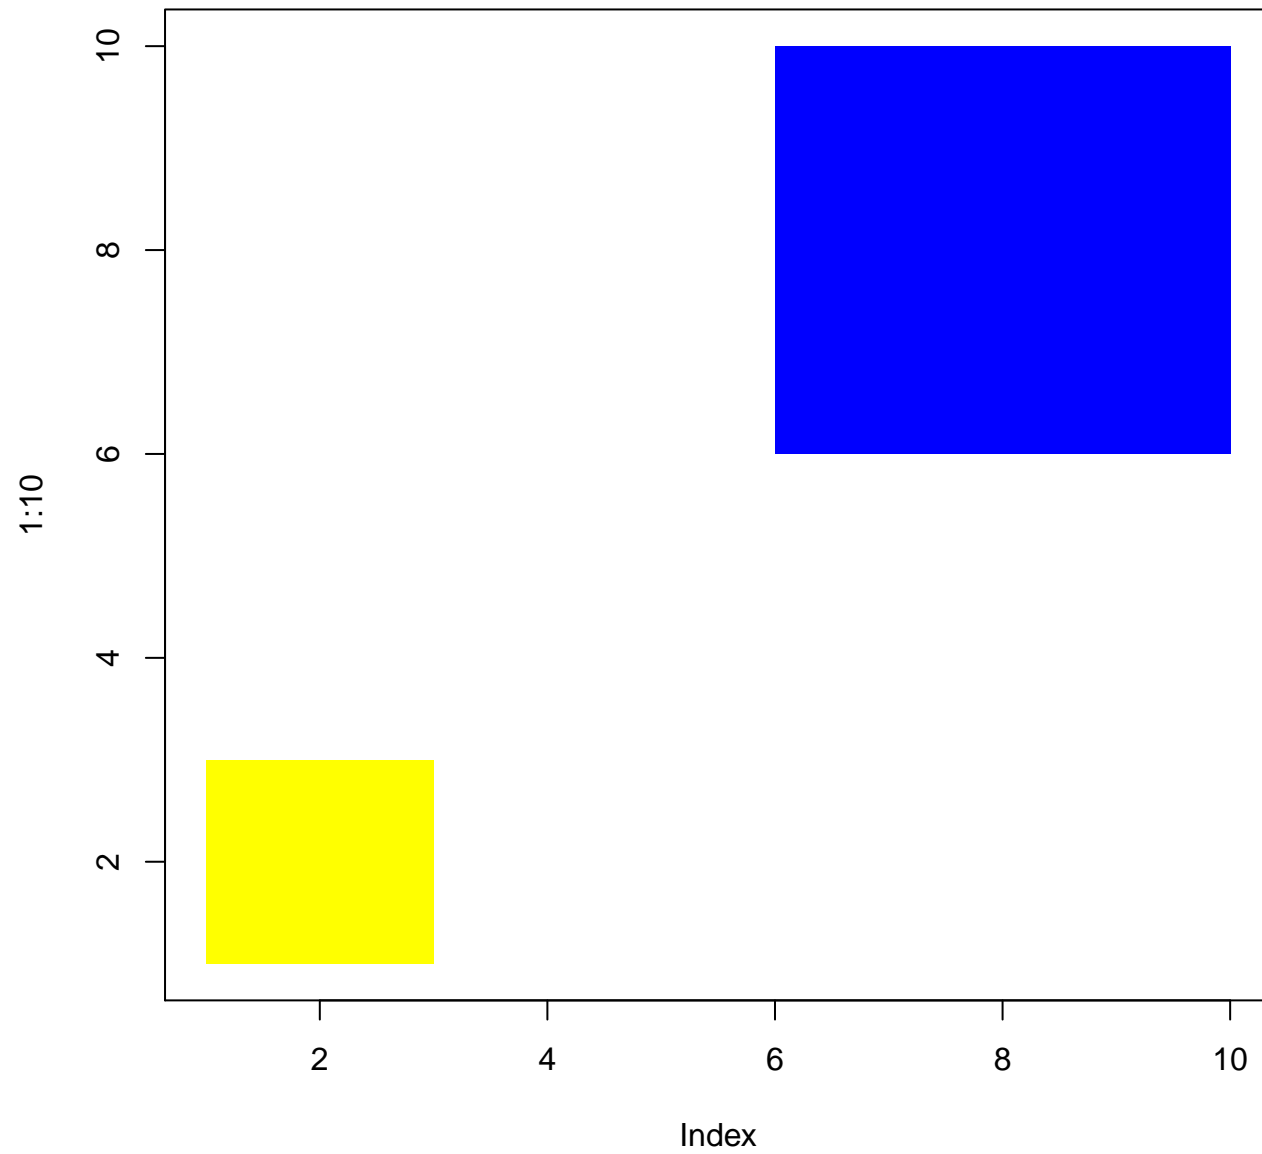


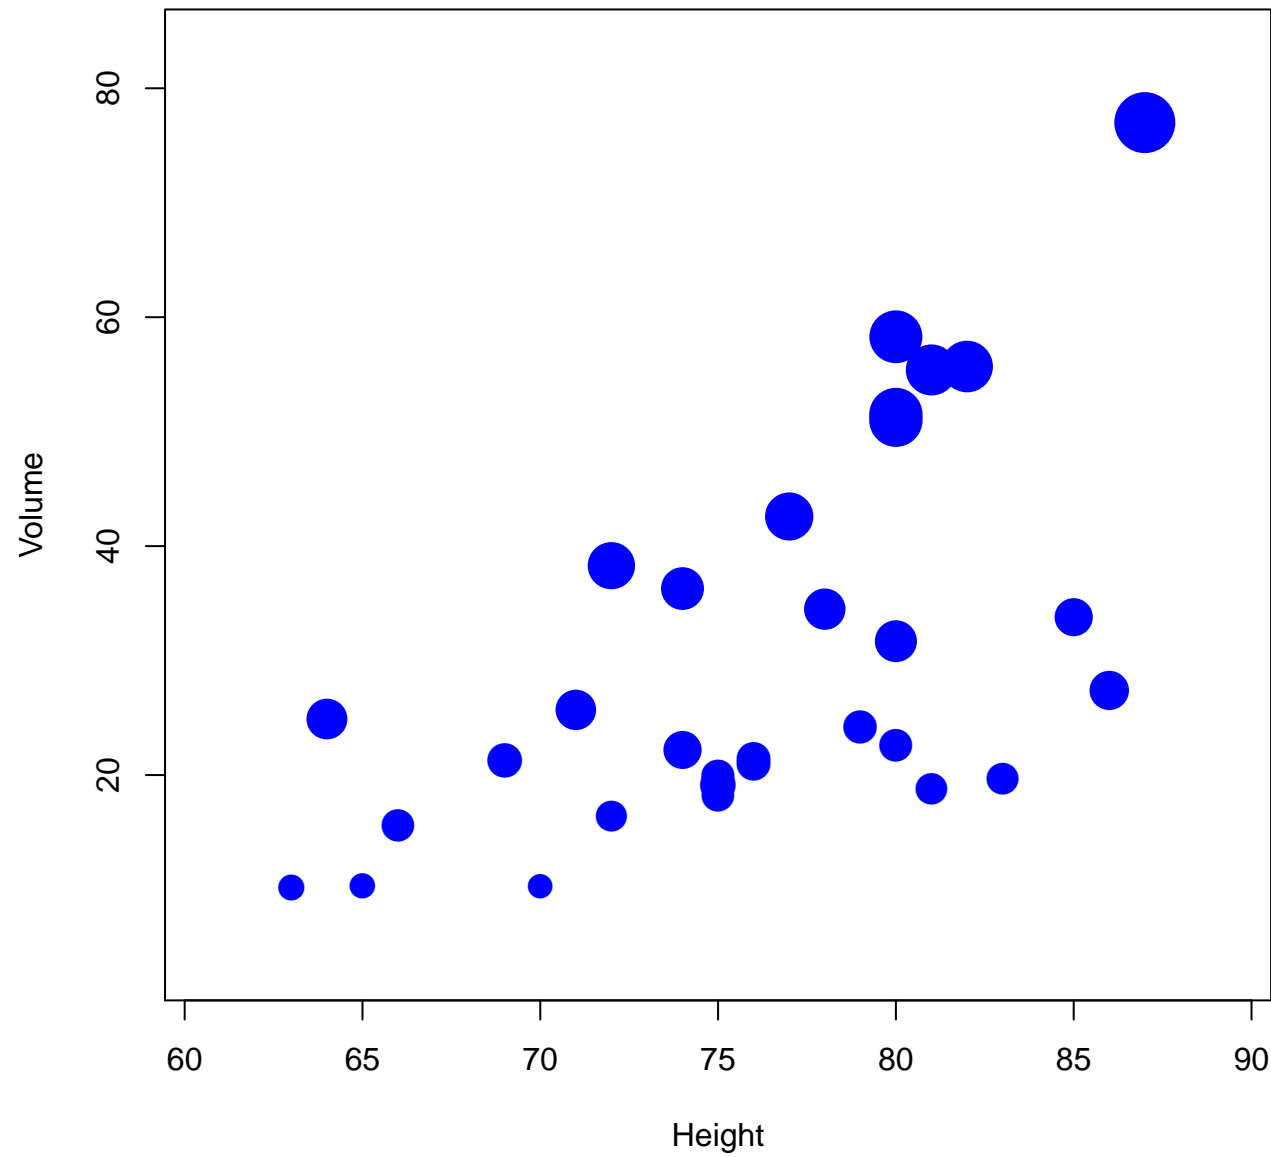


mgp < 0: all ticks and labels inside 'frame'

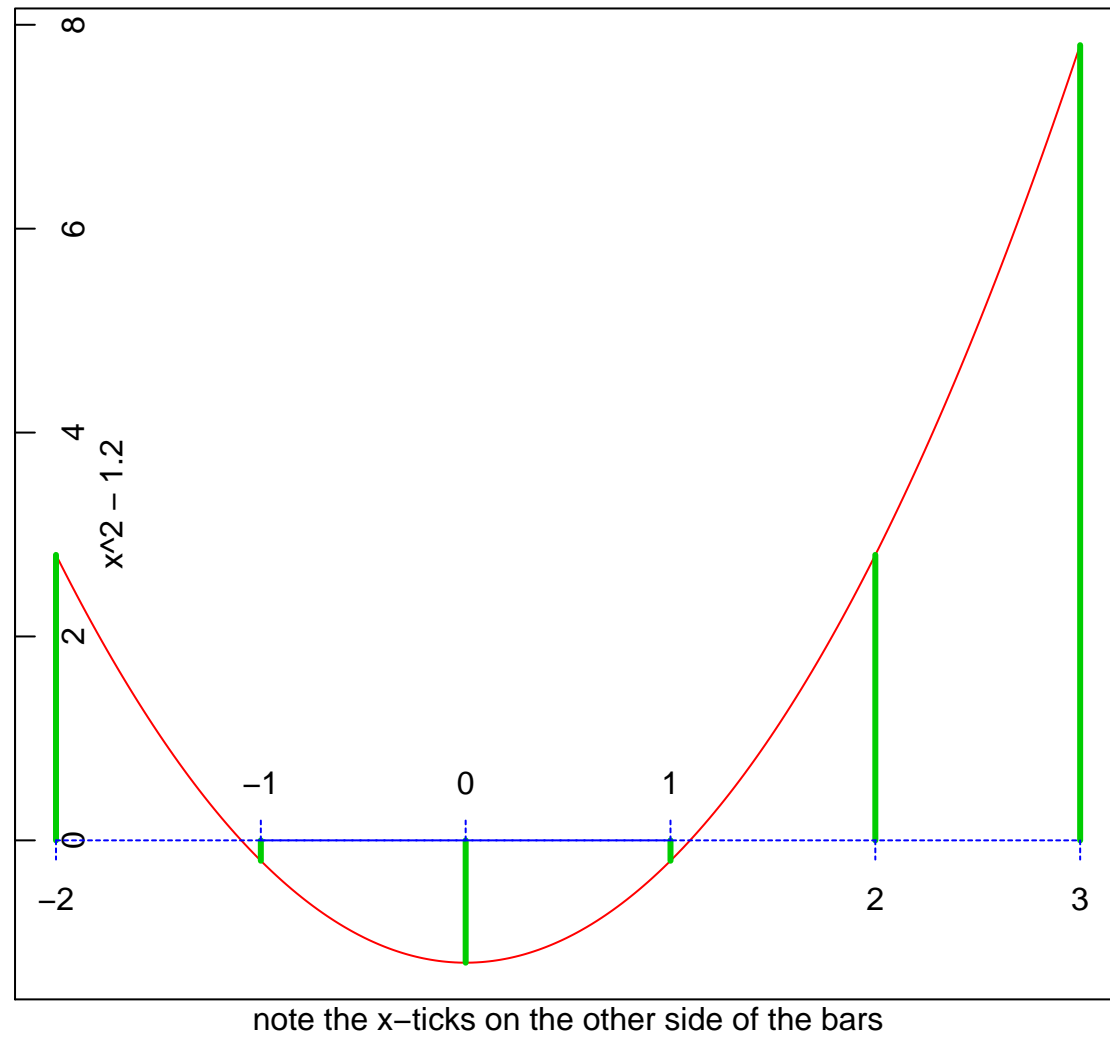


UCBAdmissions

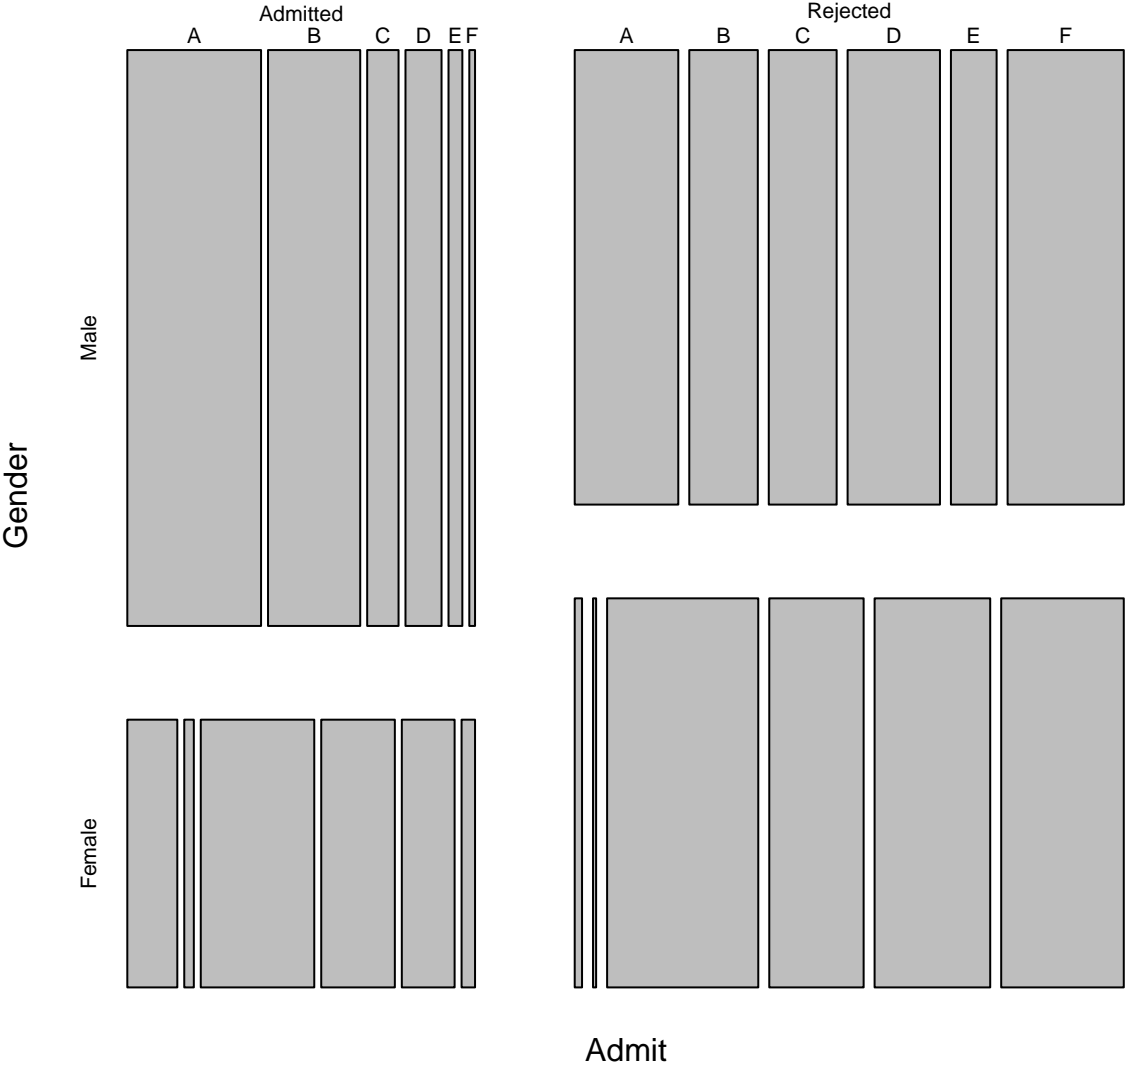



UCBAdmissions

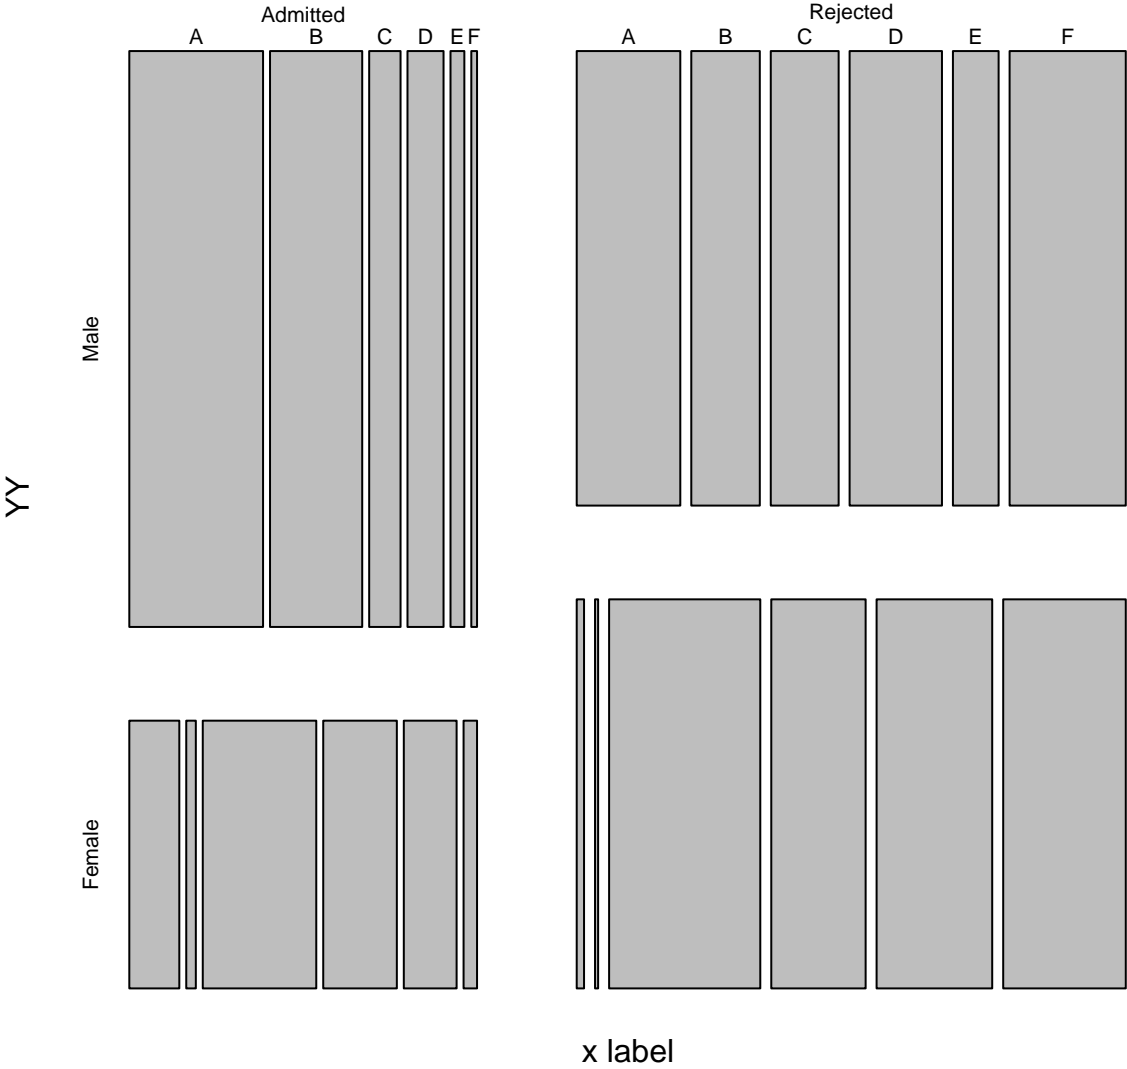



```
tt <- table(c(rep(0, 7), rep(1, 4), rep(5, 3)))
```




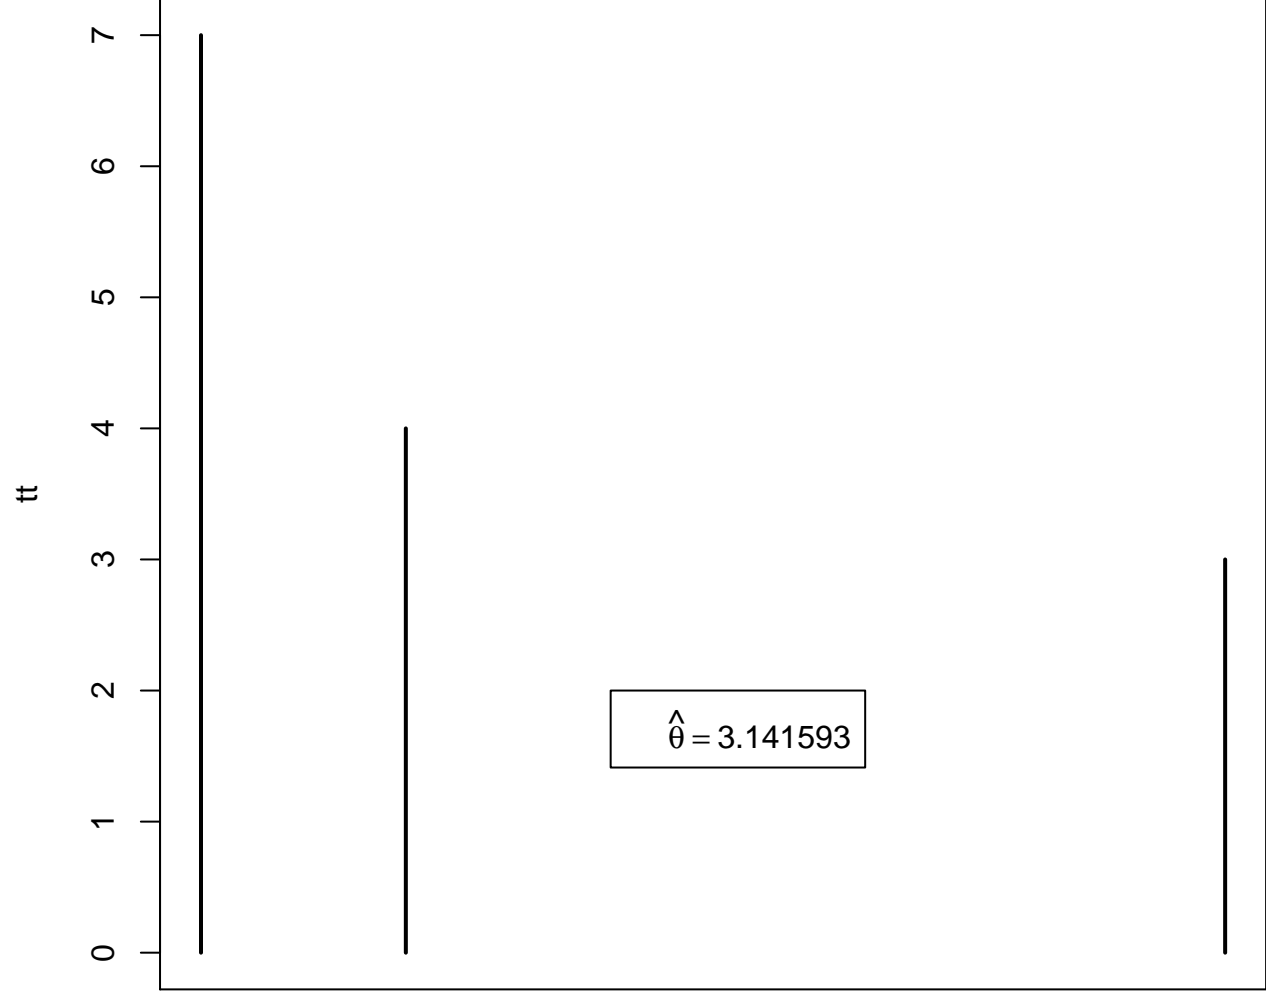


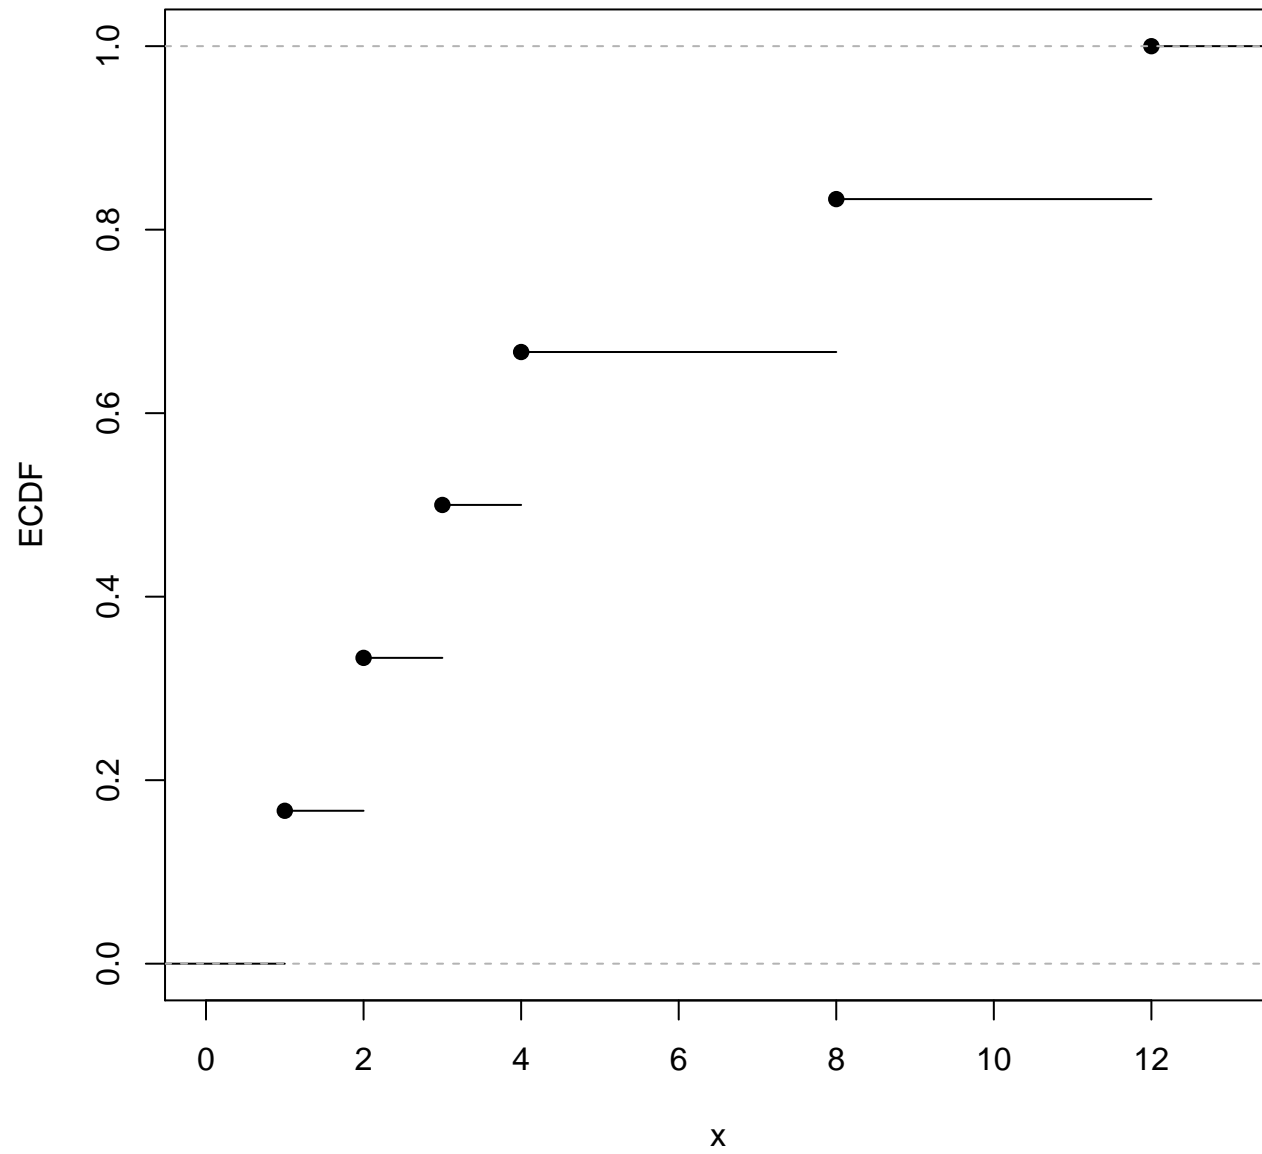

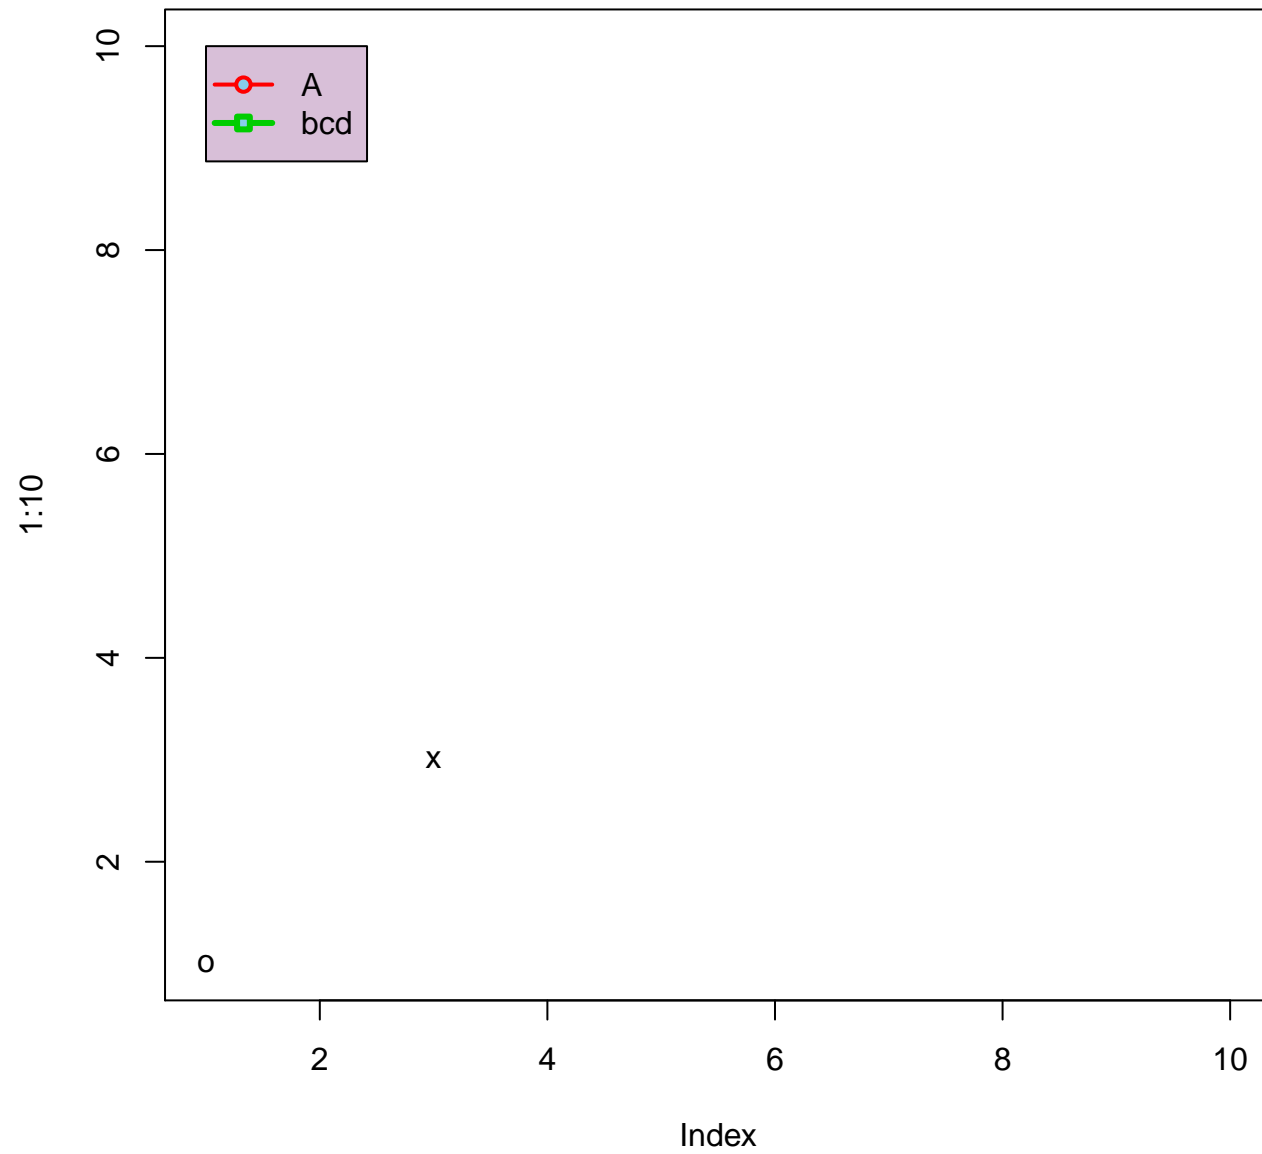

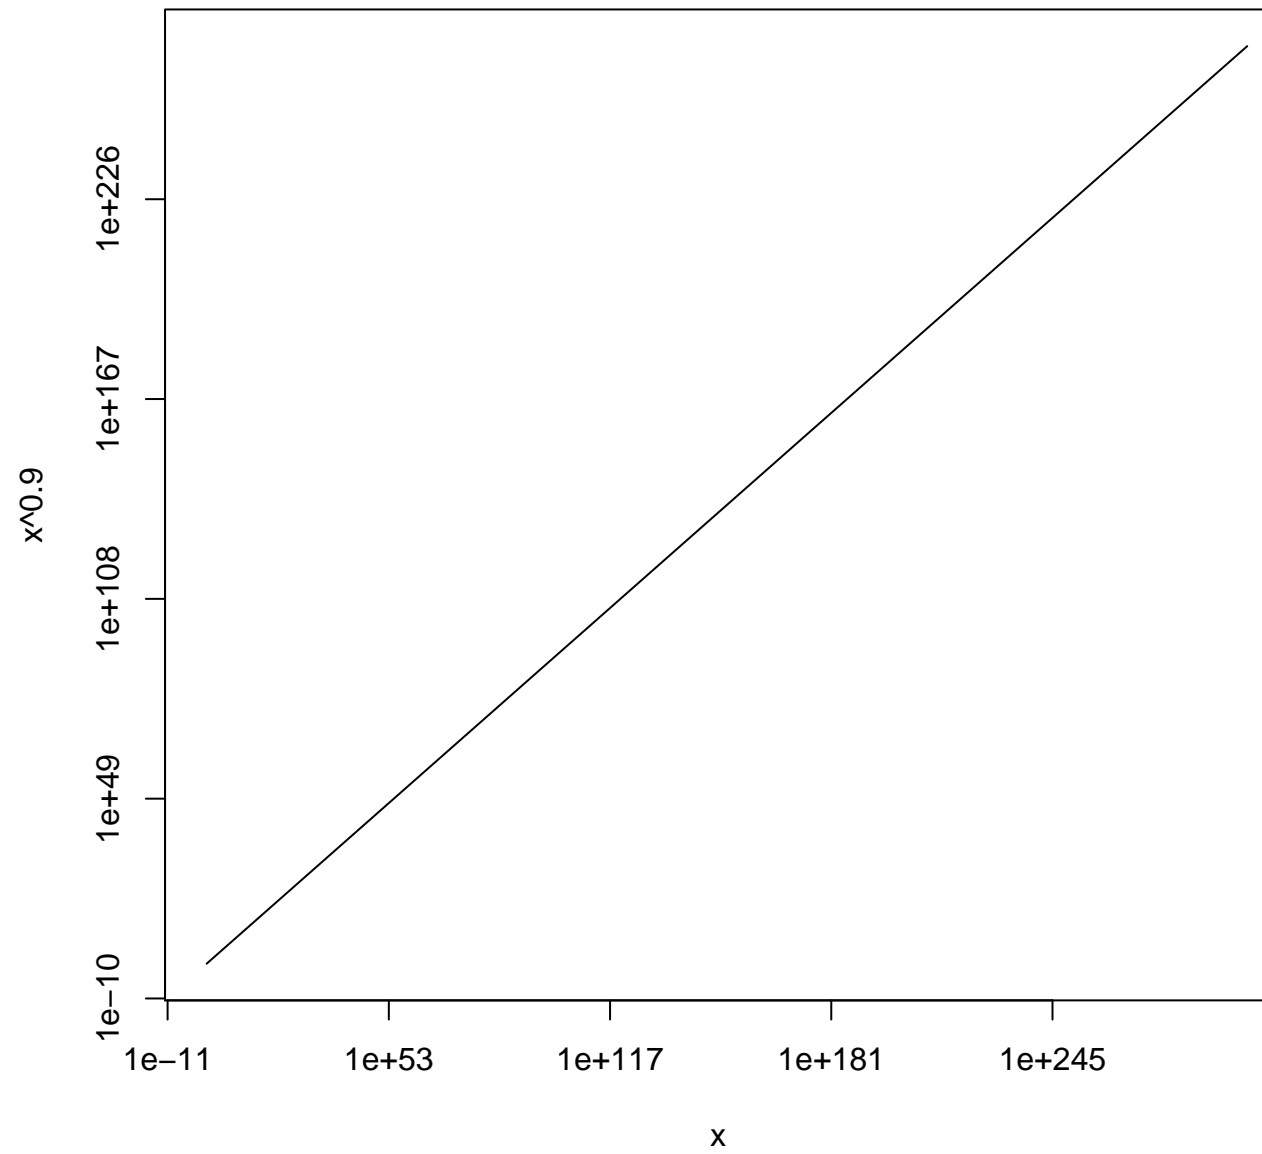


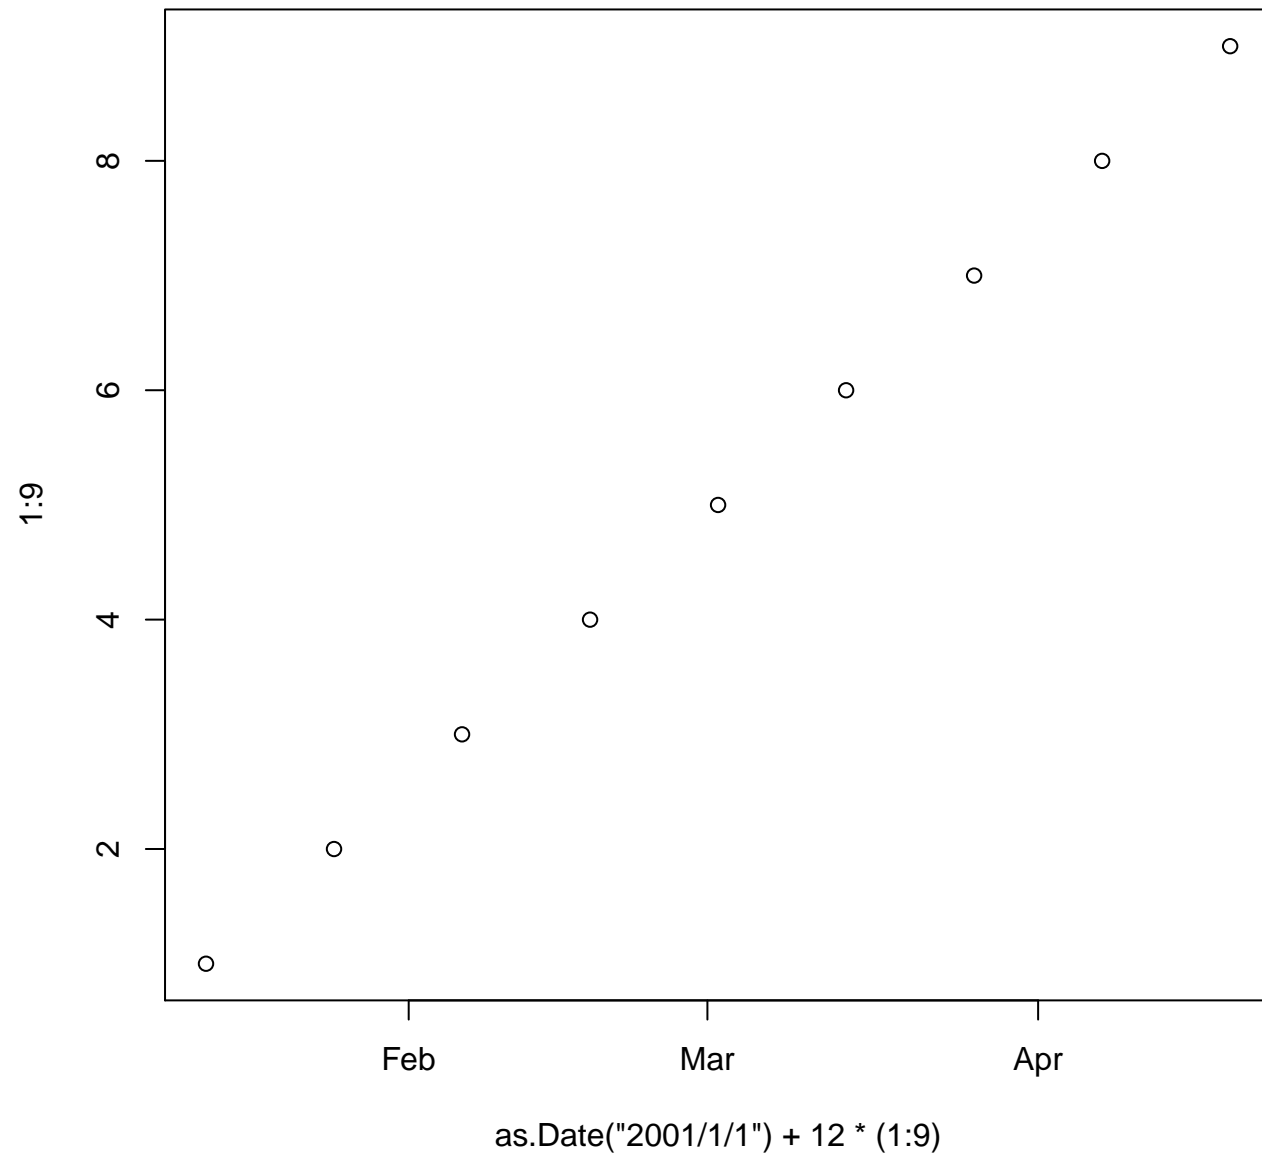

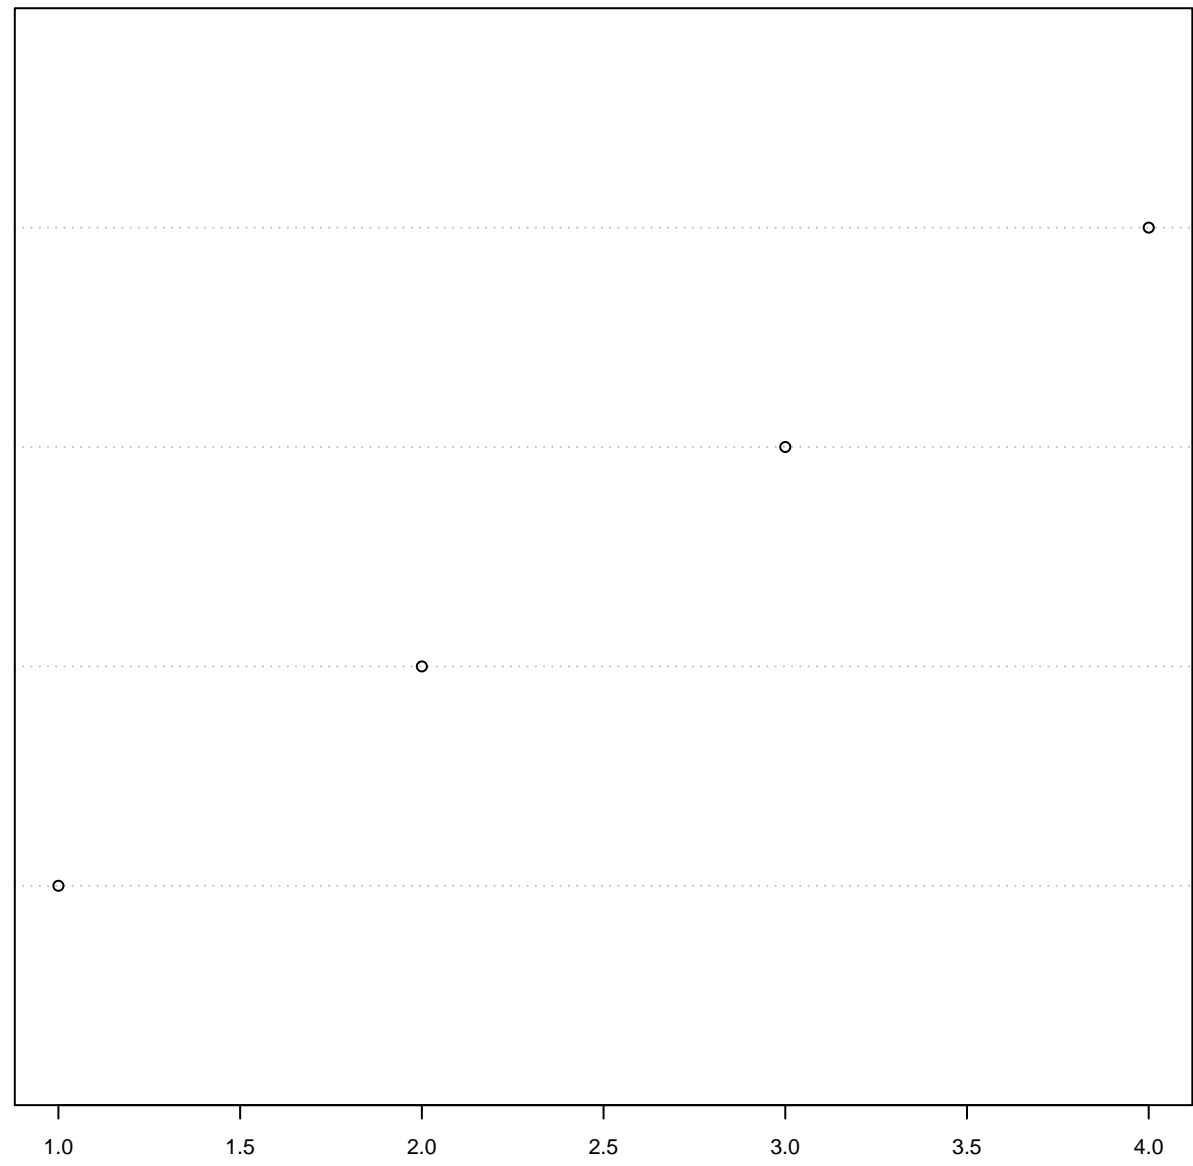


cos

x

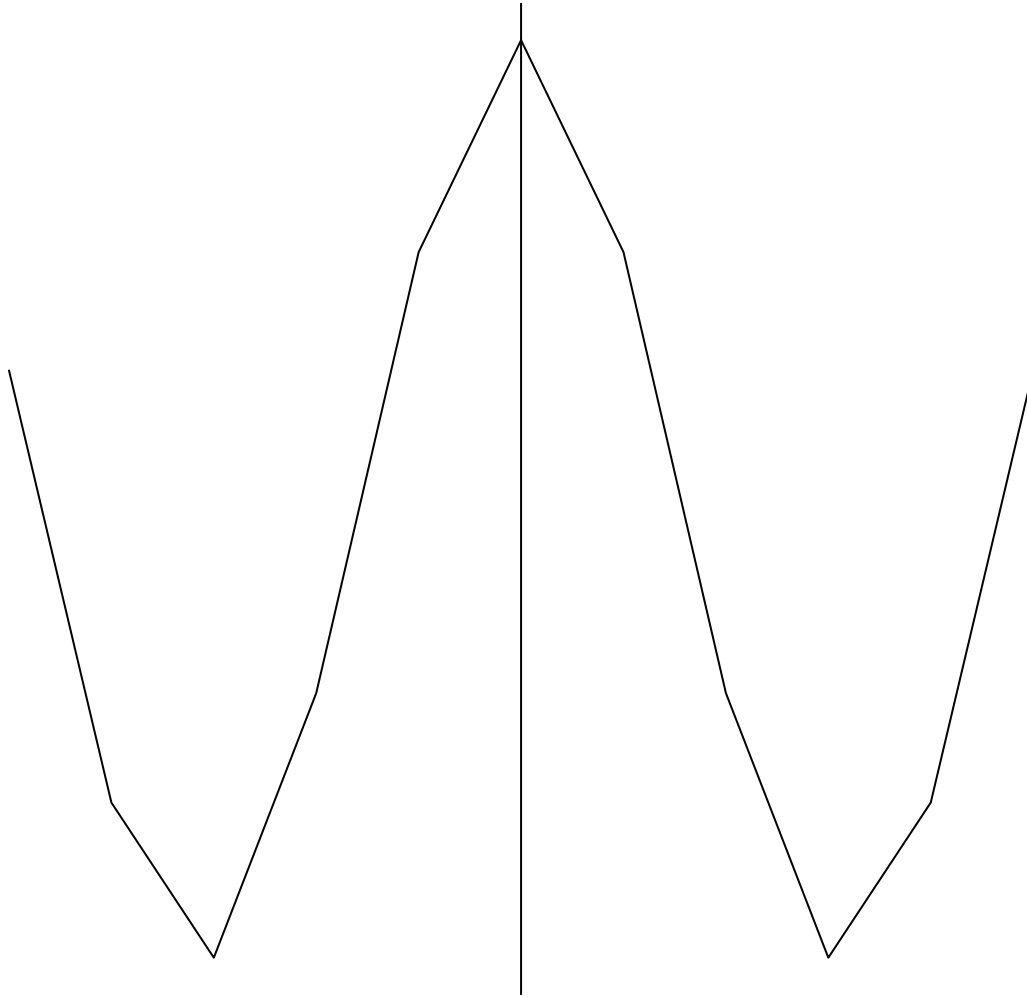


sin

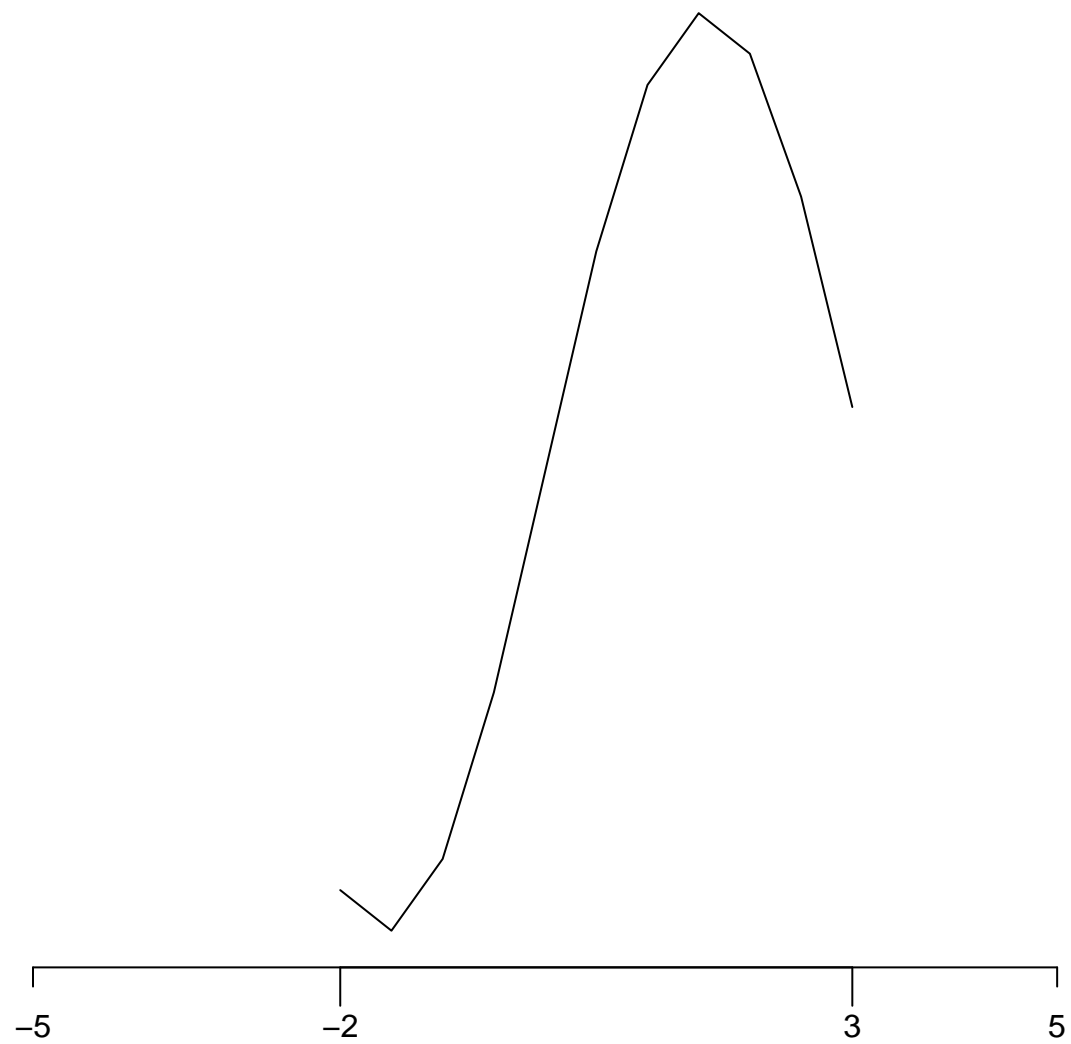


cos


x

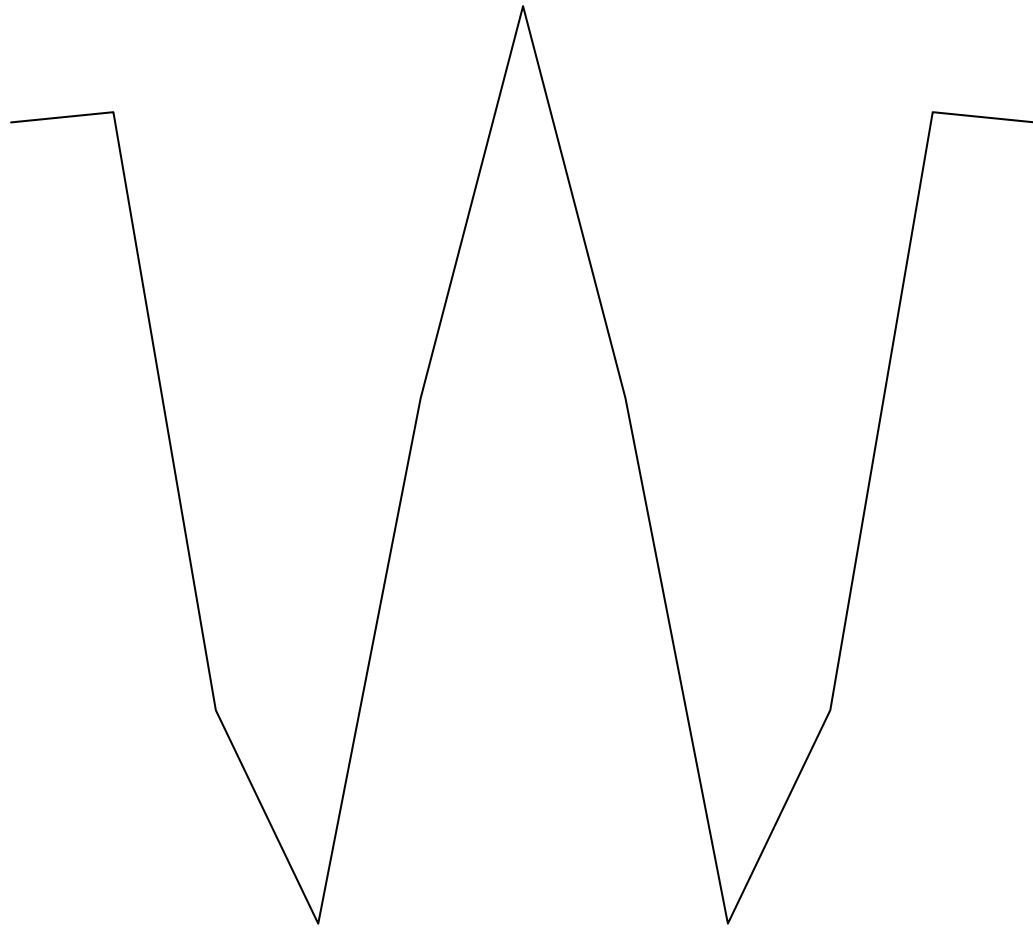



Cosine $\cos(x)$

x

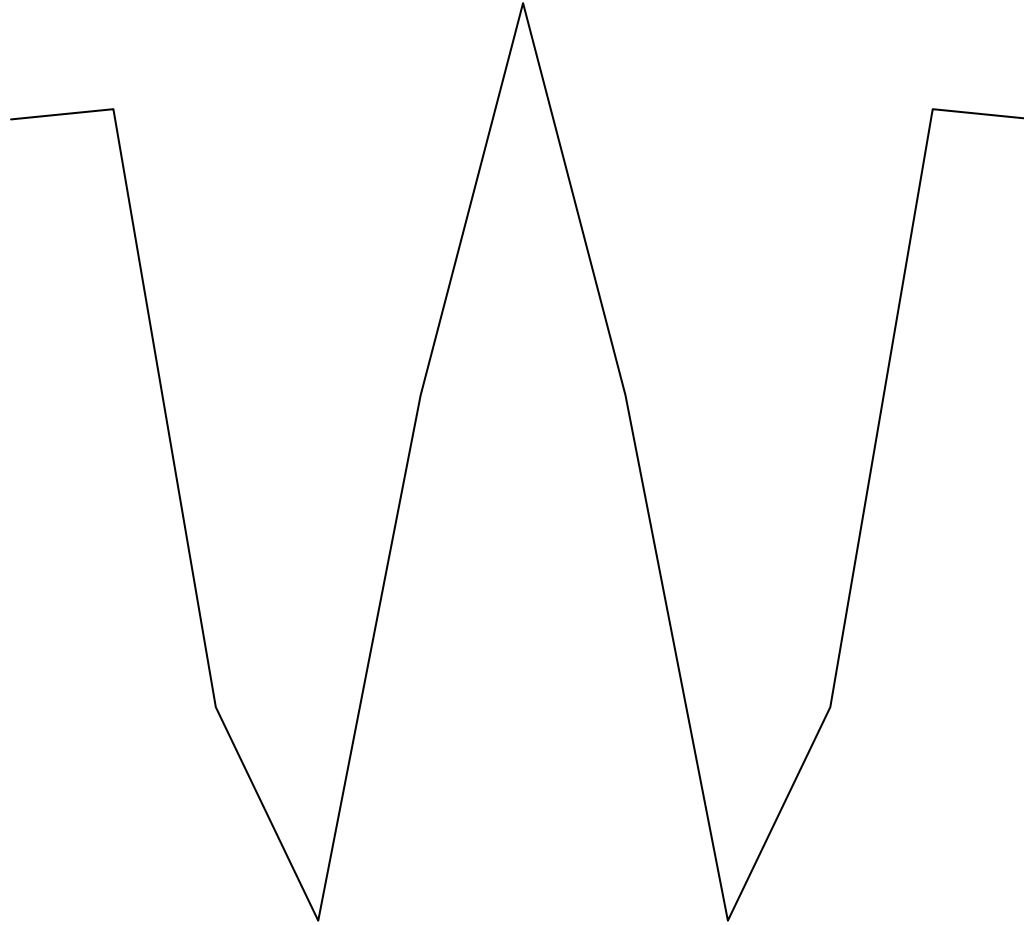


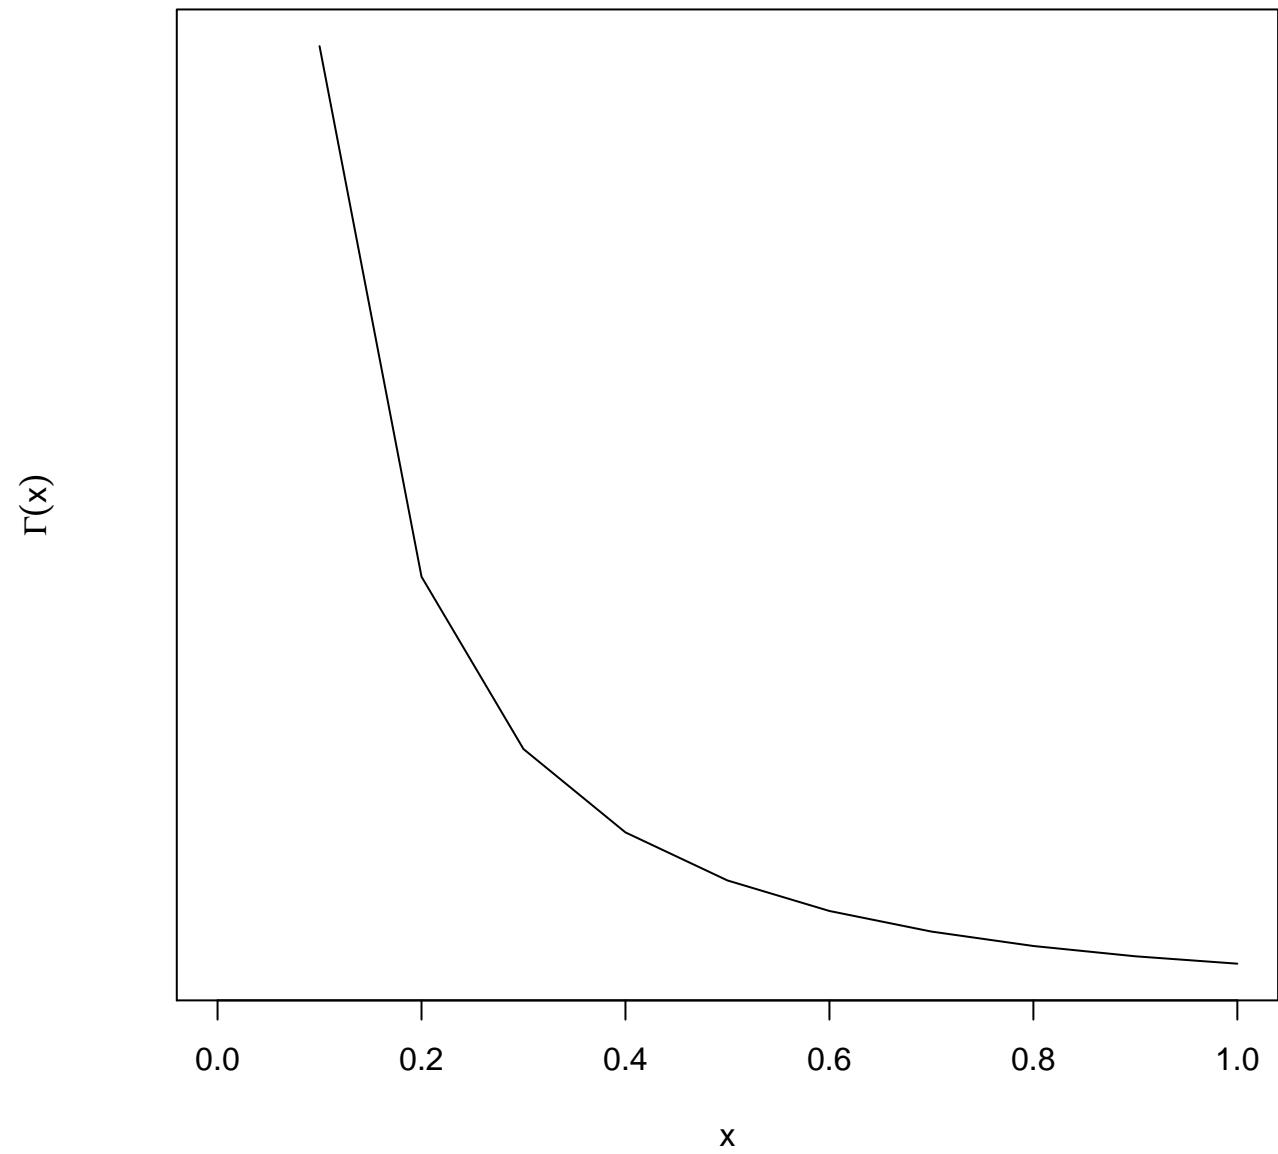

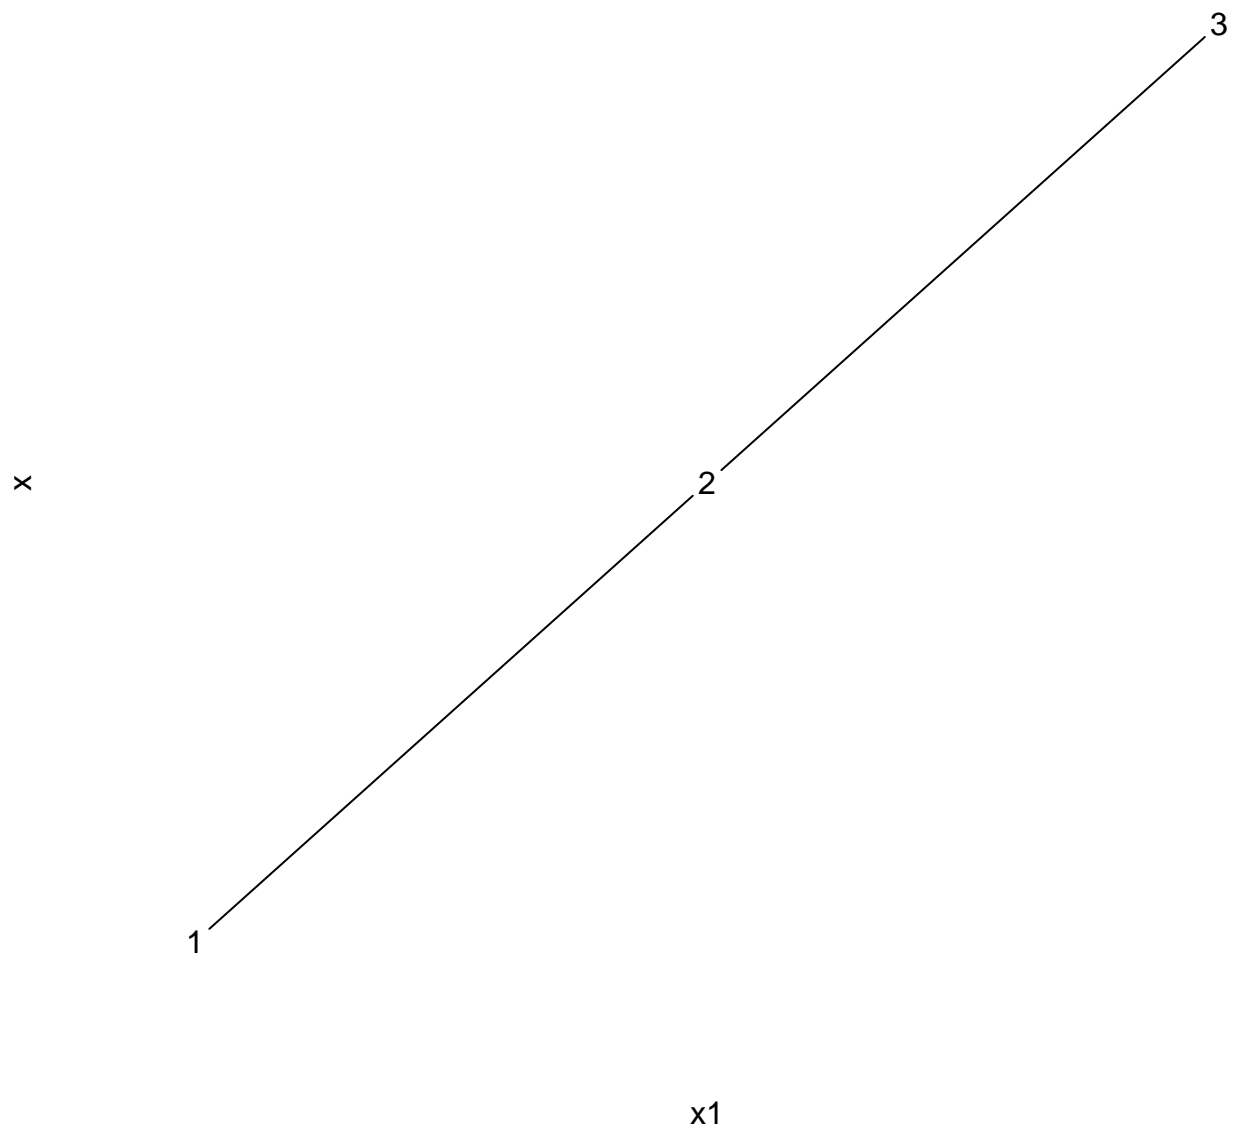

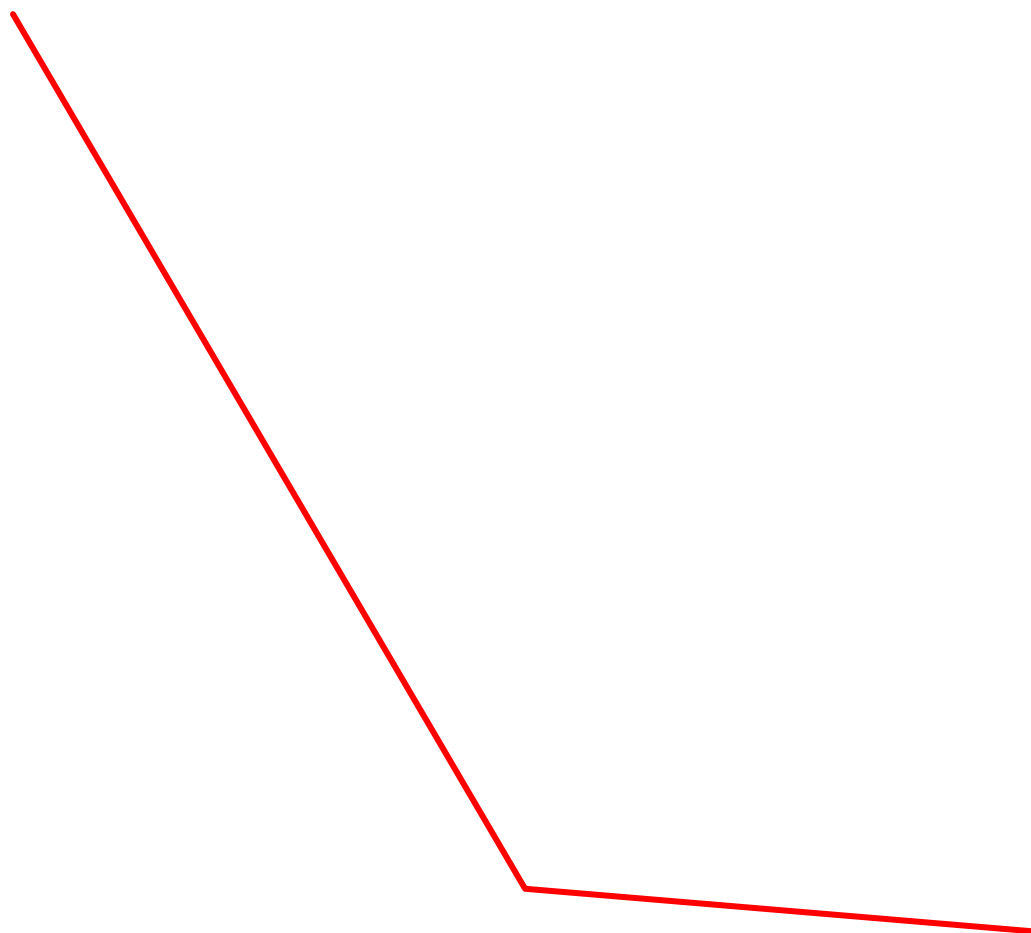

x

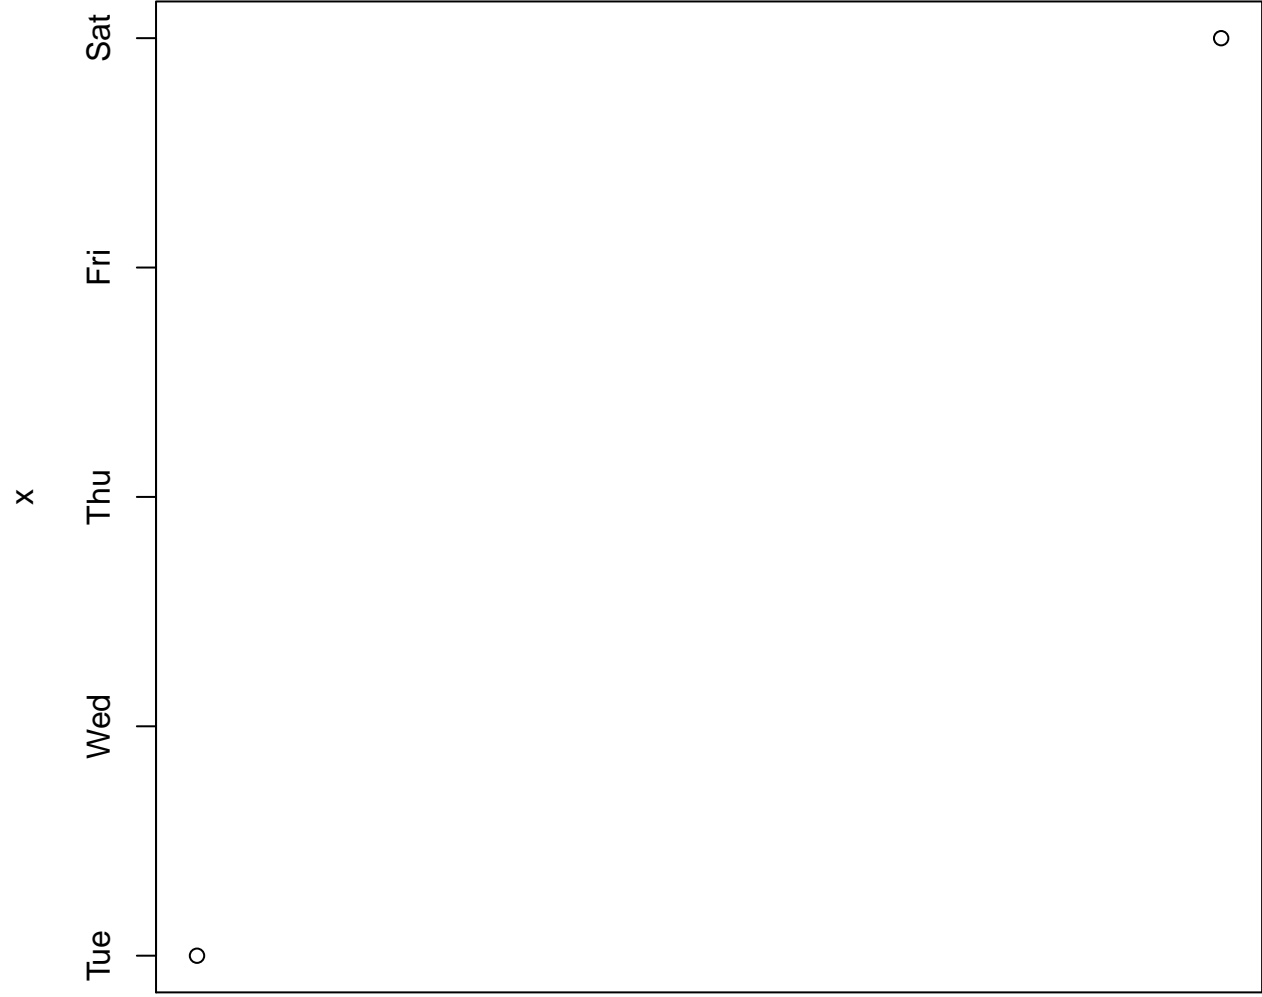

Index

