


7. Head–domain routing

Heads specialize by bias type

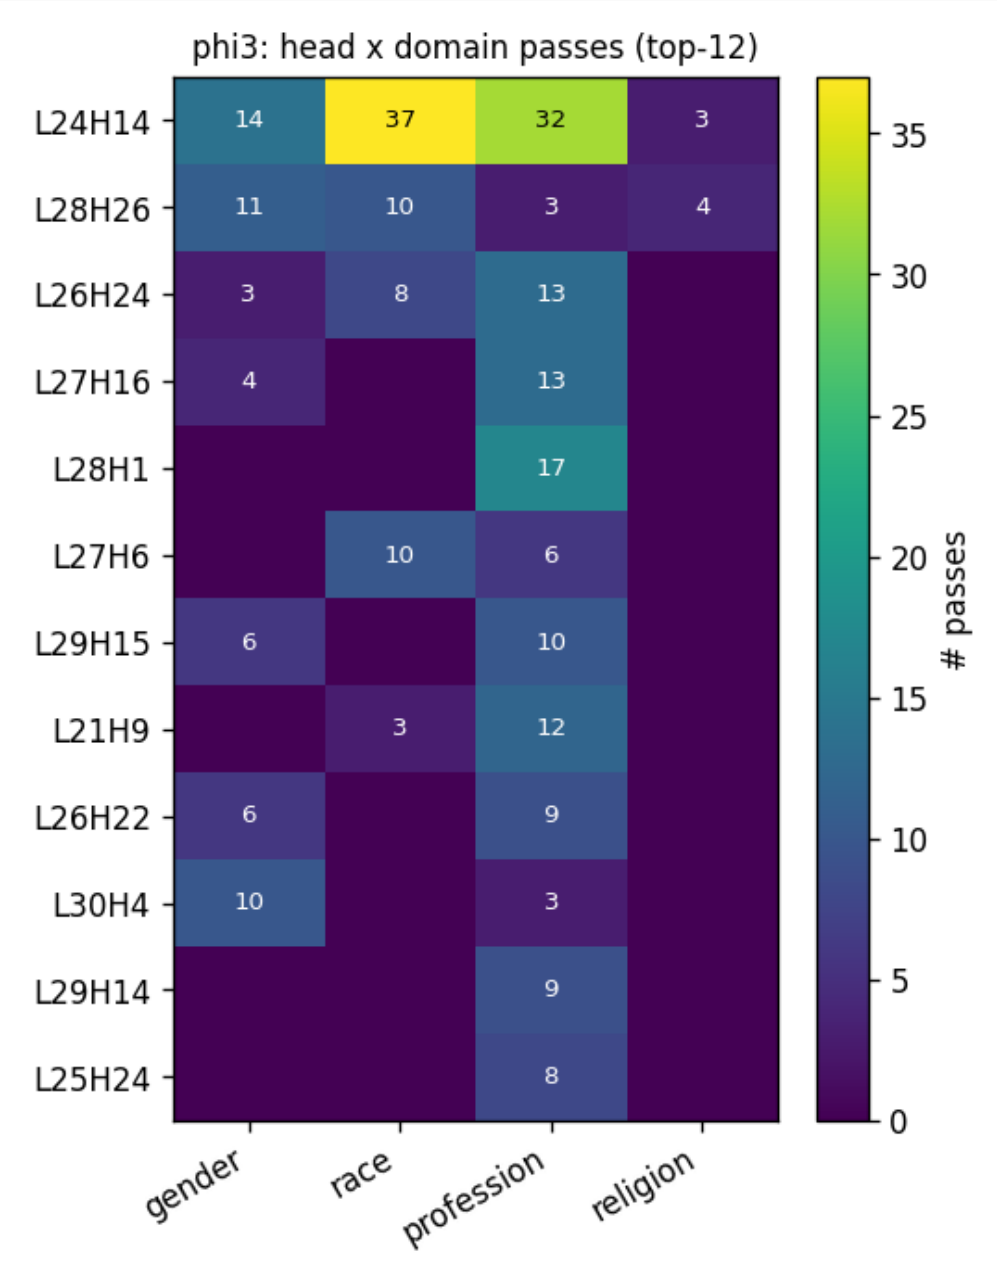

Each passing Phi-3 head concentrates on exactly one of {gender, race, profession, religion}. We inject only on rows whose `bias_type` matches, at an SNR-calibrated per-domain $\alpha_d = \tau / \overline{\text{SNR}}_d$ — one dial per axis, not one global scale.