



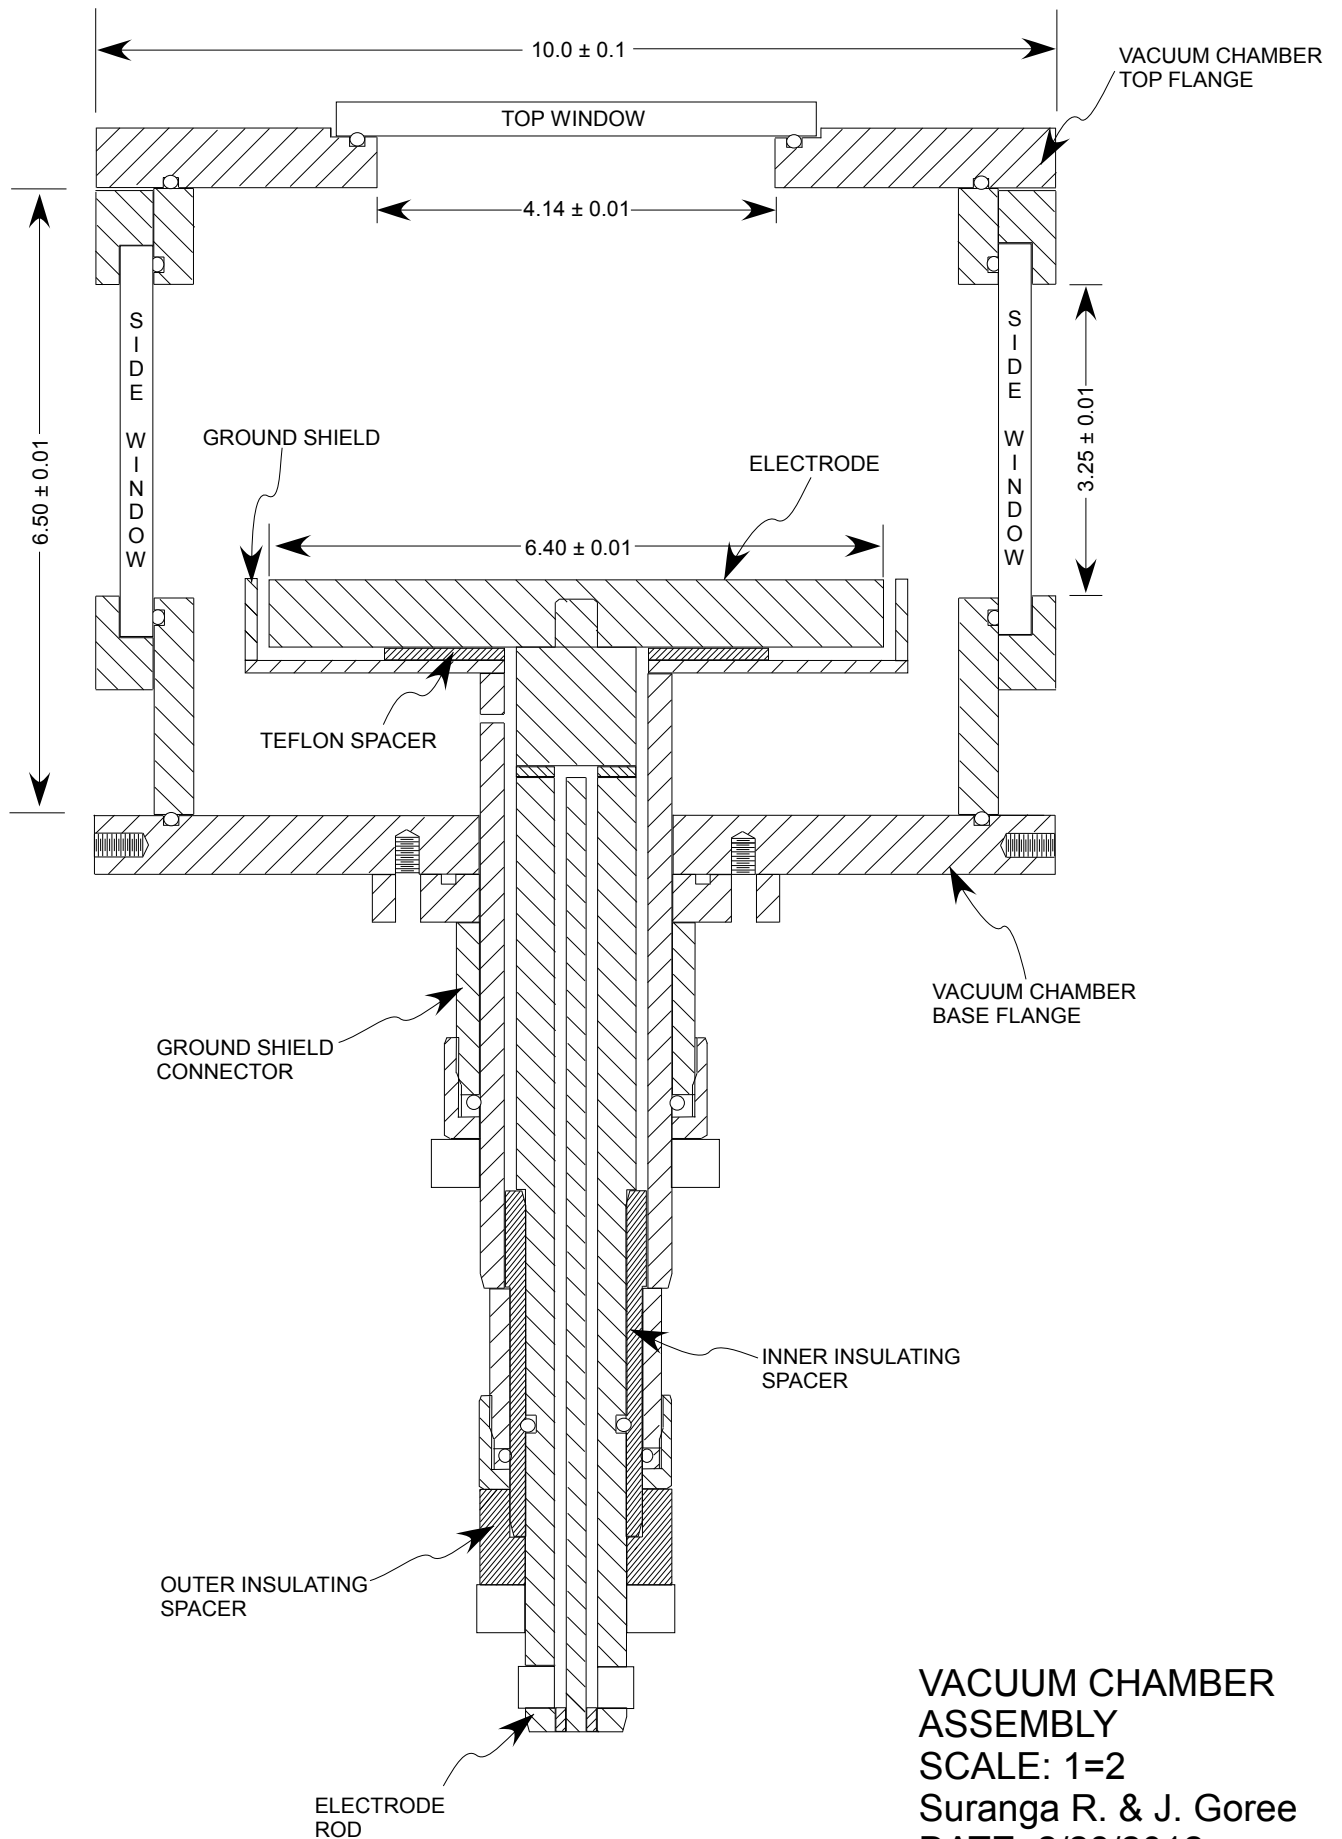

VACUUM CHAMBER
ASSEMBLY
SCALE: 1=2
Suranga R. & J. Goree
DATE: 2/28/2012

CHAMBER TOP VIEW

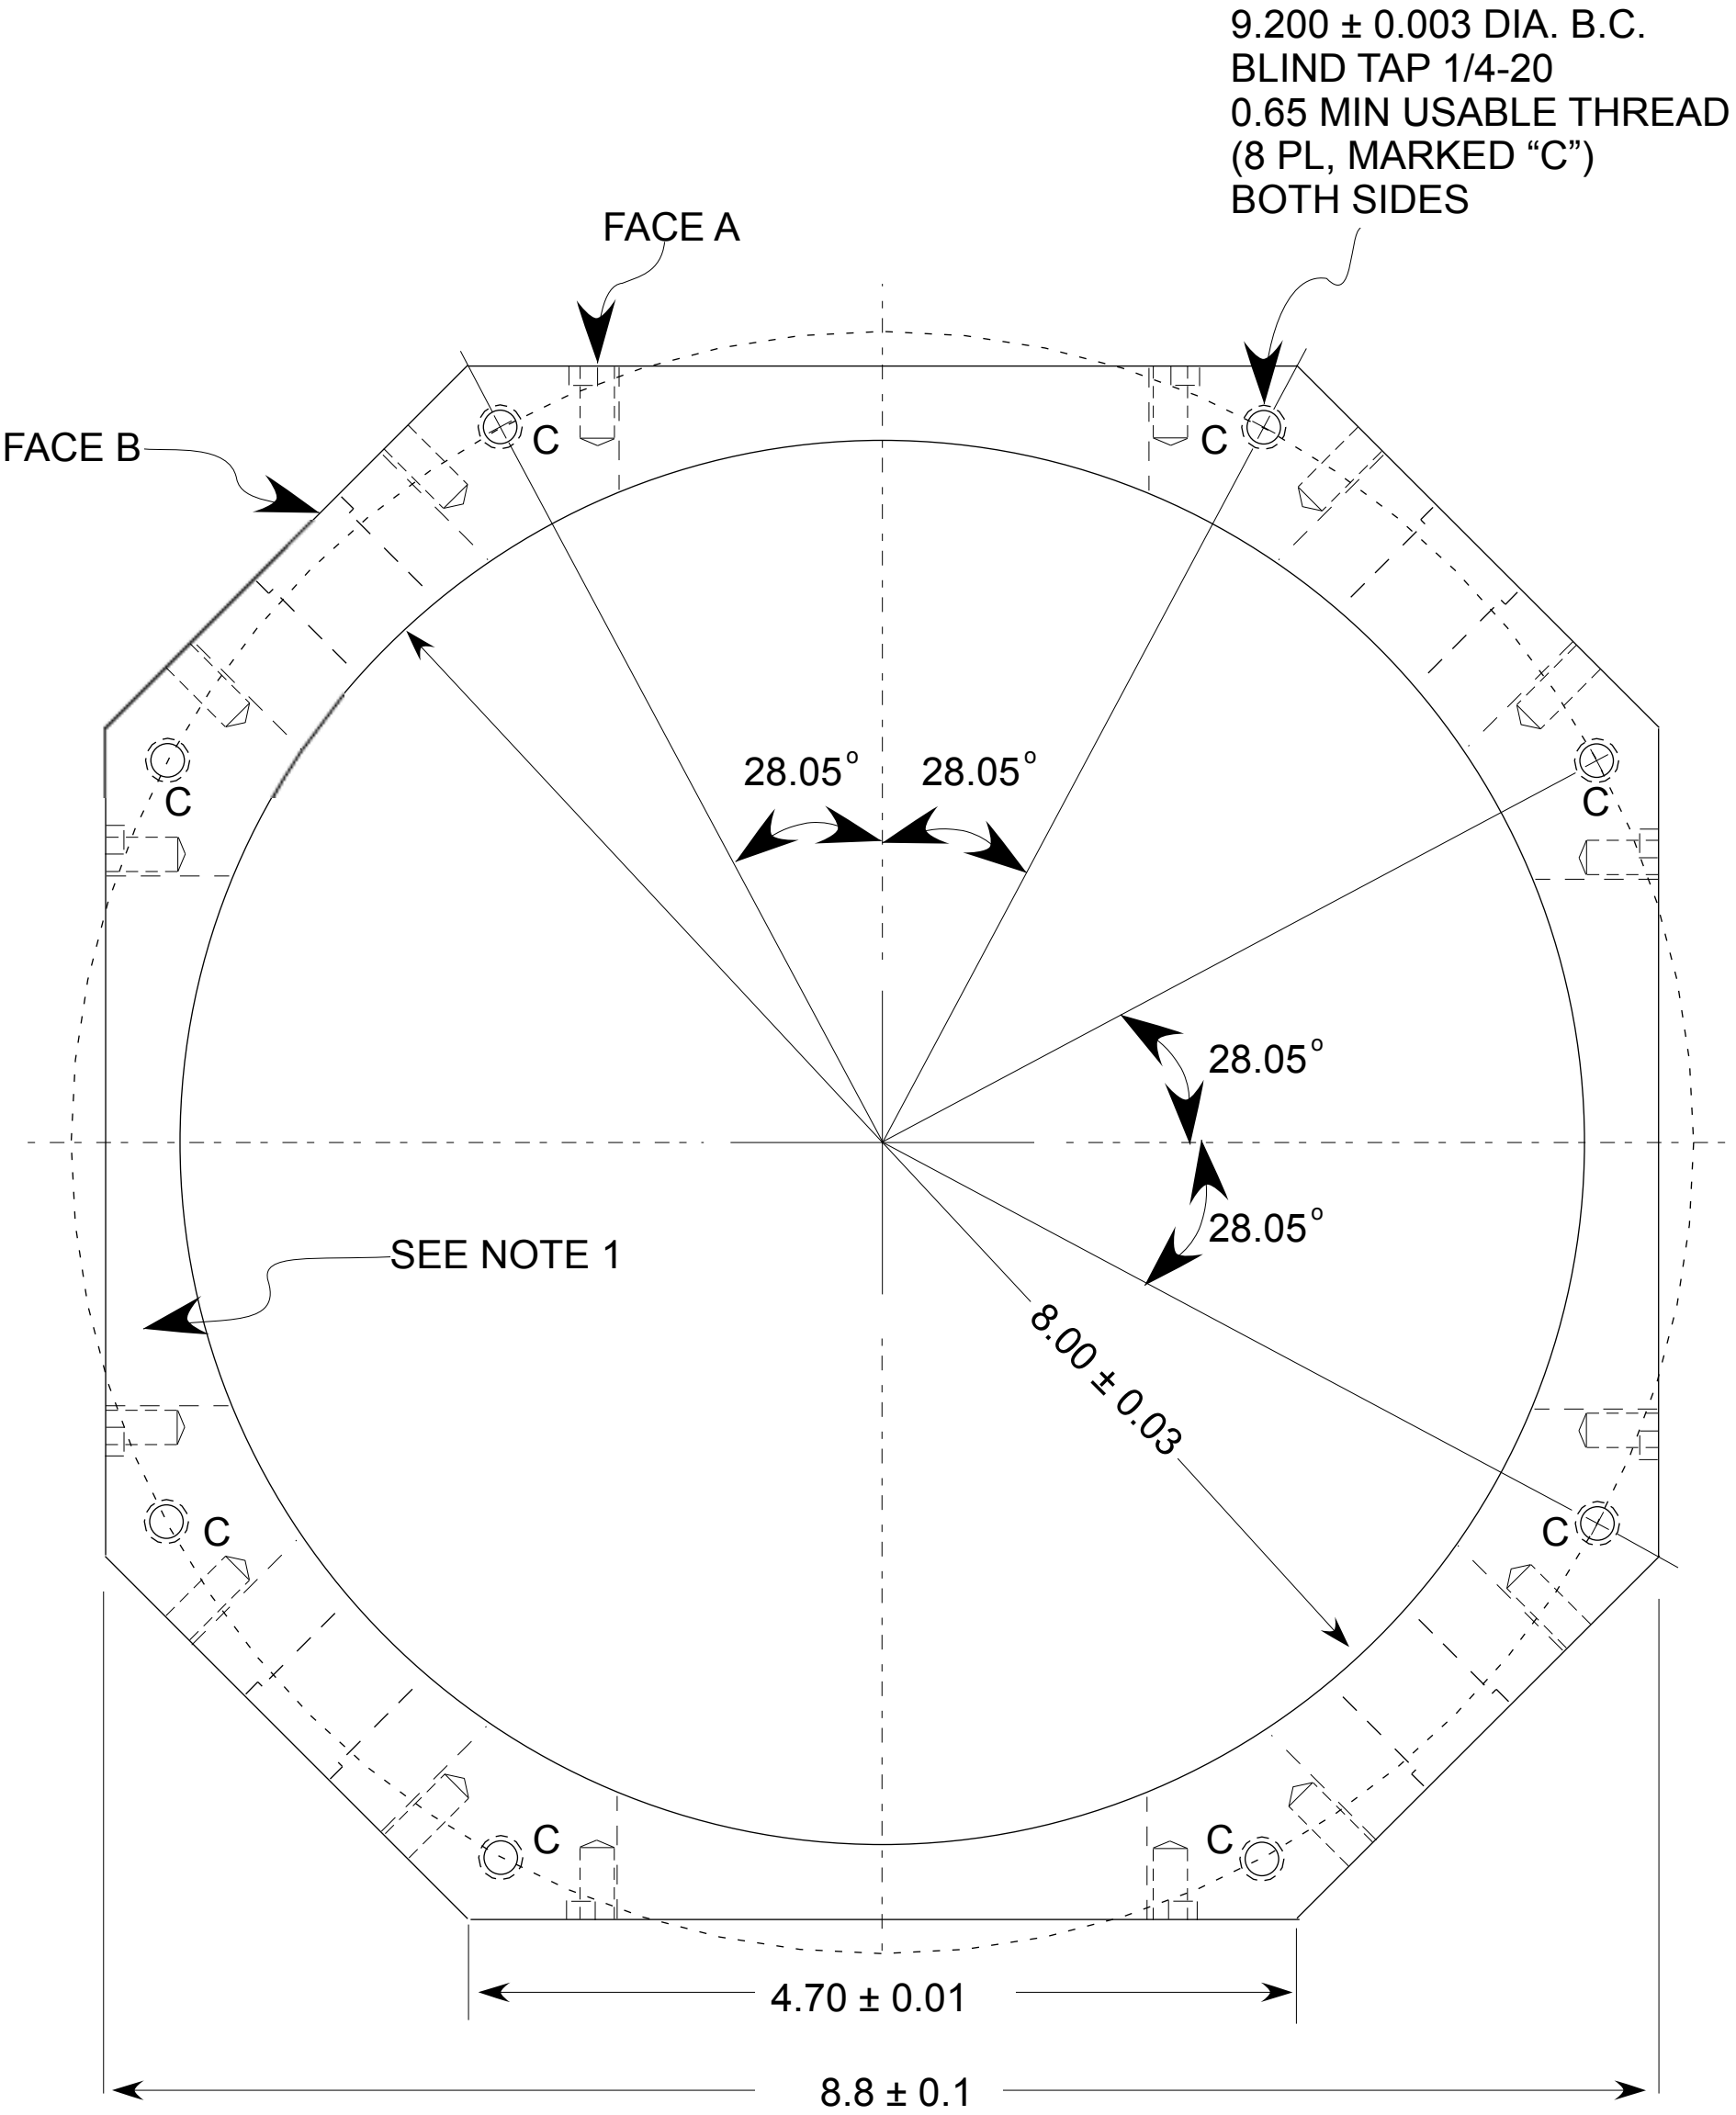

NOTE 1:
O-RING SURFACE ON BOTH
TOP AND BOTTOM SIDES
BETWEEN BOLT CIRCLE AND
INNER DIAMETER

CHAMBER WALL
SCALE: 1=1
MTL: S. S. 304
QTY: 1
Suranga R. & J. Goree
DATE: 2/28/2012

SECTION D-D

FACE A

BLIND TAP 10-32
0.45 MIN USABLE THREAD
(4 PL, MARKED "F")

CHAMBER WALL SIDE VIEW


SCALE: 1=1

MTL: S. S. 304


QTY: 1

Suranga R. & J. Goree

DATE: 2/28/2012

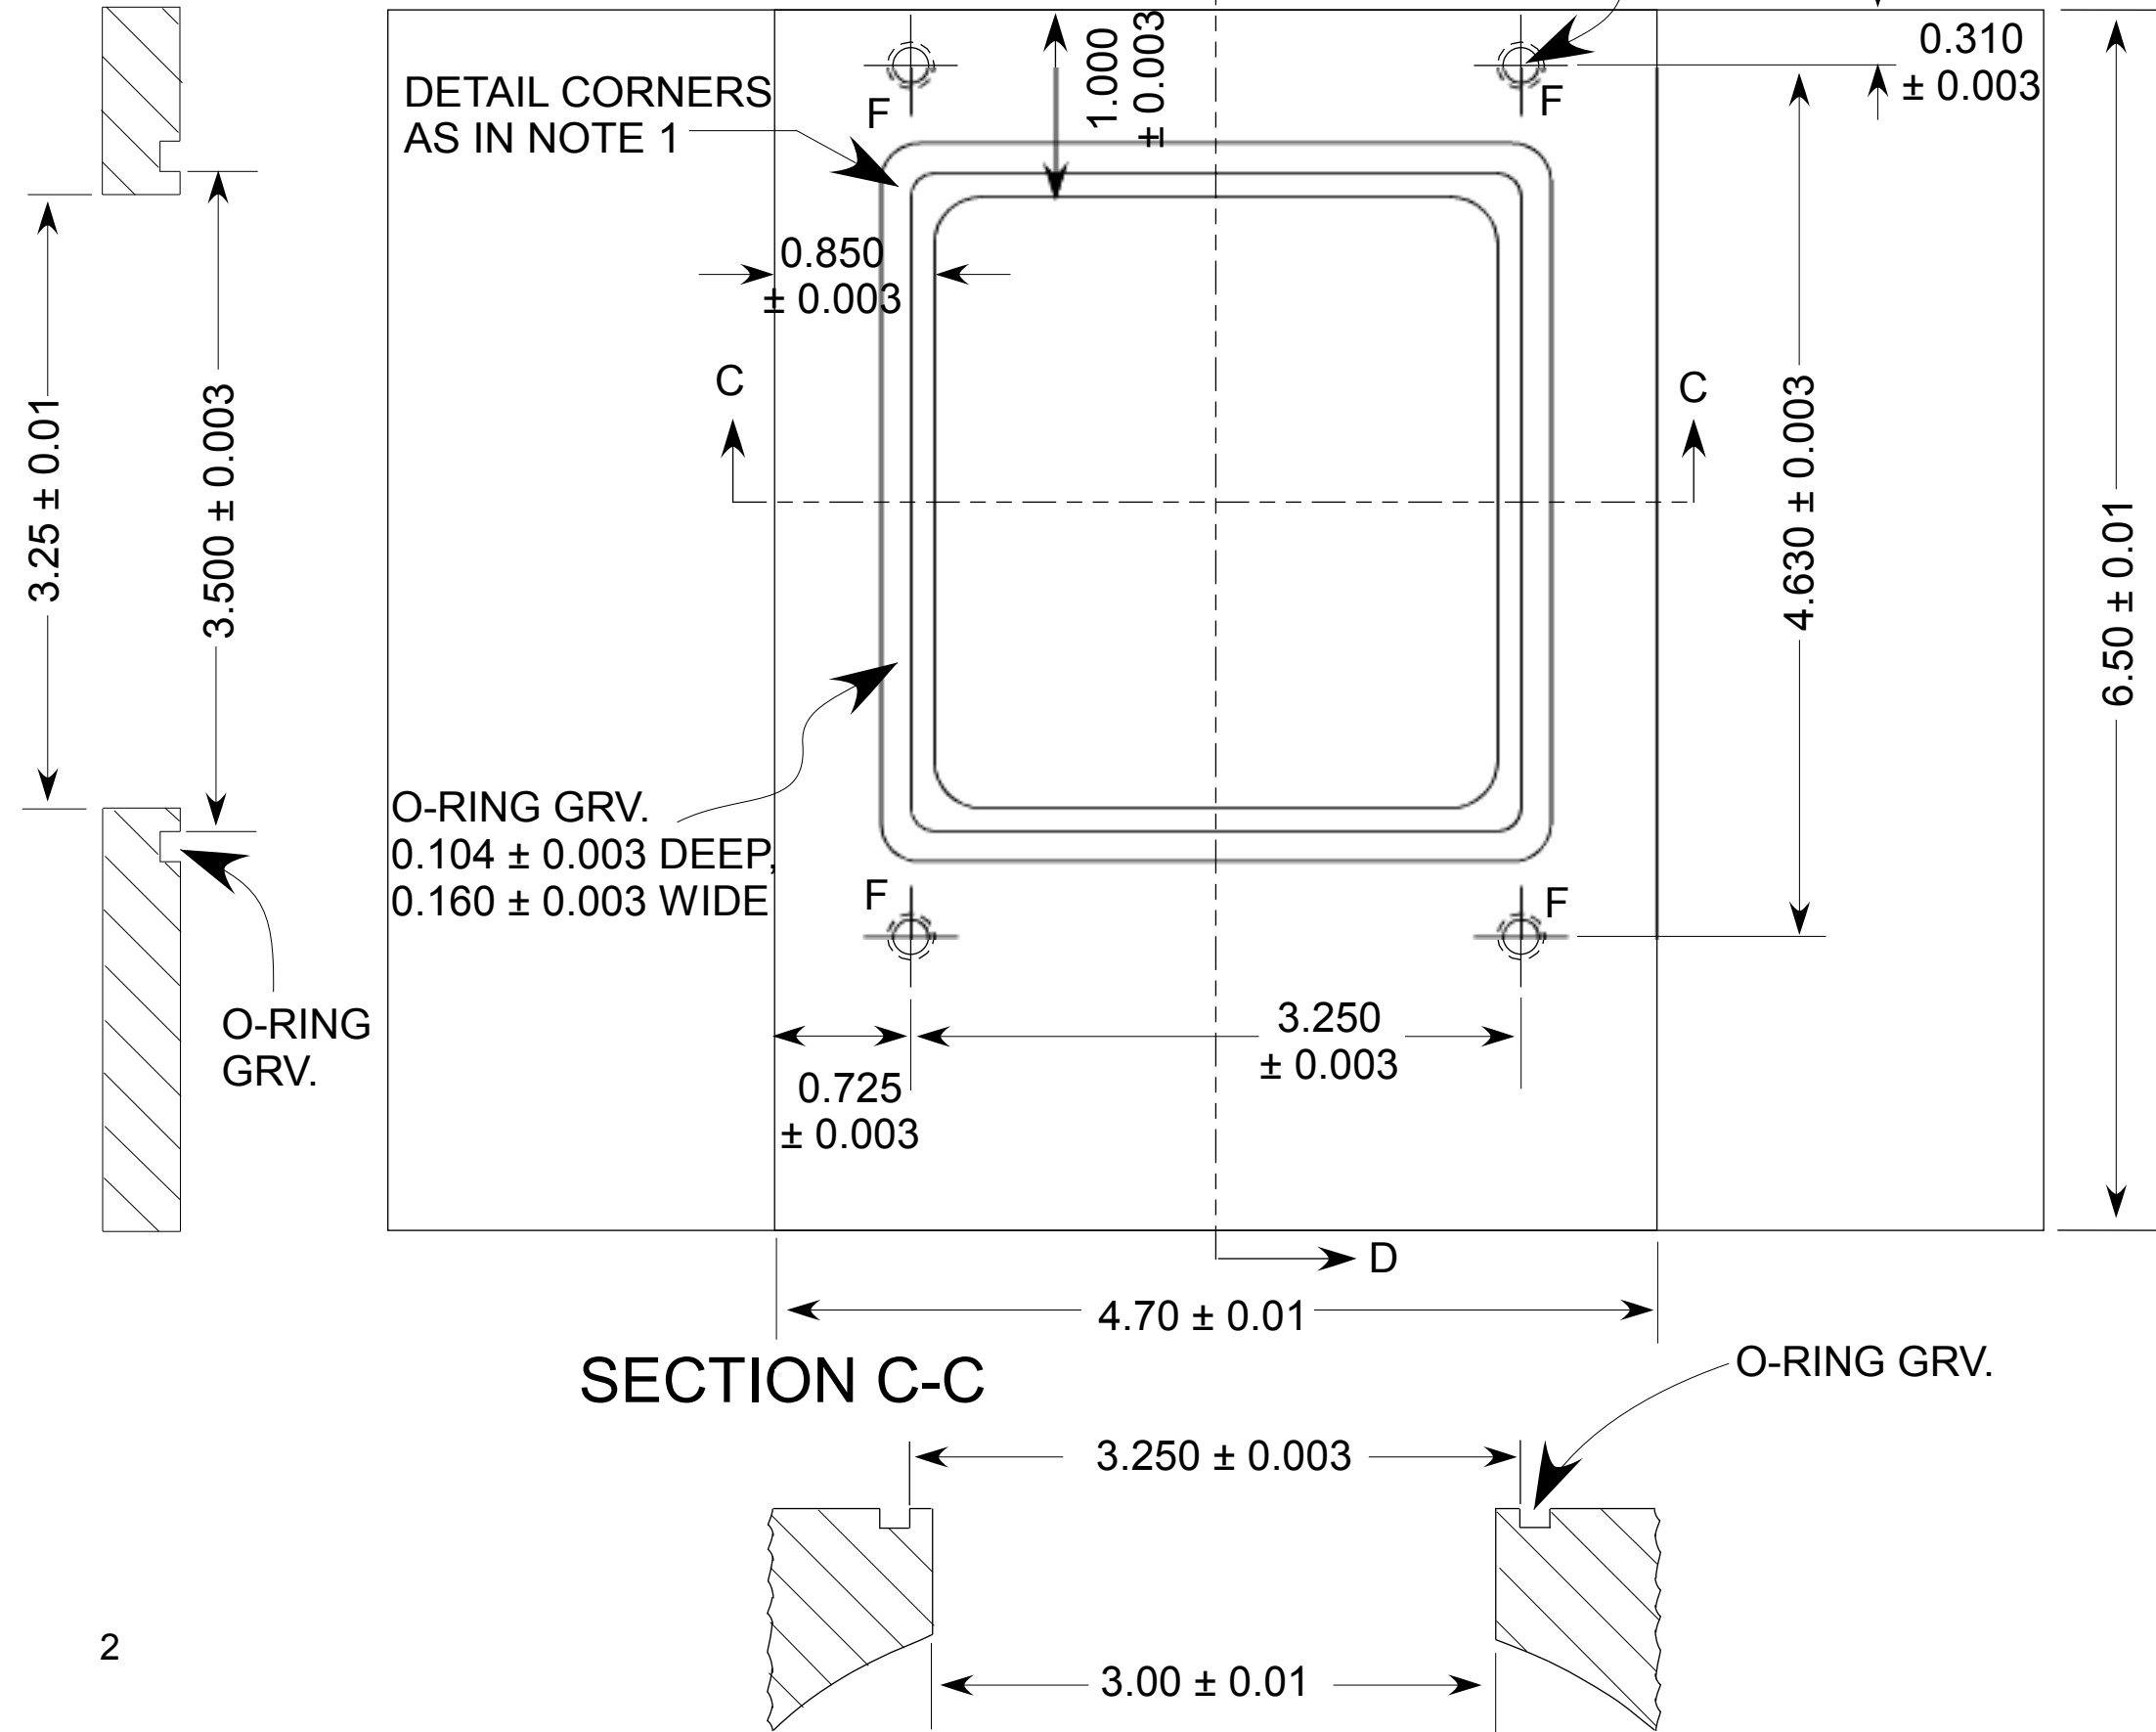



NOTE 1 - PORT & O-RING GRV.
CORNER DETAIL

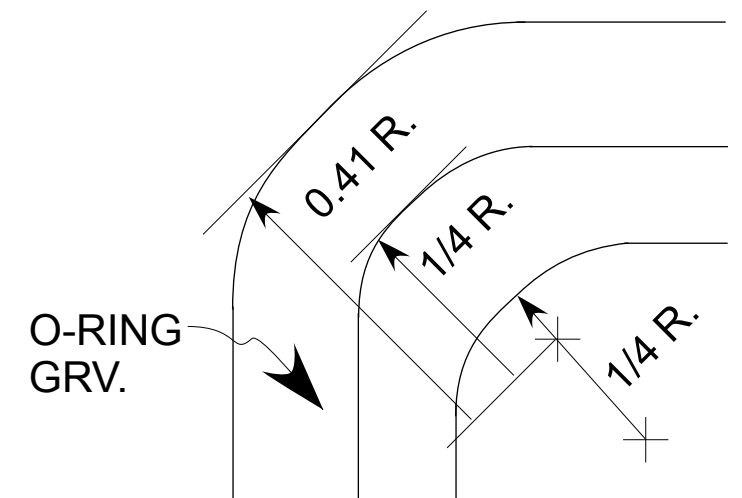

FOR USE WITH
O-RING: PARKER 2-243

NOTE 1: O-RING SURFACES:
ON THE OUTER SURFACE
SURROUNDING,
1. 3 × 1.5" RECTANGULAR PORT
2. 5/8" DIA. HOLE


SECTION E-E

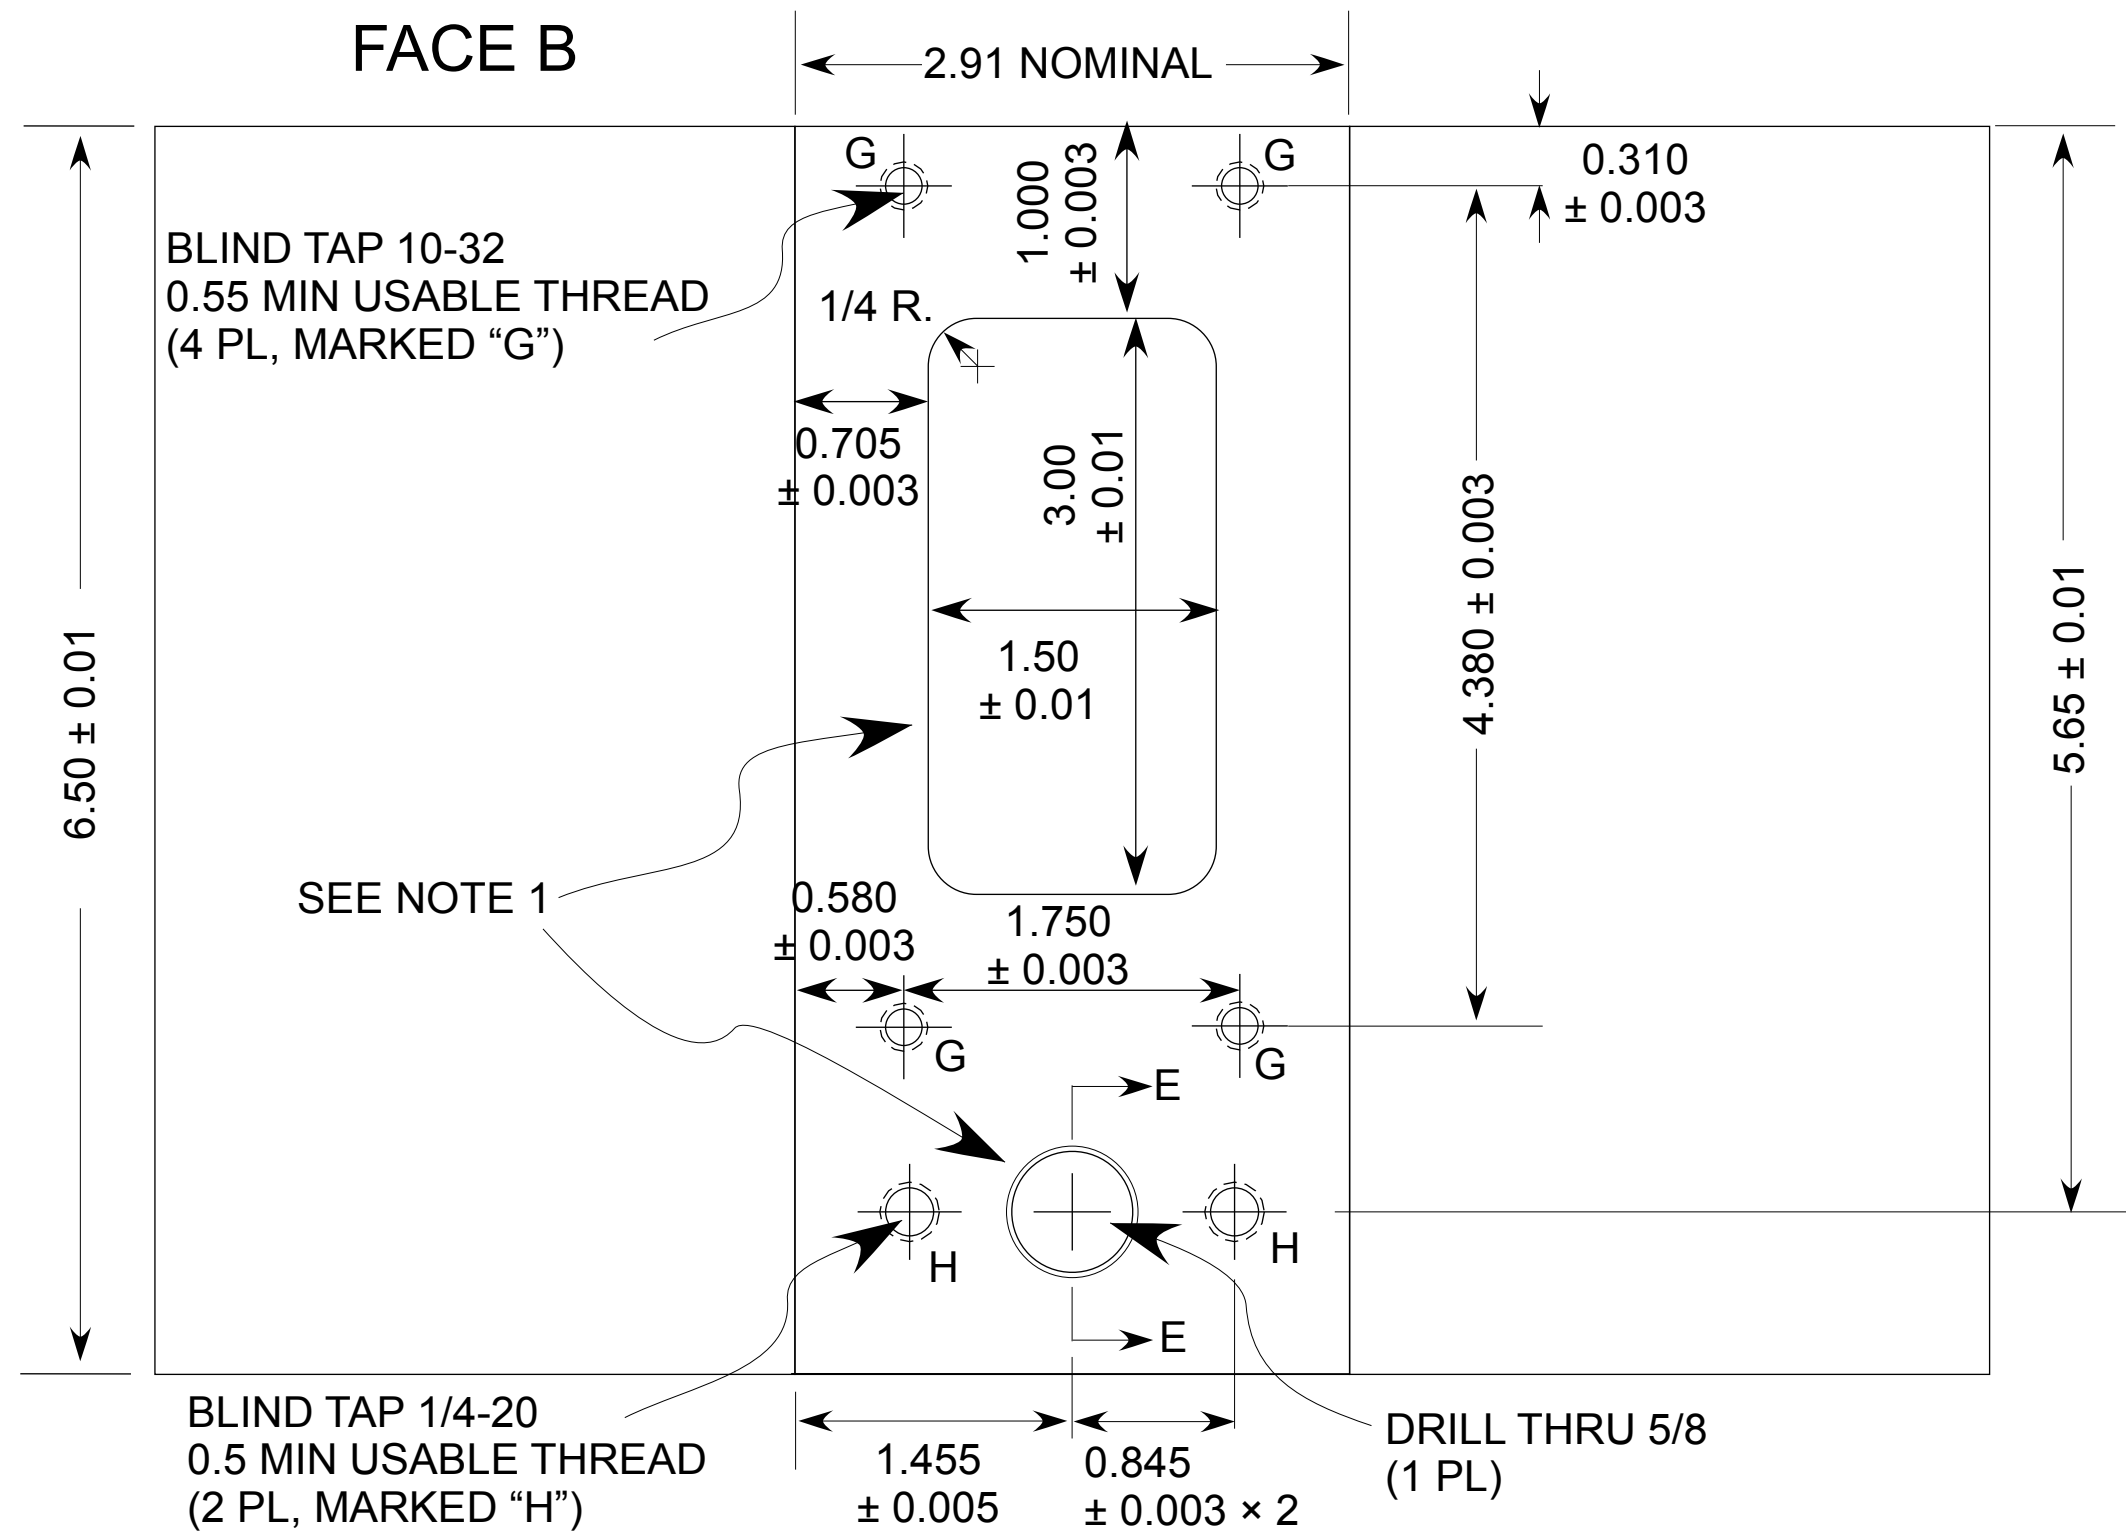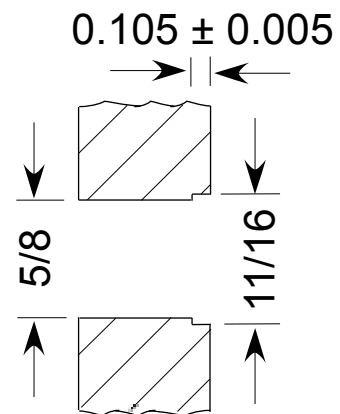

CHAMBER WALL SIDE VIEW
SCALE: 1=1
MTL: S. S. 304
QTY: 1
Suranga R. & J. Goree
DATE: 2/28/2012

TOP FLANGE
SCALE: 1=1
MTL: S. S. 304
QTY: 1
Suranga R. & J. Goree
DATE: 2/28/2012

FACE A (AIR SIDE)

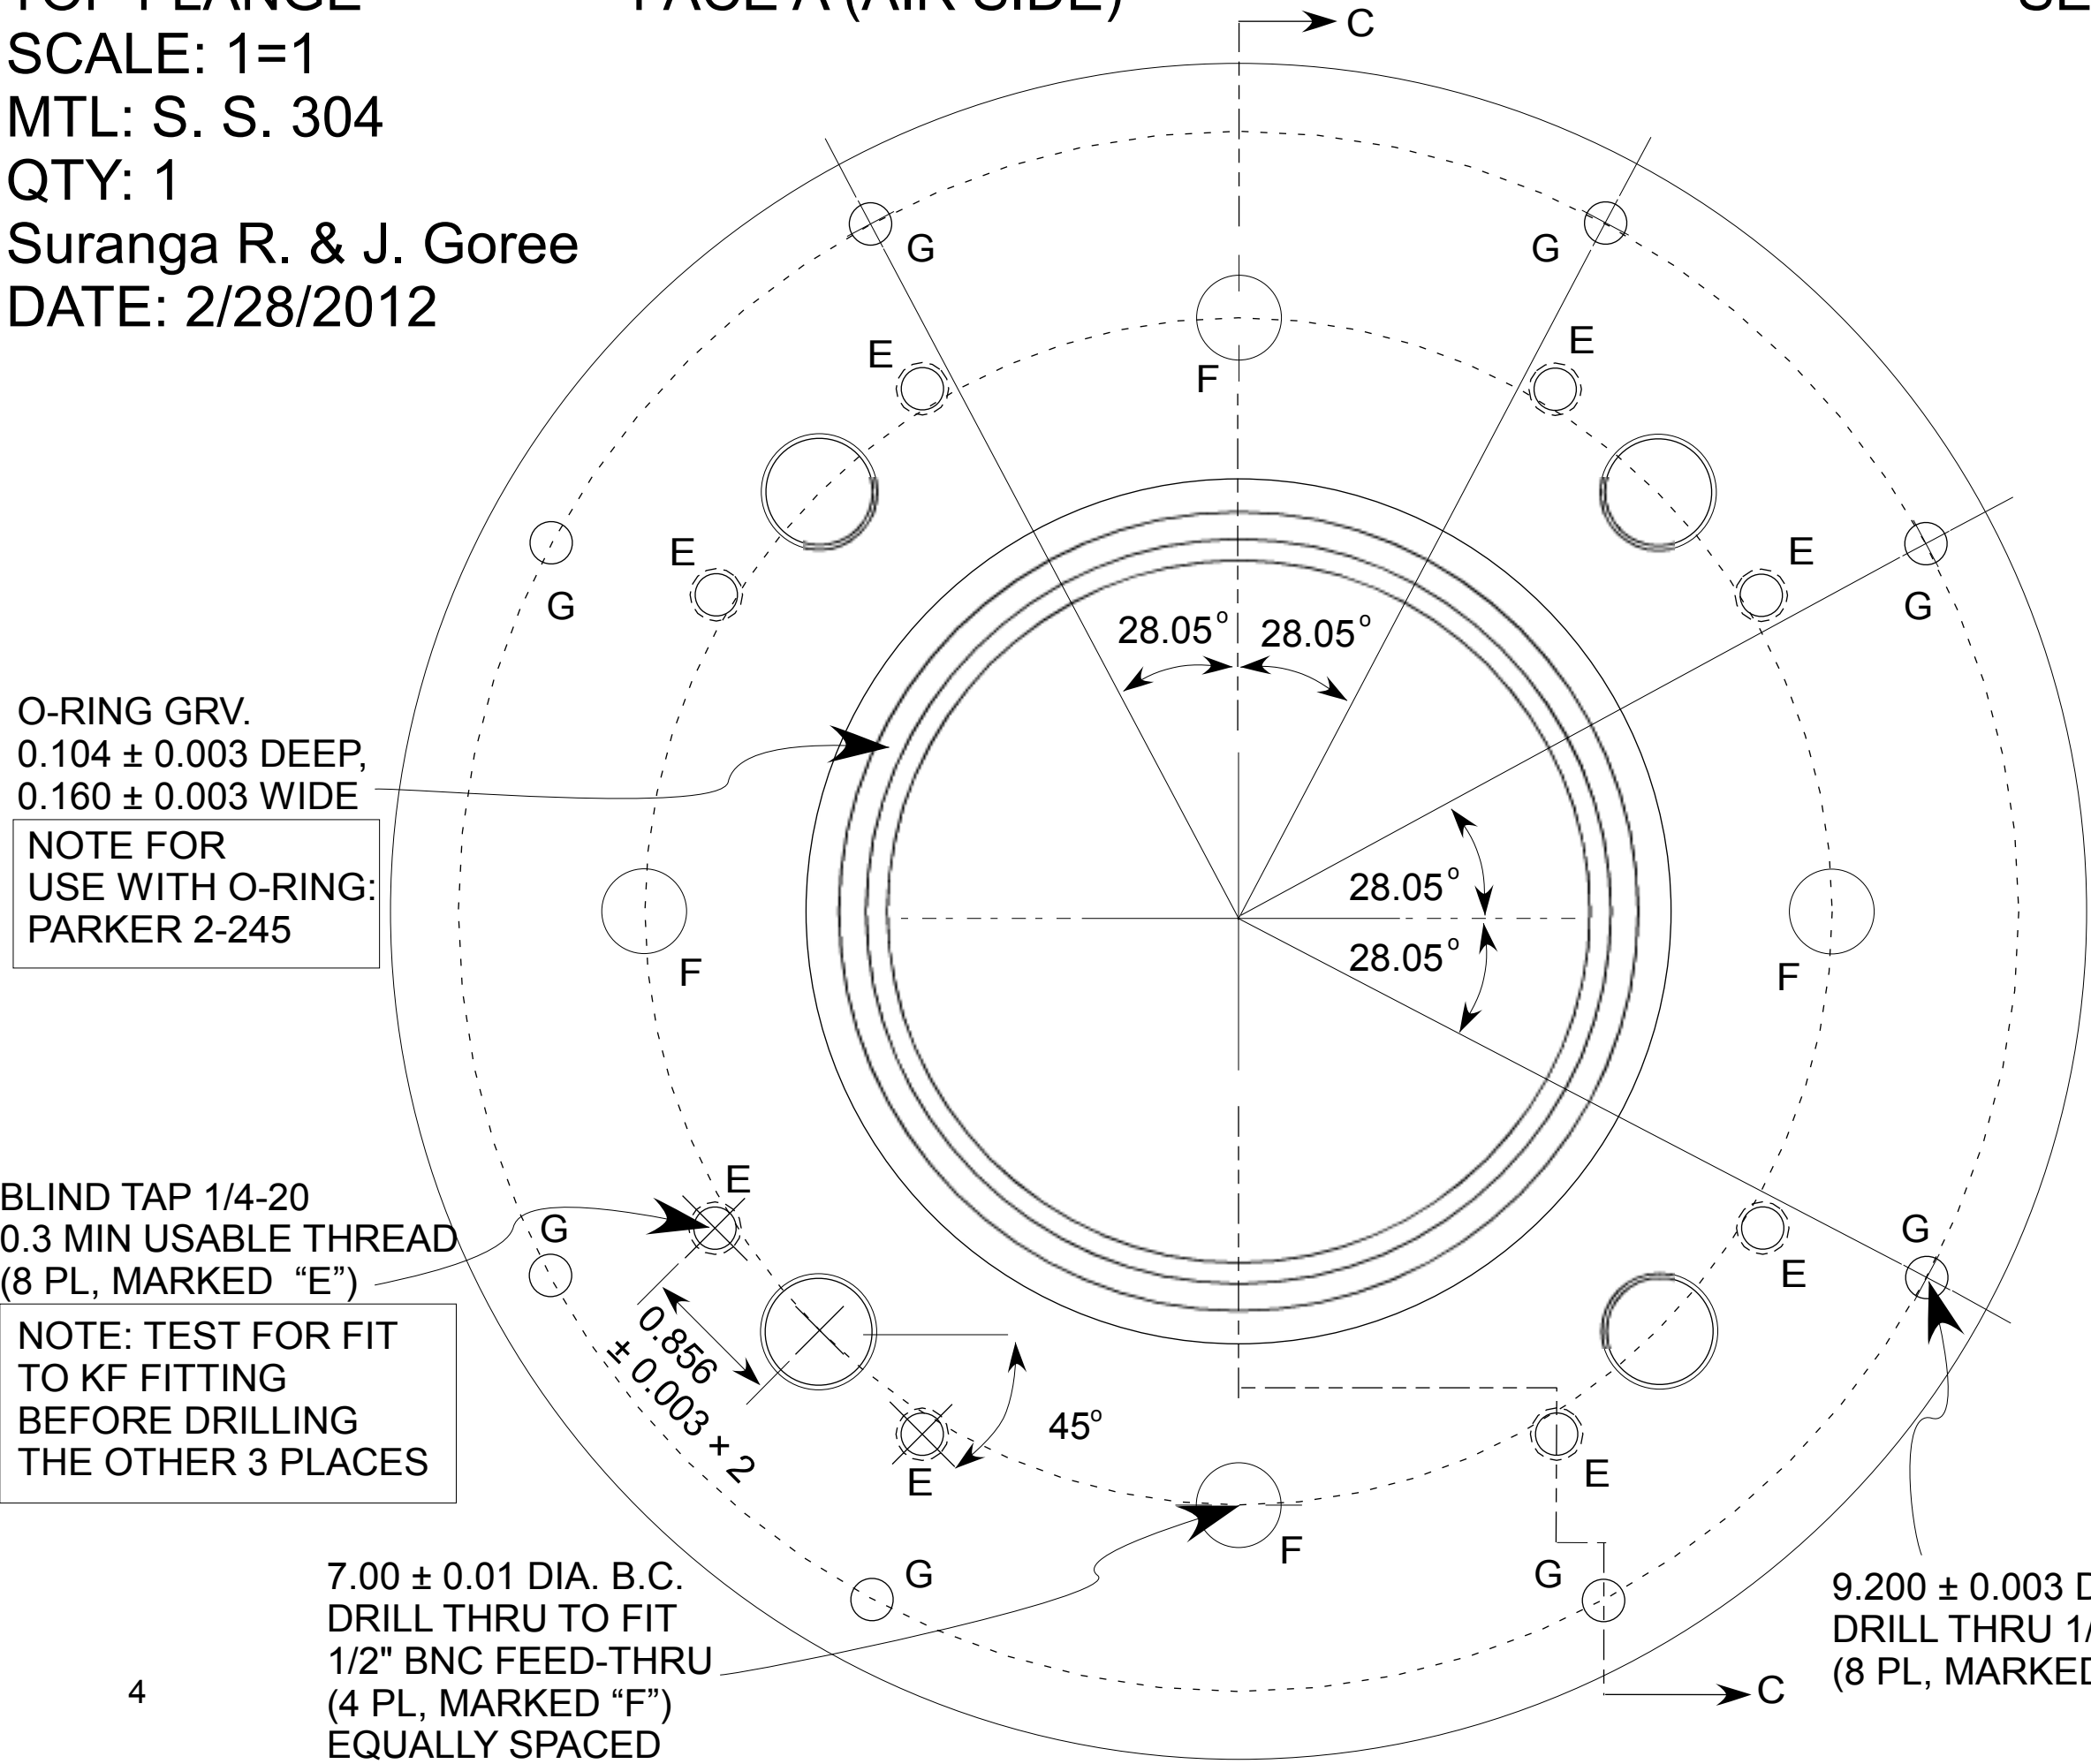


O-RING GRV.
0.104 ± 0.003 DEEP,
0.160 ± 0.003 WIDE
NOTE FOR
USE WITH O-RING:
PARKER 2-245

BLIND TAP 1/4-20
0.3 MIN USABLE THREAD
(8 PL, MARKED "E")
NOTE: TEST FOR FIT
TO KF FITTING
BEFORE DRILLING
THE OTHER 3 PLACES

7.00 ± 0.01 DIA. B.C.
DRILL THRU TO FIT
1/2" BNC FEED-THRU
(4 PL, MARKED "F")
EQUALLY SPACED


9.200 ± 0.003 DIA. B.C.
DRILL THRU 1/4-20
(8 PL, MARKED "G")

SECTION C-C

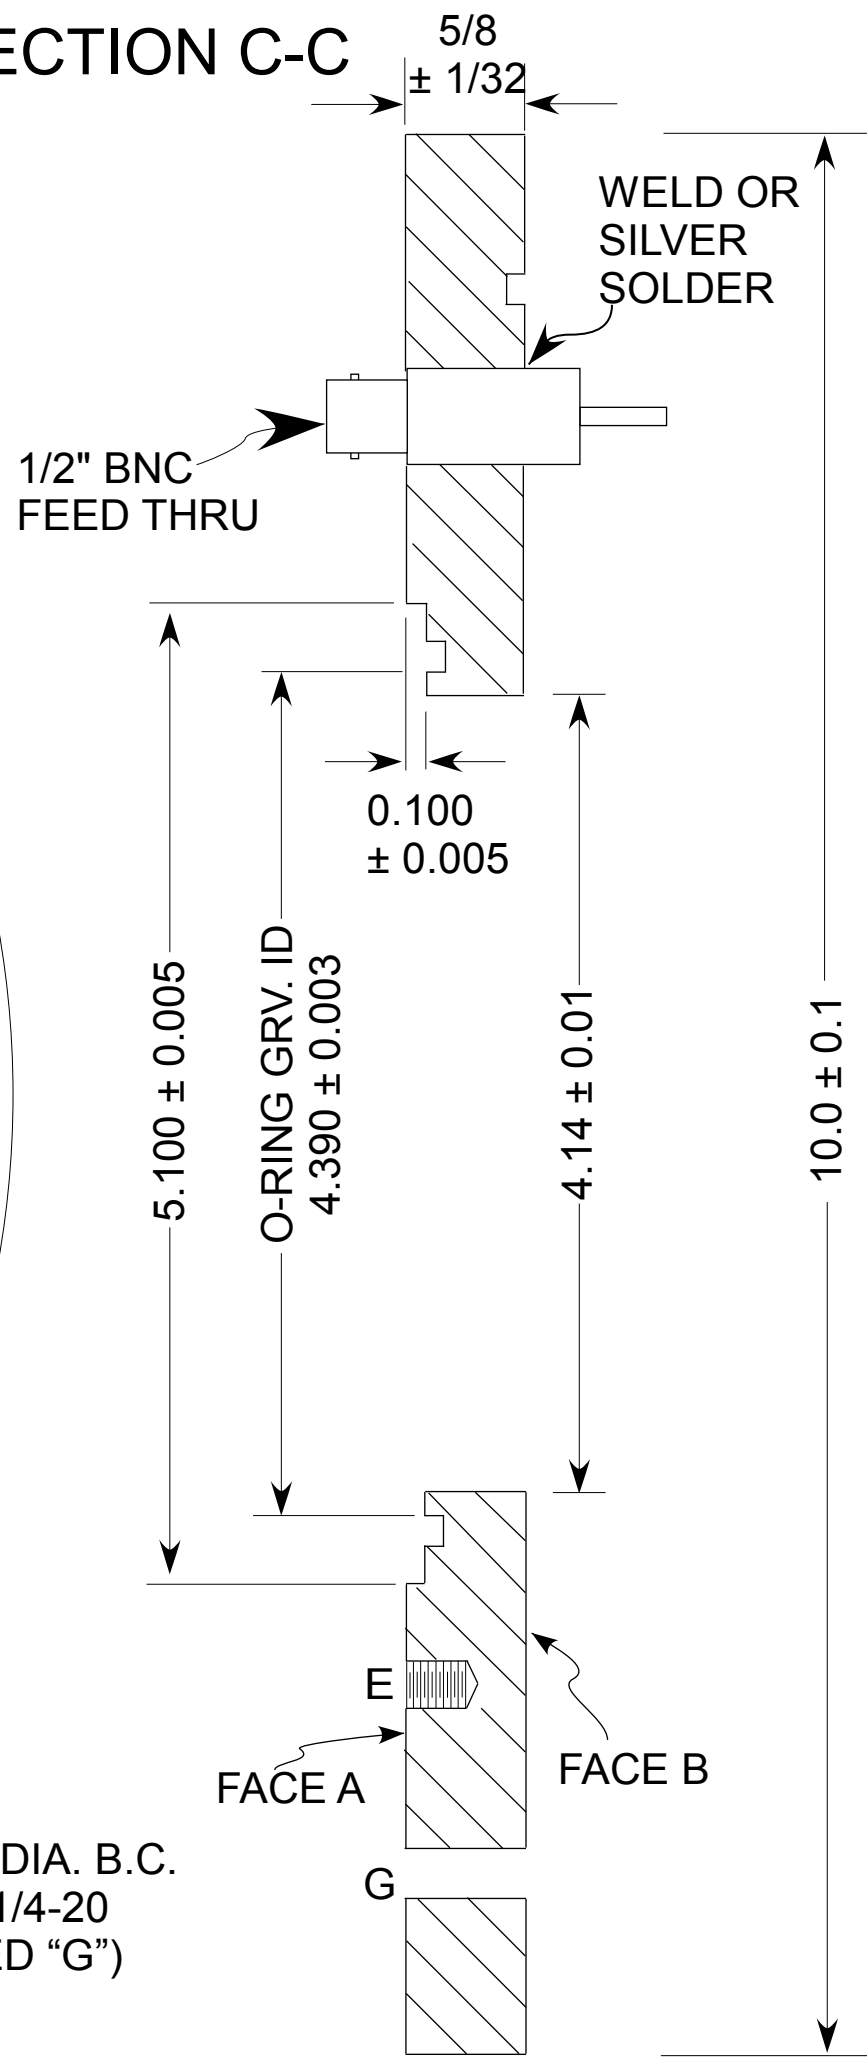


TOP FLANGE
SCALE: 1=1
MTL: S. S. 304
QTY: 1
Suranga R. & J. Goree
DATE: 2/28/2012

FACE B (VACUUM SIDE)

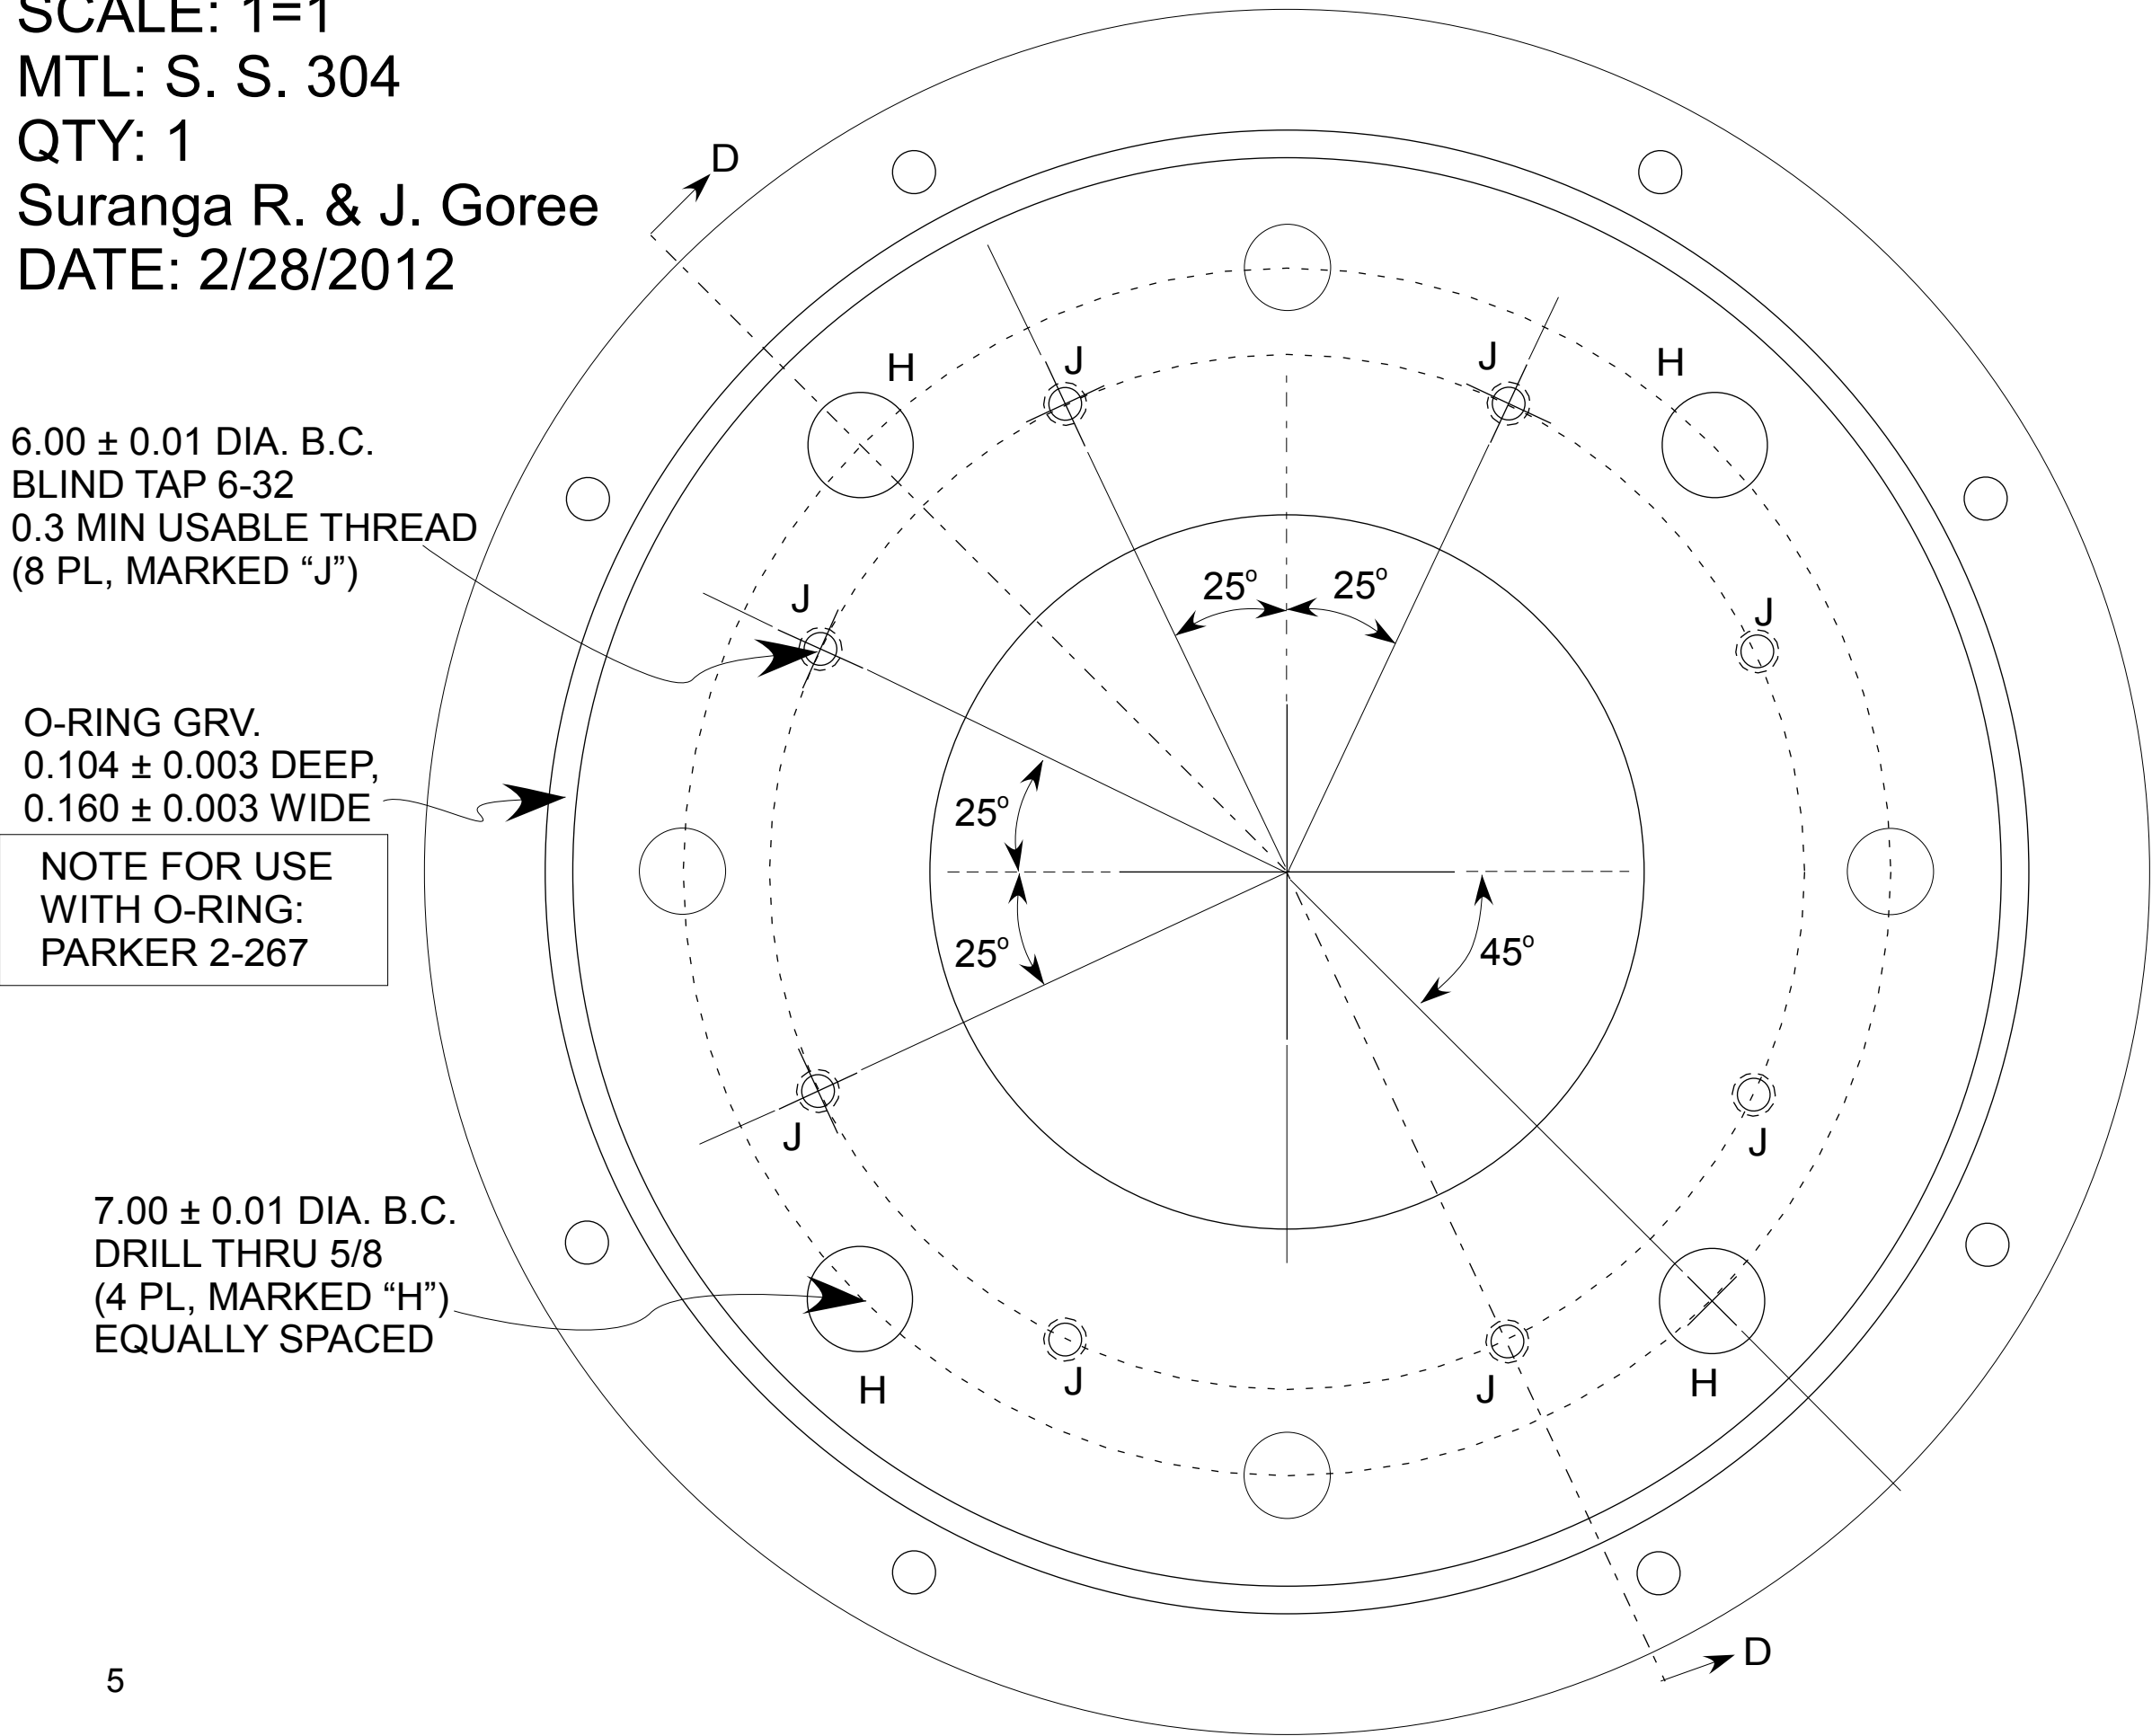

SECTION D-D

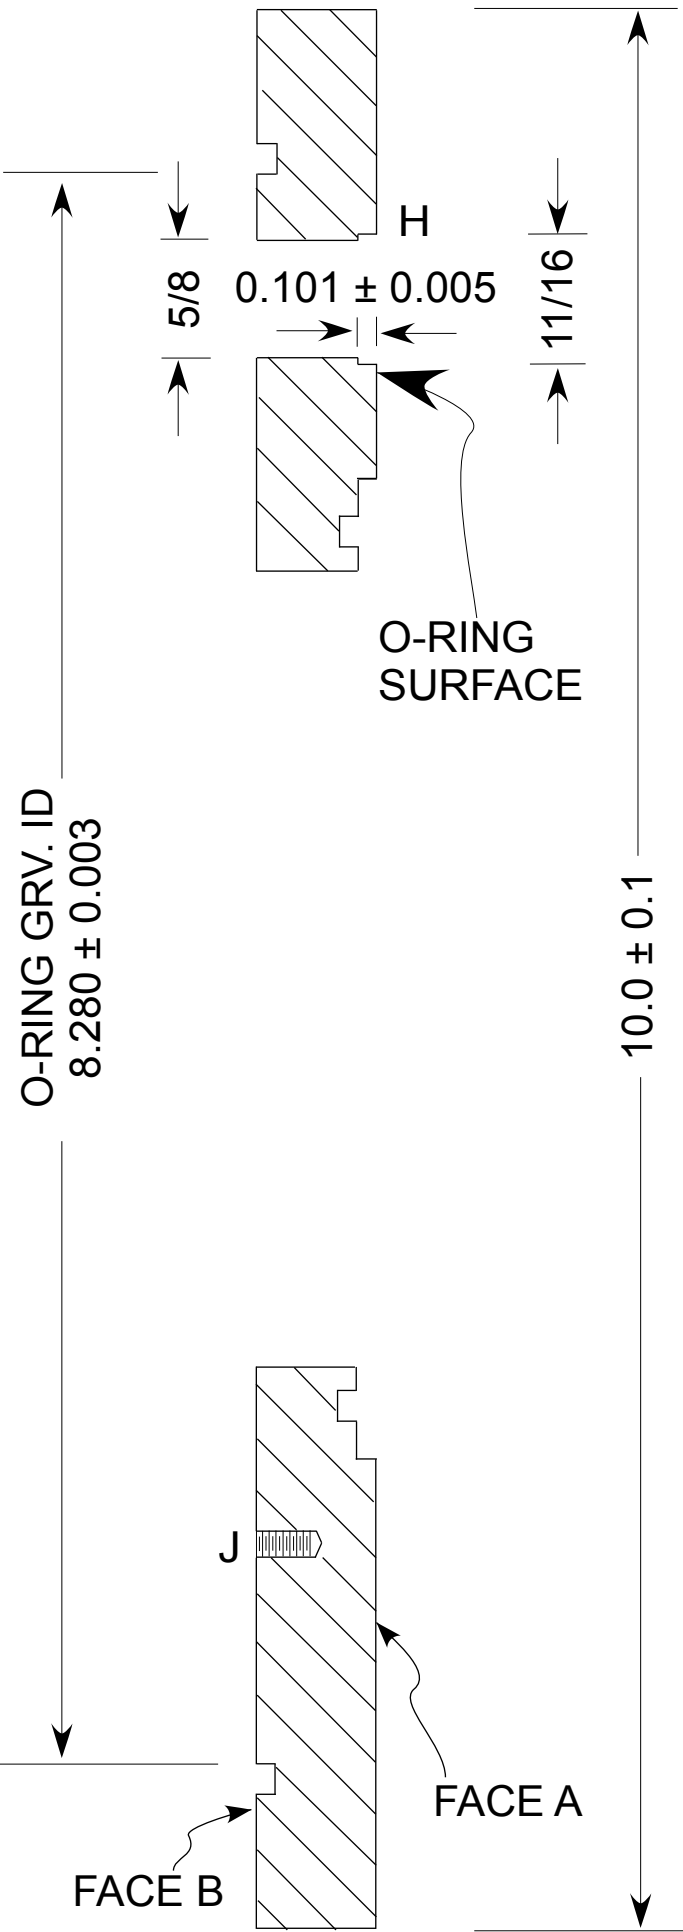

FACE A (AIR SIDE)

SECTION C-C

BLIND TAP 1/4-20
0.3 MIN USABLE THREAD
(8 PL, MARKED "H")


9.200 $\pm$ 0.003 DIA. B.C.
DRILL THRU 1/4-20
(8 PL, MARKED "J")

NOTE 1:
O-RING SURFACE
BETWEEN CENTRAL
HOLE &
3.5 DIA. B.C.

NOTE 2: TEST FOR FIT
TO KF FITTING
BEFORE DRILLING THE
OTHER
2 PLACES

DRILL THRU &
TAP 10-32
(1 PL)

BASE FLANGE
SCALE: 1=1
MTL: S. S. 304
QTY: 1
Suranga R. & J. Goree
DATE: 2/28/2012

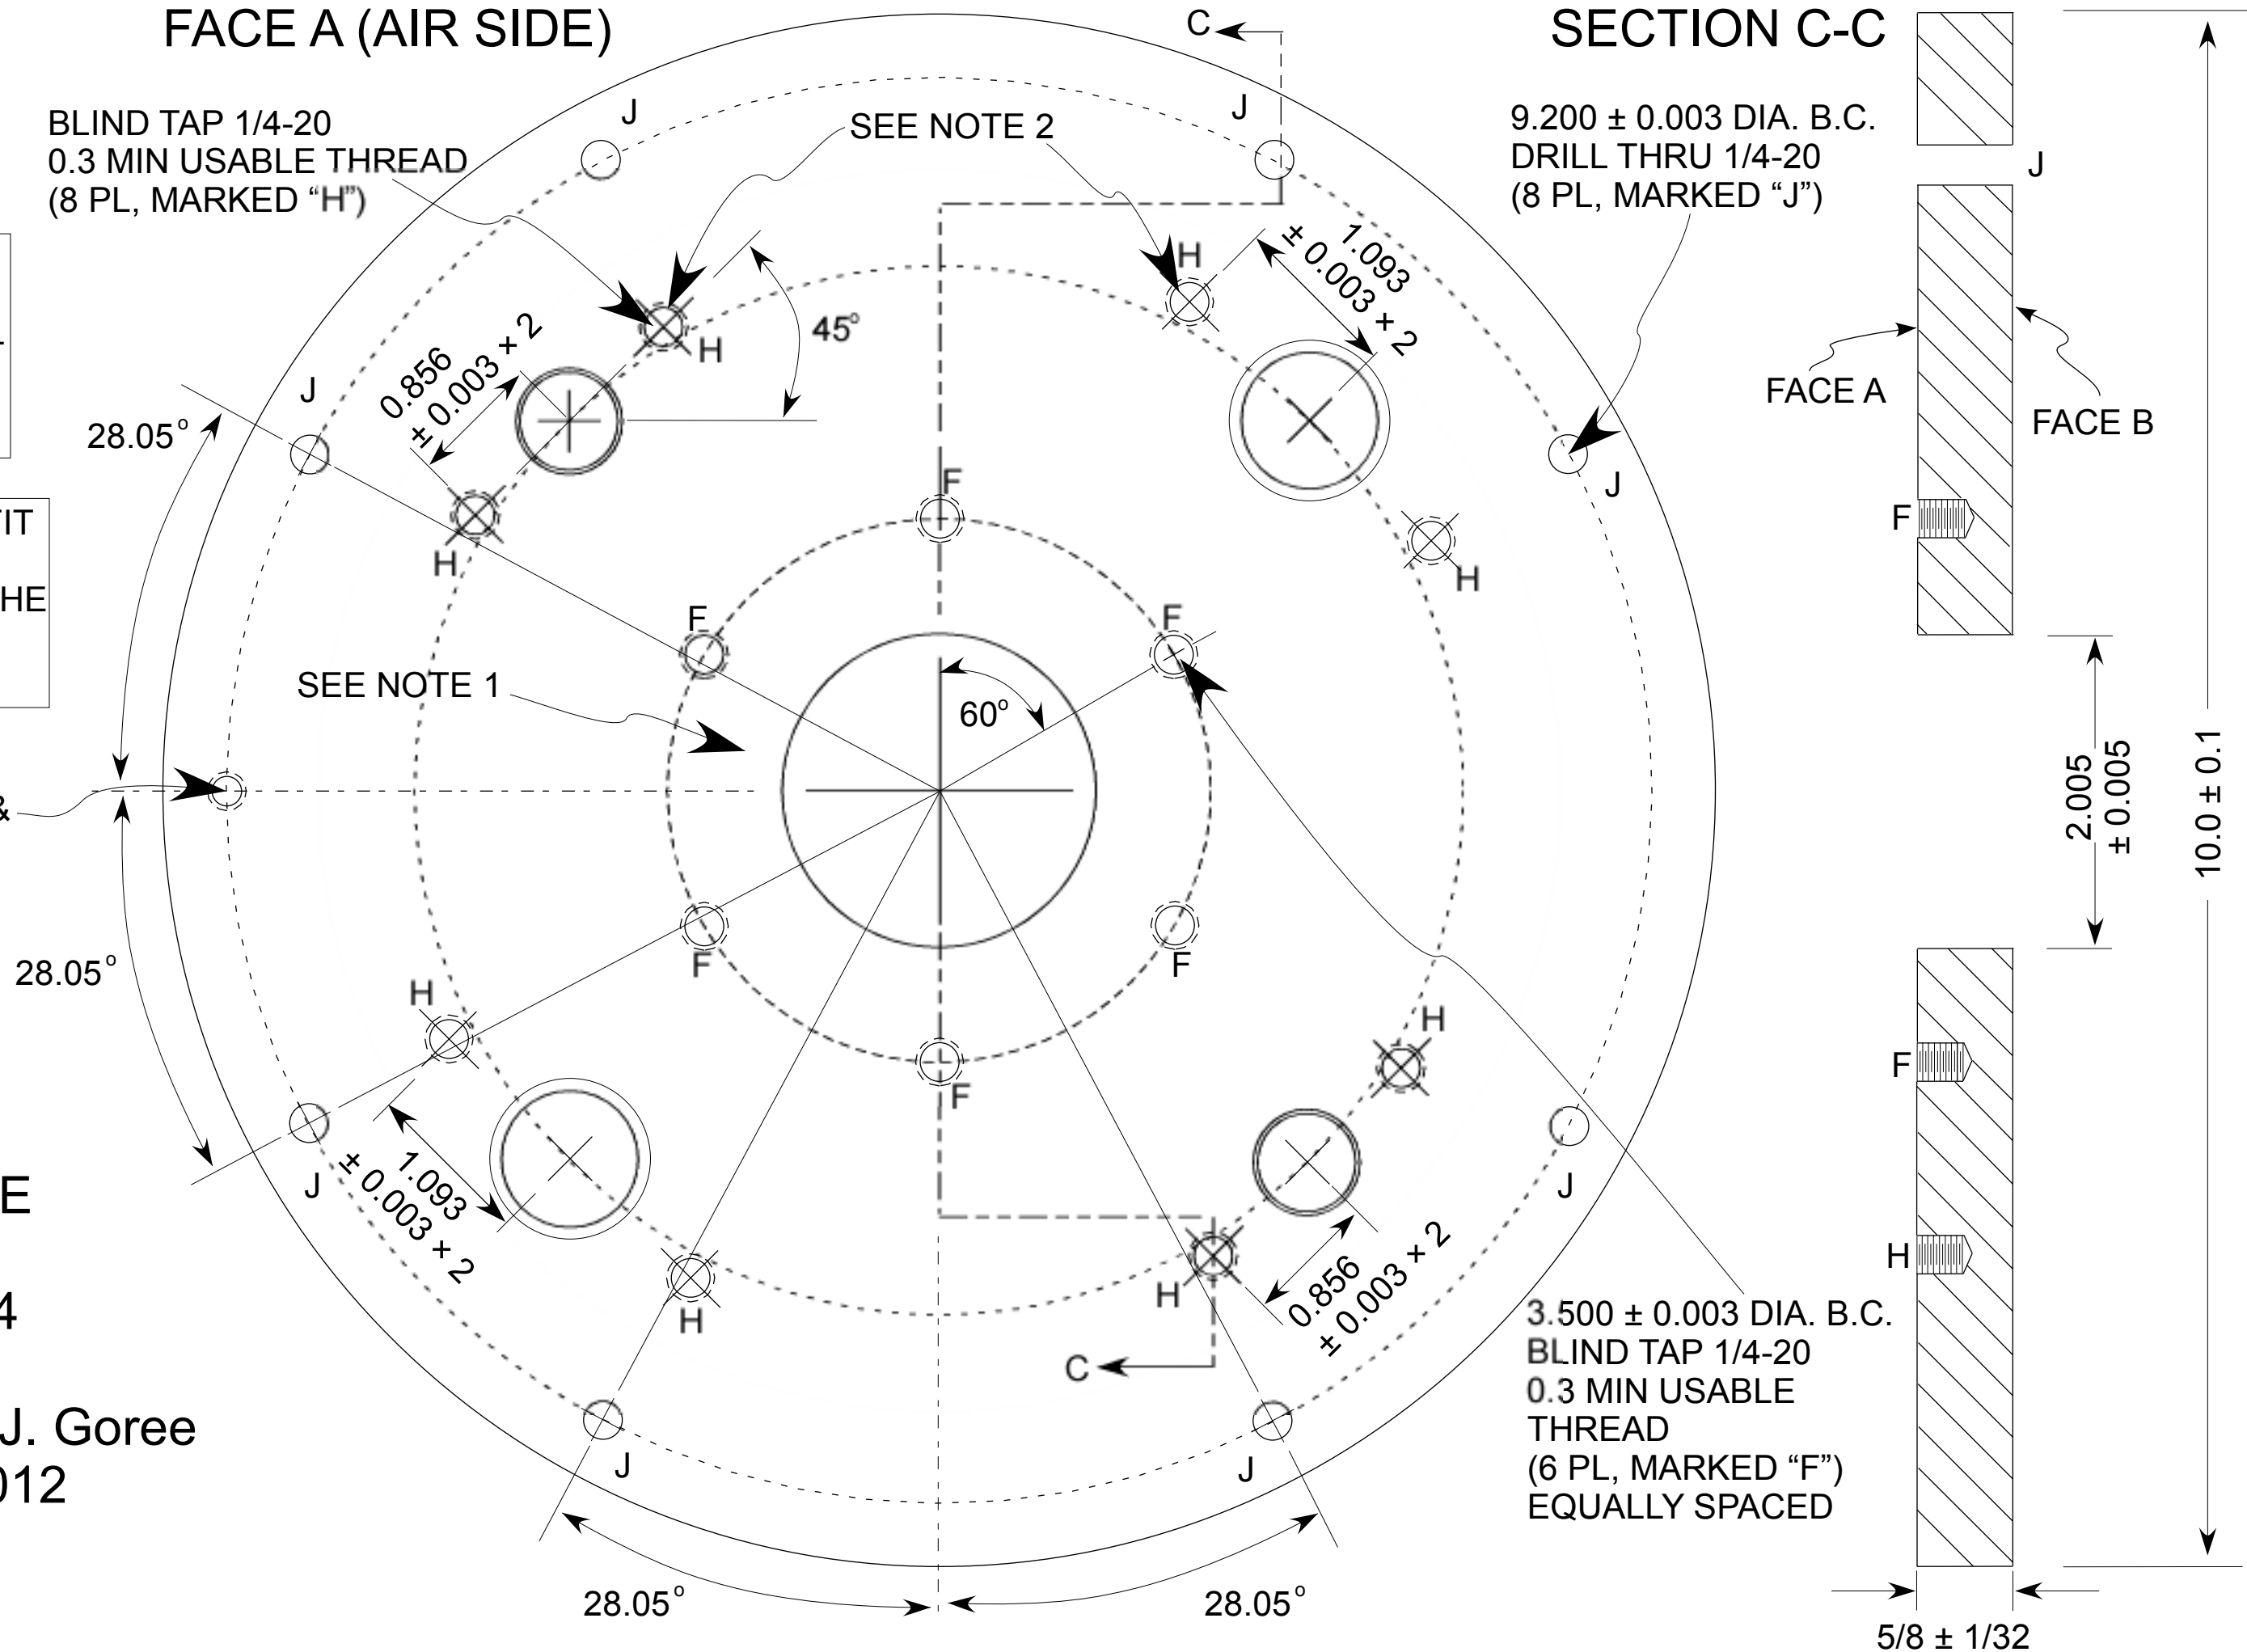

FACE B (VACUUM SIDE)

SECTION D-D

6.75 ± 0.01 DIA. B.C.
DRILL THRU 7/8
(2 PL, MARKED "M")
EQUALLY SPACED



O-RING GRV.
0.104 ± 0.003 DEEP,
0.160 ± 0.003 WIDE

NOTE FOR
USE WITH O-RING:
PARKER 2-267



6.75 ± 0.01 DIA. B.C.
DRILL THRU 5/8
(2 PL, MARKED "N")
EQUALLY SPACED

BASE FLANGE
SCALE: 1=1
MTL: S. S. 304
QTY: 1
Suranga R. & J. Goree
DATE: 2/28/2012


6.00 ± 0.01 DIA. B.C.
BLIND TAP 6-32
0.3 MIN USABLE THREAD
(8 PL, MARKED "L")

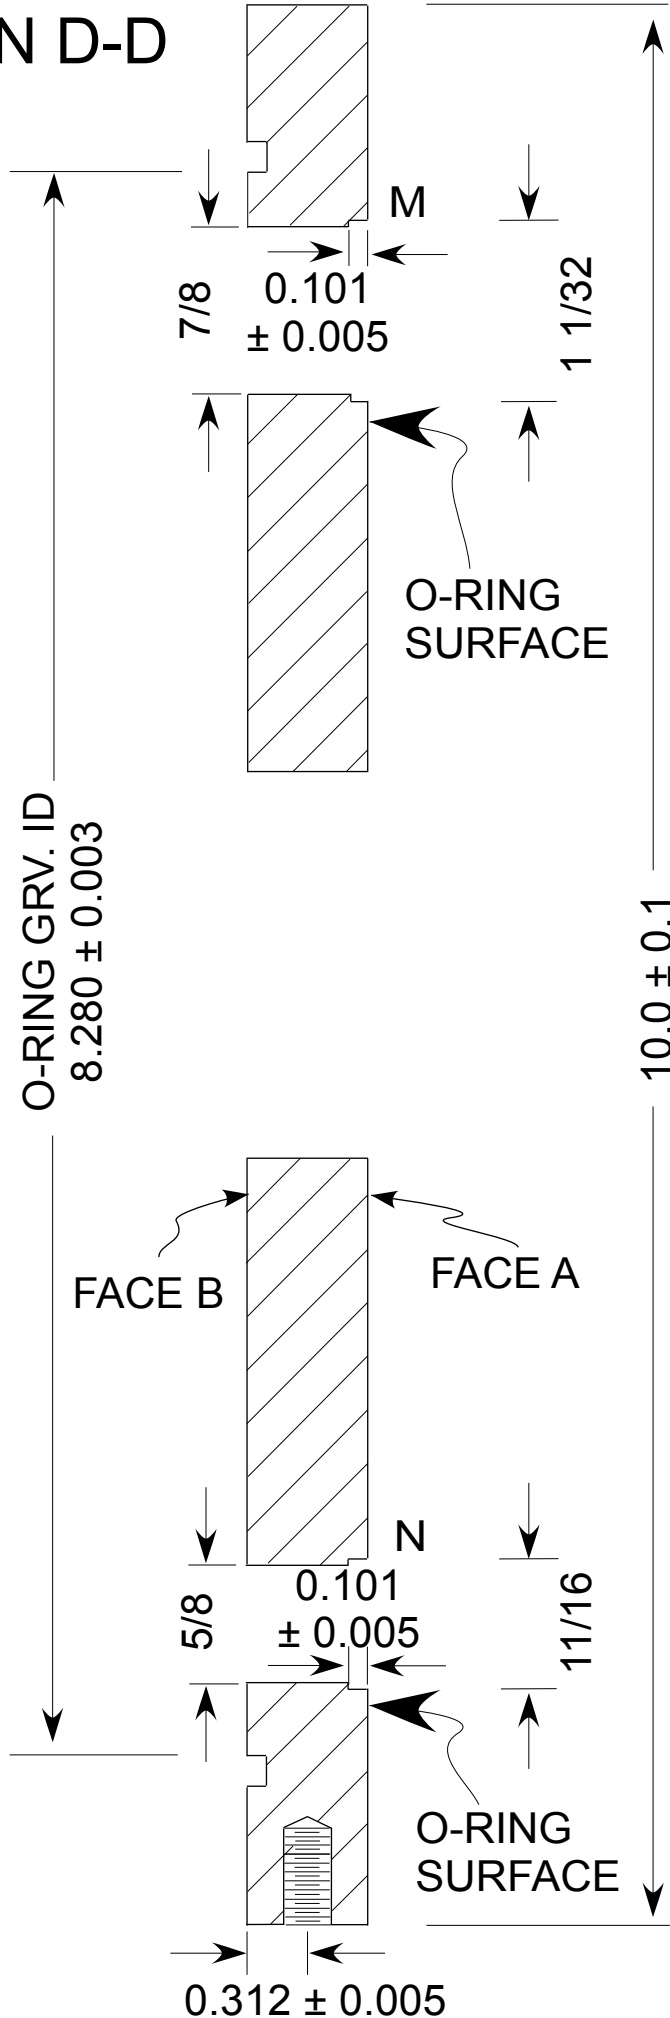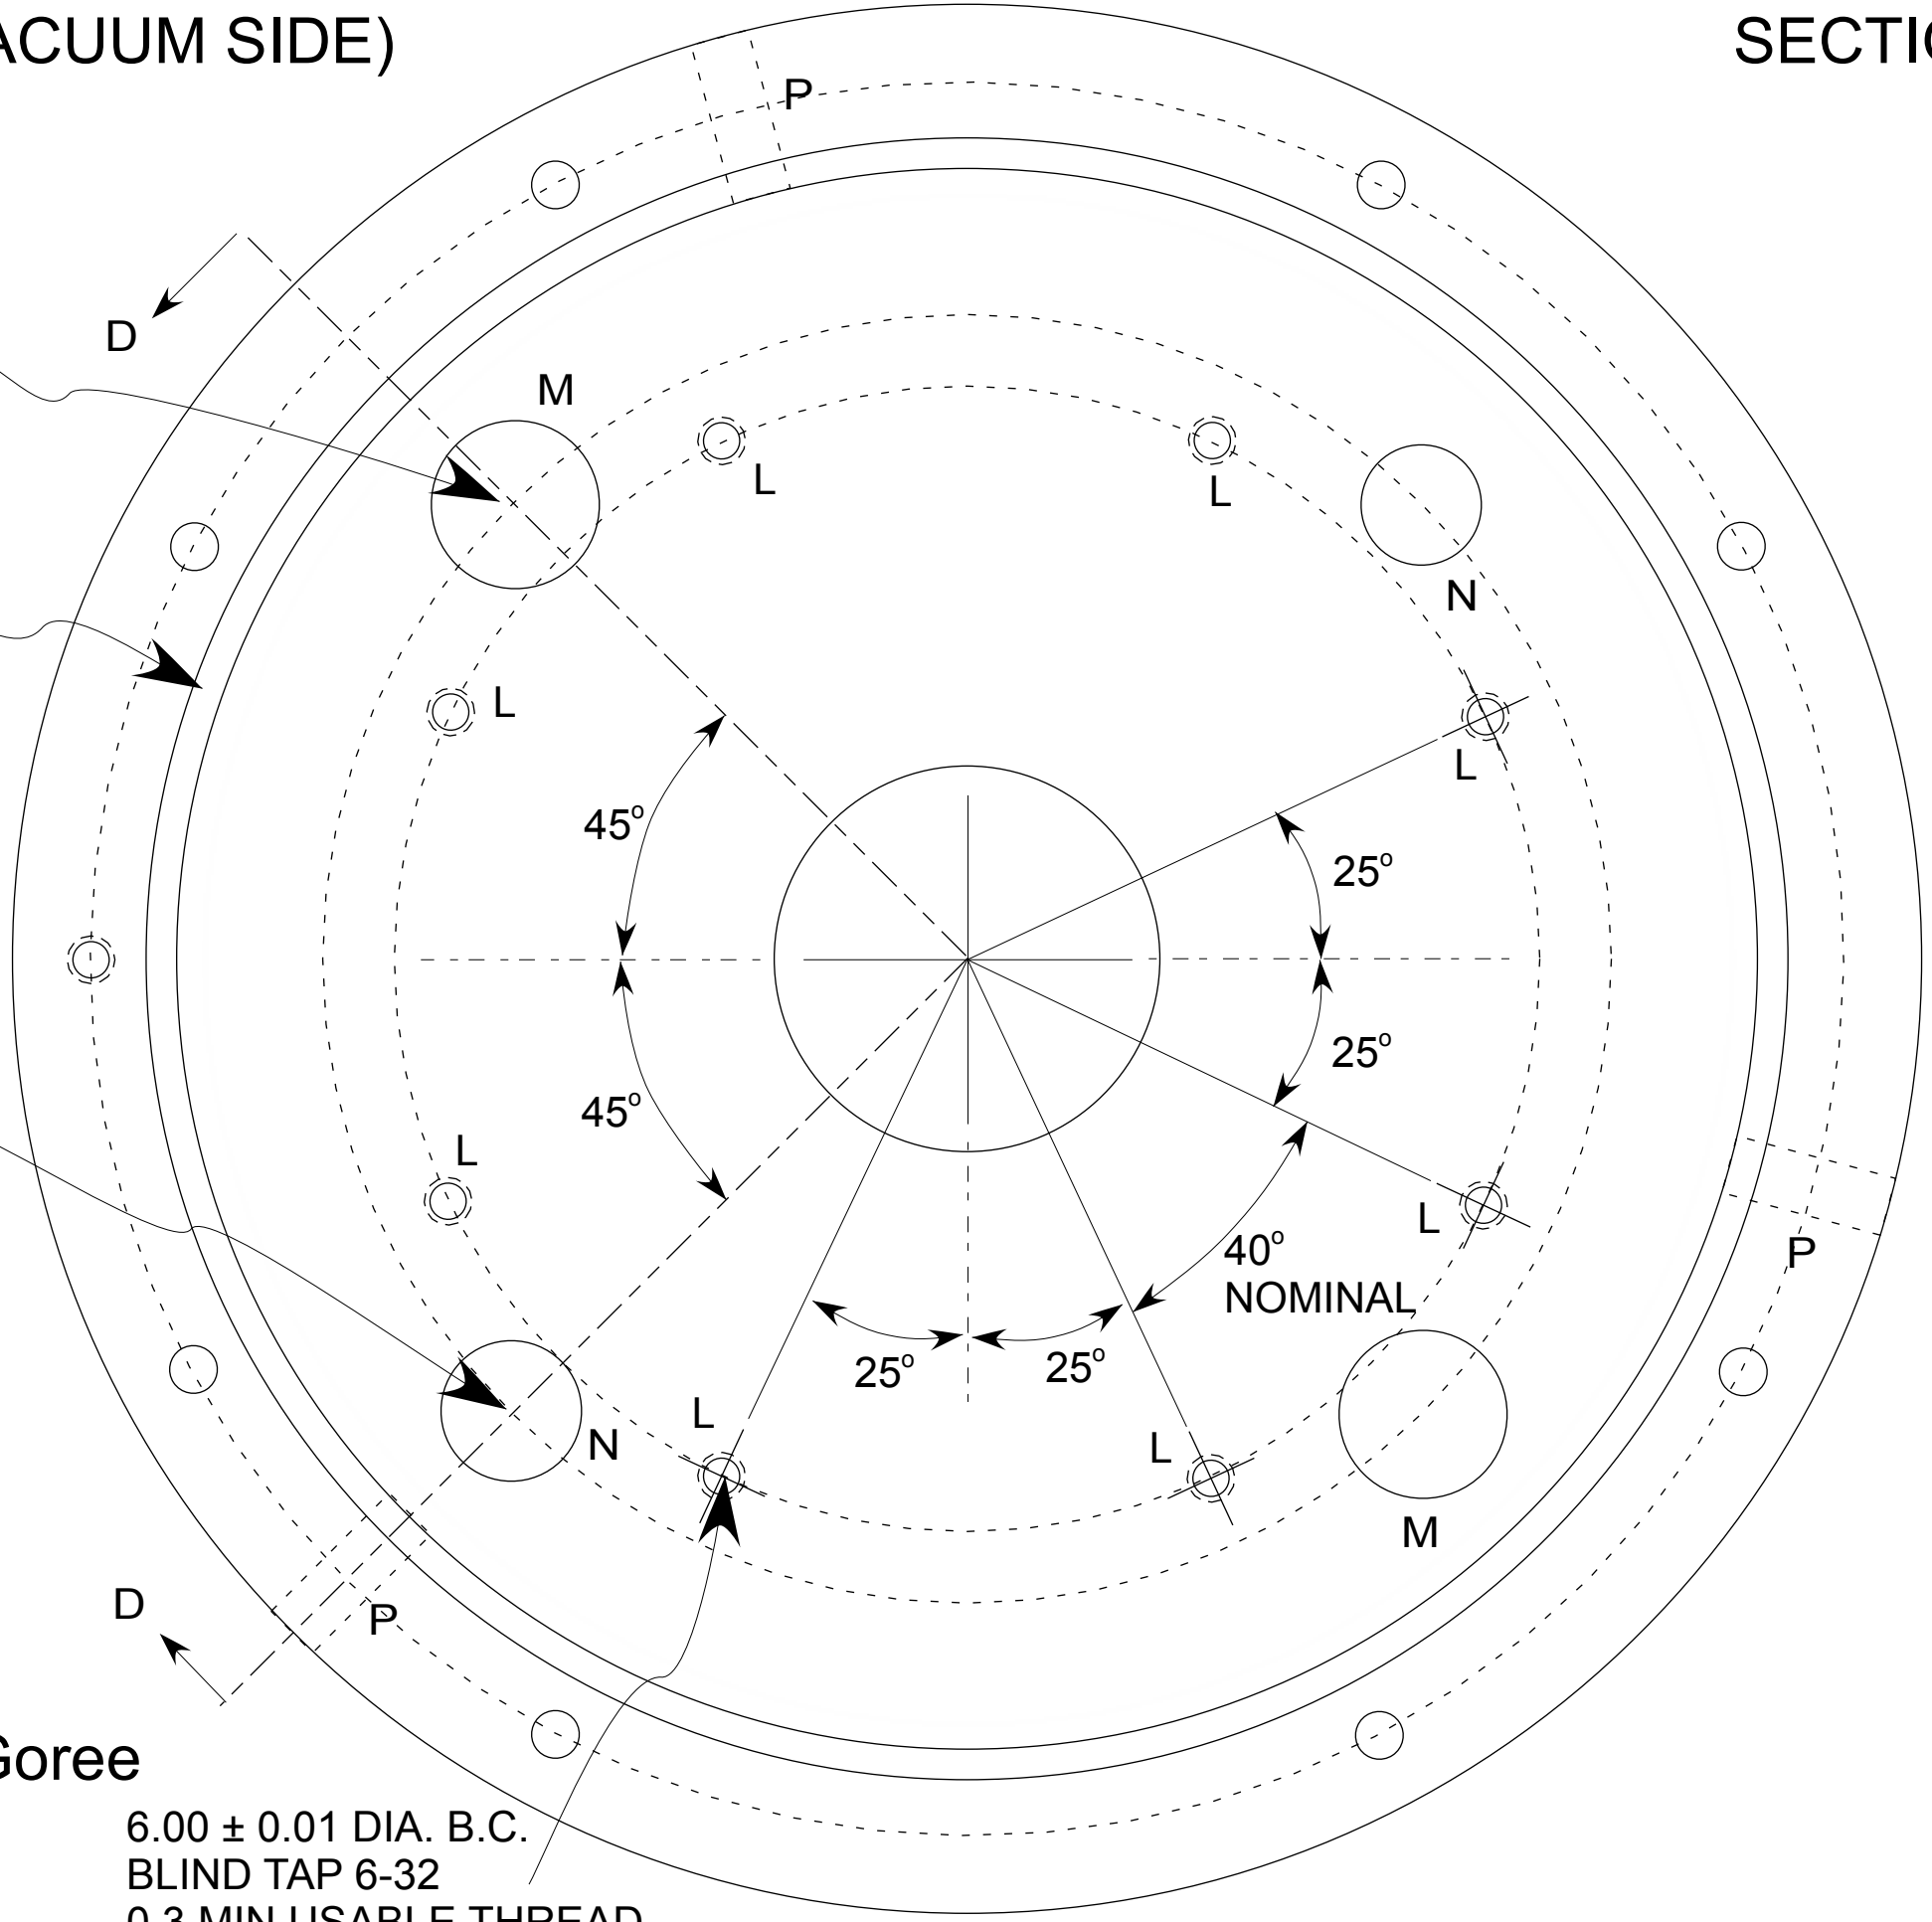

SECTION B-B

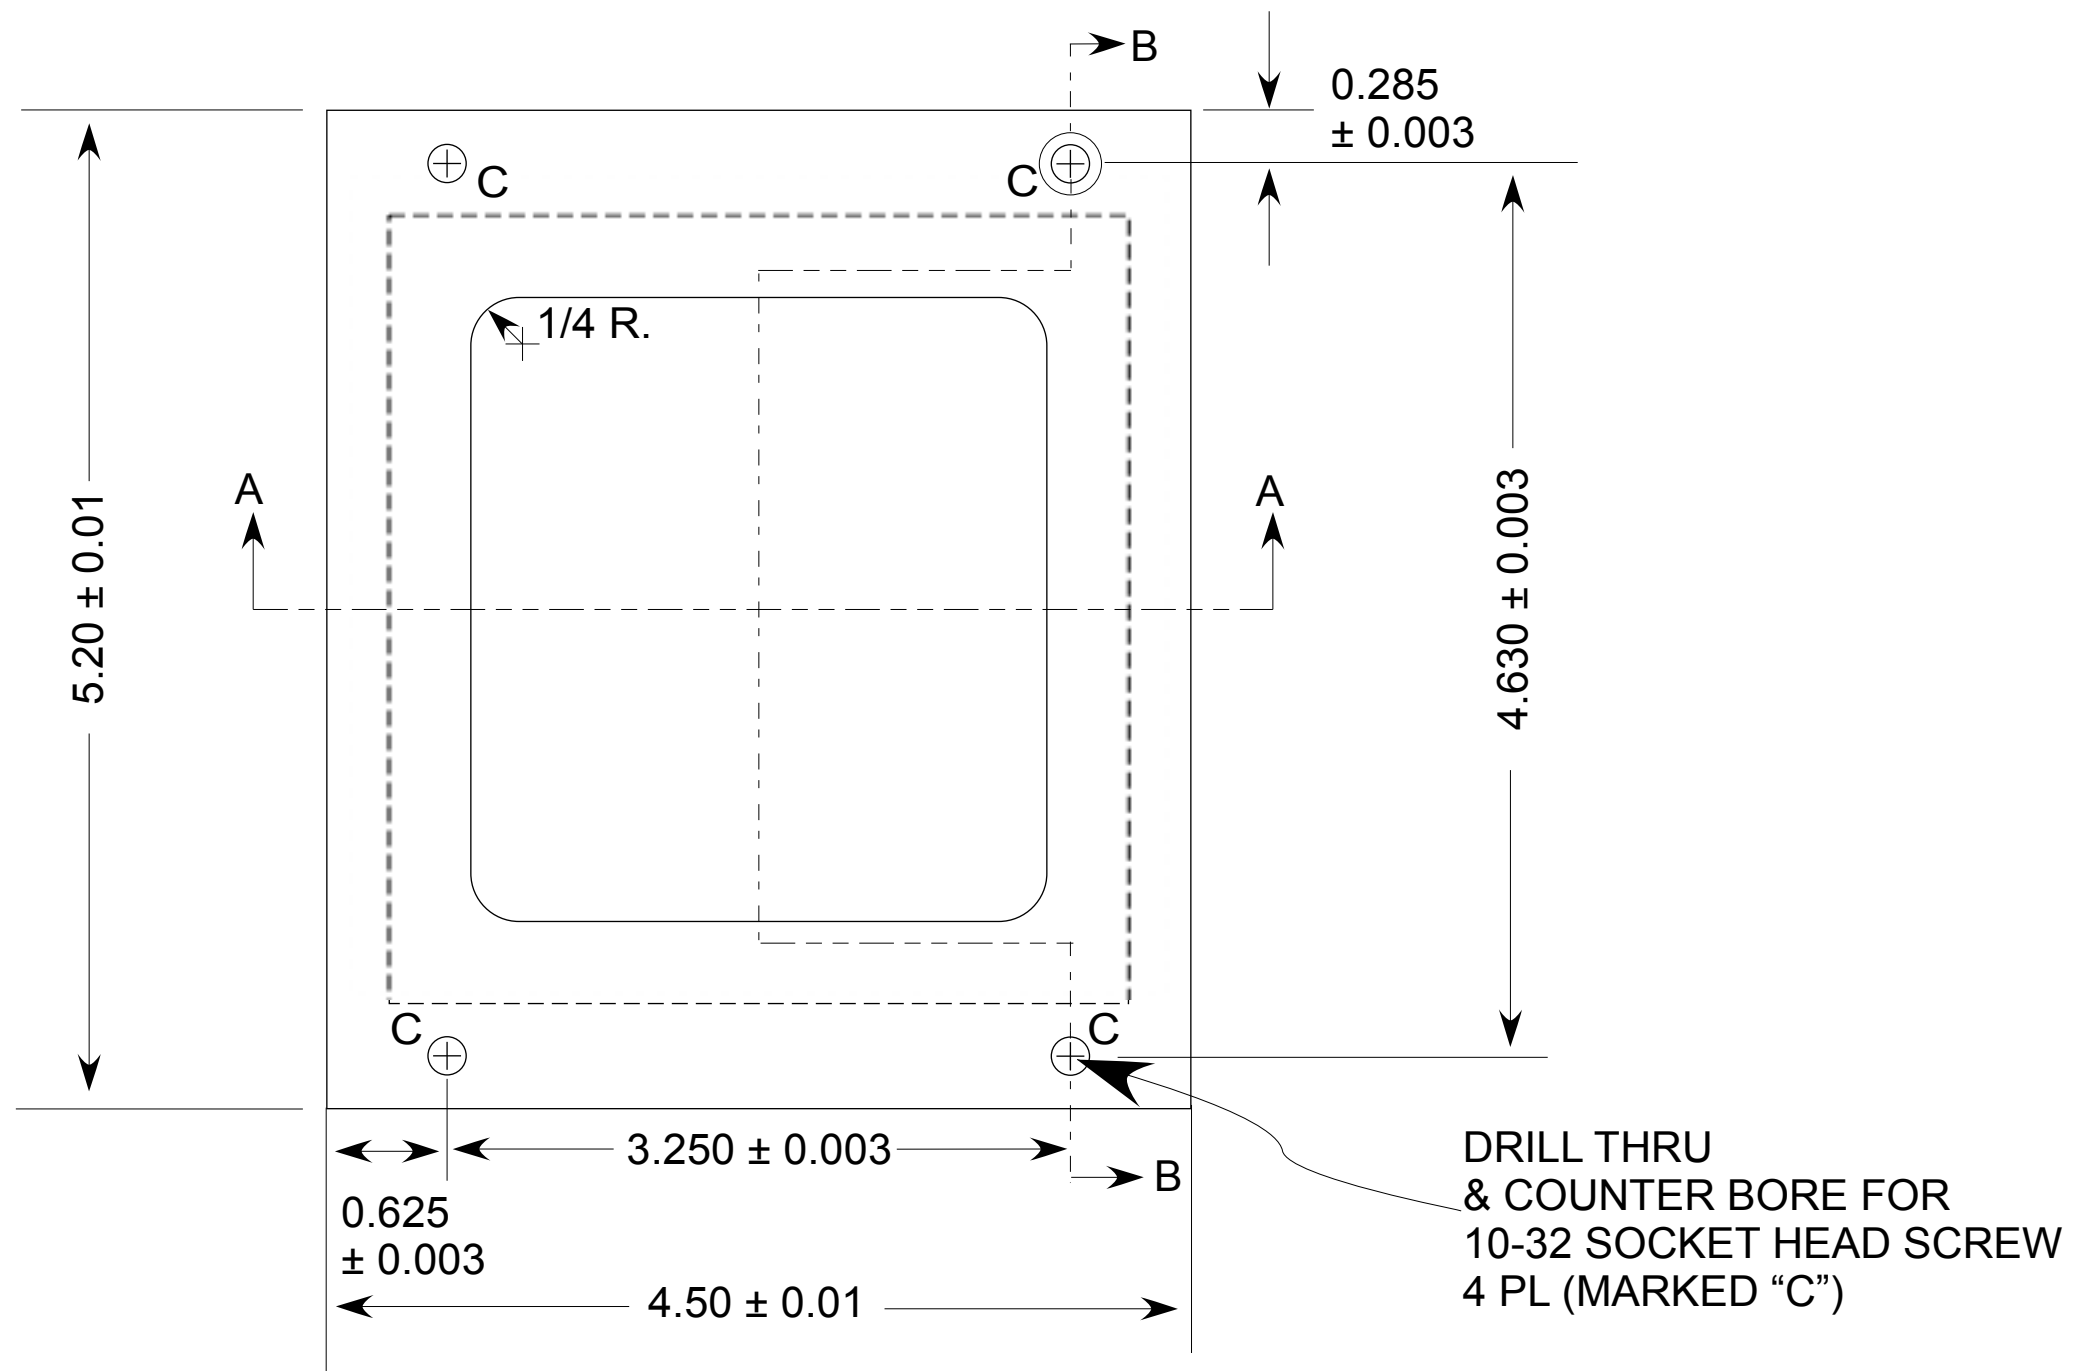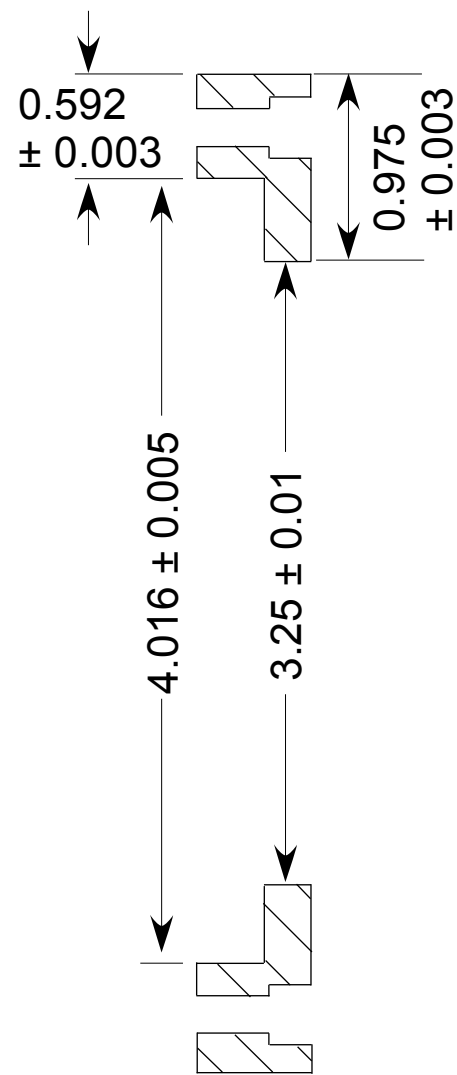

SECTION A-A

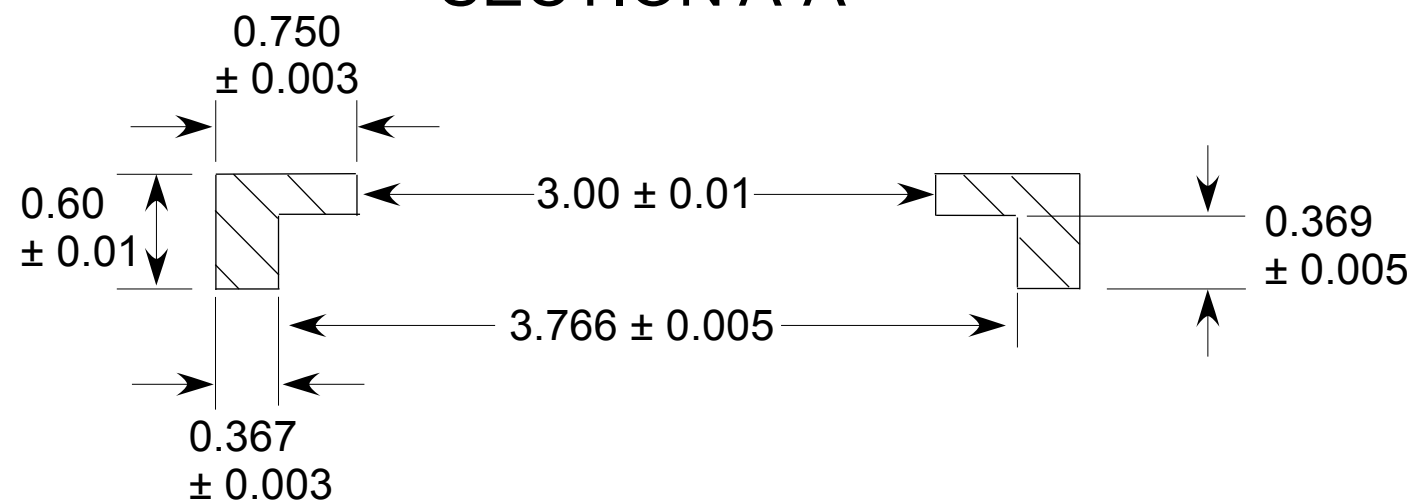

SIDE-WINDOW FLANGE

SCALE: 1 = 1


MTL: AL 6061

QTY: 4


Suranga R. & J. Goree

DATE: 2/28/2012



SECTION C-C

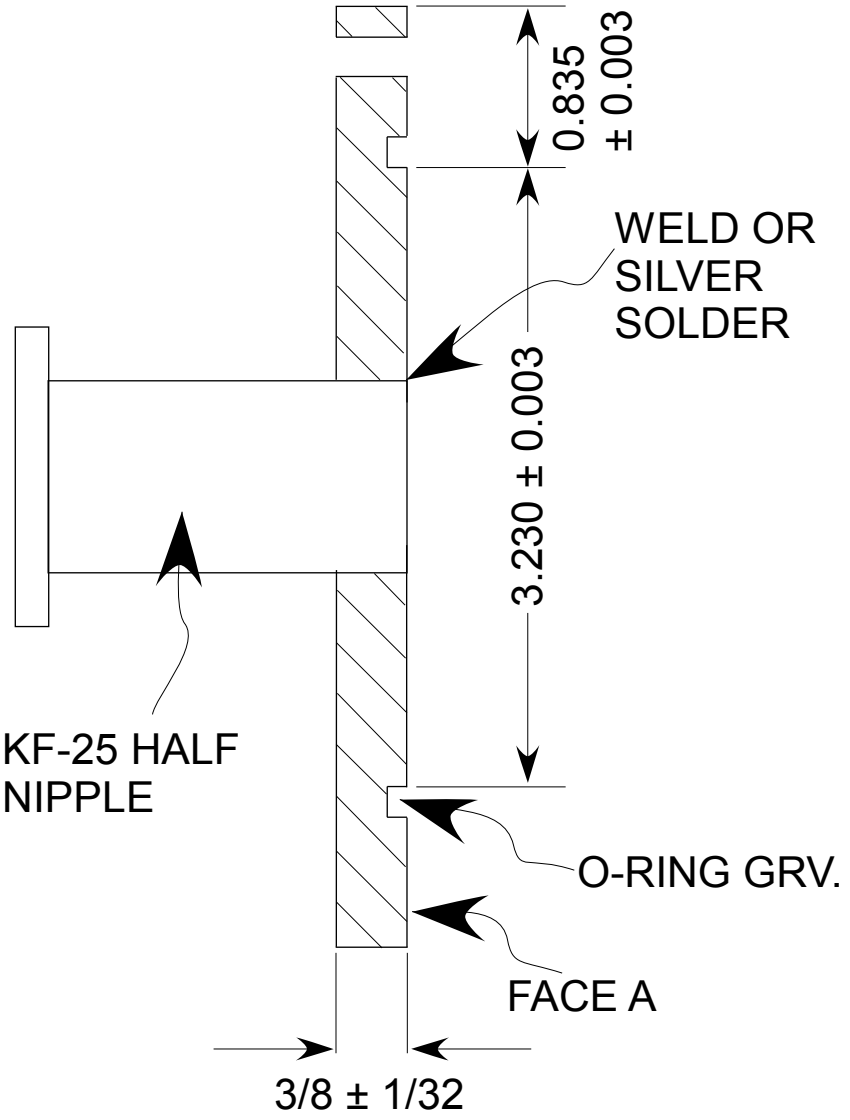

SECTION D-D



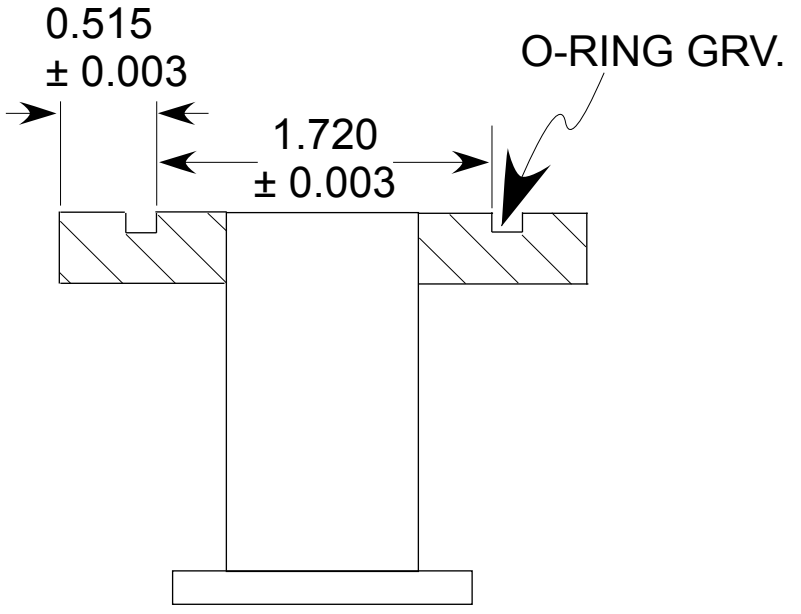


FACE A

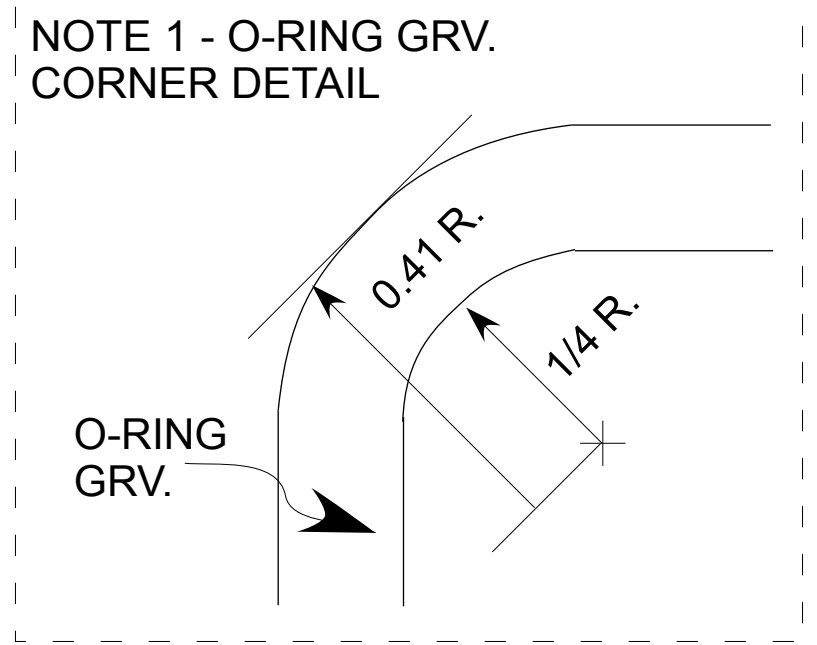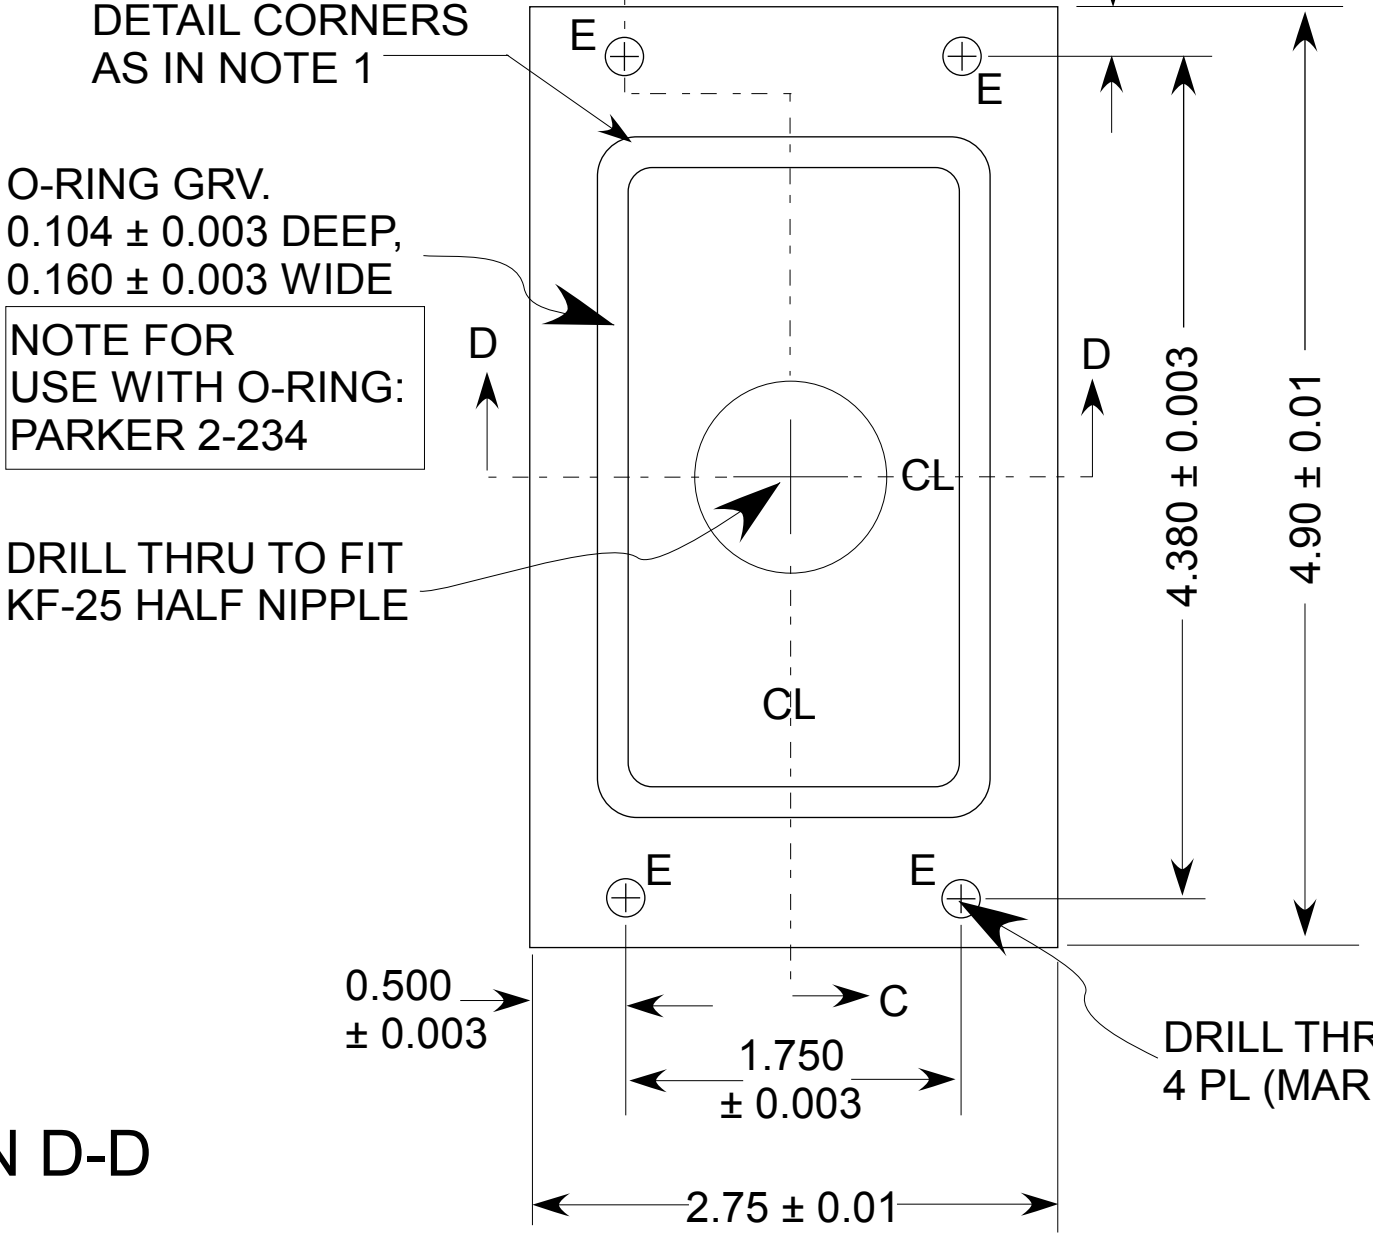


SIDE FLANGE WITH KF-25
HALF NIPPLE
SCALE 1 = 1
MATERIAL: S.S. 304
QTY: 1
Suranga R. & J. Goree
DATE: 2/28/2012

SECTION C-C

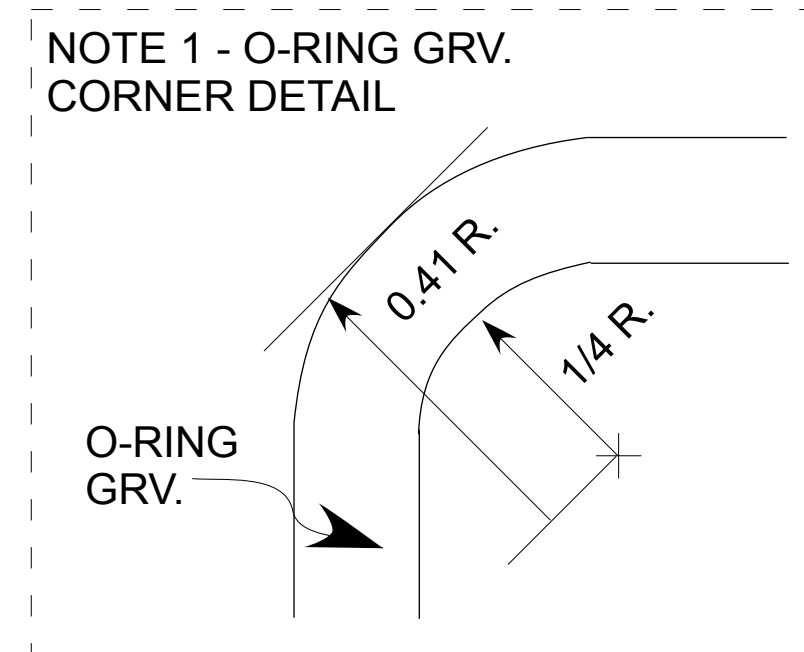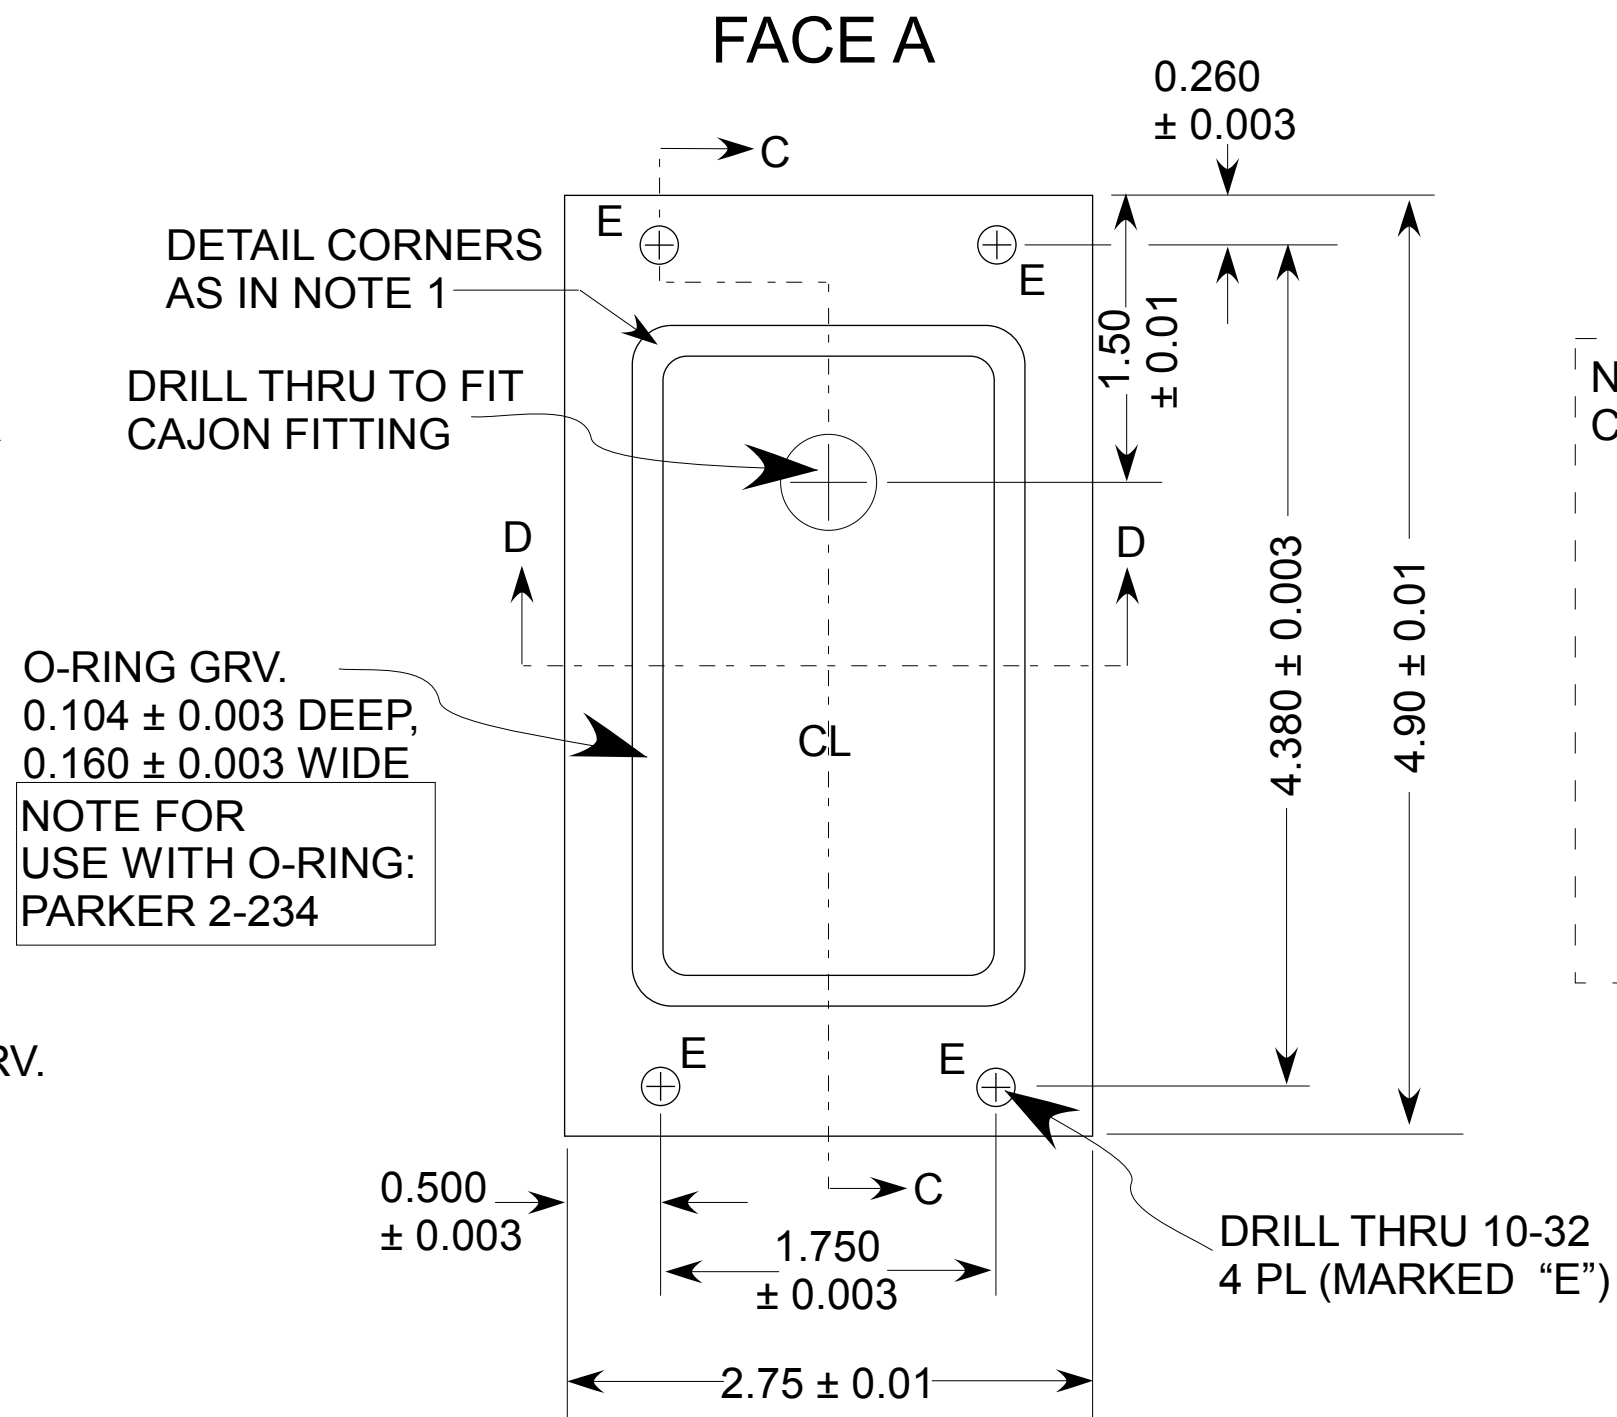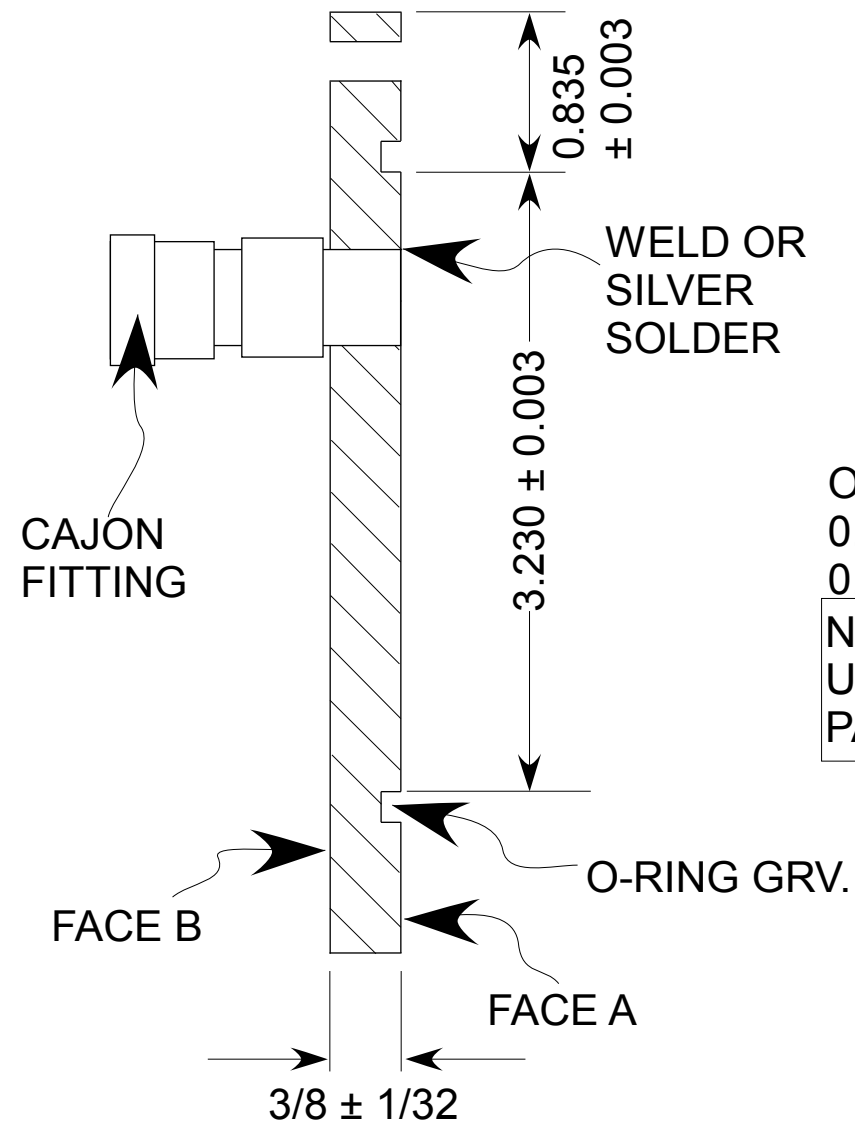

SECTION D-D

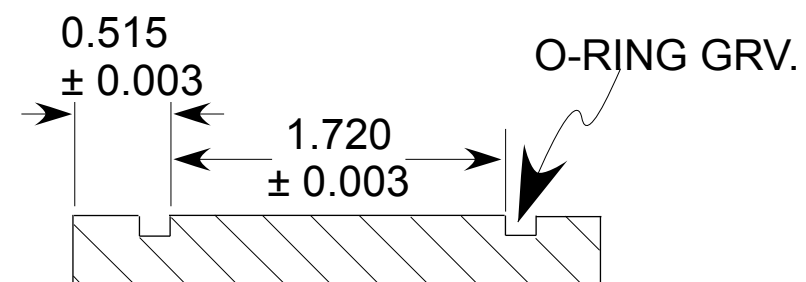

SIDE FLANGE WITH CAJON FITTING

SCALE 1 = 1


MATERIAL: S.S 304

QTY: 1



Suranga R. & J. Goree

DATE: 2/28/2012


SECTION C-C

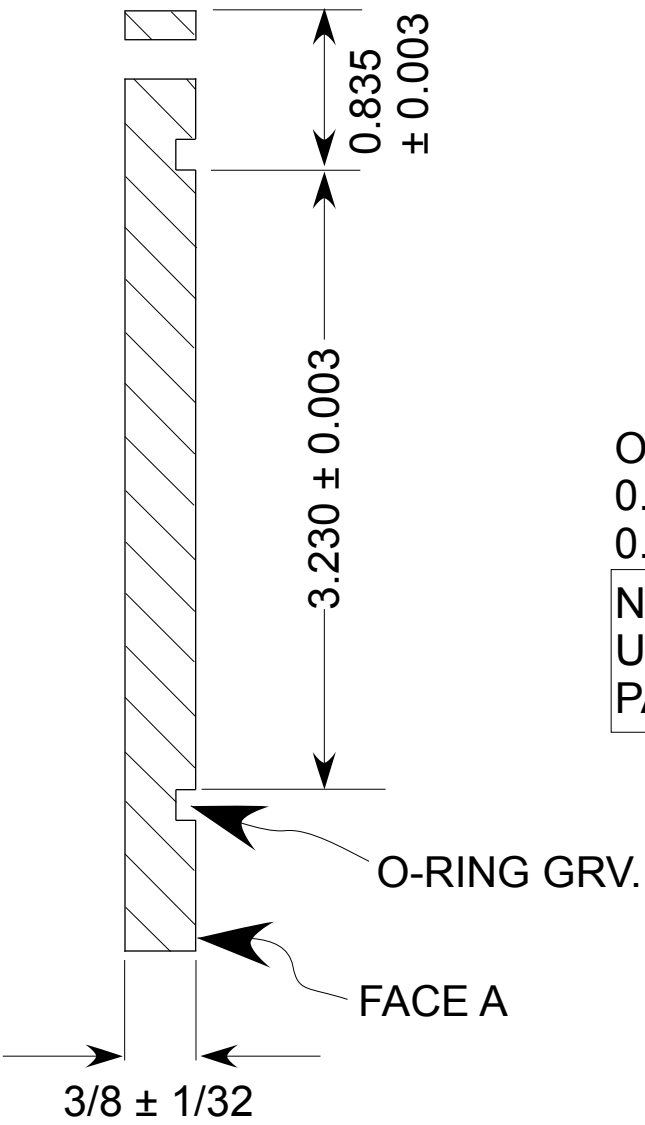

FACE A

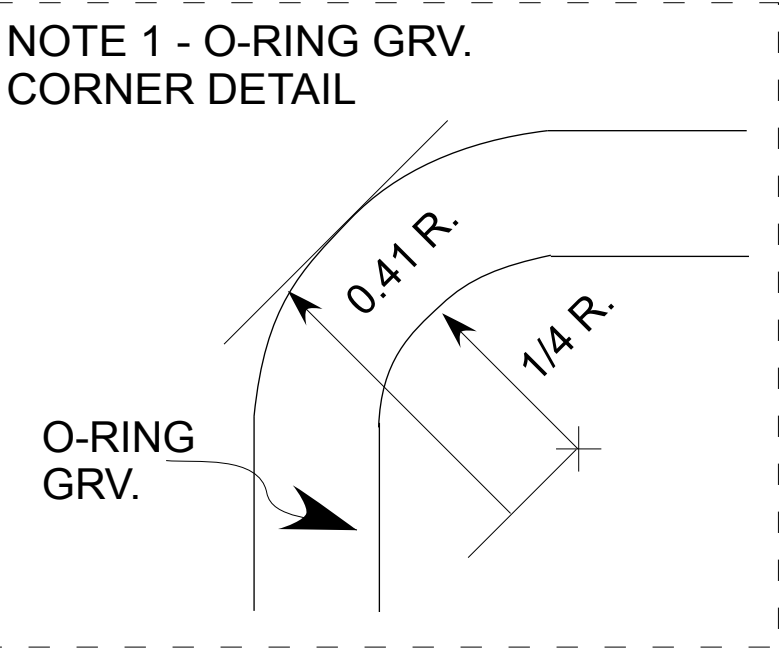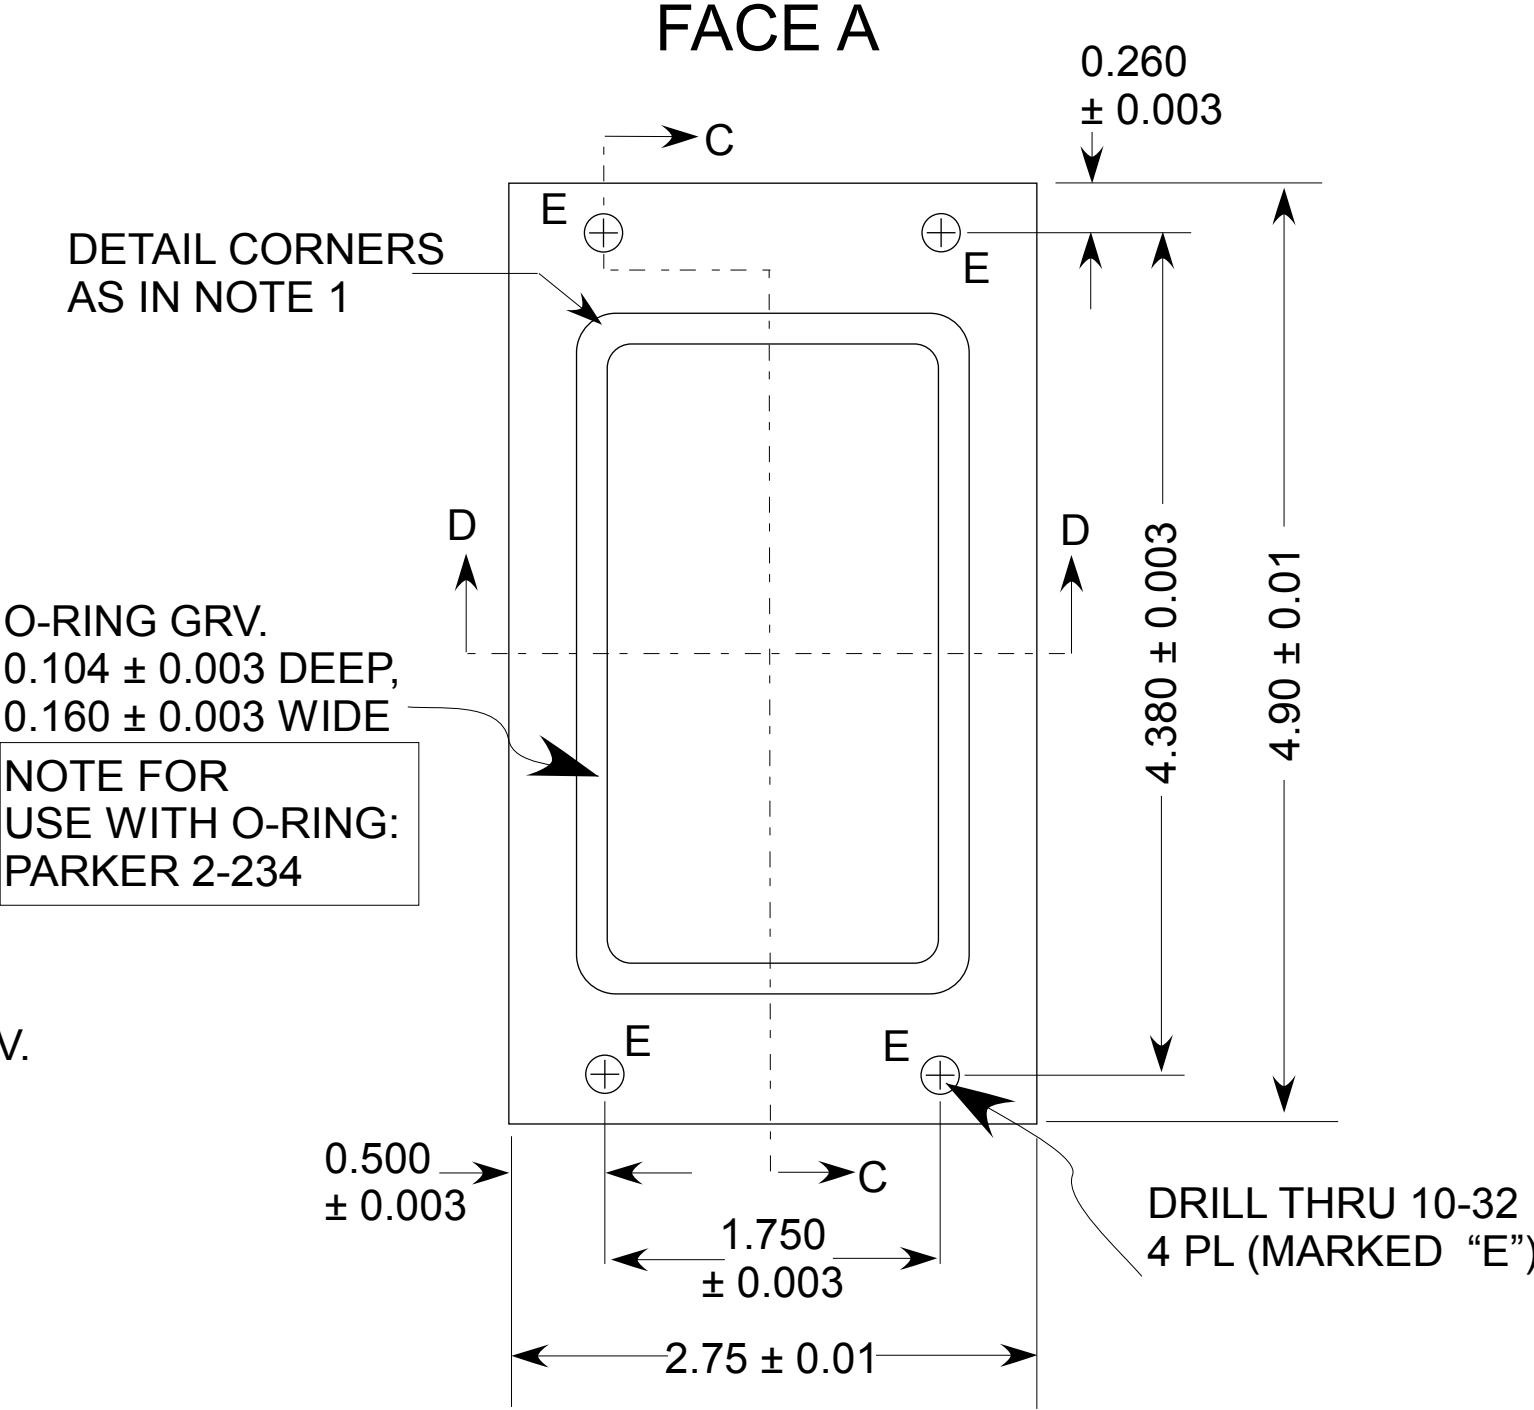



SECTION D-D

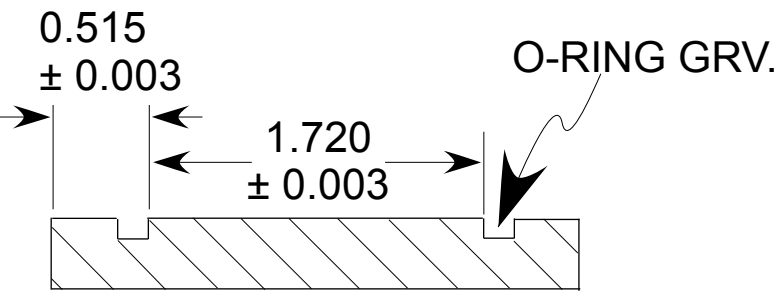


BLANK SIDE-FLANGE
SCALE 1 = 1
MATERIAL: S.S 304
QTY: 3
Suranga R. & J. Goree
DATE: 2/28/2012

ELECTRODE-ASSEMBLY
SCALE: 1=1
Suranga R. & J. Goree
DATE: 2/28/2012

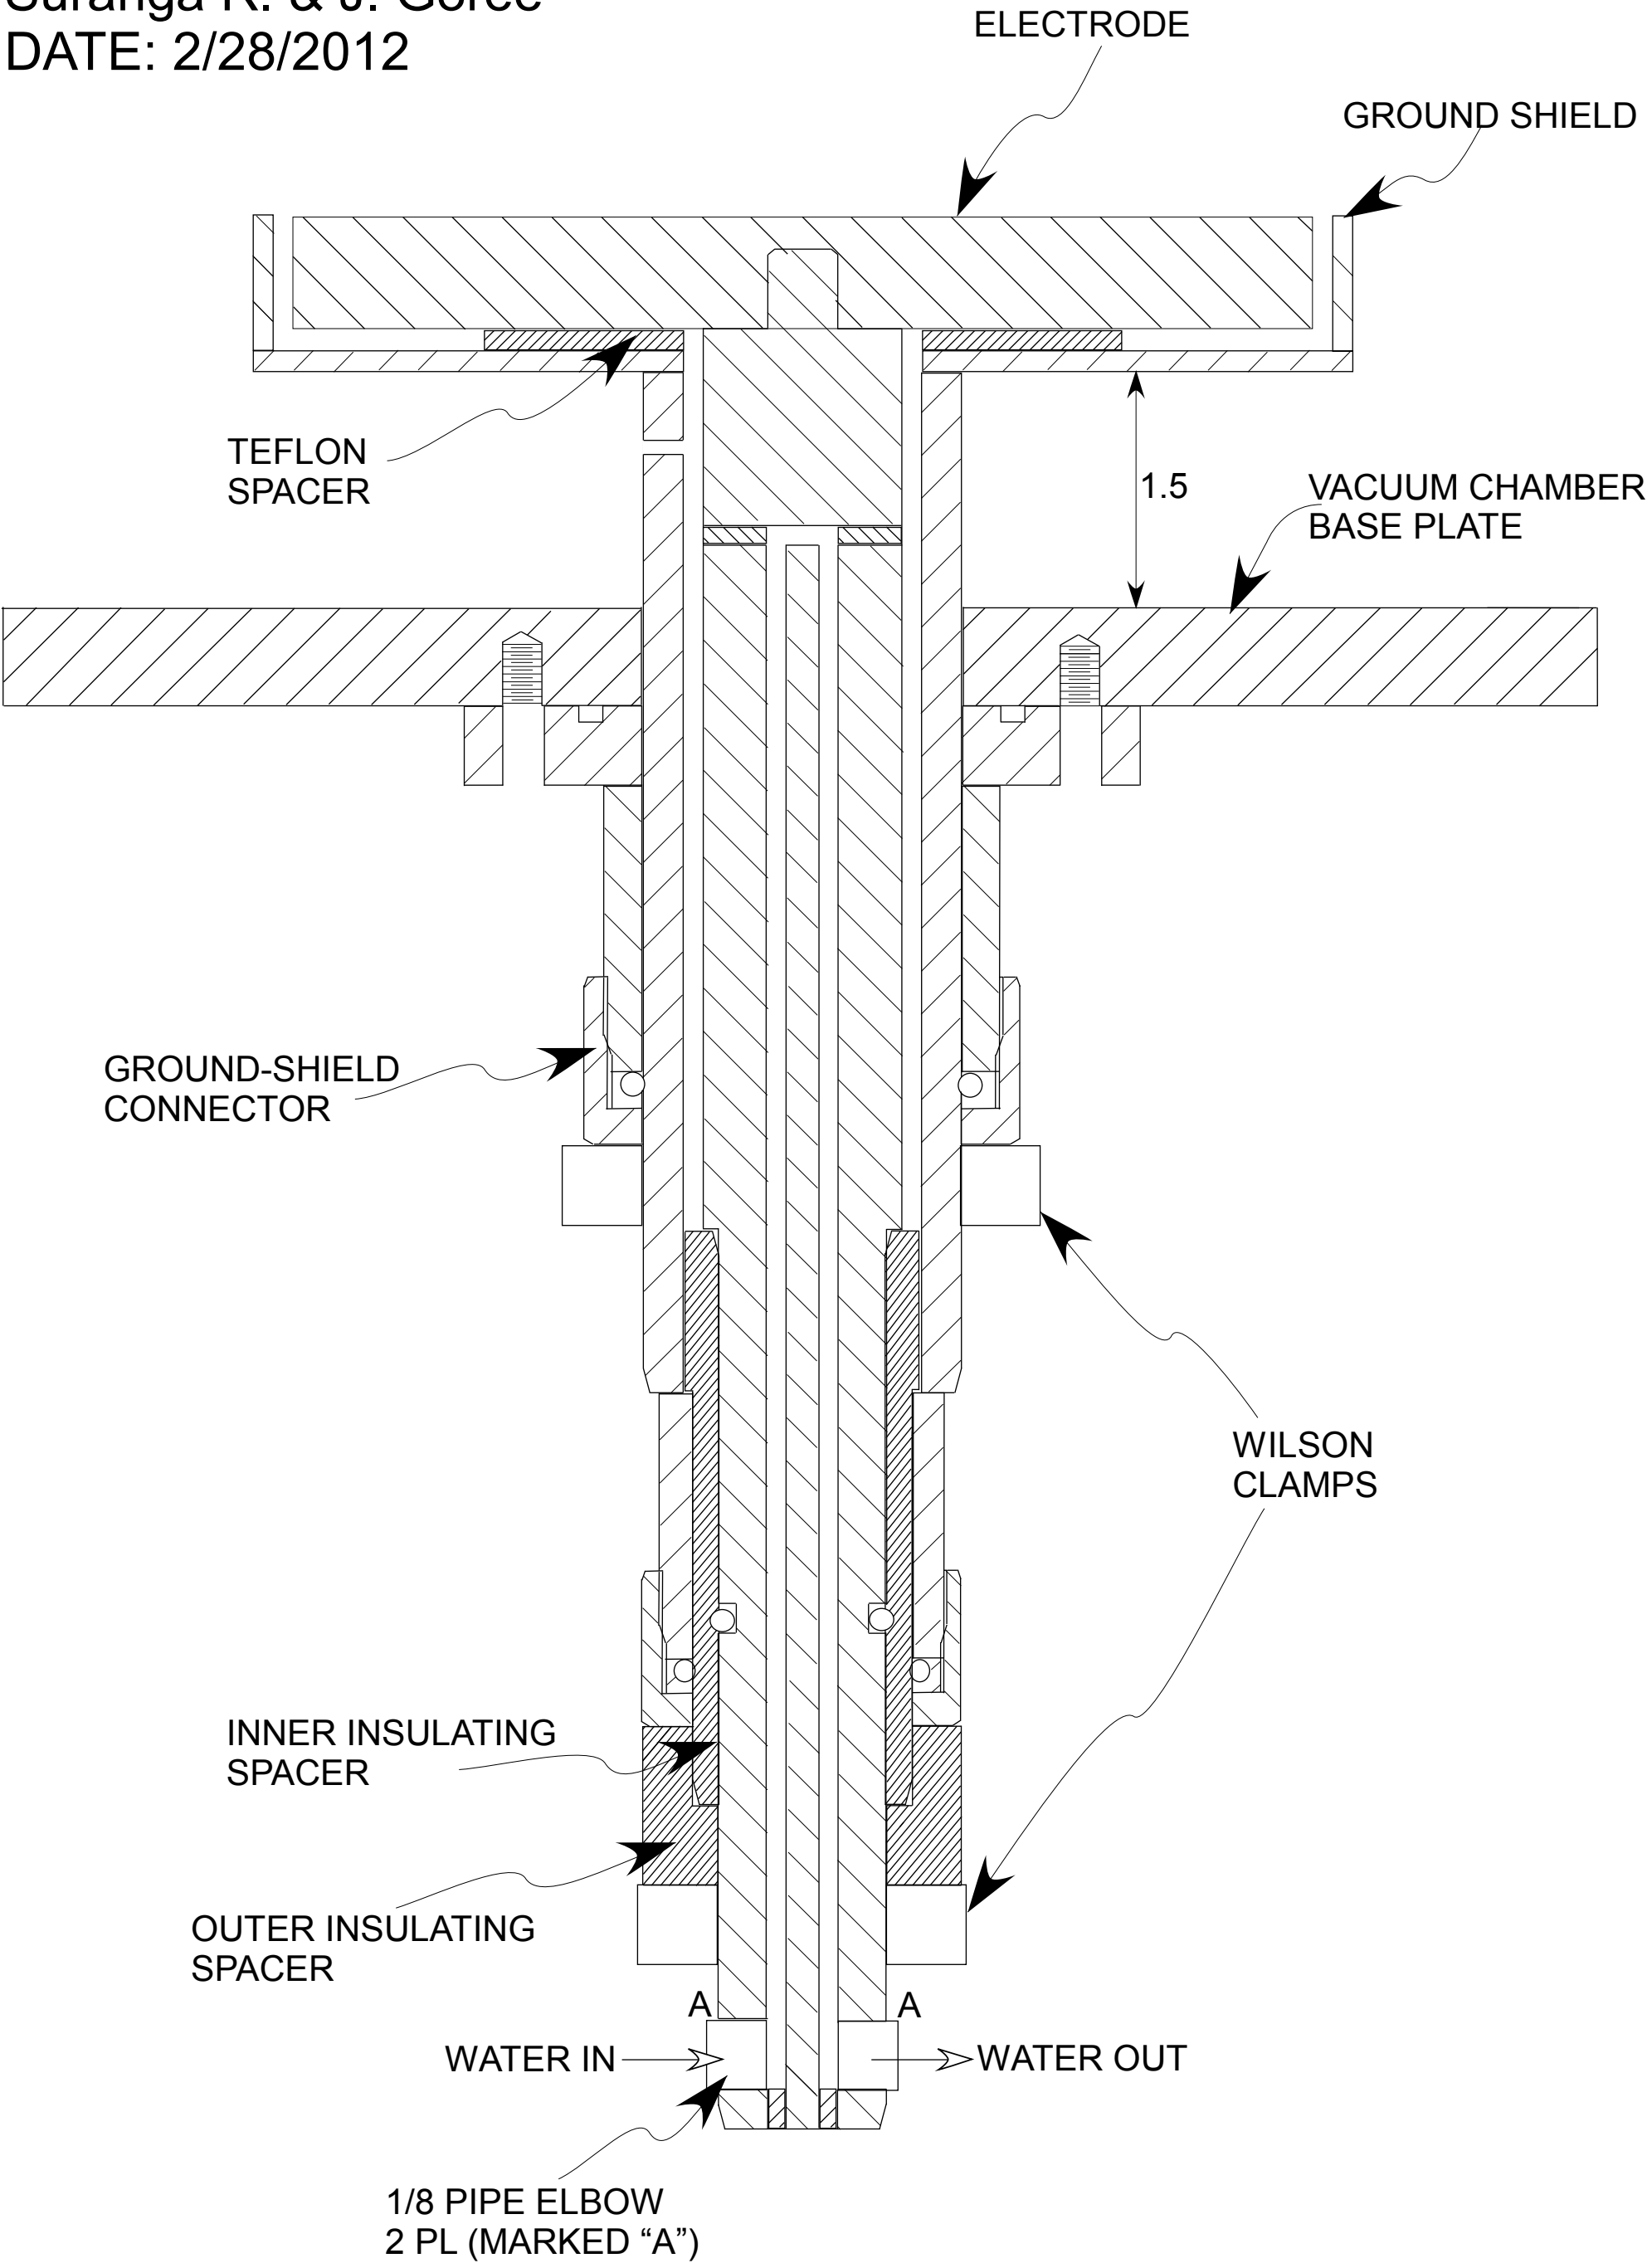

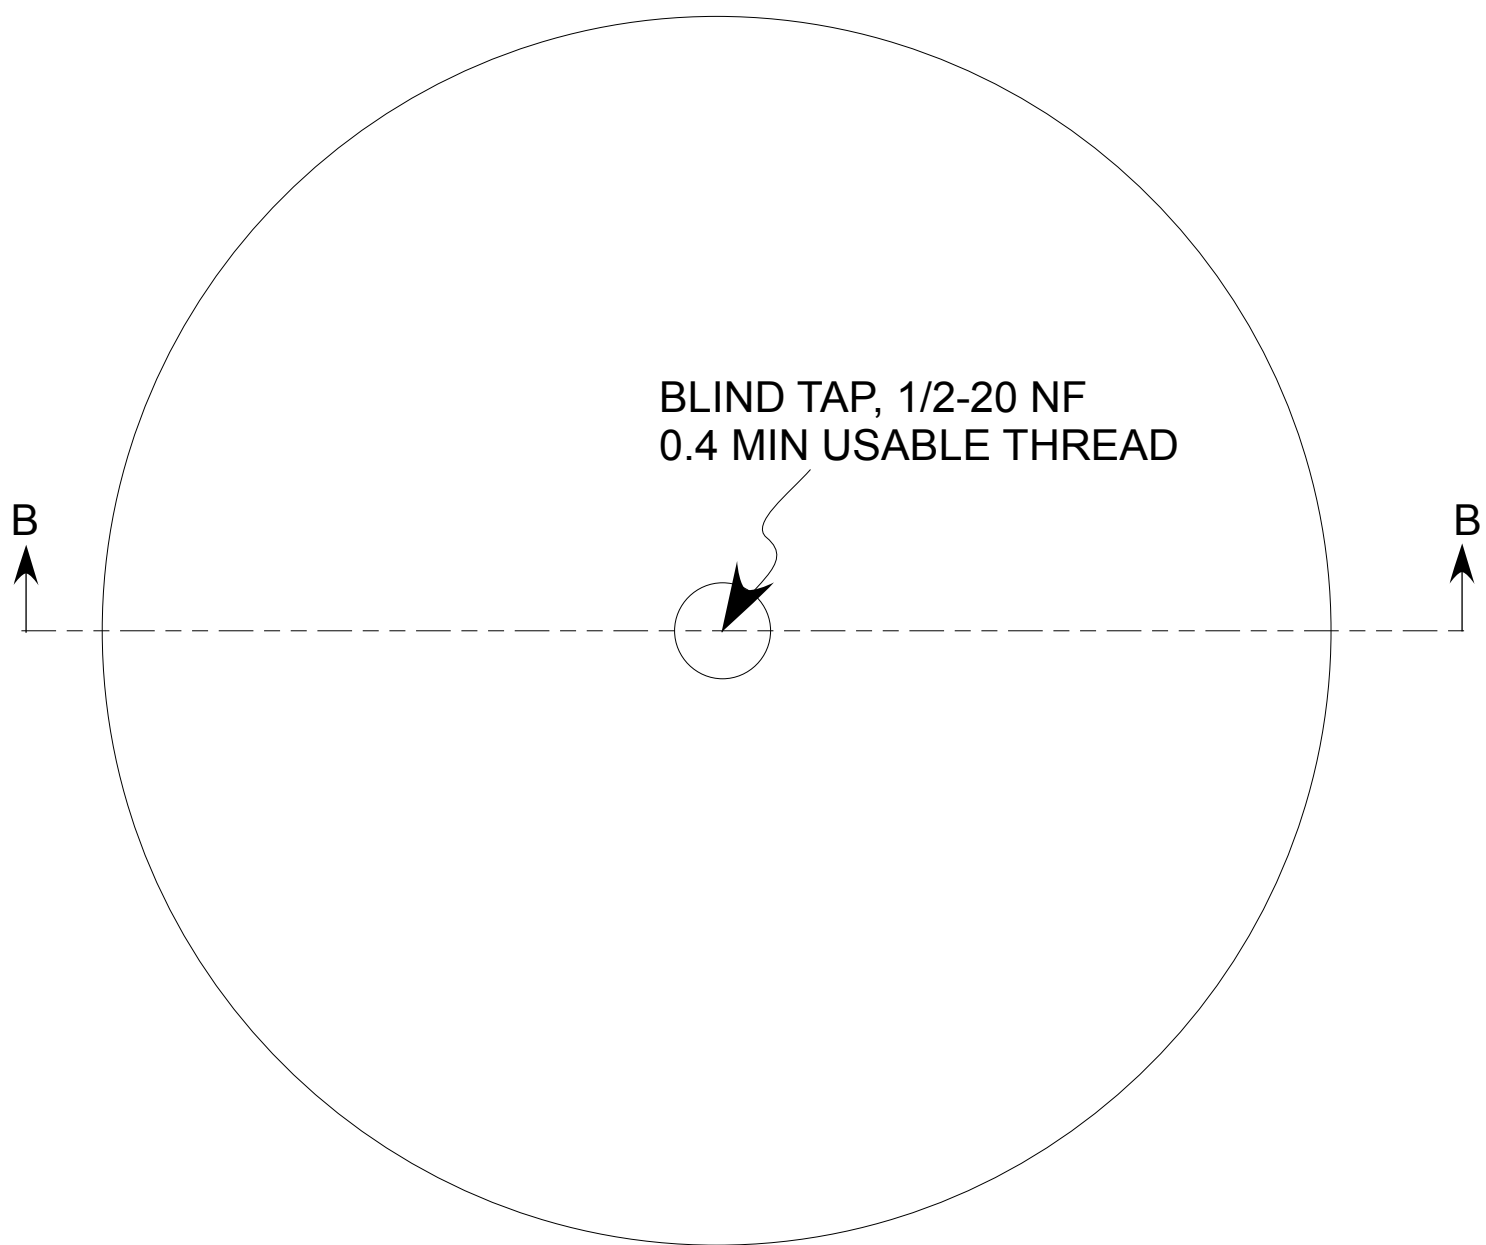


SECTION B-B

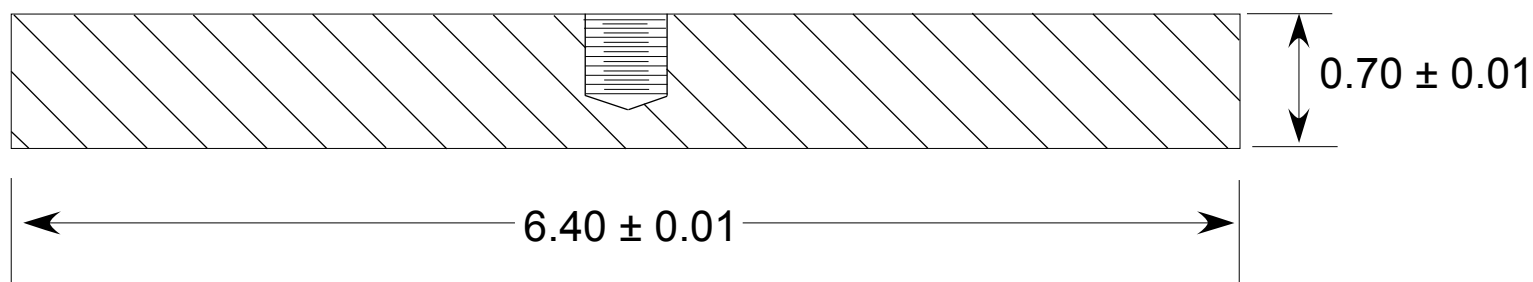


ELECTRODE
SCALE: 1=1
MATERIAL: S.S. 304
QTY: 1
Suranga R. & J. Goree
DATE: 2/28/2012

ELECTRODE ROD
SCALE: 1=1
MTL: BRASS 360
QTY: 1
Suranga R. & J. Goree
DATE: 2/28/2012


SECTION B-B


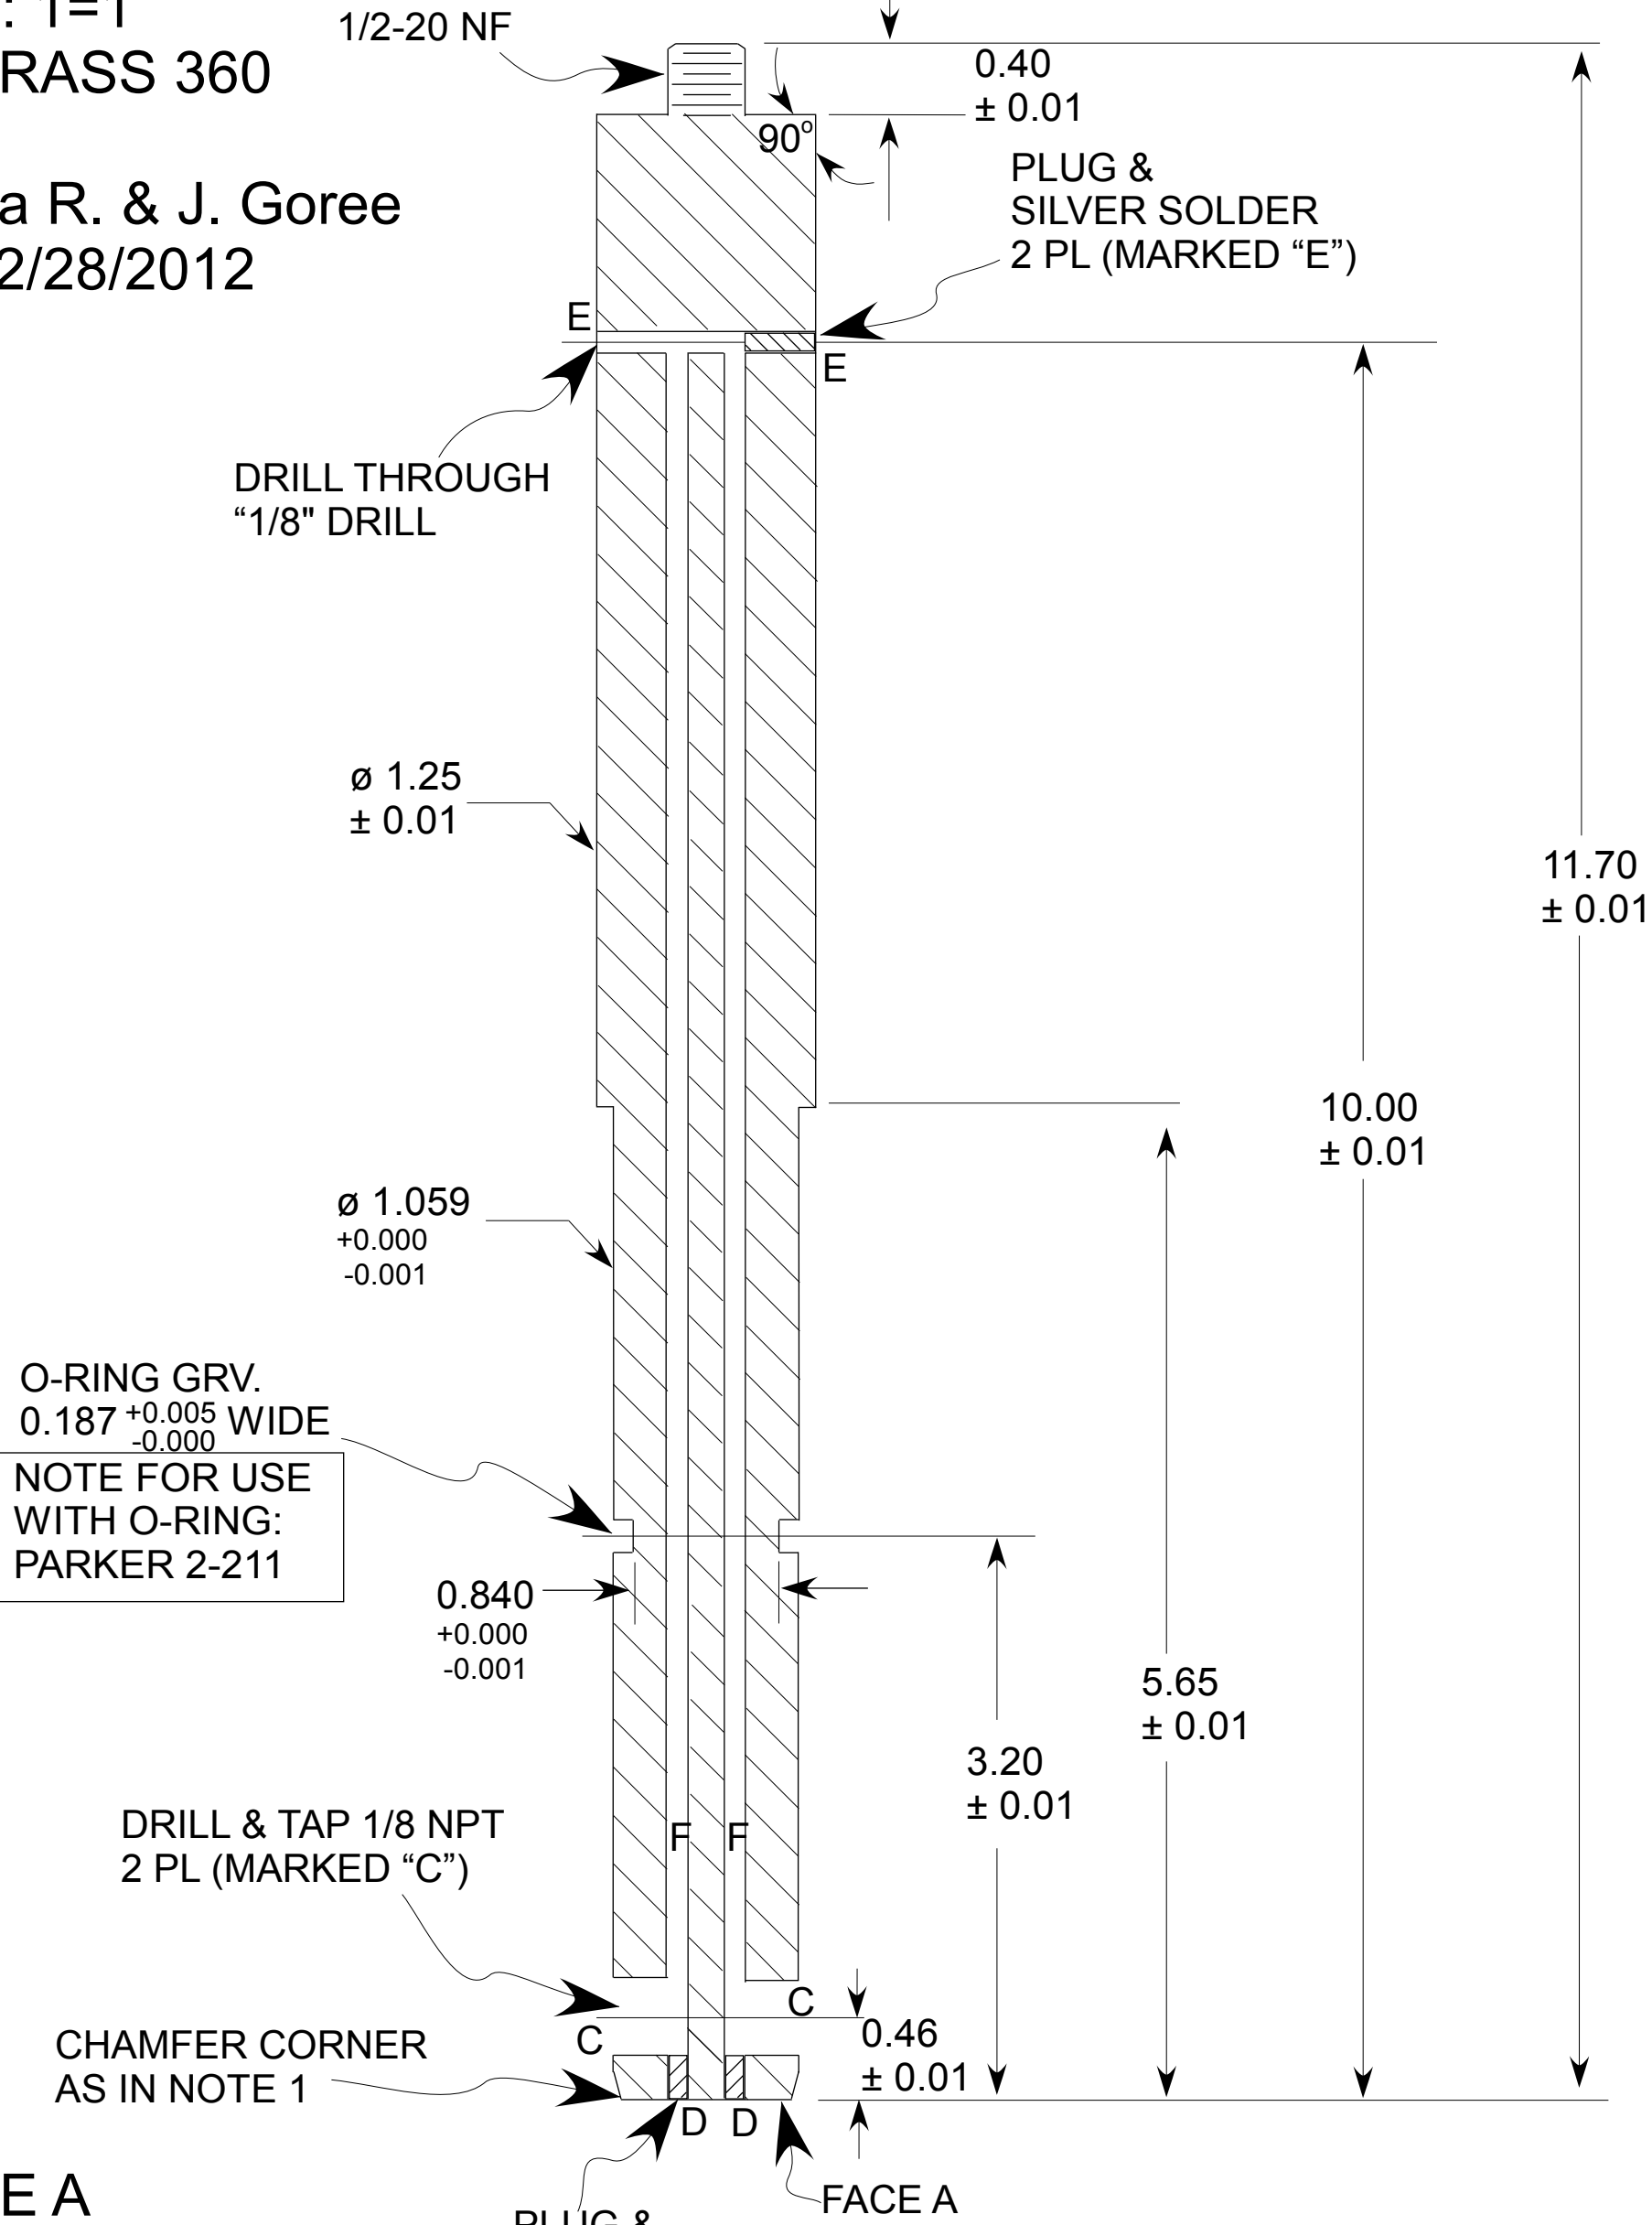


FACE A

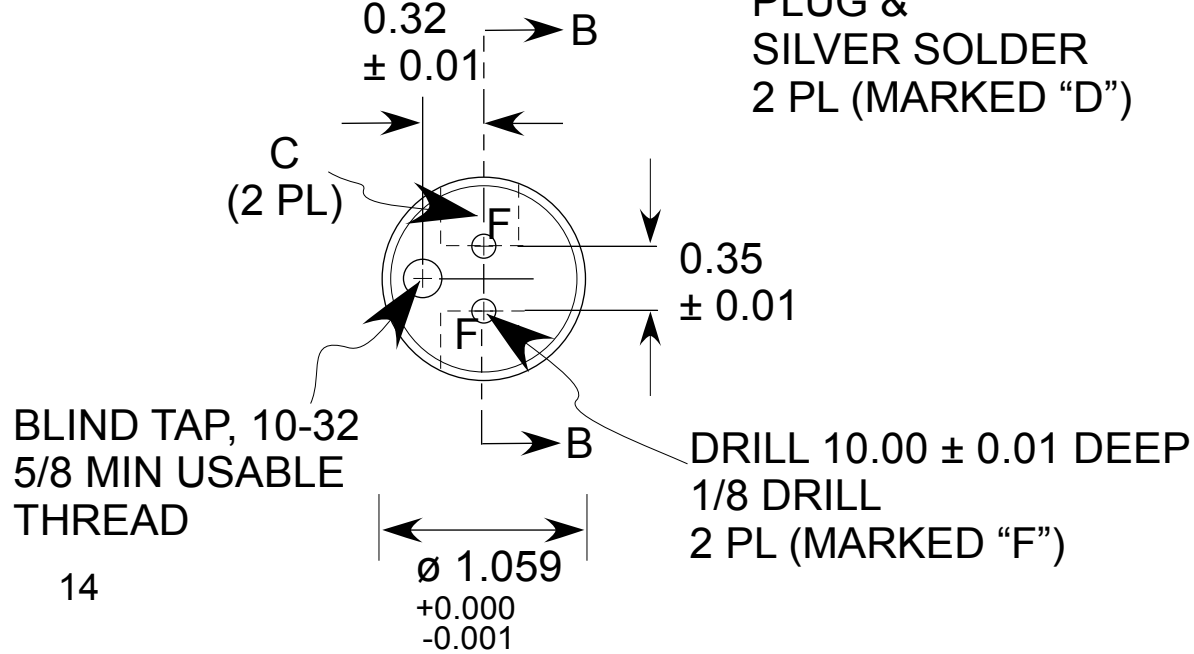


NOTE 1-CHAMFER
CORNER DETAIL

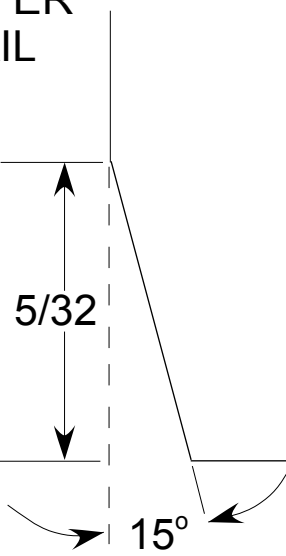


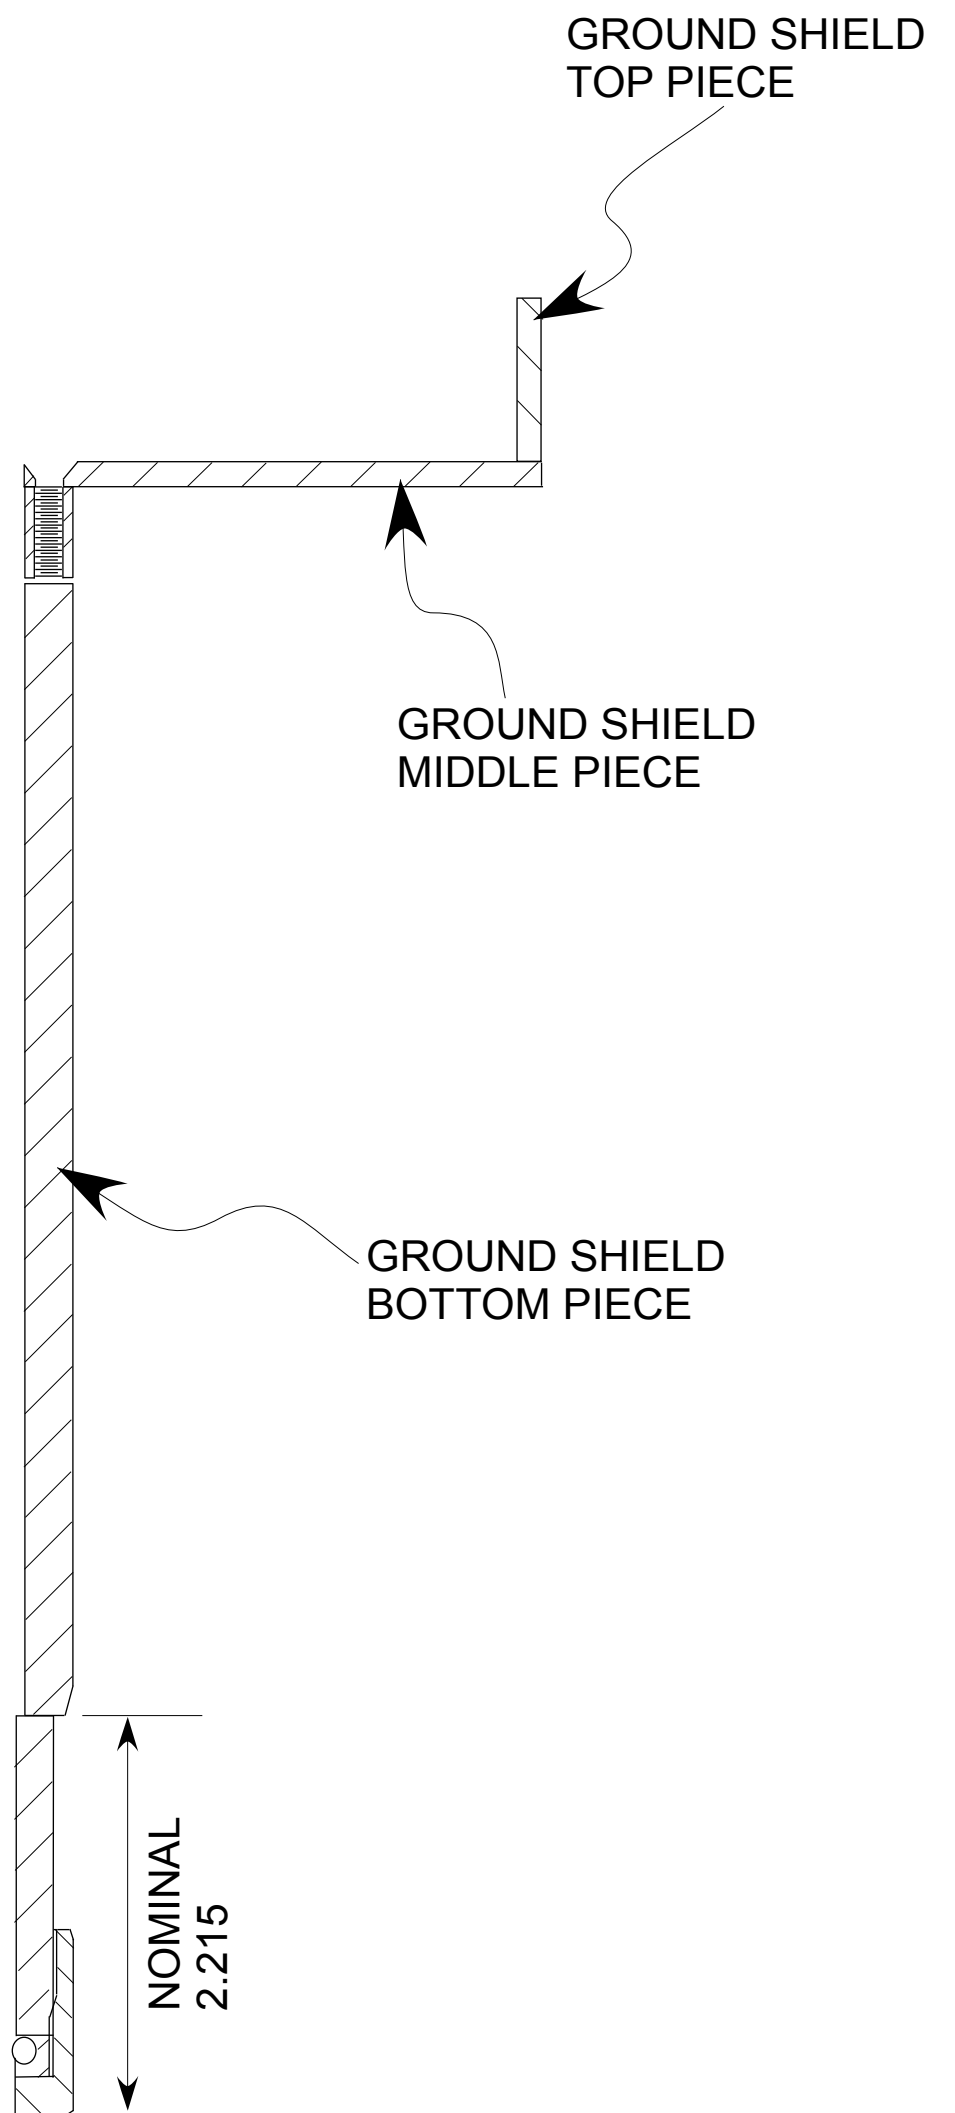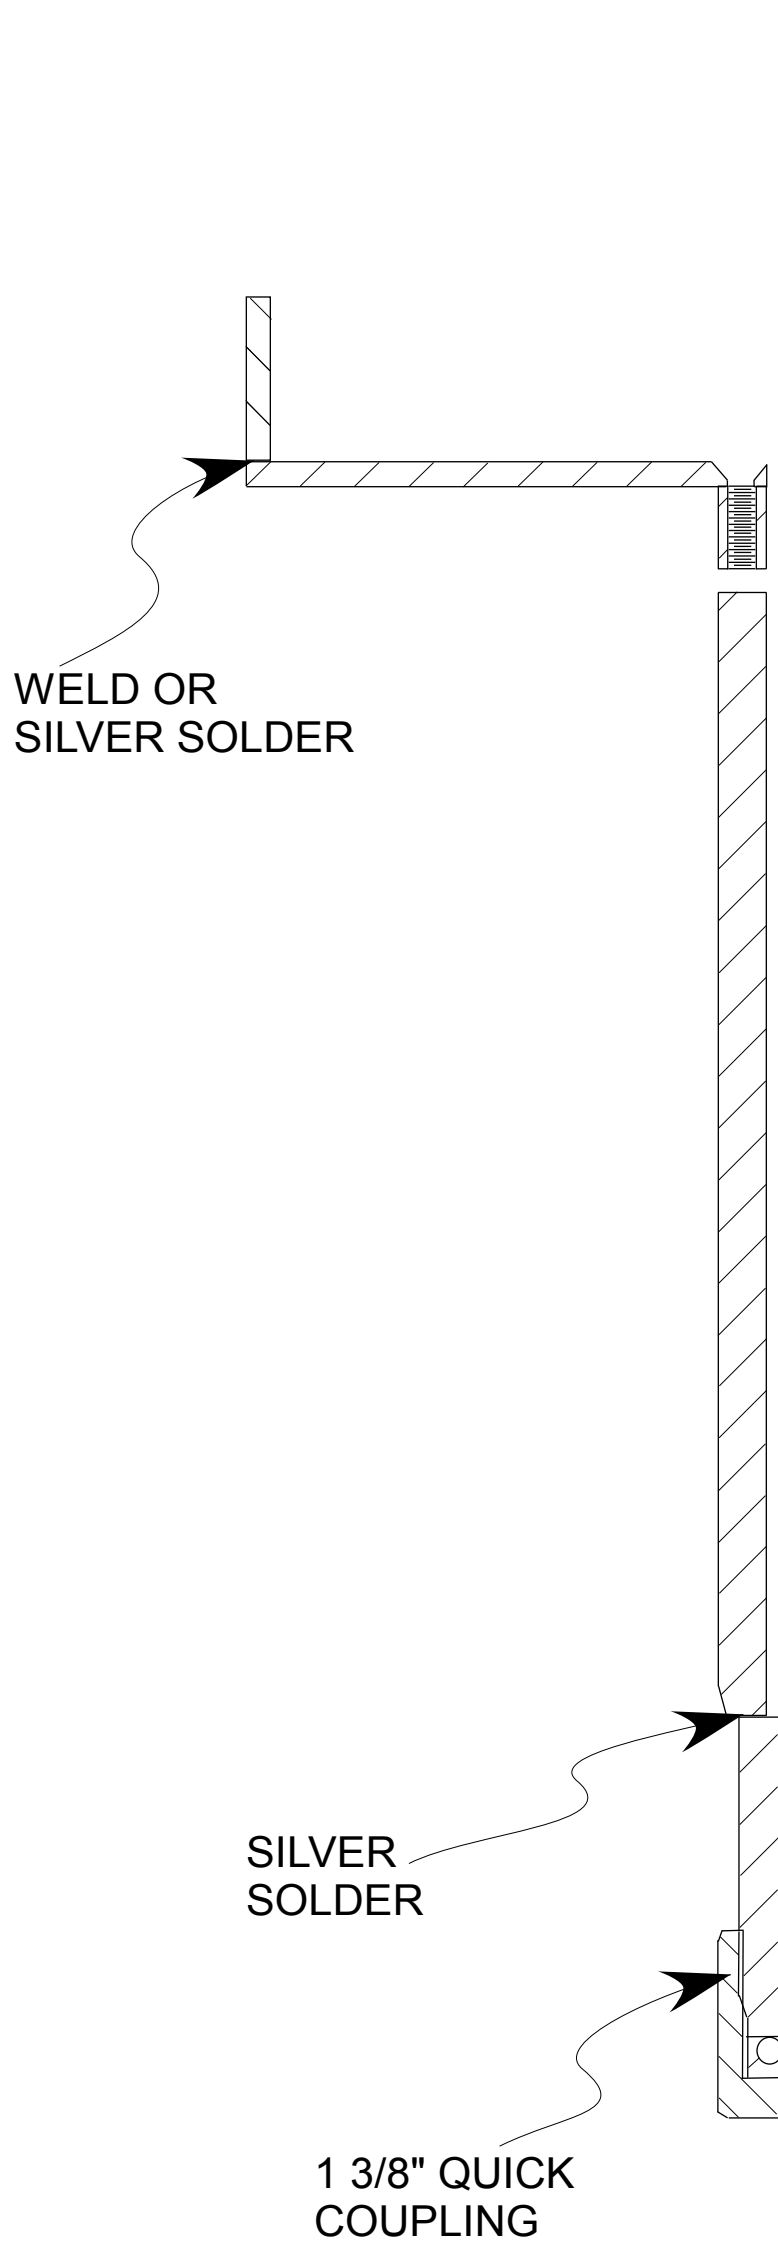


GROUND SHIELD ASSEMBLY
 MATERIAL: S. S. 304
 QTY: 1
 Suranga R. & J. Goree
 DATE:2/28/2012

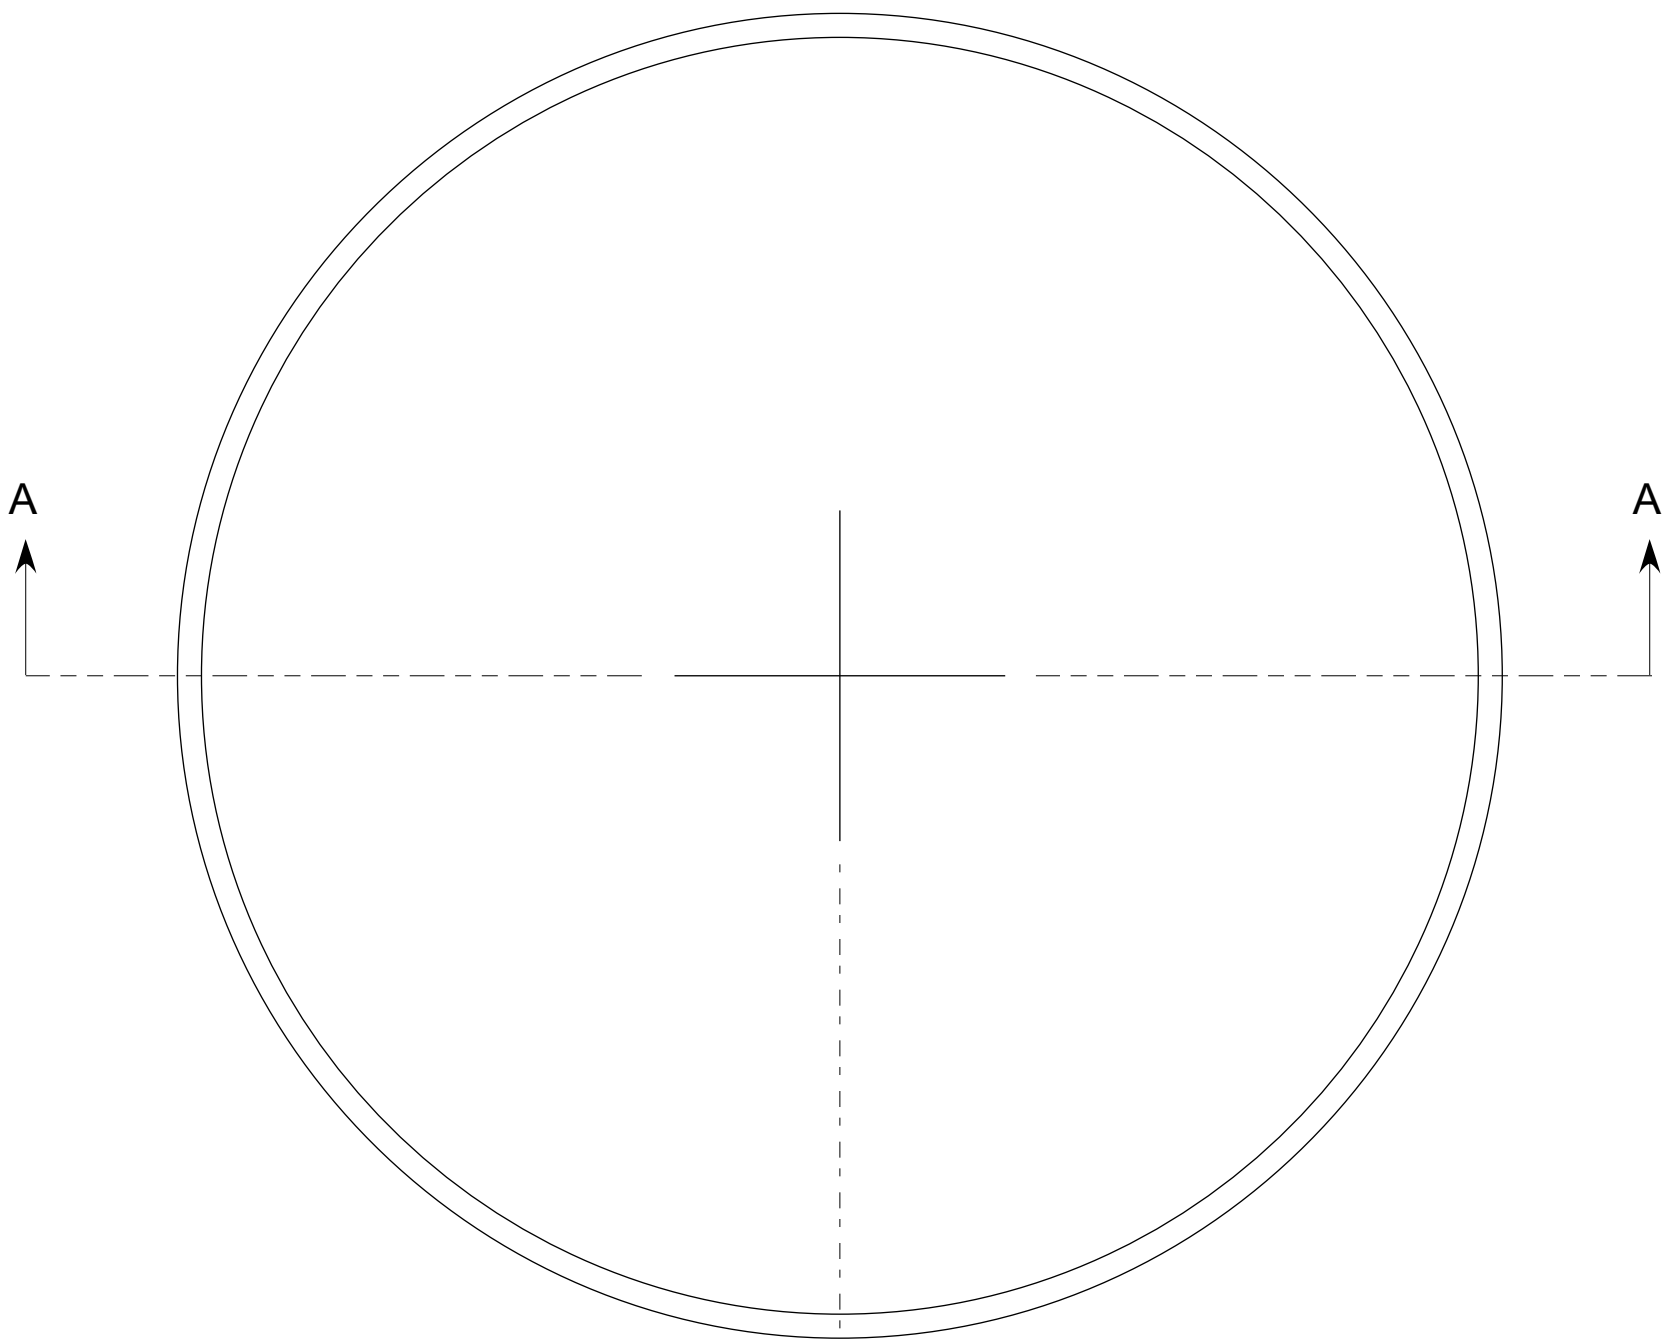


SECTION A-A

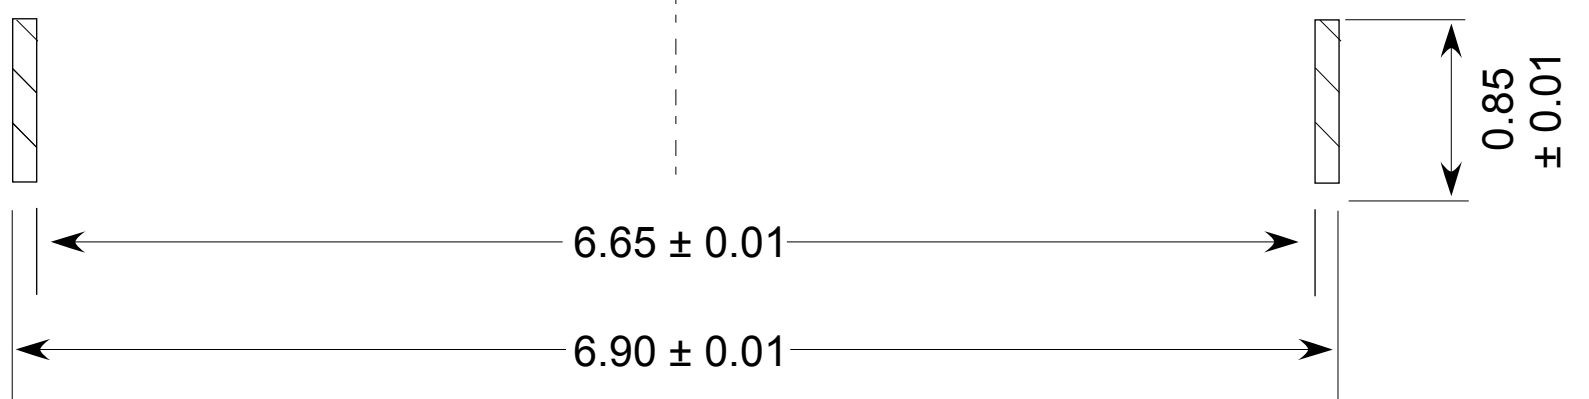



GROUND SHIELD
TOP PIECE
SCALE: 1=1
MATERIAL: S. S. 304
QTY: 1
Suranga R. & J. Goree
DATE: 2/28/2012

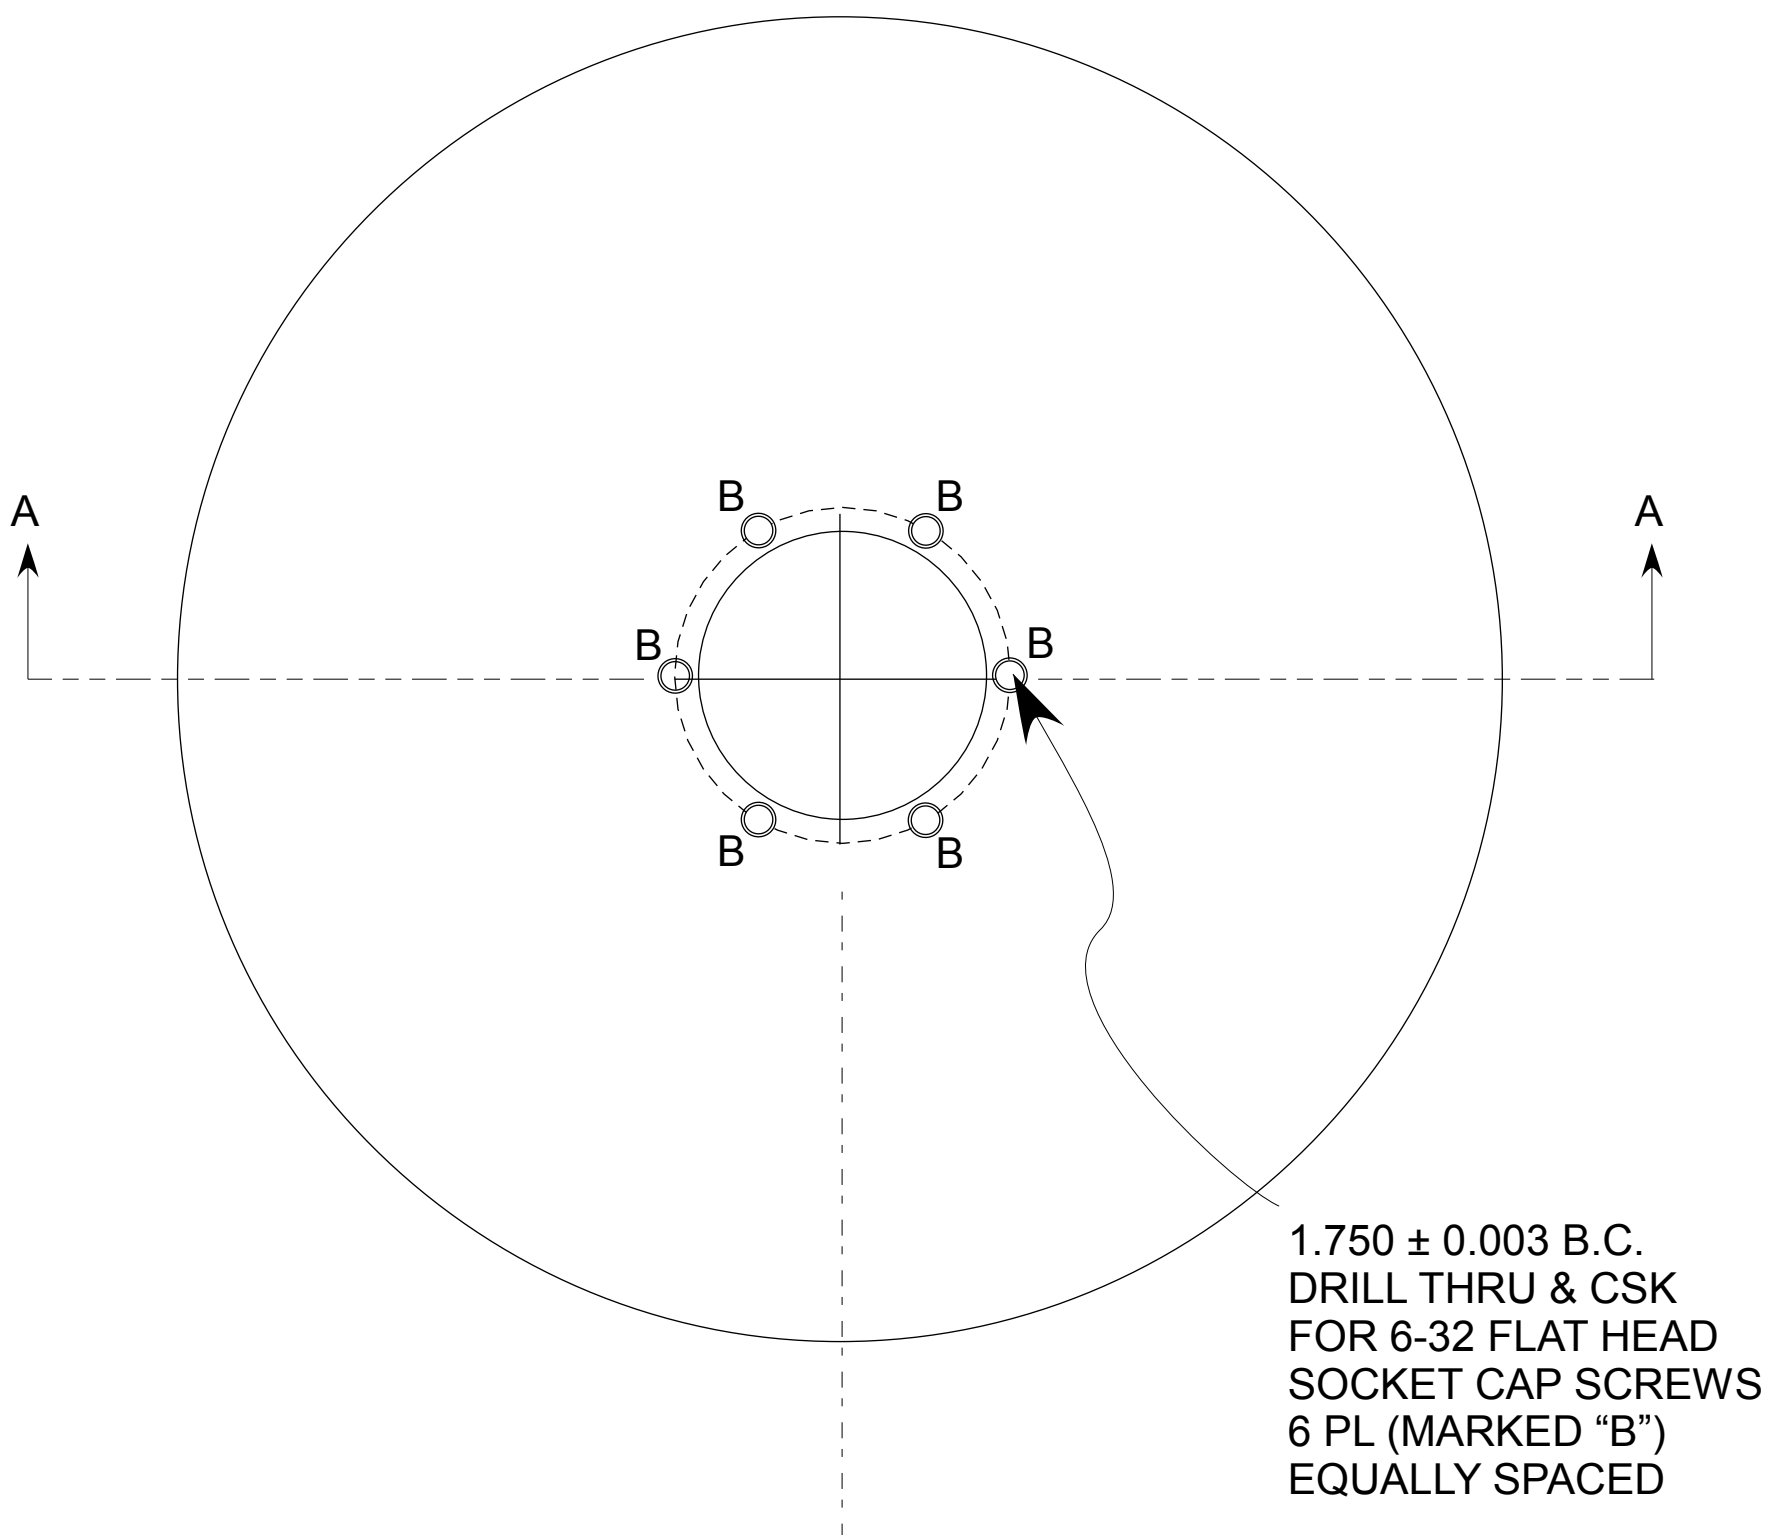


SECTION A-A

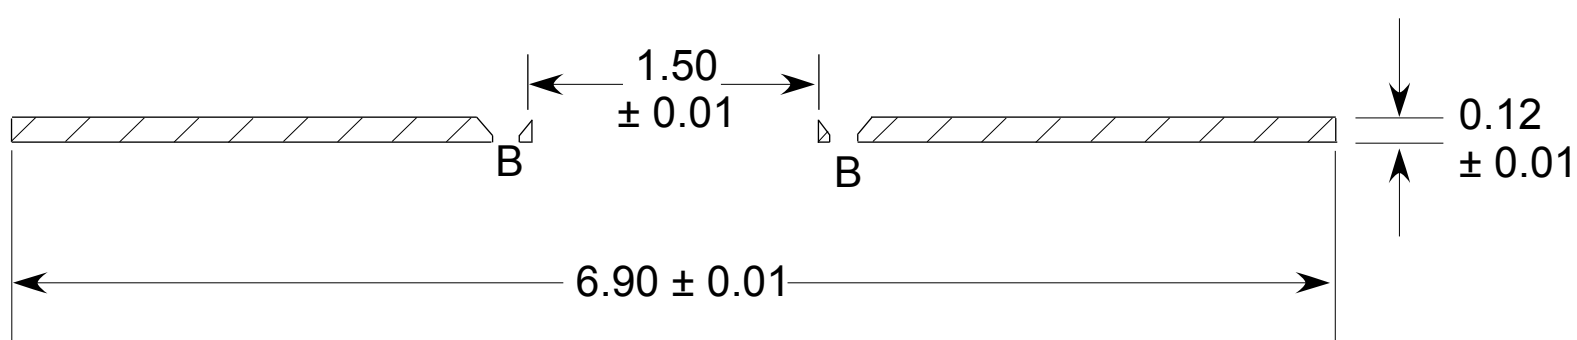


GROUND SHIELD
 MIDDLE PIECE
 SCALE: 1=1
 MATERIAL: S. S. 304
 QTY: 1
 Suranga R. & J. Goree
 DATE: 2/28/2012

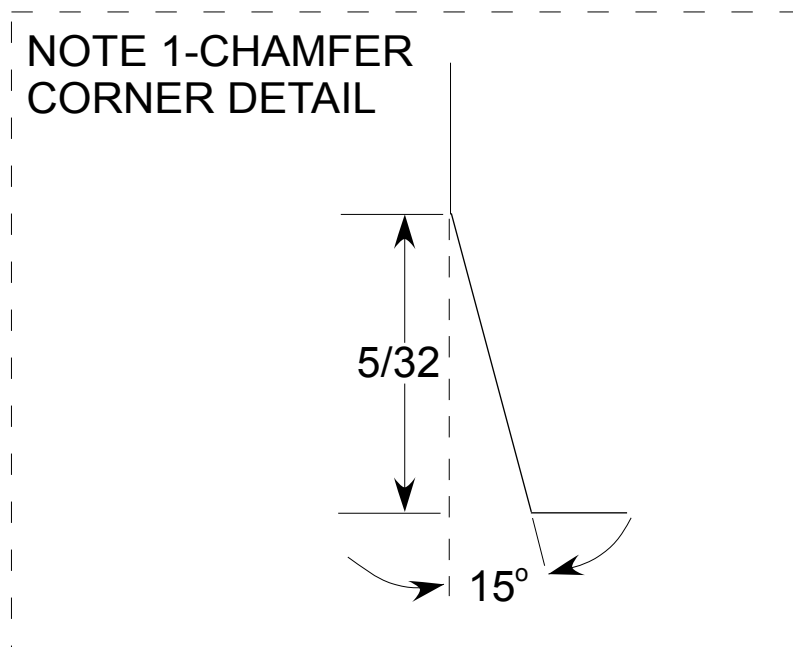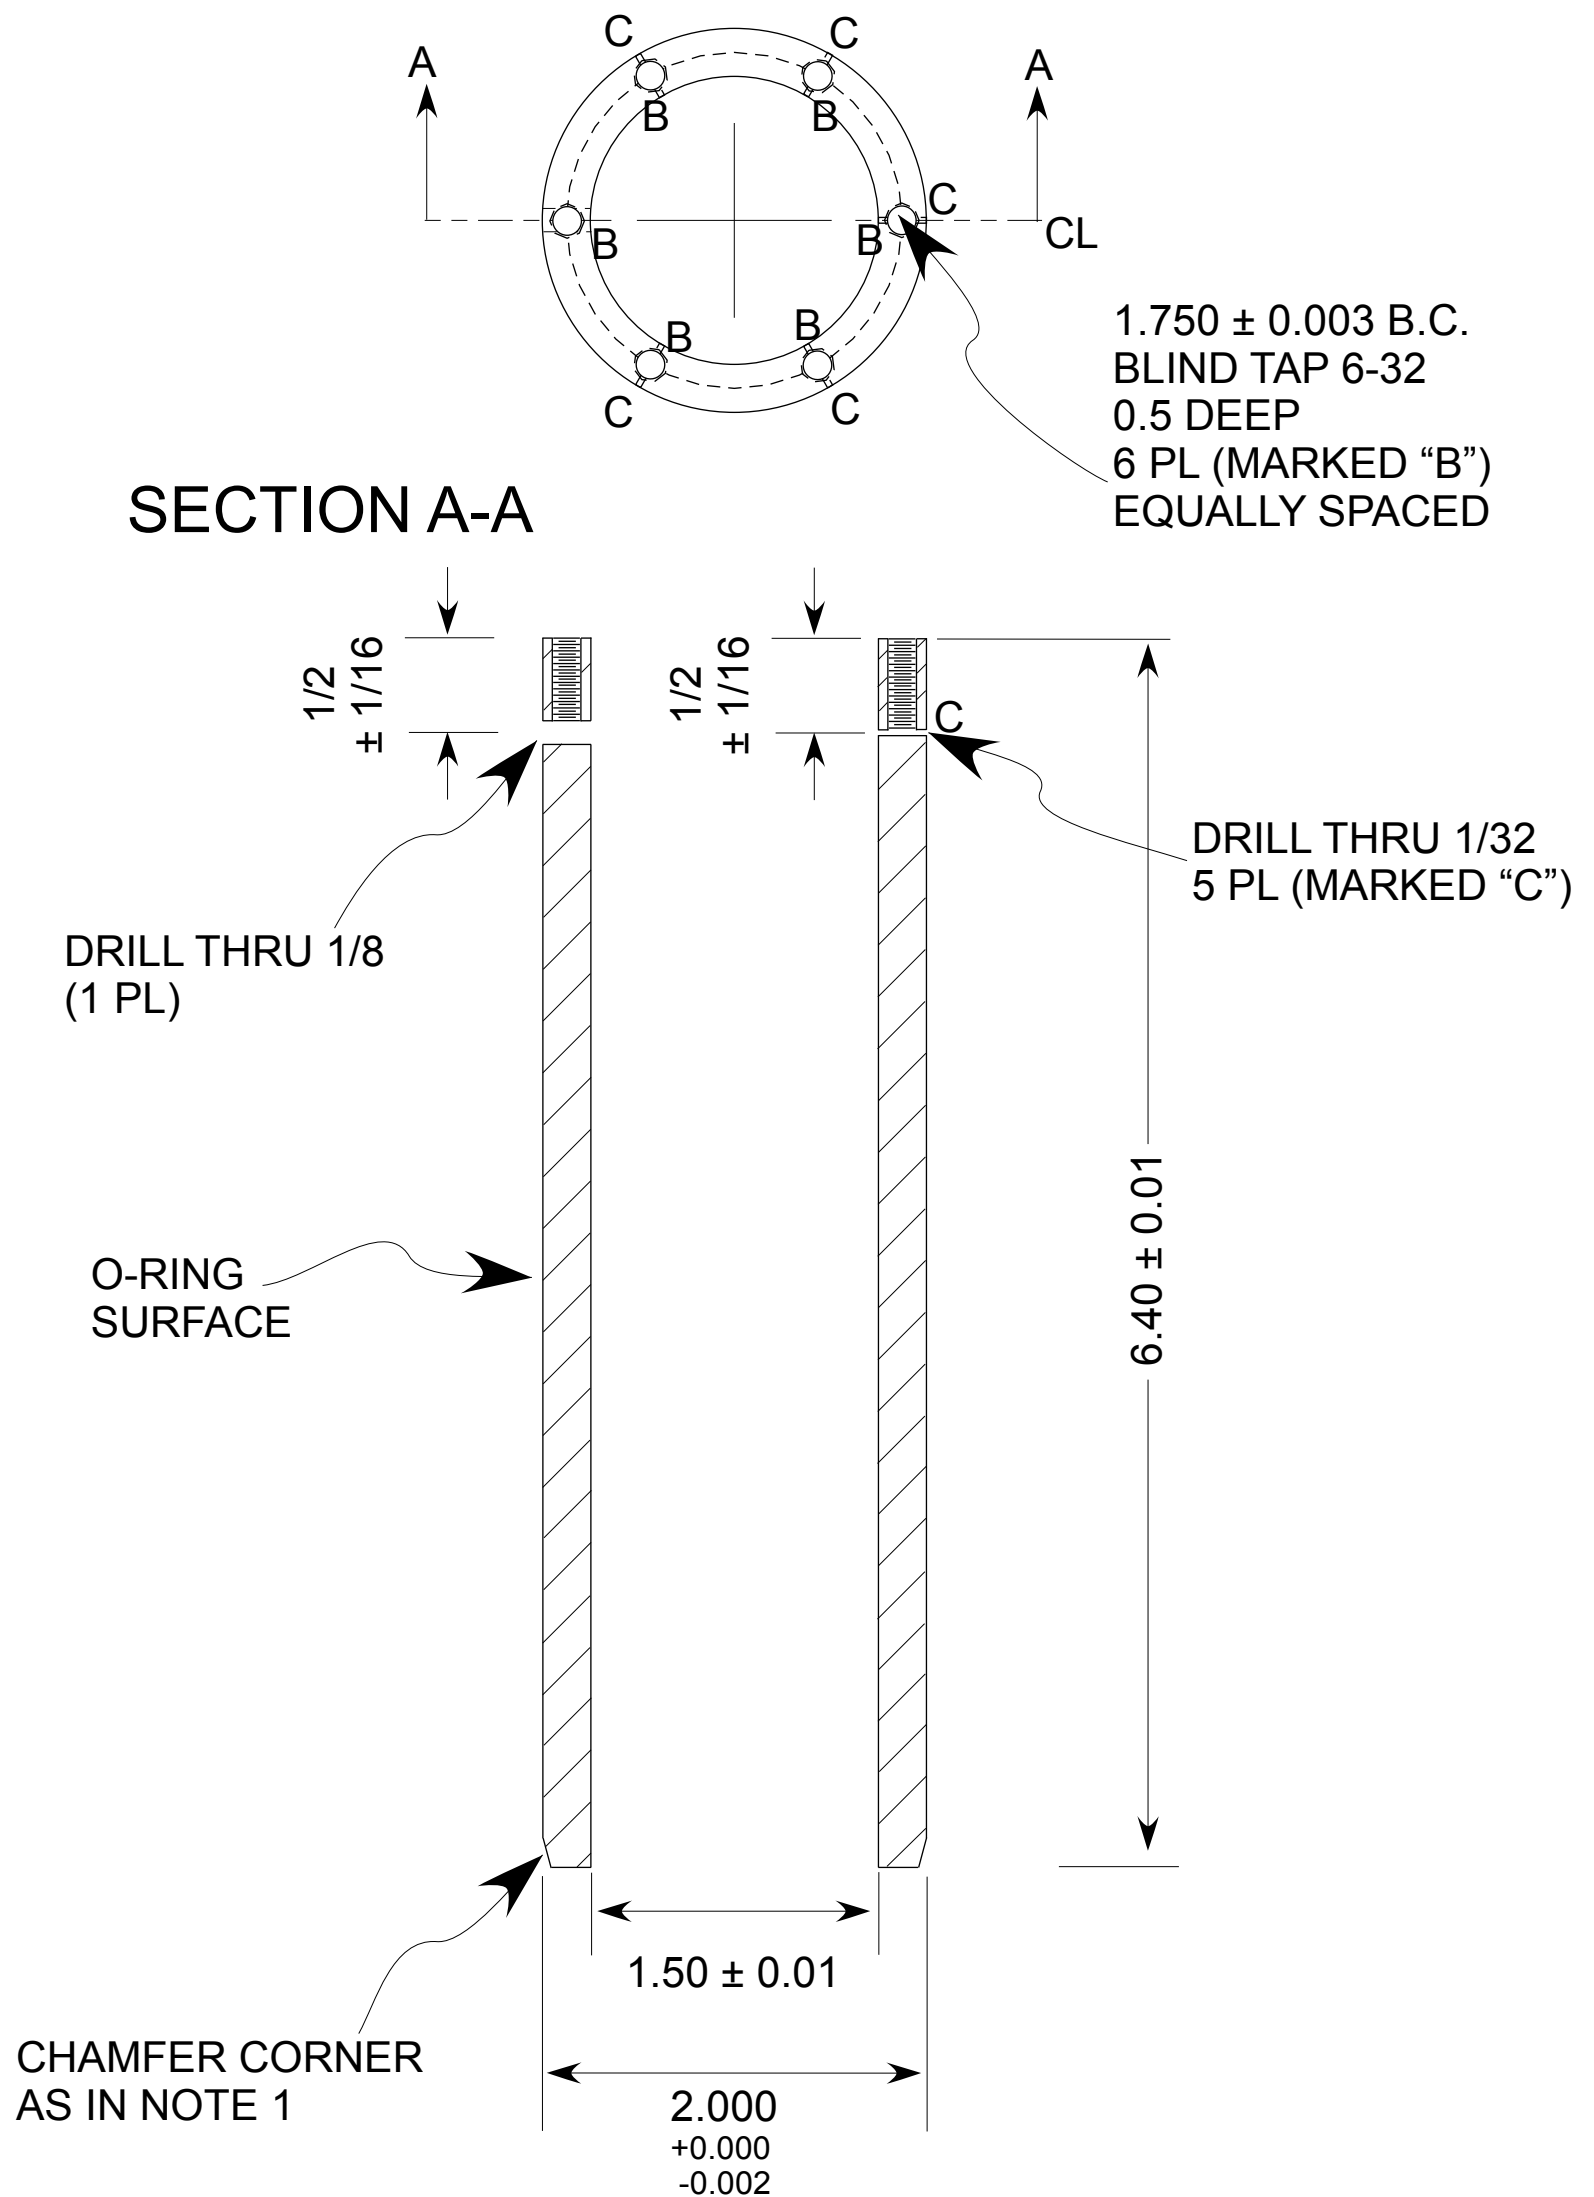


GROUND SHIELD
BOTTOM PIECE
SCALE: 1=1
MATERIAL: S. S. 304
QTY: 1
Suranga R. & J. Goree
2/28/2012

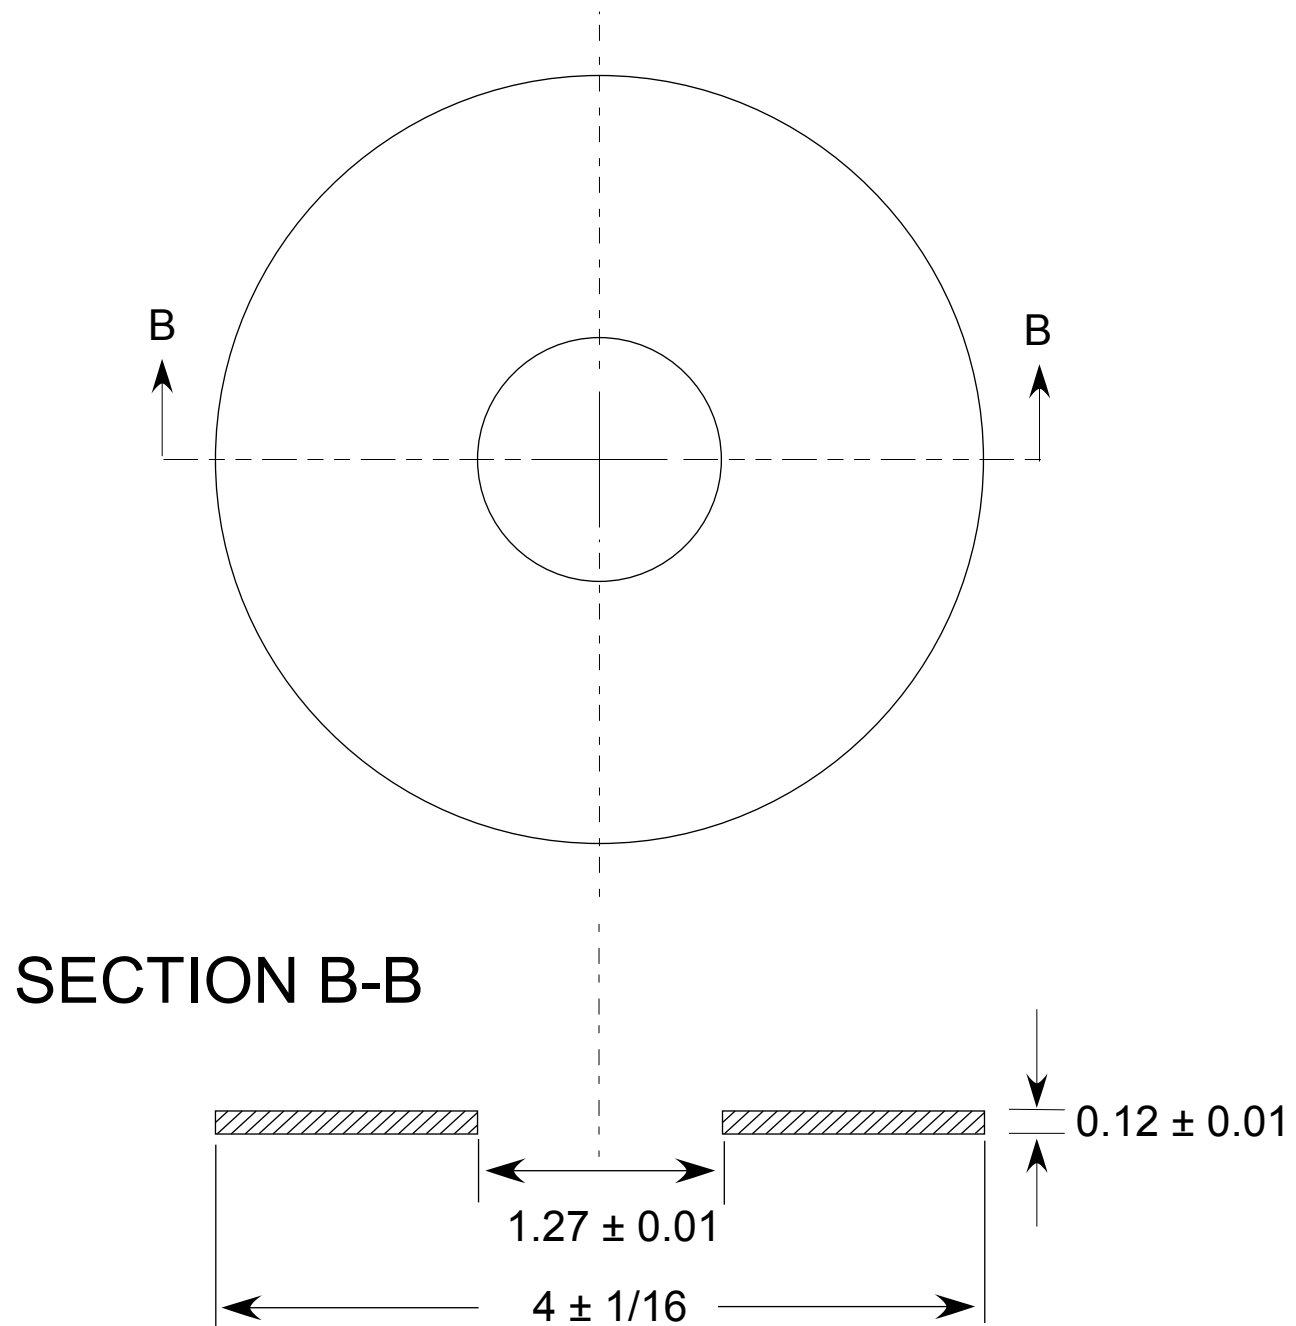


TEFLON SPACER
SCALE : 1=1
MATERIAL: TEFLON
QTY: 1
Suranga R. & J. Goree
DATE: 2/28/2012

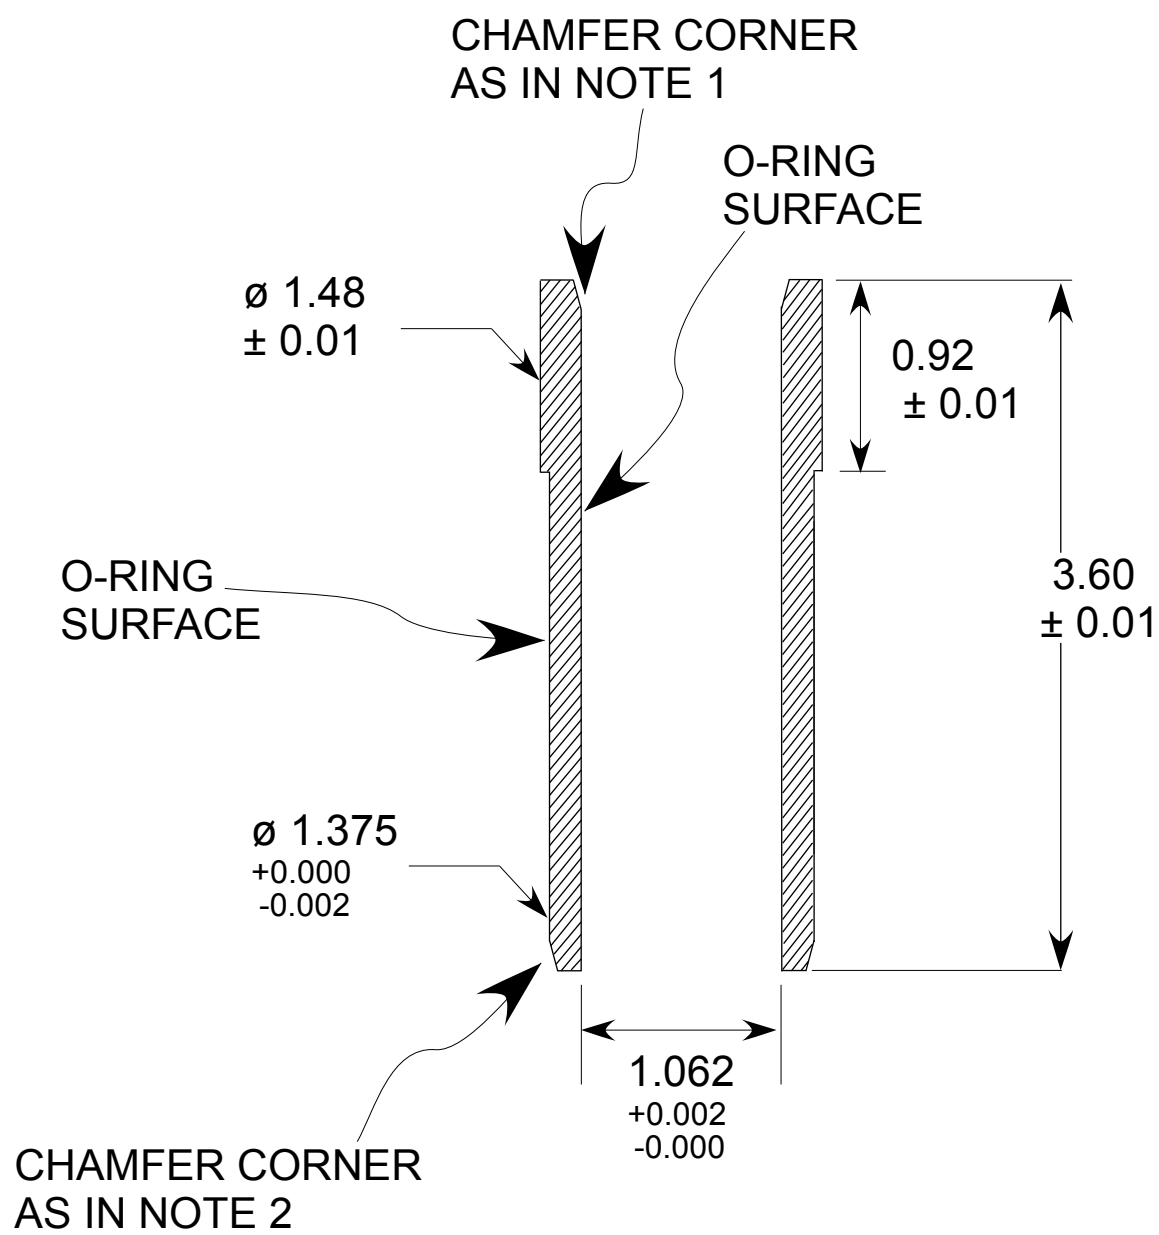


NOTE 1-CHAMFER
CORNER DETAIL

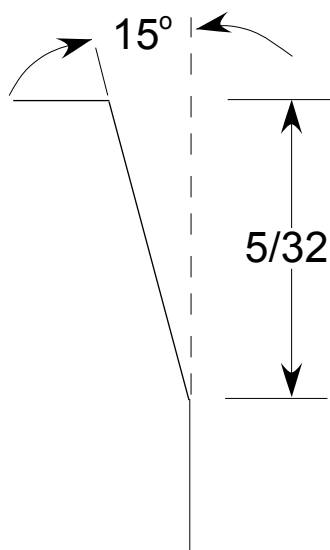

NOTE 2-CHAMFER
CORNER DETAIL

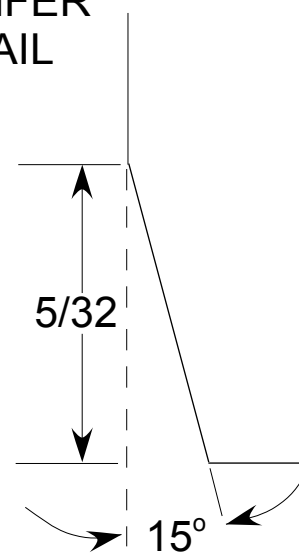


INNER INSULATING SPACER
SCALE: 1=1
MATERIAL: PEEK
QTY: 1
Suranga R. & J. Goree
DATE: 2/28/2012

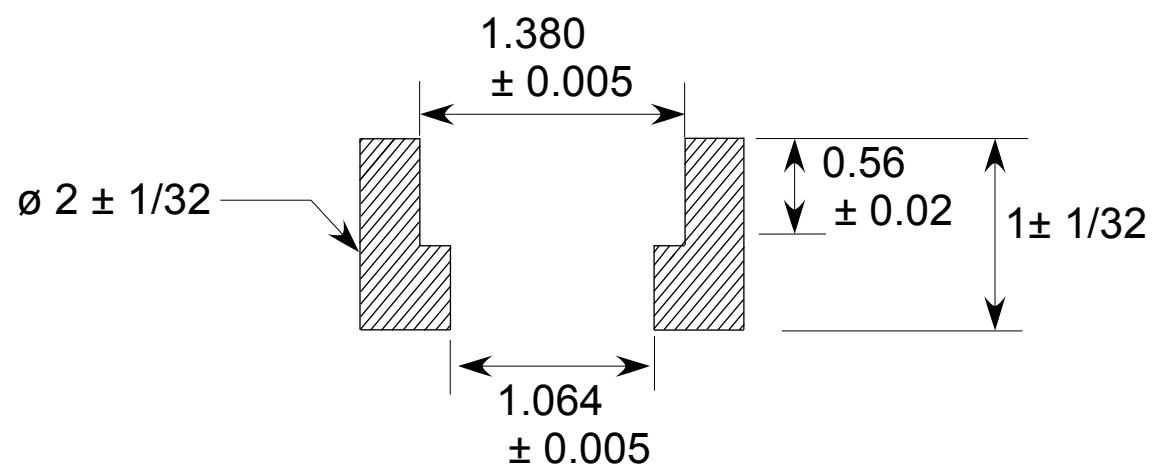

OUTER INSULATING
SPACER
SCALE : 1=1
MATERIAL: PEEK
QTY: 1
Suranga R. & J. Goree
DATE: 2/28/2012

FACE A



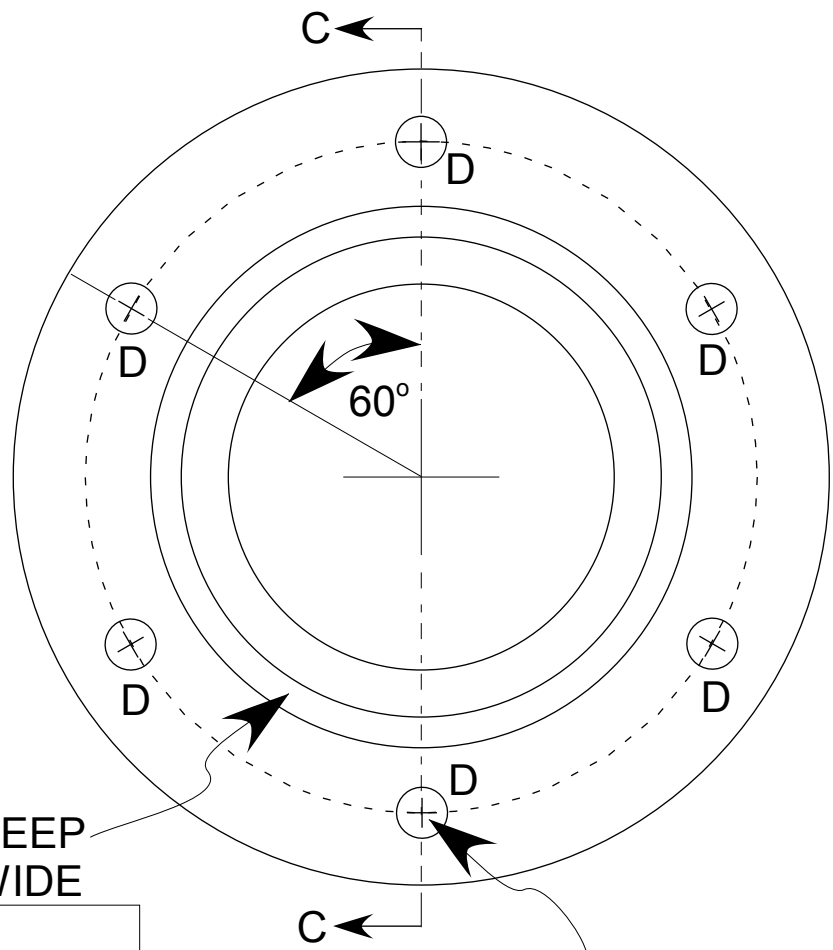


O-RING GRV.
0.104 ± 0.003 DEEP
0.160 ± 0.003 WIDE

NOTE FOR
USE WITH O-RING:
PARKER 2-230

3.500 ± 0.003 DIA. B. C.
DRILL THRU 1/4-20
6 PL (MARKED "D")
EQUALLY SPACED

SECTION C-C

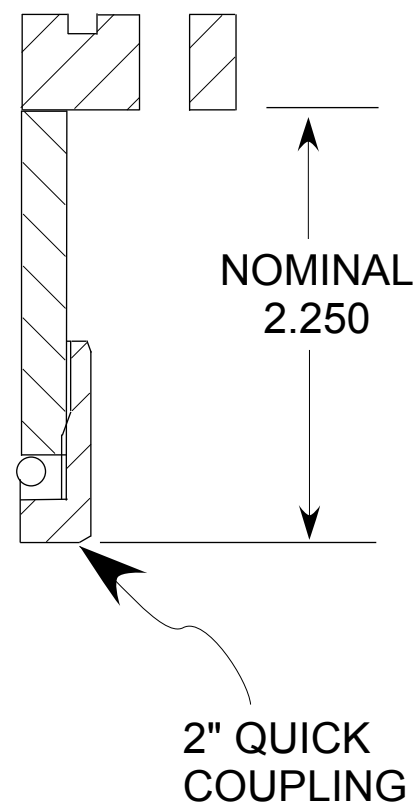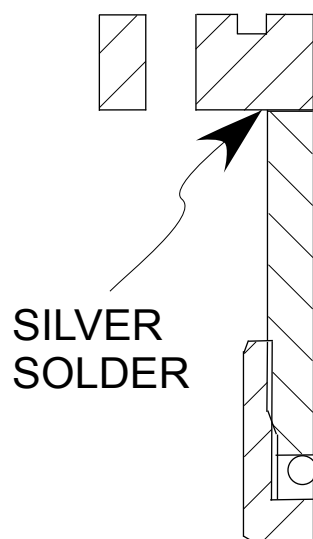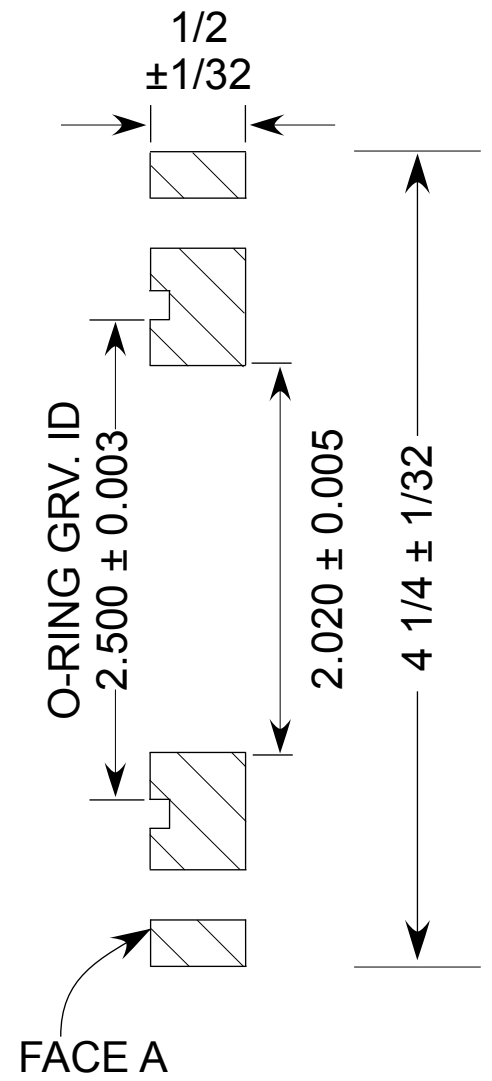

GROUND-SHIELD CONNECTOR
SCALE: 1=1
MATERIAL: S.S. 304
QTY: 1
Suranga R. & J. Goree
DATE: 2/28/2012