

Login details Bastion

Wednesday, 19 March 2025 9:16 AM

AUS Windows Bastion Load Balancer VIP (RDP)			
Data Centre	DNS Friendly Name	IP Address	Port
M1DC	LWBASM1LPC01.FNFIS.COM	10.56.88.53	3389
M2DC	LWBASM2LPC01.FNFIS.COM	10.56.89.53	3389
S2DC	LWBASS2LPC01.FNFIS.COM	10.56.90.53	3389

AUS Linux Bastion Load Balancer VIP (SSH)			
Data Centre	DNS Friendly Name	IP Address	Port
M1DC	LLBASM1LPC01.FNFIS.COM	10.56.88.52	22
M2DC	LLBASM2LPC01.FNFIS.COM	10.56.89.52	22
S2DC	LLBASS2LPC01.FNFIS.COM	10.56.90.52	22

From <<https://wiki.fisglobal.com/display/TES/Bastion+Access>>

Bastion/Utility Servers to access Openshift API			
Hostname	IP Address	Access Mode	Environment
amo4rfisocsut01	10.56.103.251 / 10.56.8.99	fnfis domain cred	NFT, Staging, IA3
amt4rfisocsut01	10.56.104.251 / 10.56.13.109	fnfis domain cred	NFT, Staging, IA3
ast1rfisocsut01	10.56.105.251 / 10.56.11.29		Sys (SandBox)
amo1rfisocsut01	10.56.103.123 / 10.56.16.86	fnfis domain cred	Prod
amt1rfisocsut01	10.56.104.123 / 10.56.17.60	fnfis domain cred	Prod

M1

.apps.m1tstocs.fnfis.com - 10.56.103.131
api.m1tstocs.fnfis.com - 10.56.103.130

M2

Name: api.m2tstocs.fnfis.com
Address: 10.56.104.130
Name: apps.m2tstocs.fnfis.com
Address: 10.56.104.131

Openshift instance

Wednesday, 19 March 2025 11:18 AM

<https://console-openshift-console.apps.s2sysocs.fnfis.com/>

<https://console-openshift-console.apps.m1tstocs.fnfis.com/>

<https://console-openshift-console.apps.m2tstocs.fnfis.com/>

oc login <https://api.s2sysocs.fnfis.com:6443> -u e5752853

oc login <https://api.m1tstocs.fnfis.com:6443> -u e5752853

oc login <https://api.m2tstocs.fnfis.com:6443> -u e5752853

oc login <https://api.m1prdocs.fnfis.com:6443> -u e5752853

oc login <https://api.m2prdocs.fnfis.com:6443> -u e5752853

Splunk

https://testausplunk.fnfis.com/en-US/account/login?return_to=%2Fen-US%2F

m1prdocs	https://console-openshift-console.apps.m1prdocs.fnfis.com	https://api.m1prdocs.fnfis.com:6443	N2DjQ-mbjtd-bpCji-JcXtp
m2prdocs	https://console-openshift-console.apps.m2prdocs.fnfis.com	https://api.m2prdocs.fnfis.com:6443	NXAeZ-fUDWn-S8fXV-wIIZF
m1tstocs		https://api.m1tstocs.fnfis.com:6443	R6wTC-dTpWX-cdDrR-DWRd8
m2tstocs		https://api.m2tstocs.fnfis.com:6444	dhKwm-rddLF-QPHVd-eqf3o
Sys			H5N9L-GFBQW-6NbiQ-WbuMJ

```
[e5752853@ast1rfisocsut01 ~]$ md5sum ldap-2026-cm.crt ldap-ca-cm.crt
d737a8c81dc2fae544d7595b05795477 ldap-2026-cm.crt
d737a8c81dc2fae544d7595b05795477 ldap-ca-cm.crt
```

```
[e5752853@ast1rfisocsut01 ~]$ md5sum ldap-ca-cm.crt ldap-2026-cm.crt
d737a8c81dc2fae544d7595b05795477 ldap-ca-cm.crt
bbe8954d6171ee4c1d5af3c90d3231b2 ldap-2026-cm.crt
[e5752853@ast1rfisocsut01 ~]$
```

Fidelity ESPP

Thursday, 20 March 2025 10:44 AM

kanavatfis
K@n@v1708

commands

Monday, 24 March 2025 9:33 AM

```
oc auth can-i --as-group=<group> --list
oc auth can-i --as=<user> --list
oc policy who-can
```

Impersonation -

```
kubectl <any command> --as=<username> --as-group=<group name>
```

example: **oc get po -n sys-mms-au --as=e5744732 --as-group=sre-app-support**

To see all the containers of a pod:

```
oc get pods ovnkube-node-bcvts -o jsonpath='{.spec.containers[*].name}' -n openshift-ovn-kubernetes
```

```
for i in {1..4}; do kubectl exec -ti -n simpson deploy/homer-deployment -- curl -s -o /dev/null -
l -w "%{http_code}" http://192.168.126.1:8080; echo "-> num $i" ; done
```

To execute test connections

Ingress/Route

```
oc get ingresses.config/cluster -o jsonpath={.spec.domain}
oc adm top nodes
```

```
oc rsync <source> <destination> [-c <container>]
```

```
oc get oauth cluster -o yaml
```

```
oc get pod -n checkpoint | grep my- | cut -d' ' -f1
```

```
oc delete pod/mbldcop-app-b4b48697f-vtjsv -n cop-nft-au; oc scale --replicas=1 deployment/mbldcop-
app -n cop-nft-au
```

Getting details of a node

```
oc get --raw /api/v1/nodes/s2sysocs-x4h7w-cop-ns228/proxy/configz | jq
```

```
--context m2tstocs/api-m2tstocs-fnfis-com:6443/e5752853
```

Node Management

Wednesday, 26 March 2025 11:00 AM

Node Management

oc adm cordon node1.example.com	Marks the node unschedulable
oc adm uncordon <node1>	Marks the node schedulable
oc adm drain <node1> <node2> [--pod-selector=<pod_selector>]	Evacuate the pods. Drains the node
oc label node <node> <key_1>=<value_1> ... <key_n>=<value_n>	Labels the nodes
oc get machinesets -n openshift-machine-api	View the machine sets in cluster
oc edit machineset <machineset> -n openshift-machine-api	

```
oc adm drain m2tstocs-mps-stg-cmbk2 m2tstocs-mps-stg-xvj9t --delete-emptydir-data --ignore-daemonsets
```

```
[e5752853@ast1rfisocsut01 ~]$ oc get mcp
```

```
NAME CONFIG UPDATED UPDATING DEGRADED MACHINECOUNT READYMACHINECOUNT UPDATEDMACHINECOUNT
DEGRADEDMACHINECOUNT AGE
master rendered-master-02c6f509cf3f599418cb7bc86383ce3f True False False 3 3 3 0 530d
worker rendered-worker-58160da5e1c887b954f5997a0a2d1781 True False False 3 3 3 0 530d
```

```
[e5752853@ast1rfisocsut01 ~]$ oc get machineset
```

No resources found in cop-sys-au namespace.

```
[e5752853@ast1rfisocsut01 ~]$ oc get machineset -A
```

```
NAMESPACE NAME DESIRED CURRENT READY AVAILABLE AGE
openshift-machine-api s2sysocs-x4h7w-cop 1 1 1 1 117d
openshift-machine-api s2sysocs-x4h7w-worker-0 2 2 2 2 530d
```

```
[e5752853@ast1rfisocsut01 ~]$ oc get machines -A
```

```
NAMESPACE NAME PHASE TYPE REGION ZONE AGE
openshift-machine-api s2sysocs-x4h7w-cop-ns228 Running 117d
openshift-machine-api s2sysocs-x4h7w-master-0 Running 530d
openshift-machine-api s2sysocs-x4h7w-master-1 Running 530d
openshift-machine-api s2sysocs-x4h7w-master-2 Running 530d
openshift-machine-api s2sysocs-x4h7w-worker-0-hmcp8 Running 530d
openshift-machine-api s2sysocs-x4h7w-worker-0-rp2jf Running 530d
```

```
[e5752853@ast1rfisocsut01 ~]$
```

[Machine management | Red Hat Product Documentation](#)

MachineSet resources are groups of compute machines. Compute machine sets are to compute machines as replica sets are to pods.

We can say there are 2 kinds of machine sets.

1. Compute machine sets for the workers.
2. Control plane machine sets for the master/controller.

[e5752853@ast1rfisocsut01 ~]\$ oc describe infrastructure cluster	Get information about the cluster
oc get dnses.config.openshift.io/cluster -o yaml	Get info about cluster DNS config

To make the master/control plane node schedulable in OCP

```
oc describe schedulers.config.openshift.io cluster
```


Edit the resource and make mastersSchedulable to True

Machine Config/scale machines


Friday, 28 March 2025 11:07 AM

[Chapter 1. Machine configuration overview | Red Hat Product Documentation](#)

most changes to operating systems on OpenShift Container Platform nodes can be done by creating what are referred to as **MachineConfig** objects that are managed by the Machine Config Operator. For example, you can use the Machine Config Operator (MCO) and machine configs to manage update to systemd, CRI-O and kubelet, the kernel, Network Manager and other system features.

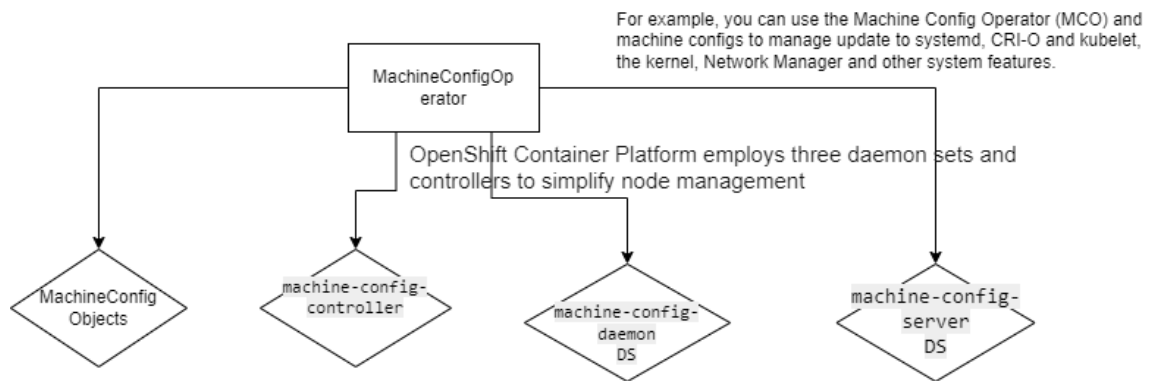


- The `machine-config-controller`, which coordinates machine upgrades from the control plane. It monitors all of the cluster nodes and orchestrates their configuration updates.
- The `machine-config-daemon` daemon set, which runs on each node in the cluster and updates a machine to configuration as defined by machine config and as instructed by the MachineConfigController. When the node detects a change, it drains off its pods, applies the update, and reboots. These changes come in the form of Ignition configuration files that apply the specified machine configuration and control kubelet configuration.
- The `machine-config-server` daemon set, which provides the Ignition config files to control plane nodes as they join the cluster.
- The machine configuration is a subset of the Ignition configuration. The `machine-config-daemon` reads the machine configuration to see if it needs to do an OSTree update or if it must apply a series of systemd kubelet file changes, configuration changes, or other changes to the operating system or OpenShift Container Platform configuration.

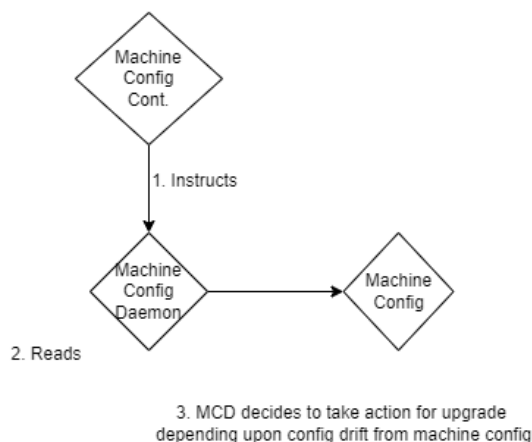


- MCO is only supported for writing to files in `/etc` and `/var` directories.
 - Ignition is the configuration format used in MachineConfigs
 - Ignition config settings can be delivered directly at OpenShift Container Platform installation time, and are formatted in the same way that MCO delivers Ignition configs, MCO has no way of seeing what those original Ignition configs are. Therefore, you should wrap Ignition config settings into a machine config before deploying them.
- A key reason for using a machine config is that it will be applied when you spin up new nodes for a pool in your OpenShift Container Platform cluster. The `machine-api-operator` provisions a new machine and **MCO** configures it.

MCO uses [Ignition](#) as the configuration format.

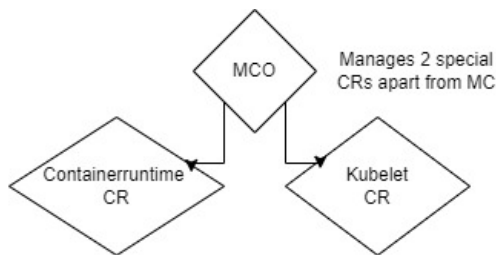


Outside of machine configs, MCO manages two special custom resources for modifying CRI-O container runtime settings (`ContainerRuntime` CR) and the Kubelet service (`Kubelet` CR)

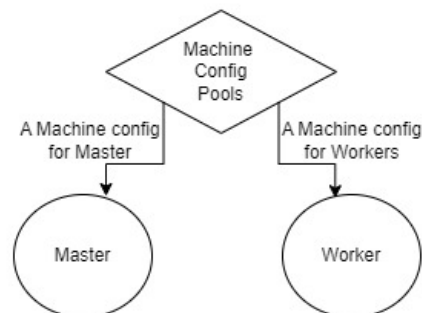

MCP is a set of machine with a similar role or profile. The role of the node determines which MCP it belongs to; the MCP governs nodes based on its assigned node role label

As a default, there are 2 Pools. More pools can be created for custom Worker nodes

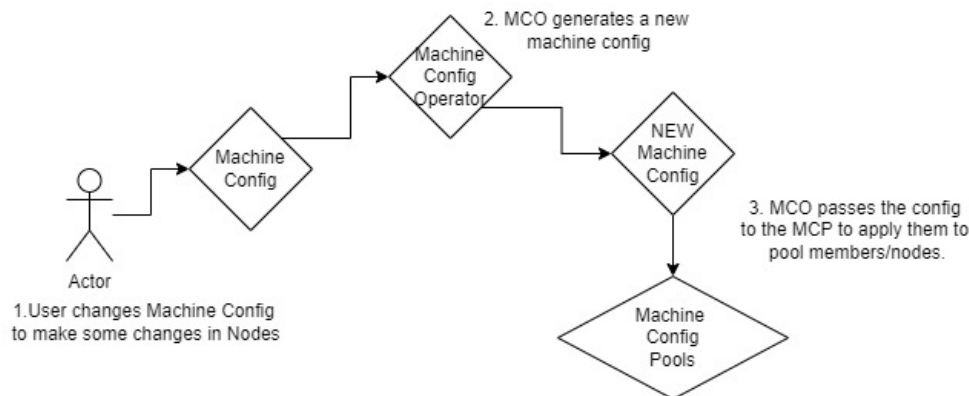

1. Cordon. The MCO marks the node as not schedulable for additional workloads.
2. Drain. The MCO terminates all running workloads on the node, causing the workloads to be rescheduled onto other nodes.
3. Apply. The MCO writes the new configuration to the nodes as needed.
4. Reboot. The MCO restarts the node.
5. Uncordon. The MCO marks the node as schedulable for workloads.

The Machine Config Operator (MCO) uses the Machine Config Daemon (MCD) to check nodes for configuration drift on a regular basis.

https://docs.redhat.com/en/documentation/openshift_container_platform/4.18/html/machine_management/modifying-machineset#machineset-modifying_modifying-machineset

Links - Upgrade

Monday, 7 April 2025 12:00 PM

https://access.redhat.com/labs/ocpupgradegraph/update_path - Upgrade Path

https://docs.redhat.com/en/documentation/openshift_container_platform/4.15/html/updating_clusters/understanding-openshift-updates-1#cluster-update-phases

https://docs.redhat.com/en/documentation/openshift_container_platform/4.9/html/installing/installation-configuration#configuring-firewall_configuring-firewall

[Chapter 1. Understanding OpenShift updates | Updating clusters | OpenShift Container Platform | 4.19 | Red Hat Documentation](#)

[OpenShift Authentication Providers with AD · OpenShift Demo](#) Openshift full

[OpenShift 4.x Upgrade Process Explained | by Kedar Salunkhe | Medium](#)

Must gather

Wednesday, 23 April 2025 3:07 PM

oc adm must-gather

```
tar -cvaf clustername.tar.gz(name of tar file to be created) mustgather.xxx-xxx(name of mustgather file as created by the command)
```

```
redhat-support-tool addattachment -c CASE_NUMBER /path/to/sosreport
```

```
PROXY_URL="http://10.56.24.125:10022"
```

```
export http_proxy="$PROXY_URL"
export https_proxy="$PROXY_URL"
export ftp_proxy="$PROXY_URL"
export no_proxy="127.0.0.1,localhost,.fnfis.com"
```

1. Obtain a token from <https://access.redhat.com/sftp-token>
2. Choose guest or login
3. Rename the file to
(i.e \${CASEID}_* or sosreport-\${CASEID} - *)

4. Use the command to connect to sftp

```
sftp -o "ProxyCommand nc --proxy 10.56.24.125:10022 --proxy-type http %h %p"
kanav.sharma@fisglobal.com@sftp.access.redhat.com
llmeEctE
```

5. Validate with below like messages

```
Connected to DpDPSPGN@sftp.access.redhat.com.
sftp> put sysreport.tar.gz
Uploading sysreport.tar.gz to /sysreport.tar.gz
sysreport.tar.gz
100% 10MB 1.8MB/s 00:05
sftp>
```

KB article

[How to Upload Files to Cases Using Red Hat Secure FTP - Red Hat Customer Portal](#)

User management

Tuesday, 29 April 2025 9:39 AM

[How to customize OpenShift roles for RBAC permissions](#)

```
oc adm policy add-cluster-role-to-user <role> <username>
```

```
[root@amo4rfisocsut01 ~]# oc adm policy add-scc-to-user anyuid -z nftcpsa
clusterrole.rbac.authorization.k8s.io/system:openshift:scc:anyuid added: "nftcpsa"
```

This commands creates a clusterrole binding. -z indicates this is for a service account.

Describe the cluster role binding and we can see which users have been assigned the roles or scc's.

```
[e5752853@ast1rfisocsut01 ~]$ oc get clusterrolebinding system:openshift:scc:anyuid
```

```
NAME                                ROLE                                AGE
system:openshift:scc:anyuid ClusterRole/system:openshift:scc:anyuid 718d
```

```
[e5752853@ast1rfisocsut01 ~]$ oc describe clusterrolebinding system:openshift:scc:anyuid
```

```
Name:      system:openshift:scc:anyuid
```

```
Labels:    <none>
```

```
Annotations: <none>
```

```
Role:
```

```
Kind: ClusterRole
```

```
Name: system:openshift:scc:anyuid
```

```
Subjects:
```

```
Kind      Name      Namespace
```

```
----
```

```
ServiceAccount splunk-sa openshift-logging
```

```
ServiceAccount default cop-iat-au
```

```
ServiceAccount stgcopsa cop-stg-au
```

```
ServiceAccount default debug
```

```
ServiceAccount default stg-mms-au
```

```
ServiceAccount default stg-mpir-au
```

```
ServiceAccount nftcpsa cop-nft-au
```

ACM/MCE/submariner

Thursday, 8 May 2025 11:10 AM

<https://access.redhat.com/solutions/7003616>

<https://access.redhat.com/solutions/7000184>

<https://access.redhat.com/solutions/7100699>

[Upgrade MCE and RHACM to an intermediate version not available in the CatalogSource - Red Hat Customer Portal](#)

[\[RHACM\] The alignment between RHACM release stream and MCE release stream - Red Hat Customer Portal](#) ACM ----> MCE version compatibility

[Red Hat Advanced Cluster Management for Kubernetes Lifecycle | Red Hat Customer Portal](#)
ACM ---> OCP compatibility

Submariner - <https://piotrminkowski.com/2021/07/08/kubernetes-multicluster-with-kind-and-submariner/>

[Intercluster VM Communication using ACM/Submariner](#)

```
948 oc get csv multicluster-engine.v2.6.6 -o yaml > mce-bkup04092025.yaml
949 cat mce-bkup04092025.yaml
950 oc get csv
951 oc get no
952 oc get csv
953 oc delete csv multicluster-engine.v2.6.6
954 oc get csv
955 oc get po -n multicluster-engine
956 oc get csv
957 oc get mce
958 oc get po -A | grep submariner
959 clear
960 oc get po -n multicluster-engine
961 watch oc get po -n multicluster-engine
962 oc get csv
963 oc project open-cluster-management
964 oc get csv
965 oc get sub
966 oc get csv
967 oc get csv advanced-cluster-management.v2.11.6 -o yaml > acm.csv bkup04092025.yaml
968 cat acm.csv-bkup04092025.yaml
969 clear
970 oc get csv
971 oc delete csv advanced-cluster-management.v2.11.6
972 oc get sub
979 oc get mch
```

```
oc adm must-gather --image=registry.redhat.io/rhacm2/acm-must-gather-rhel9:v2.11
```

[Process metrics - FIS: Australia PROD Tenant - Dynatrace](#)

[Process metrics - FIS: Australia PROD Tenant - Dynatrace](#)

OCP Registry

Friday, 23 May 2025 11:34 AM

https://docs.redhat.com/en/documentation/openshift_container_platform/4.17/html/registry/securing-exposing-registry

https://medium.com/@mgreenbe_84803/using-openshifts-internal-registry-e4a81d09da59

Above doc refers the steps to expose the registry. There are 2 ways to login.

1. Login to the registry using the route exposed.
2. Login to the local registry service from any openshift node.

We can use this flag to skip any certificate checks for login or pushing an image
`--tls-verify=false`

Example : This command is executed from within an Openshift Node.

```
podman login -u kubeadmin -p $(oc whoami -t) image-registry.openshift-image-registry.svc:5000
```

<https://hewlettpackard.github.io/OpenShift-on-SimpliVity/post-deploy/build-deploy-app.html#build-the-image>

Example:

```
podman login -u <user> -p $(oc whoami -t) default-route-openshift-image-registry.apps.ocp.hpecloud.org --tls-verify=false
```

This uses a route name to login to the registry.

OLM

Monday, 26 May 2025 1:46 PM

<https://olm.operatorframework.io/docs/tasks/uninstall-operator/>

<https://olm.operatorframework.io/docs/concepts/olm-architecture/>

FIS Wiki

Wednesday, 28 May 2025 11:26 AM

Naming convention

[CS - Server Naming Standards - Private Cloud Engineering - FIS Enterprise Wiki](#)

Graceful Shut/Stop

[MBL NPP/MPS Graceful Site Stop/Start - Technology Services - FIS Enterprise Wiki](#)

Proxy

[Proxy Details for M1/M2/BH \(PROXIES FOR ALL DCs\) - Technology Services - FIS Enterprise Wiki](#)

Proxy

Monday, 16 June 2025 11:42 AM

[Chapter 31. Configuring the cluster-wide proxy | Networking | OpenShift Container Platform | 4.15 | Red Hat Documentation](#)

```
PROXY_URL="http://10.56.24.125:10022"
```

```
export http_proxy="$PROXY_URL"  
export https_proxy="$PROXY_URL"  
export ftp_proxy="$PROXY_URL"  
export no_proxy="127.0.0.1,localhost,.fnfis.com"
```

```
less /etc/squid/squid.conf  
History  
squid -k parse  
squid -k reconfigure
```

Passwords

Tuesday, 24 June 2025 12:54 PM

SYS -- Kubeadmin

\$2a\$10\$OtoHfpAEsQyCHUOOJVfGkuHY4ngDSH1Bkz798835E7H04BsuFhuOW

Root

MRD4#rsp

M1prd -- Kubeadmin

\$2a\$10\$UnwCljKVWJxxerIGiv0vueBdeYCh5.8T/6fzegS5iGQ2CjmDs3mTW

Remove Rendered images

Monday, 7 July 2025 4:44 PM

https://docs.redhat.com/en/documentation/openshift_container_platform/4.17/html/machine_configuration/machine-configs-garbage-collection

[Image Garbage Collection in OpenShift](#) - deleting unused images using image garbage collection run by kubelet

Virtual Networking

Monday, 8 September 2025

3:41 PM

[Open vSwitch \(OVS\): What Is It and How Does Open Virtual Switch Work?](#)

[Open Virtual Network \(OVN\) and Open vSwitch \(OVS\): Key Considerations for Modern Network Virtualization](#)

Redhat OVN

[Chapter 2. OVN-Kubernetes architecture | OVN-Kubernetes network plugin | OpenShift Container Platform | 4.18 | Red Hat Documentation](#)

ovn.org/support/dist-docs/ovn-architecture.7.html
[Architecture - OVN-Kubernetes](#)

OVN+OVS - Part1 - [OpenVswitch/OVNKubernetes Primer \(Part 1\)](#)

OVN + OVS - Part 2 - [OpenVswitch/OVNKubernetes Primer \(Part 2\)](#)

ovn-nbctl shows the logical components that make up OVN such as logical routers, switches, and port information (IP and mac addresses of connected pods), and NAT (Network Address Translation) information

```
## oc rsh -c nbdb -n openshift-ovn-kubernetes ovnkube-node-ggvvb
```

```
sh-5.1# ovn-nbctl ls-list
```

```
a41e1ccf-f8fb-4e0a-8ac1-2724e7e37ebb (ext_s2sysocs-x4h7w-master-1)
```

```
e2d8fe17-ecd8-4032-85e9-cbb2af2317d2 (join)
```

```
7bb4c527-e7db-43c6-acff-d5ab1028f0ce (s2sysocs-x4h7w-master-1)
```

```
16ed9a6f-3f62-4d51-898d-1746c26e97b2 (transit_switch)
```

```
sh-5.1# ovn-nbctl lr-list
```

```
956ff41d-f142-474a-9e05-91e369ba7fd4 (GR_s2sysocs-x4h7w-master-1)
```

```
f73aca87-4629-48ad-b46b-eae06fb782ba (ovn_cluster_router)
```

```
## oc rsh -c sbdb -n openshift-ovn-kubernetes ovnkube-node-ggvvb
```

```
sh-5.1# ovn-sbctl show | grep hostname
```

```
hostname: s2sysocs-x4h7w-worker-0-rp2jf
```

```
hostname: s2sysocs-x4h7w-worker-0-gbg4r
```

```
hostname: s2sysocs-x4h7w-cop-ns228
```

```
hostname: s2sysocs-x4h7w-master-1
```

```
hostname: s2sysocs-x4h7w-master-2
```

```
hostname: s2sysocs-x4h7w-worker-0-hmkp8
```

```
hostname: s2sysocs-x4h7w-master-0
```

```
sh-5.1# ovn-sbctl show | grep -i chassis
```

```
Chassis "8ad2e93b-628c-48e3-9c24-ce6894f93dae"
```

```
Chassis "e60230aa-df56-469b-ad2c-4f633a6d494b"
```


```
Chassis "8d0cd34c-f553-4bd0-a94f-835325456646"
```

```
Chassis "9e395d09-aefd-4f4d-8506-13e2ff861c9b"
```

```
Chassis "d72a70ae-ccdf-4f51-9be1-b88d76255e6b"
```

```
Chassis "028a57b1-b3b2-452b-8ed2-d972977fd8c9"
```

```
Chassis "b8ccbc8b-c1ec-48d2-9d87-630dc733c017"
```

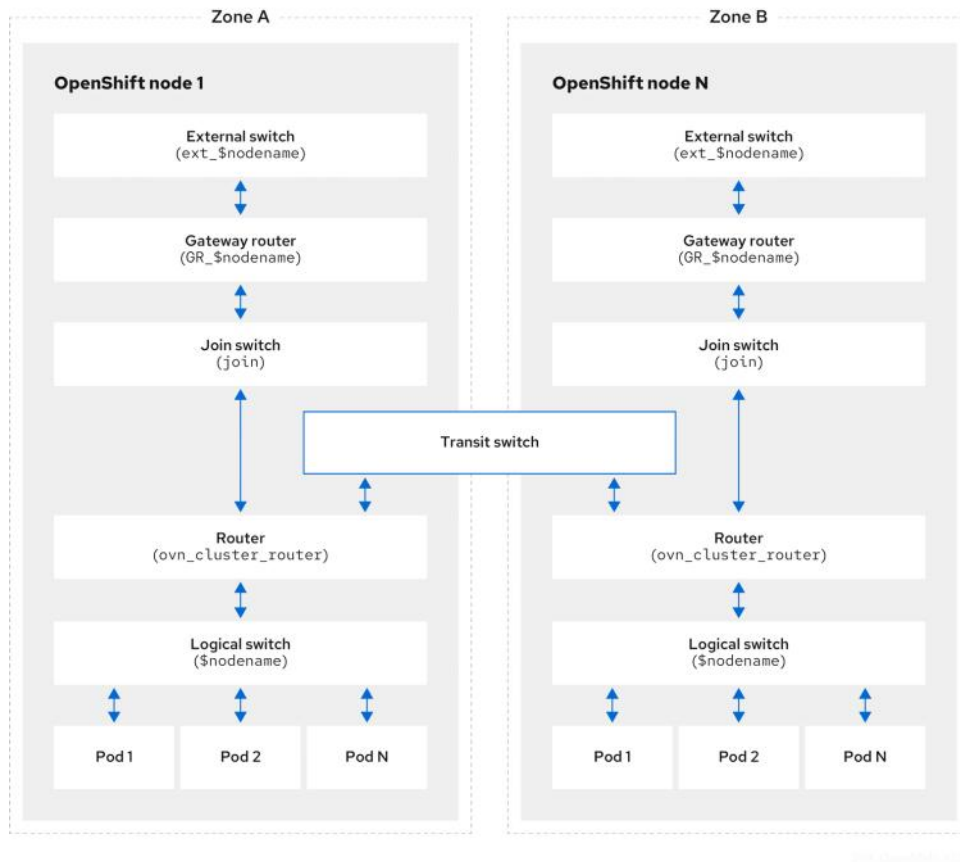

Egress

[Managing Egress IP in OpenShift 4 with OVN Kubernetes CNI plugin using OpenShift-GitOps - Rcarrrata's Blog](#)

Nmstate and internal

[Additional OCP Networks](#)

NW commands

Tuesday, 9 September 2025 4:44 PM

See the CIDR ranges for pods/svcs

```
oc get network.operator.openshift.io cluster -o yaml
```

[GitHub - openshift/cluster-network-operator: Create and manage cluster networking configuration](#) - Network operator CNO

Netshoot with Kubernetes

- if you want to debug using an [ephemeral container](#) in an existing pod:
\$ kubectl debug mypod -it --image=nicolaka/netshoot
- if you want to spin up a throw away pod for debugging.
\$ kubectl run tmp-shell --rm -i --tty --image nicolaka/netshoot
- if you want to spin up a container on the host's network namespace.
\$ kubectl run tmp-shell --rm -i --tty --overrides='{ "spec": { "hostNetwork": true } }' --image nicolaka/netshoot

AKS

Wednesday, 10 September 2025 5:29 PM

<https://stacksimplify.com/azure-aks/azure-kubernetes-service-introduction/>

Akka

Thursday, 11 September 2025 2:11 PM

[vvsbane/klusterd: Akka Clustering with Kubernetes: A Sample Project](#)

[Clustering Akka in Kubernetes with Statefulset and Deployment | by Rav Tsang | Google Cloud - Community | Medium](#)

Logs

```
[2026-03-10 12:46:59,465] [INFO] [] [com.zaxxer.hikari.HikariDataSource] [] - dbb-other - Starting...
[2026-03-10 12:46:59,466] [INFO] [] [com.zaxxer.hikari.HikariDataSource] [] - dba-other - Starting...
[2026-03-10 12:47:01,226] [INFO] [] [com.zaxxer.hikari.pool.HikariPool] [] - dba-other - Added connection oracle.jdbc.driver.T4CConnection@5d4ad67
[2026-03-10 12:47:01,232] [INFO] [] [com.zaxxer.hikari.HikariDataSource] [] - dba-other - Start completed.
[2026-03-10 12:47:01,380] [INFO] [] [com.zaxxer.hikari.pool.HikariPool] [] - dbb-other - Added connection oracle.jdbc.driver.T4CConnection@5554a47c
[2026-03-10 12:47:01,380] [INFO] [] [com.zaxxer.hikari.HikariDataSource] [] - dbb-other - Start completed.
[2026-03-10 12:47:04,078] [INFO] [] [akka.event.slf4j.Slf4jLogger] [] - Slf4jLogger started
[2026-03-10 12:47:04,666] [INFO] [main] [akka.remote.artery.ArteryTransport] [ArteryTransport(akka://MmsAuCluster)] - Remoting started with transport [Artery tls-tcp]; listening on address [akka://MmsAuCluster@10.200.36.186:25520] with UID [8163421056012362423]
[2026-03-10 12:47:04,699] [INFO] [main] [akka.cluster.Cluster] [Cluster(akka://MmsAuCluster)] - Cluster Node [akka://MmsAuCluster@10.200.36.186:25520] - Starting up, Akka version [2.7.0] ...
[2026-03-10 12:47:04,760] [INFO] [main] [akka.cluster.Cluster] [Cluster(akka://MmsAuCluster)] - Cluster Node [akka://MmsAuCluster@10.200.36.186:25520] - Started up successfully
[2026-03-10 12:47:04,798] [INFO] [MmsAuCluster-cluster-dispatcher-10] [akka.cluster.Cluster] [Cluster(akka://MmsAuCluster)] - Cluster Node [akka://MmsAuCluster@10.200.36.186:25520] - No seed nodes found in configuration, relying on Cluster Bootstrap for joining
[2026-03-10 12:47:05,343] [INFO] [MmsAuCluster-akka.actor.default-dispatcher-4] [akka.cluster.Cluster] [Cluster(akka://MmsAuCluster)] - Cluster Node [akka://MmsAuCluster@10.200.36.186:25520] - Metrics collection has started successfully
[2026-03-10 12:47:05,362] [INFO] [main] [a.m.internal.HealthChecksImpl] [HealthChecksImpl(akka://MmsAuCluster)] - Loading readiness checks [(sharding,akka.cluster.sharding.ClusterShardingHealthCheck)]
[2026-03-10 12:47:05,363] [INFO] [main] [a.m.internal.HealthChecksImpl] [HealthChecksImpl(akka://MmsAuCluster)] - Loading liveness checks []
[2026-03-10 12:47:05,516] [INFO] [main] [a.management.scaladsl.AkkaManagement] [AkkaManagement(akka://MmsAuCluster)] - Binding Akka Management (HTTP) endpoint to: 0.0.0.0:8558
[2026-03-10 12:47:05,635] [INFO] [main] [a.management.scaladsl.AkkaManagement] [AkkaManagement(akka://MmsAuCluster)] - Including HTTP management routes for ClusterBootstrap
[2026-03-10 12:47:05,638] [INFO] [main] [a.m.c.bootstrap.ClusterBootstrap] [ClusterBootstrap(akka://MmsAuCluster)] - Using self contact point address: http://10.200.36.186:8558
[2026-03-10 12:47:05,708] [INFO] [main] [a.management.scaladsl.AkkaManagement] [AkkaManagement(akka://MmsAuCluster)] - Including HTTP management routes for HealthCheckRoutes
[2026-03-10 12:47:06,257] [INFO] [main] [a.m.c.bootstrap.ClusterBootstrap] [ClusterBootstrap(akka://MmsAuCluster)] - Initiating bootstrap procedure using akka-dns method...
[2026-03-10 12:47:06,258] [INFO] [main] [a.m.c.bootstrap.ClusterBootstrap] [ClusterBootstrap(akka://MmsAuCluster)] - Bootstrap using `akka.discovery` method: akka-dns
[2026-03-10 12:47:06,269] [INFO] [MmsAuCluster-akka.actor.default-dispatcher-4] [a.management.scaladsl.AkkaManagement] [AkkaManagement(akka://MmsAuCluster)] - Bound Akka Management (HTTP) endpoint to: 0.0.0.0:8558
[2026-03-10 12:47:06,270] [INFO] [main] [akka.io.DnsExt] [DnsExt(akka://MmsAuCluster)] - Creating async dns resolver async-dns with manager name SD-DNS
[2026-03-10 12:47:06,294] [INFO] [MmsAuCluster-akka.actor.default-dispatcher-4] [a.m.c.b.i.BootstrapCoordinator] [akka://MmsAuCluster/system/bootstrapCoordinator] - Locating service members. Using discovery [akka.discovery.dns.DnsServiceDiscovery], join decider [akka.management.cluster.bootstrap.LowestAddressJoinDecider], scheme [http]
[2026-03-10 12:47:06,295] [INFO] [MmsAuCluster-akka.actor.default-dispatcher-4] [a.m.c.b.i.BootstrapCoordinator] [akka://MmsAuCluster/system/bootstrapCoordinator] - Looking up [Lookup(mms-au-headless.mms-au.svc.clusterset.local,None,Some(tcp))]
[2026-03-10 12:47:06,506] [INFO] [MmsAuCluster-akka.actor.default-dispatcher-12] [a.m.c.b.i.BootstrapCoordinator] [akka://MmsAuCluster/system/bootstrapCoordinator] - Located service members based on: [Lookup(mms-au-headless.mms-au.svc.clusterset.local,None,Some(tcp))]: [ResolvedTarget(10.200.36.186,None,Some(/10.200.36.186)), ResolvedTarget(10.200.34.67,None,Some(/10.200.34.67)), ResolvedTarget(10.204.12.52,None,Some(/10.204.12.52)), ResolvedTarget(10.204.24.48,None,Some(/10.204.24.48))], filtered to [10.204.24.48:0, 10.200.36.186:0, 10.204.12.52:0, 10.200.34.67:0]
[2026-03-10 12:47:06,985] [INFO] [] [org.apache.zookeeper.ZooKeeper] [akka://MmsAuCluster/user/$a] - Client environment:zookeeper.version=3.9.3-c26634f34490bb0ea7a09cc51e05ede3b4e320ee, built on 2024-10-17 23:21 UTC
[2026-03-10 12:47:06,986] [INFO] [] [org.apache.zookeeper.ZooKeeper] [akka://MmsAuCluster/user/$a] - Client environment:host.name=mms-au-a-1-nft-cb986b496-ksrnc
[2026-03-10 12:47:06,986] [INFO] [] [org.apache.zookeeper.ZooKeeper] [akka://MmsAuCluster/user/$a] - Client environment:java.version=17.0.13
```


[How to check the current kubelet valid configurations on OCPv4 - Red Hat Customer Portal](#)

```
curl -sSL "http://localhost:8001/api/v1/nodes/s2sysocs-x4h7w-master-0/proxy/config" | jq '.kubeletconfig|.kind="KubeletConfiguration"|.apiVersion="kubelet.config.k8s.io/v1beta1"'
```

update resources for vms

1. <https://access.redhat.com/solutions/3048681>
2. <https://access.redhat.com/solutions/6966670>

Default Ingress Cert

1. <https://access.redhat.com/solutions/7011167> - check default ingress cert details Step1
2. [How to redeploy/renew an expired default ingress certificate in RHOCp4? - Red Hat Customer Portal](#) - replace default ingress cert Step 2... Use this one as FIS uses default certs. May skip step 1

Tcpdump OCP

[Running tcpdump inside an OpenShift pod to capture network traffic - Red Hat Customer Portal](#)

To analyse tcpdump ,
tcpdump -r (filename) genrally ends with pcap

Haproxy

<https://access.redhat.com/solutions/6987555>
<https://access.redhat.com/solutions/7061602>
<https://access.redhat.com/solutions/7130954>
<https://access.redhat.com/solutions/6990416>

Upgrade multiple nodes

<https://access.redhat.com/solutions/5453781>

certificate

Tuesday, 14 October 2025 5:19 PM

curl -liv <https://mms-au-mps.apps.m1tstocs.fnfis.com>

openssl s_client -connect mms-au-mps.apps.m1tstocs.fnfis.com:443

argo

Thursday, 23 October 2025 1:21 PM

Install

```
helm repo add argo https://argoproj.github.io/argo-helm
helm repo update
helm install argocd argo/argo-cd
```

```
helm install argocd argo/argo-cd --namespace argo \
--set global.domain=argocd.apps.m1stocs.fnfis.com \
--set server.ingress.enabled=true \
--set server.ingress.annotations."route.openshift.io/termination"="passthrough"
```

ecr-public.aws.com

From <<https://console-openshift-console.apps.m1stocs.fnfis.com/k8s/ns/argo/core~v1~Pod>>

OCP Virtual/kubevirt

Friday, 23 January 2026 3:32 PM

[What is KubeVirt?](#)

[KubeVirt with libvirt/QEMU/KVM in Kind](#)

```
oc get crd -o name | grep kubevirt.io | xargs oc delete
```

dynatrace

Tuesday, 10 March 2026 1:53 PM

Troubleshoot

```
oc exec deploy/dynatrace-operator -n dynatrace -- dynatrace-operator troubleshoot
```

```
oc get deployment dynatrace-operator -n dynatrace -o jsonpath='{.metadata.labels.app\.kubernetes\n.io/version}{"\n"}'
```

LDAP

Wednesday, 15 April 2026 11:12 AM

Check AD integration

```
oc get oauth cluster -o yaml
```

```
oc get configmap ldap-2026-cm -n openshift-config -o jsonpath='{.data.ca\.crt}' > ldap-2026-cm.crt
```

```
md5sum ldap-ca-cm.crt ldap-2026-cm.crt  
openssl x509 -in ldap-ca-cm.crt -text -noout
```

```
oc adm groups sync --sync-config=./config.yaml --whitelist=whitelist.yaml
```

github

Monday, 27 April 2026 3:15 PM

github_pat_

11CB7MDMQ0MI2IAM1jAWGv_klaVho7YKD2RrTbkXVN1nTErh564WjaY9Q4K5G1a3ILVGLXQBONIdv
HFC5w

BreakGlass login

Friday, 22 May 2026 11:23 AM

The below is applicable for m1tstocs

1. Login to m1 utility node
root@amo4rfisocsut01 ----- 10.56.8.99

2. Switch Dir to

```
[root@amo4rfisocsut01 .ssh]# pwd
/root/.ssh
```

3. Use the private key to login to the node.

```
ssh -i id_ocsm1tst_rsa core@10.56.103.2(ip of a worker node)
```

To start or stop any process once inside the openshift node, use sudo

```
sudo systemctl stop kubelet or sudo systemctl start kubelet
```

For m2tstocs

Login to m2 util node

```
root@10.56.13.109
```

Follow the process as above by gng to specific dir to use the private key

```
ssh -i id_ocsm2tst_rsa core@10.56.104.174 (lp of a node)
```

```
[root@amo4rfisocsut01 .ssh]# cat id_ocsm1tst_rsa
-----BEGIN OPENSSH PRIVATE KEY-----
b3BlbnNzaC1rZXktdjEAAAABAG5vbmUAAAABbm9uZQAAAAAAAAABAAAAMwAAAAAtzc2gtZW
QyNTUxOQAAACCCPTHlkoIWJe0SO6qSzfb4NmQ5YtrSUwMlnIDYT3W9gAAAKhucs/XbnLP
1wAAAAAtzc2gtZWQyNTUxOQAAACCCPTHlkoIWJe0SO6qSzfb4NmQ5YtrSUwMlnIDYT3W9g
AAAEcog1PtQj7NLxHT6vdHzg+3rCqHz7udysEA2dxF99OLuII9OEuSghYl7RI6vqpLN9vg
2arli2tJTAYWeUNhPdb2AAAAHnJvb3RAYW1vNHJmaXNvY3N1dDAXLmZuZmlzLmNvbQECaw
QFBgc=
-----END OPENSSH PRIVATE KEY-----
```

```
[root@amt4rfisocsut01 .ssh]# cat id_ocsm2tst_rsa
-----BEGIN OPENSSH PRIVATE KEY-----
b3BlbnNzaC1rZXktdjEAAAABAG5vbmUAAAABbm9uZQAAAAAAAAABAAAAMwAAAAAtzc2gtZW
QyNTUxOQAAACAgYDAUDX/BC1cX5vjuNT4hMIDA2JnSGooM7fk/kVor4gAAAKgv2YXjL9mF
4wAAAAAtzc2gtZWQyNTUxOQAAACAgYDAUDX/BC1cX5vjuNT4hMIDA2JnSGooM7fk/kVor4g
AAAEctRExpHGs2bZCnKuQemFnLGWDBelKe1d52QP19FOzK2CBgMBQNf8ELVxfm+O41PiEw
gMDYmdlaigtz+T+RWiviAAAAHnJvb3RAYW10NHJmaXNvY3N1dDAXLmZuZmlzLmNvbQECaw
QFBgc=
-----END OPENSSH PRIVATE KEY-----
```


CH25001892598 - Dome9 for NFT Completed 23June2025
CH25001907314 - Dome9 for Prod 16 july

CH25001966992 - non prod M1/M2 TST 10 Oct 2025
CH25001967864 - s2sys 3 Oct2025
CH25001979197 - Prod M1 - Nov 1 2025
CH25001982716 - Prod M2

CH25001840208 - reference

Incident M1prdocs - IN25019031784
ECR - CH25001998364

M2prdocs IN25019032933 CH25001998386

Kubeadmin for SYS

\$2a\$10\$OtoHfpAEsQyCHUOOJVfGkuHY4ngDSH1Bkz798835E7H04BsuFhuOW

JDJhJDEwJE90b0hmcEFFc1F5Q0hVT09KVmZHa3VIWTRuZ0RTSDFCa3o30Tg4MzVFN0gwNEJzdUZodU9X

root@10.56.103.251:/tmp
MRD4#rsp

https://docs.redhat.com/en/documentation/openshift_container_platform/4.18/html-single/nodes/index#nodes-clusters-cgroups-2_nodes-cluster-cgroups-2

2026

CH26002057896 - SYS cluster upgrade to 4.20

CH26002071574 - M1TSTOCS
CH26002071605 - M2TSTOCS

[CH26002123055](#) - M1PRDOCS

[IT SPOT \(Single Point Of Truth\) - How to - Upgrade Openshift clusters - AUS | ServiceNow](#)

KB001624412

[CH26002123069](#) - M2prdocs

From <https://atyourserviceportal.service-now.com/now/nav/ui/classic/params/target/change_request.do%3Fsys_id%3Dd51207e53334839c1ae08ec32d5c7bc5%26sysparm_domain%3Dsession%26sysparm_domain_scope%3Dsession%26sysparm_view%3Dnormal_change%26sysparm_view_forced%3Dtrue>

CH26002101848 - Dynatrace install S2SYS
[CH26002106636](#) - Non Prod

MBL_Pool_COP_NFT_M1
MBL_Pool_PAG_COP_NFT_M1

MBL_Pool_COP_NFT_M2
MBL_Pool_PAG_COP_NFT_M2

M1 TEST F5
MBL_Pool_COP_NFT_M1
MBL_Pool_PAG_COP_NFT_M1
MBL_Pool_NFT_MPIR
MBL_Pool_NFT_MMS
pool_VIP-MBL-CoP-10.56.88.133-9646

M2 TEST F5
MBL_Pool_COP_NFT_M2
MBL_Pool_PAG_COP_NFT_M2
MBL_Pool_NFT_MPIR
MBL_Pool_NFT_MMS
pool_VIP-MBL-CoP-10.56.89.133-9646

1. For ACM 2.14 on OCP 4.20, the combination will be ACM 2.14 + MCE 2.9 + Submariner 0.21
For ACM 2.15 on OCP 4.20, the combination will be ACM 2.15 + MCE 2.10 + Submariner 0.22

From <<https://access.redhat.com/support/cases/#/case/04378185>>

```
oc adm must-gather --image=registry.redhat.io/rhacm2/acm-must-gather-rhel9:v  
$(oc get subs -n open-cluster-management advanced-cluster-management -  
o=jsonpath='{.spec.channel}' | cut -d '-' -f2)
```

From <<https://access.redhat.com/support/cases/#/case/new/get-support/summarize/resources/additional-information/configuration/review?caseCreate=true&product=OpenShift%20Container%20Platform&version=4.18&seSessionId=53adffd1-6c0c-468d-a06c-46839901a709>>

[Openshift-marketplace pods goes in CrashLoopBackOff due to Dynatrace Operator in RHOC P 4 - Red Hat Customer Portal](#)

Checkpoint removal non prod - [CH26002119240](#)
KB KB001618252

1. Business reason for performing outside the maintenance window

The existing version of Dynatrace is causing failures in pods

2. Why it is safe to perform outside the window

This is a staging/test environment. No production impact.

3. Impact to the business if we wait

Pods will continue to fail, generating many tickets.

1. Business reason for performing outside the maintenance window

The timelines have been agreed with the customer (MBL) and the participating members like SWIFT/AP+

2. Why it is safe to perform outside the window

The timelines have been agreed with the customer (MBL) and the participating members like SWIFT/AP+

3. Impact to the business if we wait

Adherence to the FIS patching policy. Its been delayed already due to dynatrace issues found in lower environments.

Friday, 4 July 2025 7:09 PM

httpClientCacheEnabled: false

akka.cluster.sharding.updating-state-timeout

Links

Wednesday, 10 December 2025 11:16 AM

SNOW

[Available Boards | ServiceNow](#)

AD groups

[AD Groups for Ops-Team - OpenShift Platform Services - FIS Enterprise Wiki](#)

Wiki

<https://wiki.fisglobal.com/display/OSPS/OpenShift+Platform+Services+Home>

Azure Boards

https://dev.azure.com/GIOAutomation/GIO%20Automation/_boards/board/t/Kubelets%20-%20OpenShift%20Team/Stories

Final letter of demand

Sec 54 - acceptable quality

Sec 55 - fitness for disclosed purpose

Sec 59 - honor express warranties

VCAT / Legal advice