GitHub action to run angular project: -

Example git repository: https://github.com/kanchana/angular.git

[] first we must create a directory called **.github/workflows/angular.yml** in git hub.
[] inside **angular.yml** we will write the code (we can give whichever name for .yml)

code: -

```
name: Deploy Angular to GitHub Pages

on:

  push:

    branches:

      - github_testingbranch1     -----> # Trigger deployment only when changes are pushed to the 'github_testingbranch1' branch (which branch we want to work)

jobs:

  deploy:

    runs-on: ubuntu-latest

    steps:

    - name: Checkout repository

      uses: actions/checkout@v3

    - name: Set up Node.js (v20)

      uses: actions/setup-node@v3
```

```
    with:
      node-version: '20'
  - name: Install dependencies
    run: npm install
  - name: Install Angular CLI
    run: npm install -g @angular/cli
  - name: Build Angular app
    run: ng build --configuration production --base-href=/angular/
  - name: Clean up previous worktree (if any)
    run: |
      git worktree remove --force github-pages-deploy-action-temp-deployment-folder || true
      git worktree prune || true
  - name: Deploy to GitHub Pages
    uses: JamesIves/github-pages-deploy-action@v4
    with:
      branch: gh-pages    --------> # Deploy to the 'gh-pages' branch (it will copy the dist folder file to in this branch)
      folder: dist/angular-build     ------># Adjust this path to match your build output folder
      token: ${{ secrets.TEST }}    -----> # Use the GitHub token stored in secrets
```

[] secondly, we must store GitHub token to secrete. **<>** create GitHub token **and** go to GitHub repository (which repo we want to run) **<>**settings**<>** select secret and variables **<>** select Actions**<>** select new repository secret**<>**name and in secrete paste GitHub token.

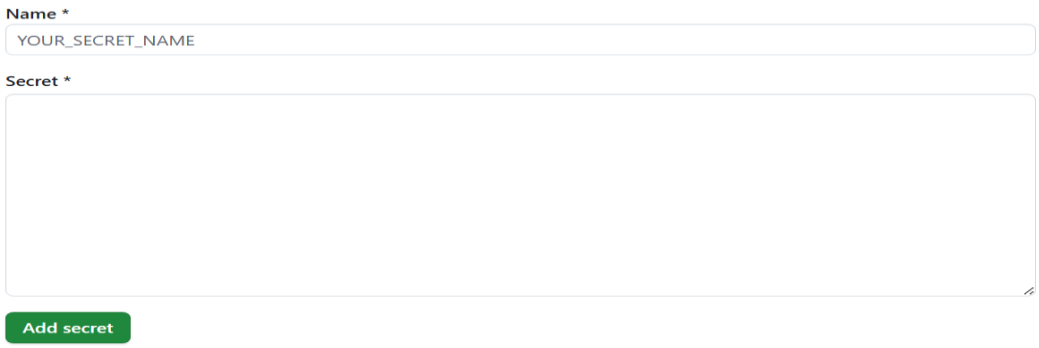

[] we must create host <> in git hub repo select Actions **<>** Runners **<>** self-hosted runner **<>** new runner **<>** new self-hosted runner **<>** it will give the commands to get the connection, copy and paste in server

Download

```
# Create a folder
$ mkdir actions-runner && cd actions-runner
# Download the latest runner package
$ curl -o actions-runner-linux-x64-2.329.0.tar.gz -L
https://github.com/actions/runner/releases/download/v2.329.0/actions-runner-linux-x64-2.329.0.tar.gz
# Optional: Validate the hash
$ echo "194f1e1e4bd02f80b7e9633fc546084d8d4e19f3928a324d512ea53430102e1d  actions-runner-linux-x64-
2.329.0.tar.gz" | shasum -a 256 -c
# Extract the installer
$ tar xzf ./actions-runner-linux-x64-2.329.0.tar.gz
```

Configure

```
# Create the runner and start the configuration experience
$ ./config.sh --url https://github.com/kanchana08/angular --token A6LEXGYAD2XBKQWCU3L5FYDJHKX7M
# Last step, run it!
$ ./run.sh
```

[] in server <> create one user (ex: actions-runner) <> create one directory called actions-runner <> give users permission for that directory (ex: chown –R actios-runner:actions-runner actions-runner) <> switch to that user. <> paste the commands. <> we will get connection success.

[] we can observe the building stage <> go to github repo <>actions.

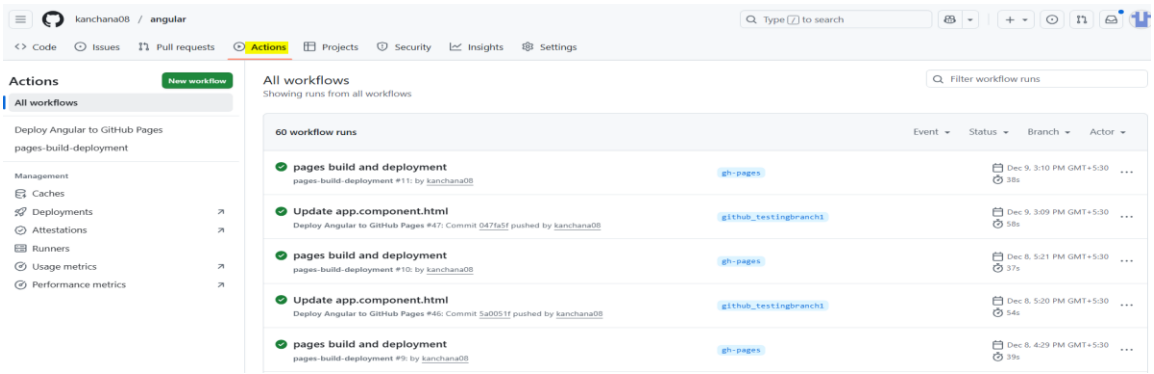

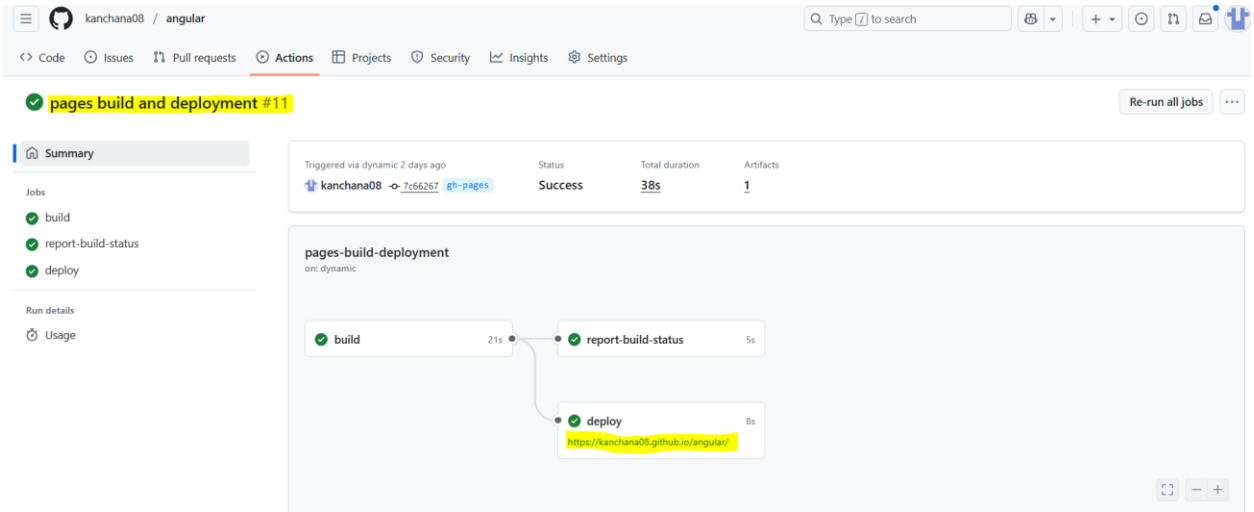

[] we will get this url https://kanchana08.github.io/angular/.<> if we click the url or copy paste it in browser we can see our application output

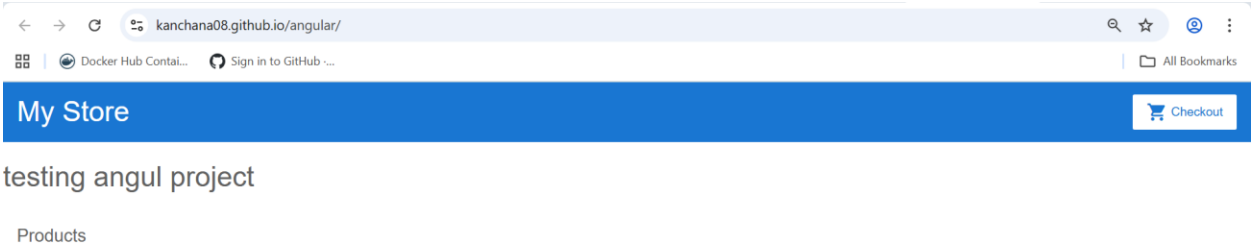
kanchana08.github.io/angular/
Docker Hub Contai...
Sign in to GitHub ·...
All Bookmarks
My Store
Checkout
testing angul project
Products