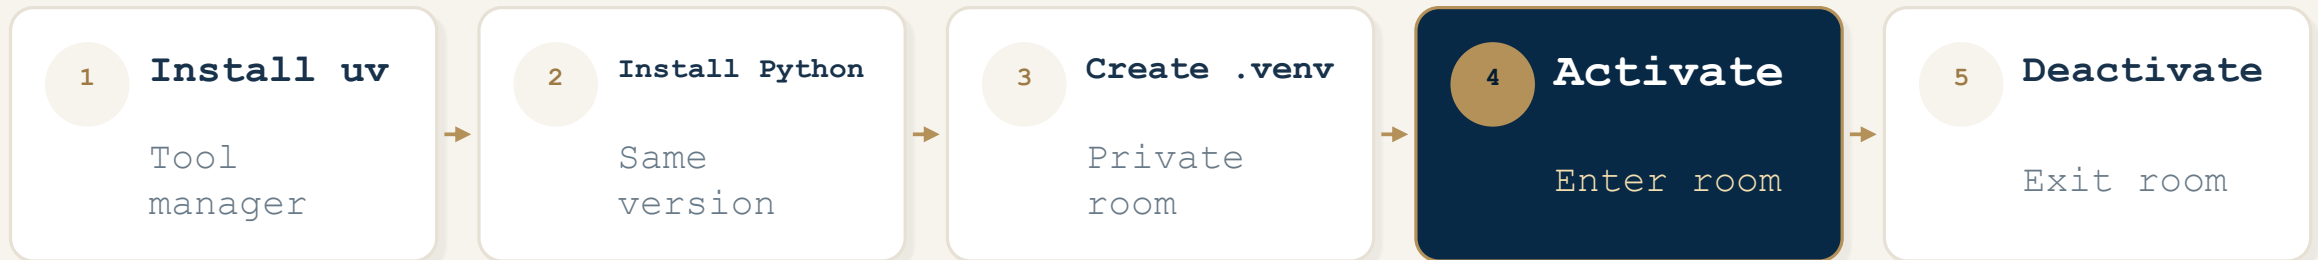


Python Setup That Does Not Fight the Class

One safe path: `install uv` → `install Python` → `create .venv` → `activate` → `deactivate`.

**GOLDEN RULE**

Always activate before running new commands. **Deactivate** when finished.

Windows: Copy → Paste → Run

Start from a freshly opened laptop with nothing pre-installed.



Windows

Open: Start → type PowerShell → Enter

```
powershell -ExecutionPolicy Bypass -c "irm https://astral.sh/uv/install.ps1 | iex"
$env:Path = "$env:USERPROFILE\.local\bin;$env:Path"
Set-ExecutionPolicy -Scope CurrentUser -ExecutionPolicy RemoteSigned -Force
uv python install 3.12
New-Item -ItemType Directory -Force -Path py-class | Out-Null
cd py-class
uv venv --python 3.12 --seed
.venv\Scripts\Activate.ps1
```

1 uv

2 Python 3.12

3 .venv --seed

4 Activate/deactivate

macOS: Copy → Paste → Run

Start from a freshly opened laptop with nothing pre-installed.



macOS

Open: ⌘ Space → type **Terminal** → Enter

```
curl -LsSf https://astral.sh/uv/install.sh | sh
export PATH="$HOME/.local/bin:$PATH"
uv python install 3.12
mkdir -p py-class
cd py-class
uv venv --python 3.12 --seed
source .venv/bin/activate
```

1 **uv**

2 **Python 3.12**

3 **.venv --seed**

4 **Activate/deactivate**

Every Class After Setup

Activate first, install/run the class command, then deactivate.

Windows

```
cd py-class
.venv\Scripts\Activate.ps1

# Paste new command here
# Example: uv pip install streamlit
# Example: streamlit run app.py
```

macOS

```
cd py-class
source .venv/bin/activate

# Paste new command here
# Example: uv pip install streamlit
# Example: streamlit run app.py
```



Deactivate

Whenever you finish!

Packages: Install from requirements.txt

Use one shared list so every laptop installs the same libraries.

requirements.txt

```
numpy  
pandas  
matplotlib  
seaborn  
streamlit  
yfinance
```

Install everything

```
# Activate .venv first  
  
uv pip install -r requirements.txt  
  
# Standard pip also works  
pip install -r requirements.txt
```

Same file → same setup

Save the library list once, then install it quickly on every computer.

Add or Update Libraries Later

Pick the command based on how the project is managed.

Project / Virtual Environment mode

```
# Ex: With pyproject.toml

uv add plotly
uv add scikit-learn scipy

# uv updates dependency config
```

Simple .venv mode (pip-style)

```
# Inside active .venv

uv pip install plotly scikit-learn

# Refresh the share file
uv pip freeze > requirements.txt
```

Freeze after changes

When you install new libraries, renew requirements.txt before sharing.