NATIONAL INSTITUTE OF TECHNOLOGY TIRUCHIRAPPALLI-15



EMPLOYEE RECORD OF DATABASE MANAGEMENT SYSTEM

PROJECT WORK

Submitted By

KANHAIYALAL PATEL - 205119043

UNDER THE GUIDENCE OF

Dr.U.Vignesh

Abstract

Employee Record Management System project used to manage the data of the employees such as personal details, education details, work exp etc. This project will reduce the paper work of the company. Through this project company can manage all data online.

An **Employee management system** is software <u>useful</u> for the <u>human resource department</u> that allows them to view details of any employee working in the organization or those who worked in the past. It is designed to simplify the process of record maintenance of employees in an organization.

Menu and Submenus

Employee Record Management System project divided in two modules:

- User Module
- Admin Module


User Module

- User can register himself.
- User login
- User password recovery.
- User can add / edit own work experience details
- User can add / edit own education details.
- User can edit own profile.
- User can update own password.
- Logout


Admin Module

- Admin Login
- Admin can manage all employee records.
- Admin can update / edit user personal details/ work exp. details / Education.
- Admin can update own profile
- Change password

ER-DIAGRAM

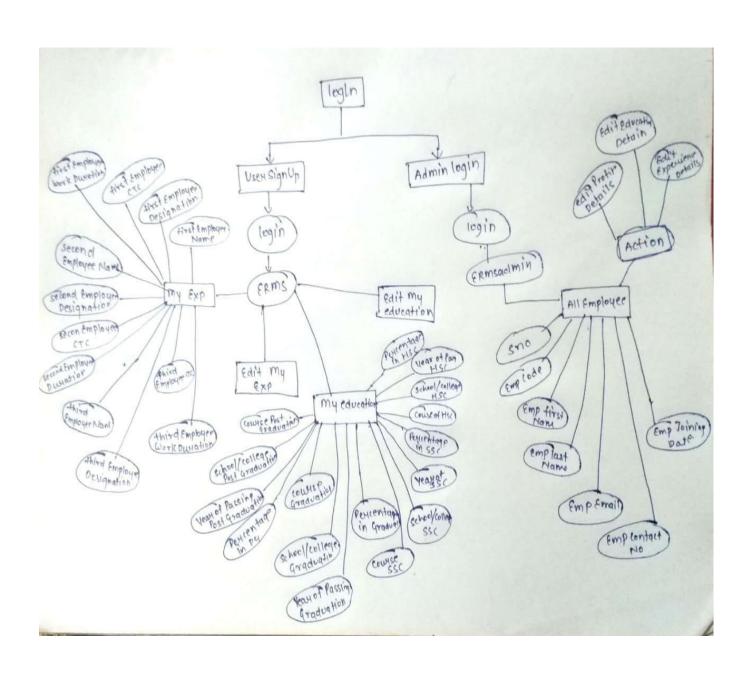

ERMSDB-DATABASE

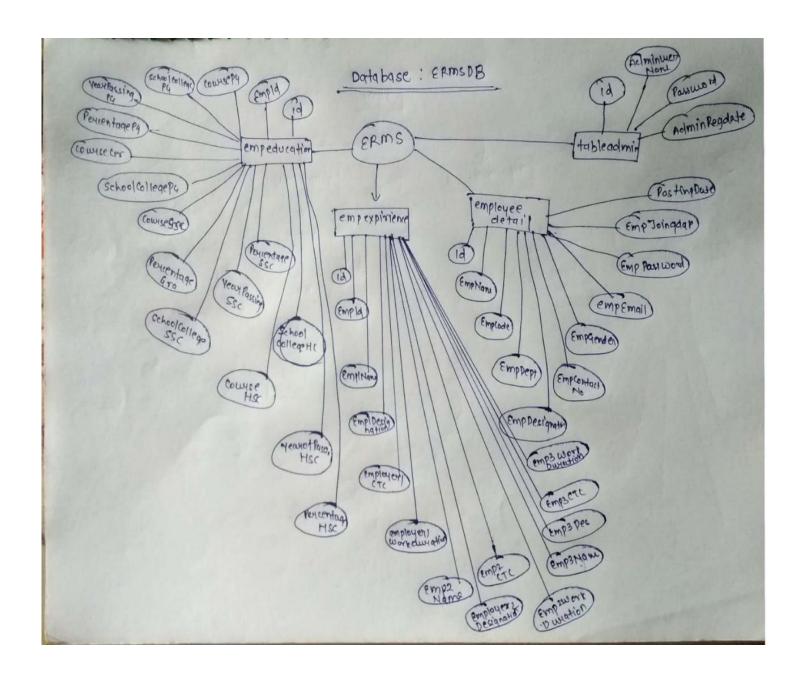

SCREENSHOTS OF THE PROJECT

HAROÉRICAD MANGENANSSEM

WHAT EMPLOYEE MANAGEMENT SYSTEM CAN DO?

It helps in **managing** the information of employees for HR functions. In short, one of the comprehensive parts of the **Human Resource Management System**.

Employee Management System in PHP Features:

Admin Module

Admin can manage all employee records, edit user personal details, work exp. details, and work exp. details.

· Admin Login

For admin security features it uses session.

Employee Module

This system has an employee module that can monitor attendance, manage payroll, and other HR features.


Employee Management

They Can add or edit own information such as work experience details, educational background, and the likes.

LOGIN ACCOUNT

username : admin

Password: Test @123

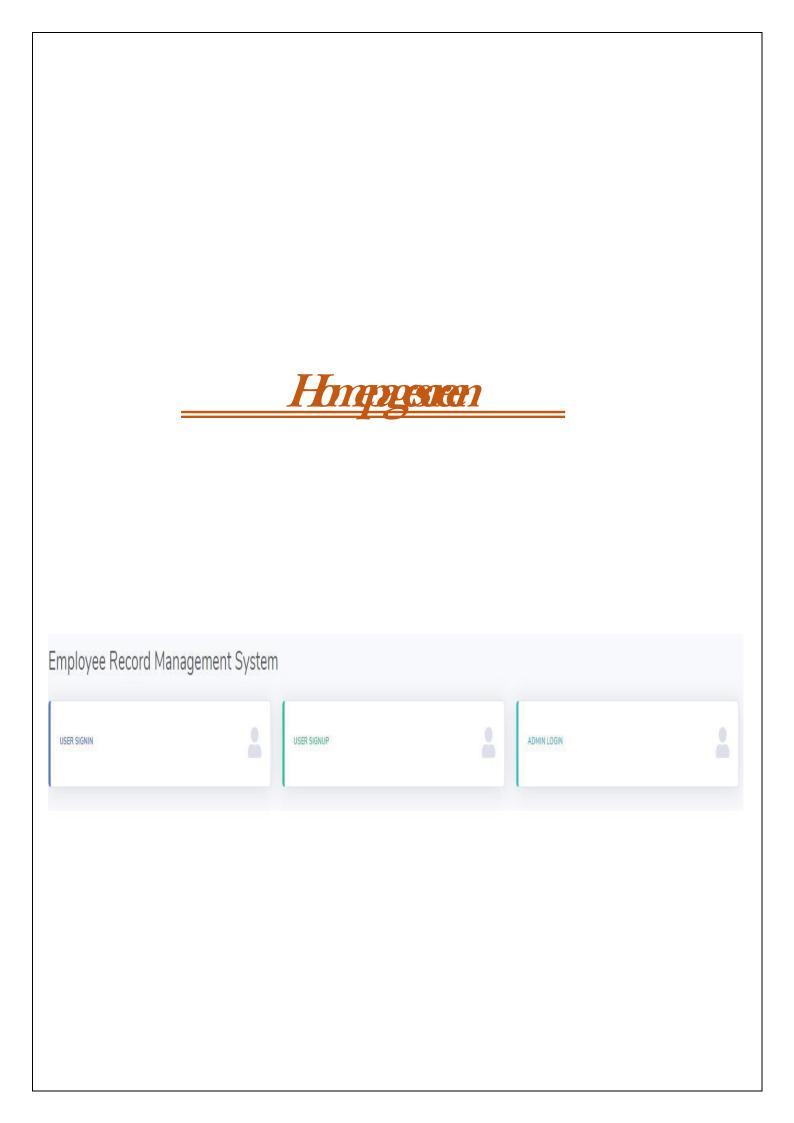

USER-SIGHIN

Welcome Back! Password Forgot Password? Create an Account!


USER-SIGHUP




ADMIN-LOGIN




HOME PAGE SCREEN

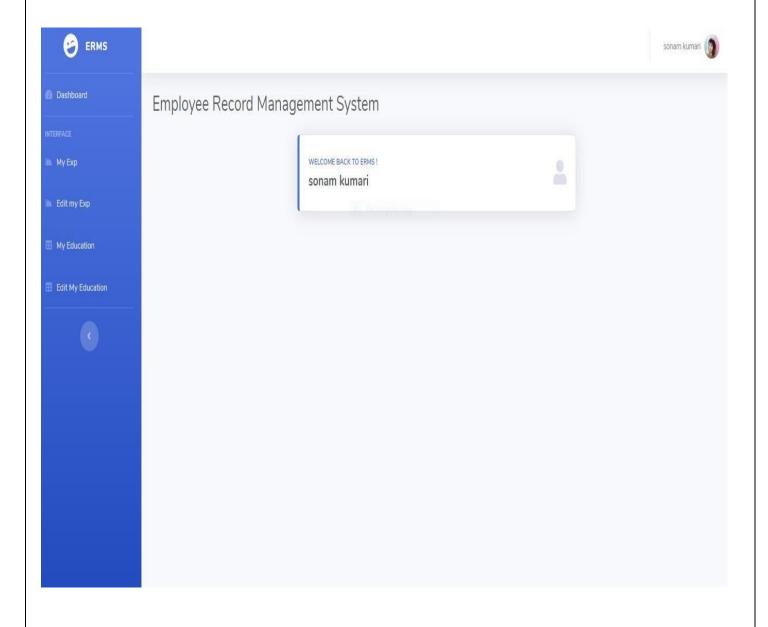


MY EXPERIENCE

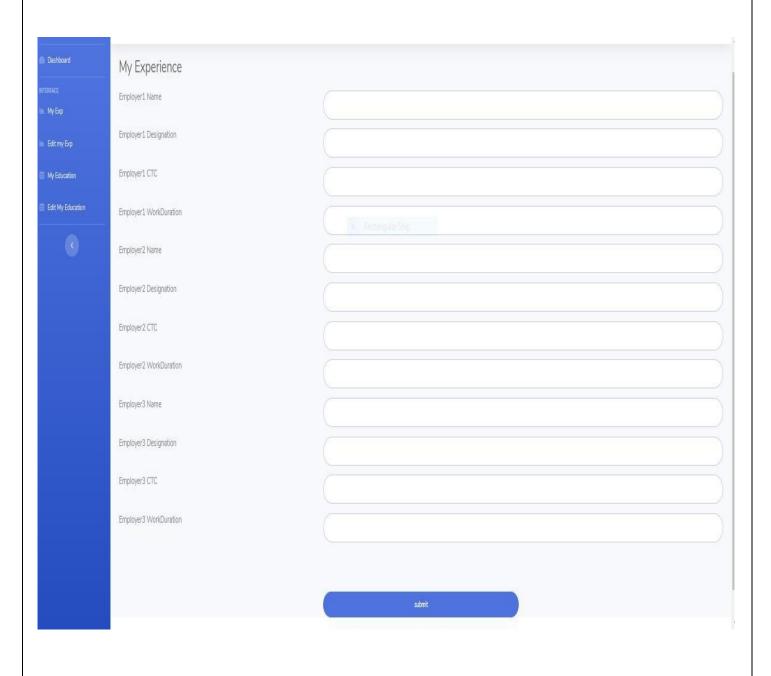


EDIT-MY EXPERIENCE

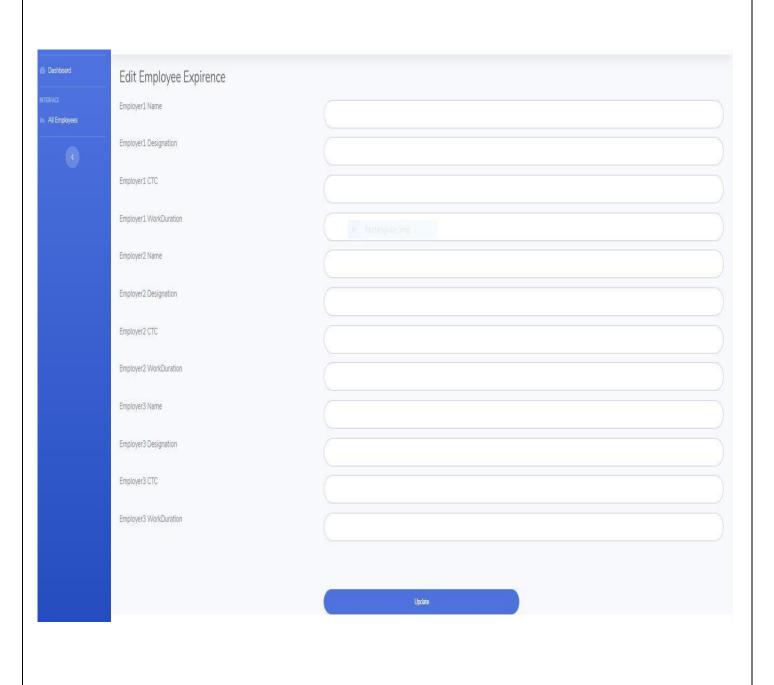


EMPLOYEE EDUCATION

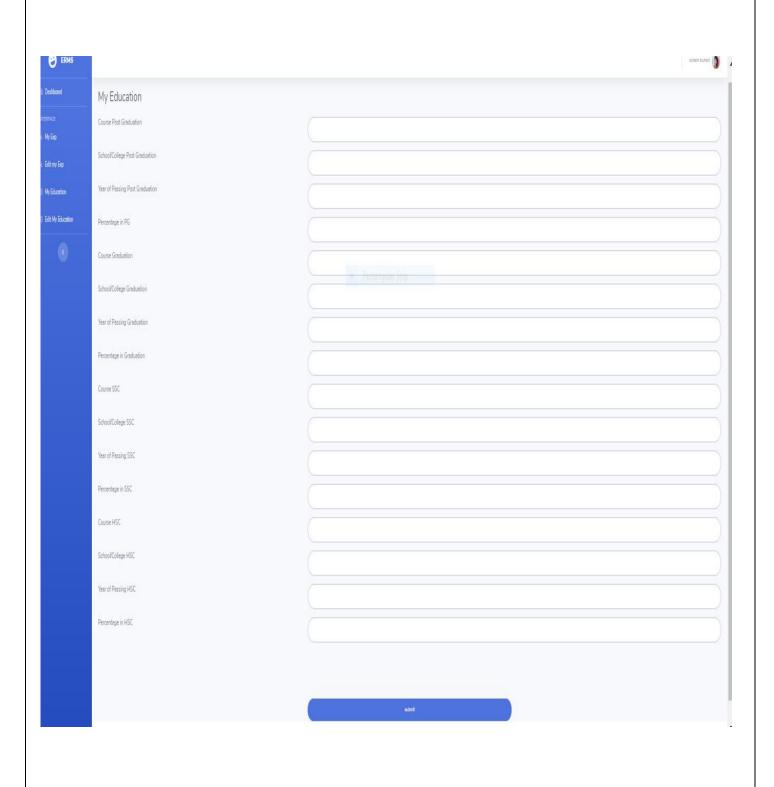

EDIT EMPLOYEE EDUCATION

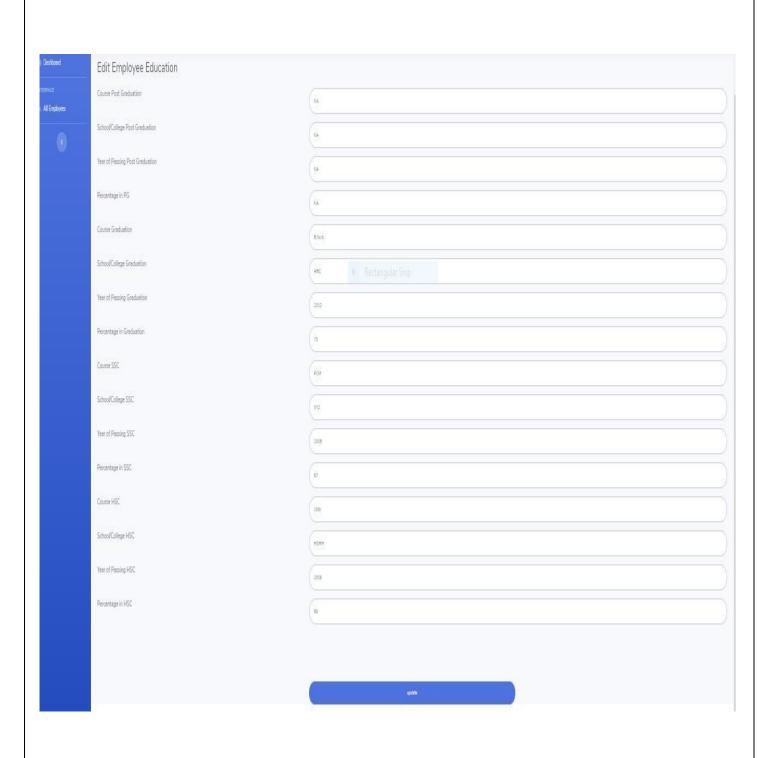

EDIT EMPLOYEE PROFILE

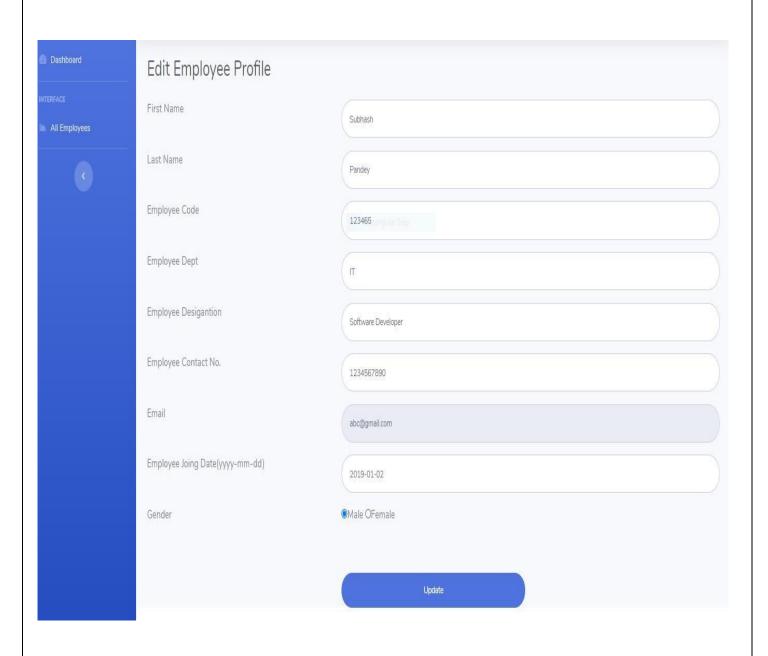

CODE OF THE PROJECT

EMPLOYEE RECORD MANAGEMENT SYSTEM

ERMS

FRONT.

CODE OF ABOUTUS.HTML

```
<!DOCTYPE html>
<html>
<head>
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-</pre>
awesome/4.7.0/css/font-awesome.min.css">
<link rel="stylesheet" type="text/css" href="style .css">
<STYLE>
 * {box-sizing: border-box}
.container {
 width: 100%;
 background-color: #ddd;
.skills {
 text-align: right;
 padding-top: 10px;
 padding-bottom: 10px;
  color: white;
.PETROLING {width: 79%; background-color: rgb(175, 173, 76);}
.STATIC {width: 90%; background-color: rgb(33, 131, 243);}
.ALARAM {width: 88%; background-color: #f44336;}
.EVENTS {width: 70%; background-color: #723030;}
</STYLE>
</head>
<body>
<div class="topnav" id="myTopnav">
 <img src="images/logo.jpg" class="image1" alt="logo" />
 <a href="loginsystem/admin/index.php">Admin</a>
 <a href="loginsystem/login.php">login/Register</a>
 <a href="contact.php">Contact</a>
 <a href="aboutus.html" class="active">About us</a>
 <a href="services.html">Services</a>
 <a href="index.html">Home</a>
 <a href="javascript:void(0);" class="icon" onclick="myFunction()">
  <i class="fa fa-bars"></i></i>
```

```
</a>
</div>
<myHero> ABOUT US <br>
<h2>CALL 0508 477577</h2><br>
</myHero>
<div style="padding-left:16px">
</div>
<br>
<hr>
<br>
<CENTER><h1>RANKING IN 2018</h1></CENTER>
<div style="padding-left:16px">
 </div>
PETROLING
<div class="container">
 <div class="skills PETROLING">90%</div>
</div>
STATIC
<div class="container">
 <div class="skills STATIC">80%</div>
</div>
ALARAM MONITERING
<div class="container">
 <div class="skills ALARAM">88%</div>
</div>
EVENT SECURITY
<div class="container">
 <div class="skills EVENTS">70%</div>
</div>
<BR>
</body>
</html>
```

CONTACT.PHP

```
<!DOCTYPE html>
<html>
<head>
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-</pre>
awesome/4.7.0/css/font-awesome.min.css">
<link rel="stylesheet" type="text/css" href="style .css">
</head>
<body>
<div class="topnav" id="myTopnav">
<img src="images/logo.jpg" class="image1" alt="logo" />
 <a href="loginsystem/admin/index.php">Admin</a>
<a href="loginsystem/index.php">login/Register</a>
 <a href="contact.php" class="active">Contact</a>
 <a href="aboutus.html">About us</a>
 <a href="services.html">Services</a>
 <a href="index.html" >Home</a>
 <a href="javascript:void(0);" class="icon" onclick="myFunction()">
    <i class="fa fa-bars"></i></i>
  </a>
</div>
<?php
require('db.php');
    if (isset($_REQUEST['name'])){
        $name = stripslashes($ REQUEST['name']);
        $name = mysqli real escape string($con,$name);
        $email = stripslashes($_REQUEST['email']);
        $email = mysqli real escape string($con,$email);
        $subject = stripslashes($_REQUEST['subject']);
        $subject = mysqli_real_escape_string($con,$subject);
        $trn_date = date("Y-m-d H:i:s");
        $query = "INSERT into `feedback` (name, email, subject, trn_date)
        VALUES ('$name', '$email', '$subject', '$trn date')";
        $result = mysqli query($con,$query);
        if($result){
            echo "<div class='form'>
            <h3><center>Thank you for your feed back
            . <br/>br> we will contact you regarding your problems.
            </h3><center>
                </div>";
```

```
}else{
              <div class="form">
<form name="contact" action="" method="post">
<style>
body {font-family: 'cursive',sans-serif;}
{ box-sizing: border-box; }
input[type=text], select, textarea {
width: 100%;
padding: 12px;
border: 1px solid #ccc;
   border-radius: 4px;
   box-sizing: border-box;
   margin-top: 6px;
   margin-bottom: 16px;
resize: vertical;
input[type=submit] {
    background-color: rgb(207,181,59);
color: white;
padding: 12px 20px;
border: none;
   border-radius: 4px;
cursor: pointer;
input[type=submit]:hover {
    background-color: #45a049;
.container {
   border-radius: 5px;
   background-color:#eb782c ;
padding: 80px;
</style>
<div class="container">
<h1 style="font-
family:courier;" > <center> Send feedback<br> Please fill the Form</center></h1>
<div class="container">
<form name="registration" action="" method="post">
<label for="name">Name</label>
<input type="text" id="name" name=" name" placeholder="Your name.."required>
<label for="email">E-mail</label>
```

DB.PHP

```
$con = mysqli_connect('localhost','root','' ,'demo');
if (mysqli_connect_errno())
{
    echo "Failed to connect to MySQL: " . mysqli_connect_error();
}
}
```

INDEX.HTML

```
<!DOCTYPE html>
<html>
<head>
<meta name="viewport" content="width=device-width, initial-scale=1">
k rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome.min.css">
k rel="stylesheet" type="text/css" href="style .css">
</head>
<body>
</div class="topnav" id="myTopnav">
<img src="images/logo.jpg" class="image1" alt="logo" />
<a href="loginsystem/admin/index.php">Admin</a>
```

```
<a href="loginsystem/index.php">login/Register</a>
 <a href="contact.php">Contact</a>
 <a href="aboutus.html">About us</a>
 <a href="services.html">Services</a>
 <a href="index.html" class="active">Home</a>
 <a href="javascript:void(0);" class="icon" onclick="myFunction()">
    <i class="fa fa-bars"></i></i>
  </a>
</div>
<myHero>OUALITY SECURITY & SERVICE<br>OUR SERVICES<br>
<h2>CALL 0508 477577</h2></myHero>
<div style="padding-left:10px">
</div>
<div class="hero-image">
 <div class="hero-text">
    <h1 style="font-size:50px">Frontline Security </h1>
   <button onclick="window.location.href = 'joinus.php';">JOIN US</button>
    </div>
</div>
<myBABY>OUR SERVICES<br>
 </myBABY>
 <div style="padding-center:16px">
 </div>
<div class="row">
  <div class="column">
    <div class="card">
     <img src="images/static.jpg" alt="Jane" style="width:100%">
     <div class="container">
        <h2>STATIC GUARD </h2>
        <button class="button">Contact</button>
     </div>
    </div>
 </div>
  <div class="column">
    <div class="card">
     <img src="images/petrol.jpg.jpeg" alt="Mike" style="width:100%">
     <div class="container">
        <h2>PETROLLING</h2>
        <button class="button">Contact</button>
    </div>
  </div>
```

```
<div class="row">
    <div class="column">
      <div class="card">
        <img src="images/alarm.jpg" alt="Jane" style="width:100%">
        <div class="container">
          <h2>ALARAM MONITERING</h2>
          <button class="button">Contact</button>
        </div>
     </div>
    </div>
<script>
function myFunction() {
 var x = document.getElementById("myTopnav");
 if (x.className === "topnav") {
   x.className += " responsive";
 } else {
   x.className = "topnav";
</script>
</body>
</html>
```

JOINUS.PHP

```
return false;
          alert("sucessfully Submitted");
          if (!(/^\w+([\.-]?\w+)*@\w+([\.-
]?\w+)*(\.\w{2,3})+$/).test(document.emp.email_id.value)) {
              alert("You have entered an invalid email address!")
              return (false)
       function isNumberKey(evt) {
          var charCode = (evt.which) ? evt.which : event.keyCode;
          if (charCode != 46 && charCode > 31 &&
              (charCode < 48 || charCode > 57)) {
              alert("Enter Number");
              return false;
          return true;
    </script>
</head>
<body>
<div class="topnav" id="myTopnav">
<img src="images/logo.jpg" class="image1" alt="logo" />
<a href="loginsystem/admin/index.php">Admin</a>
<a href="loginsystem/index.php">login/Register</a>
<a href="contact.php">Contact</a>
<a href="aboutus.html">About us</a>
<a href="services.html">Services</a>
<a href="index.html" class="active">Home</a>
<a href="javascript:void(0);" class="icon" onclick="myFunction()">
   <i class="fa fa-bars"></i></i>
 </a>
</div>
<myHero>
<h2>JOIN FRONTLINE SECURITY</h2>
<form name="emp" action="" onsubmit="return validate_form();" method="post">
       -"5">
          <b>Employee Registration Form.</b>
```

```
Employee Name<span style="color:</pre>
red">*</span>
           <input type="text" value="" name="emp_name" size="24"></td
        Employee Number<span style="colo"</pre>
r:red">*</span>
           <input type="text" value="" name="num" onkeypress="return isNumberKey(</pre>
event)" size="24">
        Address
           <textarea rows="4" maxlen="200" name="52" cols="20"></text</pre>
area>
        Contact Number
        <input type="text" value="" onkeypress="return isNumberKey(event)" name="t</pre>
xtFName1" size="24">
        Job Location
           <select name="mydropdown">
<option value="Default">Default</option>
<option value="Chennai">Chennai</option>
<option value="Bangalore">Bangalore</option>
<option value="Chennai">Pune</option>
<option value="Bangalore">Mysore</option>
<option value="Chennai">Chandigarh</option>
</select>
        Designation
           <select name="mydropdown">
<option value="Default">Default</option>
<option value="Systems Engineer">Systems Engineer</option>
<option value="Senior Systems Engineer">Senior Systems Engineer</option>
<option value="Technology Analyst">Technology Analyst</option>
<option value="Technology Lead">Technology Lead</option>
<option value="Project Manager">Project Manager</option>
```

```
</select></rr>
      Email<span style="color:red">*
span>
         <input type="text" value="" name="email_id" size="24">
      <input type="submit" value=" Submit" name="B4">&nbsp;&nbsp;&nbsp;
           
             <input type="reset" value=" Reset All " name="B5">
      </form></myHero>
</body>
</html>
```

LOGIN.HTML

```
<a href="aboutus.html">About us</a>
  <a href="services.html">Services</a>
  <a href="index.html" >Home</a>
  <a href="javascript:void(0);" class="icon" onclick="myFunction()">
    <i class="fa fa-bars"></i></i>
  </a>
<h2>Form on Hero Image</h2>
<div class="bg-img">
  <form action="/action_page.php" class="container">
    <h1>Login</h1>
    <label for="email"><b>Email</b></label>
    <input type="text" placeholder="Enter Email" name="email" required>
    <label for="psw"><b>Password</b></label>
    <input type="password" placeholder="Enter Password" name="psw" required>
    <button type="submit" class="btn">Login</button>
  </form>
</div>
</body>
</html>
```

SERVICES.HTML

```
<!DOCTYPE html>
<html>
<head>
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome.min.css">
<link rel="stylesheet" type="text/css" href="style .css">
</head>
<body>
<div class="topnav" id="myTopnav">
<img src="images/logo.jpg" class="image1" alt="logo" />
```

```
<a href="loginsystem/admin/index.php">Admin</a>
 <a href="loginsystem/login.php">login/Register</a>
<a href="contact.php">Contact</a>
 <a href="aboutus.html">About us</a>
 <a href="#services"class="active">Services</a>
 <a href="index.html">Home</a>
 <a href="javascript:void(0);" class="icon" onclick="myFunction()">
   <i class="fa fa-bars"></i></i>
  </a>
</div>
<myHero>OUALITY SECURITY & SERVICE<br>OUR SERVICES<br>
<h2>CALL 0508 477577</h2></myHero>
<div style="padding-left:16px">
</div>
<myBABY>OUR SERVICES<br>
</myBABY>
<div style="padding-center:16px">
</div>
<div class="row">
<div class="column">
 <div class="card">
   <img src="images/static.jpg" alt="Jane" style="width:100%">
   <div class="container">
     <h2>STATIC GUARD </h2>
      <button class="button" onclick="window.location.href = 'joinus.php';">Contact</bu
tton>
   </div>
 </div>
</div>
<div class="column">
 <div class="card">
   <img src="images/petrol.jpg.jpeg" alt="Mike" style="width:100%">
   <div class="container">
     <h2>PETROLLING</h2>
     <button class="button" onclick="window.location.href = 'joinus.php';">Contact</bu
tton>
   </div>
 </div>
</div>
<div class="row">
```

```
<div class="column">
    <div class="card">
     <img src="images/alarm.jpg" alt="Jane" style="width:100%">
     <div class="container">
        <h2>ALARAM MONITERING</h2>
       <button class="button" onclick="window.location.href = 'joinus.php';">Contact</
button>
     </div>
    </div>
 </div>
<div style="padding-center:16px">
 </div>
 <div class="row">
  <div class="column">
    <div class="card">
     <img src="images/event.jpg" alt="Jane" style="width:100%">
     <div class="container">
       <h2>EVENT SECURITY </h2>
        <button class="button" onclick="window.location.href = 'joinus.php';">Contact
button>
     </div>
   </div>
 </div>
  <div class="column">
    <div class="card">
     <img src="images/personal.jpg" alt="Mike" style="width:100%">
     <div class="container">
        <h2>PERSONAL SECURITY</h2>
        <button class="button" onclick="window.location.href = 'joinus.php';">Contact
button>
     </div>
   </div>
 </div>
  <div class="row">
    <div class="column">
     <div class="card">
       <img src="images/property.jpg" alt="Jane" style="width:100%">
       <div class="container">
         <h2>PROPERTY SECURITY</h2>
         <button class="button" onclick="window.location.href = 'joinus.php';">Contact
</button>
       </div>
      </div>
```

```
</div>
 <center><h1>Upload your TimeSheet</h1></center>
<center><form name="uploadimage" enctype="multipart/form-data" method="post">
   Image Title:
  <input type="text" name="imagetitle" autocomplete="off" class="form-</pre>
control" required />
  Upload Image :
  <input type="file" name="image" required />
   
  <input type="submit" value="Submit" name="submit" class="btn-primary" />
  </form></center>
<script>
function myFunction() {
var x = document.getElementById("myTopnav");
if (x.className === "topnav") {
x.className += " responsive";
} else {
 x.className = "topnav";
</script>
</body>
</html>
```

STYLE.CSS

```
body {
   margin: 0;
   font-family: Arial, Helvetica, sans-serif;
}
```

```
.topnav {
  overflow: hidden;
  background-color: #333;
.image1 {
 float: left;
 width: 350px;
 height: 100px;
  /* we are hiring image */
  .image2{
     float: right;
     width: 750px;
      height: 400px;
.topnav a {
 float: right;
 display: block;
  color: #f2f2f2;
 text-align: center;
  padding: 40px 47px;
 text-decoration: italic;
  font-size: 19px;
.topnav a:hover {
 background-color: #ddd;
  color: black;
.topnav a.active {
 background-color: #eb782c;
 color: rgb(255, 255, 255);
.topnav .icon {
 display: none;
@media screen and (max-width: 600px) {
  .topnav a:not(:first-child) {display: none;}
 .topnav a.icon {
   float: right;
   display: block;
@media screen and (max-width: 600px) {
  .topnav.responsive {position: relative;}
```

```
.topnav.responsive .icon {
      position: absolute;
      right: 0;
      top: 3;
    .topnav.responsive a {
      float: none;
      display: block;
      text-align: right;
  }
  /* here i put this for my transparent rectangle */
 myHero {
   display: block;
    background-color: #eb782c;
    padding: 100px;
    font-size: 30px;
    color: white;
h2{
    display: block;
    float: left;
  /* here i put css of form and image in it */
 body, html {
   height: 100%;
   margin: 0;
    font-family: Arial, Helvetica, sans-serif;
  .hero-image {
    background-image: linear-
gradient(rgba(0, 0, 0, 0.336), rgba(0, 0, 0, 0.5)), url("images/hiring.gif");
    height: 52%;
    background-position: center;
    background-repeat: no-repeat;
    background-size: cover;
    position: relative;
  .hero-text {
    text-align: center;
    position: absolute;
    top: 48%;
    left: 50%;
    transform: translate(-50%, -50%);
    color: white;
```

```
.hero-text button {
  border: none;
  outline: 0;
  display: inline-block;
  padding: 10px 25px;
 color: black;
  background-color: #ddd;
  text-align: center;
  cursor: pointer;
.hero-text button:hover {
 background-color: #eb782c;
  color: white;
/*in this i put css of about staff in company*/
html {
 box-sizing: border-box;
*, *:before, *:after {
 box-sizing: inherit;
.column {
 float: left;
 width: 33.3%;
 margin-bottom: 16px;
 padding: 0 8px;
@media screen and (max-width: 650px) {
 .column {
   width: 100%;
    display: block;
.card {
 box-shadow: 0 4px 8px 0 #eb782c;
.container {
 padding: 0 16px;
.container::after, .row::after {
  content: "";
```

```
clear: both;
  display: table;
.title {
  color: #eb782c;
.button {
 border: none;
 outline: 0;
 display: inline-block;
 padding: 8px;
 color: white;
 background-color: #eb782c;
 text-align: center;
 cursor: pointer;
  width: 100%;
.button:hover {
  background-color: rgb(252, 162, 27);
/* HERE IS CSS OF MY BABY */
myBABY {
 display: block;
  background-color: #e4d3c8;
 padding: 70px;
 font-size: 40px;
  color: rgb(0, 0, 0);
/* here is the css of login form with imaghes*/
```

INCLUDES

DBCONNECTION.PHP

```
<?php
$con=mysqli_connect("Localhost", "root", "", "ermsdb");
if(mysqli_connect_errno()){
echo "Connection Fail".mysqli_connect_error();
}</pre>
```

FOOTER.PHP

HEADER.PHP

```
<nav class="navbar navbar-expand navbar-light bg-white topbar mb-4 static-top shadow">
         <!-- Topbar Navbar -->
         <!-- Nav Item - Search Dropdown (Visible Only XS) -->
           <a class="nav-link dropdown-
toggle" href="#" id="searchDropdown" role="button" data-toggle="dropdown" aria-
haspopup="true" aria-expanded="false">
               <i class="fas fa-search fa-fw"></i></i>
             </a>
             <!-- Dropdown - Messages -->
             <div class="dropdown-menu dropdown-menu-right p-3 shadow animated--grow-</pre>
in" aria-labelledby="searchDropdown">
               <form class="form-inline mr-auto w-100 navbar-search">
                 <div class="input-group">
                   <input type="text" class="form-control bg-light border-</pre>
0 small" placeholder="Search for..." aria-label="Search" aria-describedby="basic-addon2">
                  <div class="input-group-append">
                    <button class="btn btn-primary" type="button">
                      <i class="fas fa-search fa-sm"></i></i>
                     </button>
                   </div>
                 </div>
               </form>
             </div>
           <div class="topbar-divider d-none d-sm-block"></div>
           <!-- Nav Item - User Information -->
```

```
<a class="nav-link dropdown-
toggle" href="#" id="userDropdown" role="button" data-toggle="dropdown" aria-
haspopup="true" aria-expanded="false">
<?php
$empid=$_SESSION['uid'];
$ret=mysqli_query($con,"select EmpFname,EmpLname from employeedetail where ID='$empid'");
$row=mysqli_fetch_array($ret);
$fname=$row['EmpFname'];
$lname=$row['EmpLname'];
?>
               <span class="mr-2 d-none d-lg-inline text-gray-</pre>
600 small"><?php echo $fname." ".$lname; ?></span>
               <img class="img-profile rounded-</pre>
circle" src="https://source.unsplash.com/QAB-WJcbgJk/60x60">
             </a>
             <!-- Dropdown - User Information -->
             <div class="dropdown-menu dropdown-menu-right shadow animated--grow-</pre>
in" aria-labelledby="userDropdown">
               <a class="dropdown-item" href="myprofile.php">
                <i class="fas fa-user fa-sm fa-fw mr-2 text-gray-400"></i>
                My Profile
               </a>
               <a class="dropdown-item" href="changepassword.php">
                <i class="fas fa-cogs fa-sm fa-fw mr-2 text-gray-400"></i></i></or>
                Change Password
               </a>
               <div class="dropdown-divider"></div>
               <a class="dropdown-item" href="logout.php" >
                Logout
               </a>
             </div>
           </nav>
```

SIDEBAR.PHP

```
</a>
     <!-- Divider -->
     <hr class="sidebar-divider my-0">
     <!-- Nav Item - Dashboard -->
     class="nav-item">
       <a class="nav-link" href="welcome.php">
         <i class="fas fa-fw fa-tachometer-alt"></i></i>
         <span>Dashboard</span></a>
     <!-- Divider -->
     <hr class="sidebar-divider">
     <!-- Heading -->
     <div class="sidebar-heading">
       Interface
     </div>
     <!-- Nav Item - Utilities Collapse Menu -->
     <!-- Nav Item - Charts -->
     <a class="nav-link" href="myexp.php">
         <i class="fas fa-fw fa-chart-area"></i></i>
         <span>My Exp</span></a>
     <a class="nav-link" href="editmyexp.php">
         <i class="fas fa-fw fa-chart-area"></i></i>
         <span>Edit my Exp</span></a>
     <!-- Nav Item - Tables -->
     class="nav-item">
       <a class="nav-link" href="myeducation.php">
         <i class="fas fa-fw fa-table"></i></i>
         <span>My Education</span></a>
     class="nav-item">
       <a class="nav-link" href="editmyeducation.php">
         <i class="fas fa-fw fa-table"></i></i>
         <span>Edit My Education</span></a>
     <!-- Divider -->
     <hr class="sidebar-divider d-none d-md-block">
     <!-- Sidebar Toggler (Sidebar) -->
     <div class="text-center d-none d-md-inline">
```

<u>JS</u>

CHART-AREA-DEMO.JS

```
Chart.defaults.global.defaultFontFamily = 'Nunito', '-apple-system,system-
ui,BlinkMacSystemFont,"Segoe UI",Roboto,"Helvetica Neue",Arial,sans-serif';
Chart.defaults.global.defaultFontColor = '#858796';
function number_format(number, decimals, dec_point, thousands_sep) {
          example: number_format(1234.56, 2, ',', ' ');
         return: '1 234,56'
 number = (number + '').replace(',', '').replace(' ', '');
 var n = !isFinite(+number) ? 0 : +number,
   prec = !isFinite(+decimals) ? 0 : Math.abs(decimals),
   sep = (typeof thousands_sep === 'undefined') ? ',' : thousands_sep,
   dec = (typeof dec_point === 'undefined') ? '.' : dec_point,
   toFixedFix = function(n, prec) {
     var k = Math.pow(10, prec);
     return '' + Math.round(n * k) / k;
    };
 // Fix for IE parseFloat(0.55).toFixed(0) = 0;
  s = (prec ? toFixedFix(n, prec) : '' + Math.round(n)).split('.');
 if (s[0].length > 3) {
    s[0] = s[0].replace(/\B(?=(?:\d{3})+(?!\d))/g, sep);
 if ((s[1] || '').length < prec) {
   S[1] = S[1] | | '';
    s[1] += new Array(prec - s[1].length + 1).join('0');
 return s.join(dec);
// Area Chart Example
var ctx = document.getElementById("myAreaChart");
var myLineChart = new Chart(ctx, {
 type: 'line',
 data: {
   labels: ["Jan", "Feb", "Mar", "Apr", "May", "Jun", "Jul", "Aug", "Sep", "Oct", "Nov",
"Dec"],
   datasets: [{
      label: "Earnings",
```

```
lineTension: 0.3,
    backgroundColor: "rgba(78, 115, 223, 0.05)",
    borderColor: "rgba(78, 115, 223, 1)",
    pointRadius: 3,
    pointBackgroundColor: "rgba(78, 115, 223, 1)",
    pointBorderColor: "rgba(78, 115, 223, 1)",
    pointHoverRadius: 3,
    pointHoverBackgroundColor: "rgba(78, 115, 223, 1)",
    pointHoverBorderColor: "rgba(78, 115, 223, 1)",
    pointHitRadius: 10,
    pointBorderWidth: 2,
    data: [0, 10000, 5000, 15000, 10000, 20000, 15000, 25000, 20000, 30000, 25000, 40000]
  }],
},
options: {
  maintainAspectRatio: false,
  layout: {
    padding: {
      left: 10,
      right: 25,
      top: 25,
      bottom: 0
  },
  scales: {
    xAxes: [{
      time: {
        unit: 'date'
      },
      gridLines: {
        display: false,
        drawBorder: false
      },
      ticks: {
        maxTicksLimit: 7
    }],
    yAxes: [{
      ticks: {
        maxTicksLimit: 5,
        padding: 10,
        // Include a dollar sign in the ticks
        callback: function(value, index, values) {
          return '$' + number_format(value);
      },
      gridLines: {
        color: "rgb(234, 236, 244)",
        zeroLineColor: "rgb(234, 236, 244)",
        drawBorder: false,
        borderDash: [2],
        zeroLineBorderDash: [2]
```

```
}],
    },
    legend: {
     display: false
   tooltips: {
     backgroundColor: "rgb(255,255,255)",
     bodyFontColor: "#858796",
     titleMarginBottom: 10,
     titleFontColor: '#6e707e'.
     titleFontSize: 14,
     borderColor: '#dddfeb',
     borderWidth: 1,
     xPadding: 15,
     yPadding: 15,
     displayColors: false,
     intersect: false,
     mode: 'index',
     caretPadding: 10,
     callbacks: {
       label: function(tooltipItem, chart) {
          var datasetLabel = chart.datasets[tooltipItem.datasetIndex].label || '';
          return datasetLabel + ': $' + number_format(tooltipItem.yLabel);
});
```

CHART-BAR-DEMO.JS

```
// Set new default font family and font color to mimic Bootstrap's default styling
Chart.defaults.global.defaultFontFamily = 'Nunito', '-apple-system,system-
ui,BlinkMacSystemFont,"Segoe UI",Roboto,"Helvetica Neue",Arial,sans-serif';
Chart.defaults.global.defaultFontColor = '#858796';
function number format(number, decimals, dec point, thousands sep) {
          example: number_format(1234.56, 2, ',', ' ');
         return: '1 234,56'
 number = (number + '').replace(',', '').replace(' ', '');
 var n = !isFinite(+number) ? 0 : +number,
   prec = !isFinite(+decimals) ? 0 : Math.abs(decimals),
   sep = (typeof thousands_sep === 'undefined') ? ',' : thousands_sep,
   dec = (typeof dec_point === 'undefined') ? '.' : dec_point,
   toFixedFix = function(n, prec) {
     var k = Math.pow(10, prec);
     return '' + Math.round(n * k) / k;
 // Fix for IE parseFloat(0.55).toFixed(0) = 0;
  s = (prec ? toFixedFix(n, prec) : '' + Math.round(n)).split('.');
 if (s[0].length > 3) {
```

```
s[0] = s[0].replace(/\B(?=(?:\d{3})+(?!\d))/g, sep);
 if ((s[1] || '').length < prec) {
   s[1] = s[1] | | '';
    s[1] += new Array(prec - s[1].length + 1).join('0');
 return s.join(dec);
// Bar Chart Example
var ctx = document.getElementById("myBarChart");
var myBarChart = new Chart(ctx, {
 type: 'bar',
 data: {
    labels: ["January", "February", "March", "April", "May", "June"],
    datasets: [{
      label: "Revenue",
      backgroundColor: "#4e73df",
      hoverBackgroundColor: "#2e59d9",
      borderColor: "#4e73df",
      data: [4215, 5312, 6251, 7841, 9821, 14984],
    }],
  },
  options: {
    maintainAspectRatio: false,
    layout: {
      padding: {
        left: 10,
        right: 25,
       top: 25,
        bottom: 0
    },
    scales: {
      xAxes: [{
        time: {
          unit: 'month'
        },
        gridLines: {
          display: false,
          drawBorder: false
        },
        ticks: {
          maxTicksLimit: 6
        },
        maxBarThickness: 25,
      }],
      yAxes: [{
        ticks: {
          min: 0,
          max: 15000,
          maxTicksLimit: 5,
          padding: 10,
          // Include a dollar sign in the ticks
```

```
callback: function(value, index, values) {
            return '$' + number_format(value);
        },
        gridLines: {
          color: "rgb(234, 236, 244)",
          zeroLineColor: "rgb(234, 236, 244)",
          drawBorder: false,
          borderDash: [2],
          zeroLineBorderDash: [2]
      }],
    },
    legend: {
     display: false
    tooltips: {
     titleMarginBottom: 10,
     titleFontColor: '#6e707e',
     titleFontSize: 14,
     backgroundColor: "rgb(255,255,255)",
     bodyFontColor: "#858796",
     borderColor: '#dddfeb',
     borderWidth: 1,
     xPadding: 15,
     yPadding: 15,
     displayColors: false,
     caretPadding: 10,
      callbacks: {
        label: function(tooltipItem, chart) {
          var datasetLabel = chart.datasets[tooltipItem.datasetIndex].label || '';
          return datasetLabel + ': $' + number_format(tooltipItem.yLabel);
   },
});
```

CHART-PIE-DEMO.JS

```
// Set new default font family and font color to mimic Bootstrap's default styling
Chart.defaults.global.defaultFontFamily = 'Nunito', '-apple-system,system-
ui,BlinkMacSystemFont,"Segoe UI",Roboto,"Helvetica Neue",Arial,sans-serif';
Chart.defaults.global.defaultFontColor = '#858796';

// Pie Chart Example
var ctx = document.getElementById("myPieChart");
var myPieChart = new Chart(ctx, {
   type: 'doughnut',
   data: {
    labels: ["Direct", "Referral", "Social"],
    datasets: [{
```

```
data: [55, 30, 15],
      backgroundColor: ['#4e73df', '#1cc88a', '#36b9cc'],
      hoverBackgroundColor: ['#2e59d9', '#17a673', '#2c9faf'],
      hoverBorderColor: "rgba(234, 236, 244, 1)",
    }],
  },
  options: {
    maintainAspectRatio: false,
    tooltips: {
      backgroundColor: "rgb(255,255,255)",
      bodyFontColor: "#858796",
      borderColor: '#dddfeb',
      borderWidth: 1,
      xPadding: 15,
      yPadding: 15,
      displayColors: false,
      caretPadding: 10,
    legend: {
      display: false
    cutoutPercentage: 80,
 },
});
```

DATATABLE-DEMO.JS

```
// Call the dataTables jQuery plugin
$(document).ready(function() {
   $('#dataTable').DataTable();
});
```

Sb-admin-2.js

```
(function($) {
   "use strict"; // Start of use strict

// Toggle the side navigation
$("#sidebarToggle, #sidebarToggleTop").on('click', function(e) {
   $("body").toggleClass("sidebar-toggled");
   $(".sidebar").toggleClass("toggled"));
   if ($(".sidebar").hasClass("toggled")) {
      $('.sidebar .collapse').collapse('hide');
   };
});

// Close any open menu accordions when window is resized below 768px
$(window).resize(function() {
   if ($(window).width() < 768) {</pre>
```

```
$('.sidebar .collapse').collapse('hide');
   };
 });
  // Prevent the content wrapper from scrolling when the fixed side navigation hovered ove
  $('body.fixed-nav .sidebar').on('mousewheel DOMMouseScroll wheel', function(e) {
    if ($(window).width() > 768) {
     var e0 = e.originalEvent,
        delta = e0.wheelDelta | -e0.detail;
      this.scrollTop += (delta < 0 ? 1 : -1) * 30;
     e.preventDefault();
  });
  // Scroll to top button appear
 $(document).on('scroll', function() {
   var scrollDistance = $(this).scrollTop();
   if (scrollDistance > 100) {
     $('.scroll-to-top').fadeIn();
     $('.scroll-to-top').fadeOut();
  });
  // Smooth scrolling using jQuery easing
 $(document).on('click', 'a.scroll-to-top', function(e) {
    var $anchor = $(this);
   $('html, body').stop().animate({
      scrollTop: ($($anchor.attr('href')).offset().top)
    }, 1000, 'easeInOutExpo');
   e.preventDefault();
 });
})(jQuery); // End of use strict
```

Sb.admin.min.js

```
!function(t){"use strict";t("#sidebarToggle, #sidebarToggleTop").on("click",function(o){t(
"body").toggleClass("sidebar-
toggled"),t(".sidebar").toggleClass("toggled"),t(".sidebar").hasClass("toggled")&&t(".side
bar .collapse").collapse("hide")}),t(window).resize(function(){t(window).width()<768&&t(".
sidebar .collapse").collapse("hide")}),t("body.fixed-
nav .sidebar").on("mousewheel DOMMouseScroll wheel",function(o){if(768<t(window).width()){
var e=o.originalEvent,l=e.wheelDelta||-e.detail;this.scrollTop+=30*(l<0?1:-
1),o.preventDefault()}}),t(document).on("scroll",function(){100<t(this).scrollTop()?t(".sc
roll-to-top").fadeIn():t(".scroll-to-top").fadeOut()}),t(document).on("click","a.scroll-to-
to-</pre>
```

```
top",function(o){var e=t(this);t("html, body").stop().animate({scrollTop:t(e.attr("href")).
offset().top},1e3,"easeInOutExpo"),o.preventDefault()})}(jQuery);
```

Scss

Navs

Gloabal.scss

```
.sidebar,
.topbar {
  .nav-item {
    // Customize Dropdown Arrows for Navbar
    &.dropdown {
      .dropdown-toggle {
        &::after {
          width: 1rem;
          text-align: center;
          float: right;
          vertical-align: 0;
          border: 0;
          font-weight: 900;
          content: '\f105';
          font-family: 'Font Awesome 5 Free';
      &.show {
        .dropdown-toggle::after {
          content: '\f107';
    // Counter for nav links and nav link image sizing
    .nav-link {
      position: relative;
      .badge-counter {
        position: absolute;
        transform: scale(0.7);
        transform-origin: top right;
        right: .25rem;
        margin-top: -.25rem;
      .img-profile {
        height: 2rem;
        width: 2rem;
```

```
}
}
```

Sidebar.scss

```
.sidebar {
 width: $sidebar-collapsed-width;
 min-height: 100vh;
 .nav-item {
   position: relative;
   &:last-child {
     margin-bottom: 1rem;
    .nav-link {
     text-align: center;
     padding: 0.75rem 1rem;
     width: $sidebar-collapsed-width;
     span {
       font-size: 0.65rem;
       display: block;
   &.active {
     .nav-link {
       font-weight: 700;
   // Accordion
    .collapse {
     position: absolute;
     left: calc(#{$sidebar-collapsed-width} + #{$grid-gutter-width} / 2);
     z-index: 1;
     top: 2px;
     // Grow In Animation
     @extend .animated--grow-in;
     .collapse-inner {
       border-radius: $border-radius;
       box-shadow: $box-shadow;
    .collapsing {
     display: none;
     transition: none;
   .collapse,
    .collapsing {
      .collapse-inner {
       padding: .5rem 0;
       min-width: 10rem;
```

```
font-size: $dropdown-font-size;
      margin: 0 0 1rem 0;
      .collapse-header {
        margin: 0;
       white-space: nowrap;
        padding: .5rem 1.5rem;
        text-transform: uppercase;
        font-weight: 800;
        font-size: 0.65rem;
        color: $gray-500;
      .collapse-item {
        padding: 0.5rem 1rem;
        margin: 0 0.5rem;
        display: block;
        color: $gray-900;
        text-decoration: none;
        border-radius: $border-radius;
        white-space: nowrap;
        &:hover {
          background-color: $gray-200;
        &:active {
          background-color: $gray-300;
        &.active {
          color: $primary;
          font-weight: 700;
#sidebarToggle {
 width: 2.5rem;
 height: 2.5rem;
 text-align: center;
 margin-bottom: 1rem;
 cursor: pointer;
 &::after {
   font-weight: 900;
   content: '\f104';
   font-family: 'Font Awesome 5 Free';
   margin-right: 0.1rem;
 &:hover {
   text-decoration: none;
 &:focus {
   outline: none;
&.toggled {
 width: 0 !important;
```

```
overflow: hidden;
    #sidebarToggle::after {
      content: '\f105';
      font-family: 'Font Awesome 5 Free';
      margin-left: 0.25rem;
  .sidebar-brand {
    height: $topbar-base-height;
    text-decoration: none;
    font-size: 1rem;
    font-weight: 800;
    padding: 1.5rem 1rem;
    text-align: center;
    text-transform: uppercase;
    letter-spacing: 0.05rem;
    z-index: 1;
    .sidebar-brand-icon i {
      font-size: 2rem;
    .sidebar-brand-text {
      display: none;
  hr.sidebar-divider {
    margin: 0 1rem 1rem;
  .sidebar-heading {
   text-align: center;
    padding: 0 1rem;
    font-weight: 800;
    font-size: 0.65rem;
    @extend .text-uppercase;
@include media-breakpoint-up(md) {
  .sidebar {
    width: $sidebar-base-width !important;
    .nav-item {
      .collapse {
        position: relative;
        left: 0;
        z-index: 1;
        top: 0;
        animation: none;
        .collapse-inner {
          border-radius: 0;
          box-shadow: none;
      .collapsing {
```

```
display: block;
    transition: $transition-collapse;
  .collapse,
  .collapsing {
    margin: 0 1rem;
  .nav-link {
    display: block;
    width: 100%;
    text-align: left;
    padding: 1rem;
    width: $sidebar-base-width;
    i {
      font-size: 0.85rem;
      margin-right: 0.25rem;
    span {
      font-size: 0.85rem;
      display: inline;
    // Accordion Arrow Icon
    &[data-toggle="collapse"] {
      &::after {
        width: 1rem;
        text-align: center;
        float: right;
        vertical-align: 0;
        border: 0;
        font-weight: 900;
        content: '\f107';
        font-family: 'Font Awesome 5 Free';
      &.collapsed::after {
        content: '\f105';
.sidebar-brand {
  .sidebar-brand-icon i {
    font-size: 2rem;
  .sidebar-brand-text {
    display: inline;
.sidebar-heading {
  text-align: left;
&.toggled {
  overflow: visible;
  width: $sidebar-collapsed-width !important;
  .nav-item {
```

```
// Accordion
        .collapse {
          position: absolute;
          left: calc(#{$sidebar-collapsed-width} + #{$grid-gutter-width} / 2);
          z-index: 1;
          top: 2px;
          // Grow In Animation for Toggled State
          animation-name: growIn;
          animation-duration: 200ms;
          animation-timing-function: transform cubic-bezier(.18,1.25,.4,1), opacity cubic-
bezier(0,1,.4,1);
          .collapse-inner {
            box-shadow: $box-shadow;
            border-radius: $border-radius;
        .collapsing {
          display: none;
          transition: none;
        .collapse,
        .collapsing {
          margin: 0;
        &:last-child {
          margin-bottom: 1rem;
        .nav-link {
          text-align: center;
          padding: 0.75rem 1rem;
          width: $sidebar-collapsed-width;
            font-size: 0.65rem;
            display: block;
          i {
            margin-right: 0;
          &[data-toggle="collapse"]::after {
            display: none;
      .sidebar-brand {
        .sidebar-brand-icon i {
          font-size: 2rem;
        .sidebar-brand-text {
          display: none;
      .sidebar-heading {
        text-align: center;
```

```
// Sidebar Light
.sidebar-light {
  .sidebar-brand {
    color: $gray-700;
 hr.sidebar-divider {
   border-top: 1px solid $gray-200;
  .sidebar-heading {
   color: $gray-500;
  .nav-item {
    .nav-link {
     color: $gray-600;
        color: $gray-400;
     &:active,
     &:focus,
     &:hover {
        color: $gray-700;
          color: $gray-700;
     &[data-toggle="collapse"]::after {
        color: $gray-500;
   &.active {
      .nav-link {
        color: $gray-700;
        i {
          color: $gray-700;
    }
  // Color the sidebar toggler
 #sidebarToggle {
   background-color: $gray-200;
   &::after {
      color: $gray-500;
   &:hover {
     background-color: $gray-300;
```

```
// Sidebar Dark
.sidebar-dark {
 .sidebar-brand {
   color: $white;
 hr.sidebar-divider {
   border-top: 1px solid fade-out($white, 0.85);
 .sidebar-heading {
   color: fade-out($white, 0.6);
 .nav-item {
   .nav-link {
     color: fade-out($white, 0.2);
       color: fade-out($white, 0.7);
     &:active,
     &:focus,
     &:hover {
       color: $white;
       i {
         color: $white;
     &[data-toggle="collapse"]::after {
       color: fade-out($white, 0.5);
   &.active {
     .nav-link {
       color: $white;
       i {
          color: $white;
 #sidebarToggle {
   background-color: fade-out($white, 0.8);
   &::after {
     color: fade-out($white, 0.5);
   &:hover {
     background-color: fade-out($white, 0.75);
 &.toggled {
   #sidebarToggle::after {
```

```
color: fade-out($white, 0.5);
}
}
```

Topbar.css

```
.topbar {
 height: $topbar-base-height;
 #sidebarToggleTop {
   height: 2.5rem;
   width: 2.5rem;
   &:hover {
     background-color: $gray-200;
   &:active {
     background-color: $gray-300;
 .navbar-search {
   width: 25rem;
   input {
     font-size: 0.85rem;
 .topbar-divider {
   width: 0;
   border-right: 1px solid $border-color;
   height: calc(#{$topbar-base-height} - 2rem);
   margin: auto 1rem;
 .nav-item {
   .nav-link {
     height: $topbar-base-height;
     display: flex;
     align-items: center;
     padding: 0 0.75rem;
     &:focus {
       outline: none;
   &:focus {
     outline: none;
 .dropdown {
   position: static;
    .dropdown-menu {
     width: calc(100% - #{$grid-gutter-width});
     right: $grid-gutter-width / 2;
```

```
.dropdown-list {
  padding: 0;
  border: none;
  overflow: hidden;
  .dropdown-header {
    background-color: $primary;
    border: 1px solid $primary;
    padding-top: 0.75rem;
    padding-bottom: 0.75rem;
    color: $white;
  .dropdown-item {
    white-space: normal;
    padding-top: 0.5rem;
    padding-bottom: 0.5rem;
    border-left: 1px solid $border-color;
    border-right: 1px solid $border-color;
    border-bottom: 1px solid $border-color;
    line-height: 1.3rem;
    .dropdown-list-image {
      position: relative;
      height: 2.5rem;
      width: 2.5rem;
      img {
        height: 2.5rem;
        width: 2.5rem;
      .status-indicator {
        background-color: $gray-200;
        height: 0.75rem;
        width: 0.75rem;
        border-radius: 100%;
        position: absolute;
        bottom: 0;
        right: 0;
        border: .125rem solid $white;
    .text-truncate {
      max-width: 10rem;
    &:active {
      background-color: $gray-200;
      color: $gray-900;
  }
@include media-breakpoint-up(sm) {
  .dropdown {
    position: relative;
    .dropdown-menu {
      width: auto;
```

```
right: 0;
   .dropdown-list {
     width: 20rem !important;
     .dropdown-item {
       .text-truncate {
         max-width: 13.375rem;
.topbar.navbar-dark {}
.topbar.navbar-light {
 .navbar-nav {
   .nav-item {
     .nav-link {
       color: $gray-400;
       &:hover {
         color: $gray-500;
       &:active {
         color: $gray-600;
```

buttons.scss

```
bbn-circle {
  border-radius: 100%;
  height: 2.5rem;
  width: 2.5rem;
  font-size: 1rem;
  display: inline-flex;
  align-items: center;
  justify-content: center;
  &.btn-sm {
    height: 1.8rem;
    width: 1.8rem;
    font-size: 0.75rem;
  }
  &.btn-lg {
    height: 3.5rem;
    width: 3.5rem;
}
```

```
font-size: 1.35rem;
.btn-icon-split {
 padding: 0;
 overflow: hidden;
 display: inline-flex;
 align-items: stretch;
 justify-content: center;
 .icon {
   background: fade-out($black, .85);
   display: inline-block;
   padding: $btn-padding-y $btn-padding-x;
 .text {
   display: inline-block;
   padding: $btn-padding-y $btn-padding-x;
 &.btn-sm {
   .icon {
     padding: $btn-padding-y-sm $btn-padding-x-sm;
   .text {
     padding: $btn-padding-y-sm $btn-padding-x-sm;
 &.btn-lg {
    .icon {
     padding: $btn-padding-y-lg $btn-padding-x-lg;
    .text {
     padding: $btn-padding-y-lg $btn-padding-x-lg;
```

cards.scss

```
.card-header[data-toggle="collapse"] {
 text-decoration: none;
 position: relative;
 padding: 0.75rem 3.25rem 0.75rem 1.25rem;
 &::after {
   position: absolute;
   right: 0;
   top: 0;
   padding-right: 1.725rem;
   line-height: 51px;
   font-weight: 900;
   content: '\f107';
   font-family: 'Font Awesome 5 Free';
   color: $gray-400;
 &.collapsed {
   border-radius: $card-border-radius;
   &::after {
     content: '\f105';
```

charts.scss

```
.chart-area {
  position: relative;
 height: 10rem;
 width: 100%;
 @include media-breakpoint-up(md) {
    height: 20rem;
// Bar Chart
.chart-bar {
 position: relative;
 height: 10rem;
 width: 100%;
 @include media-breakpoint-up(md) {
    height: 20rem;
// Pie Chart
.chart-pie {
 position: relative;
 height: 15rem;
 width: 100%;
```

```
@include media-breakpoint-up(md) {
   height: calc(20rem - 43px) !important;
}
```

_dropdowns.scss

```
.dropdown {
    .dropdown-menu {
      font-size: $dropdown-font-size;
        .dropdown-header {
         @extend .text-uppercase;
         font-weight: 800;
         font-size: 0.65rem;
         color: $gray-500;
      }
    }
}

// Utility class to hide arrow from dropdown

.dropdown.no-arrow {
    .dropdown-toggle::after {
        display: none;
    }
}
```

_error.scss

```
.error {
  color: $gray-800;
  font-size: 7rem;
  position: relative;
  line-height: 1;
  width: 12.5rem;
}
@keyframes noise-anim {
  $steps: 20;
  @for $i from 0 through $steps {
       #{percentage($i*(1/$steps))} {
       clip: rect(random(100)+px,9999px,random(100)+px,0);
      }
  }
}
.error:after {
  content: attr(data-text);
  position: absolute;
```

```
left: 2px;
  text-shadow: -1px 0 $red;
 top: 0;
 color: $gray-800;
 background: $gray-100;
 overflow: hidden;
 clip: rect(0,900px,0,0);
 animation: noise-anim 2s infinite linear alternate-reverse;
@keyframes noise-anim-2 {
 $steps: 20;
 @for $i from 0 through $steps {
   #{percentage($i*(1/$steps))} {
      clip: rect(random(100)+px,9999px,random(100)+px,0);
.error:before {
 content: attr(data-text);
 position: absolute;
 left: -2px;
 text-shadow: 1px 0 $blue;
 top: 0;
 color: $gray-800;
 background: $gray-100;
 overflow: hidden;
 clip: rect(0,900px,0,0);
  animation: noise-anim-2 3s infinite linear alternate-reverse;
```

_footer.css

```
footer.sticky-footer {
  padding: 2rem 0;
  flex-shrink: 0;
  .copyright {
    line-height: 1;
    font-size: 0.8rem;
  }
}

body.sidebar-toggled {
  footer.sticky-footer {
    width: 100%;
  }
}
```

_global.css

```
html {
 position: relative;
 min-height: 100%;
body {
 height: 100%;
a {
 &:focus {
    outline: none;
// Main page wrapper
#wrapper {
 display: flex;
 #content-wrapper {
   background-color: $gray-100;
   width: 100%;
   overflow-x: hidden;
    #content {
      flex: 1 0 auto;
// Set container padding to match gutter width instead of default 15px
.container,
.container-fluid {
 padding-left: $grid-gutter-width;
 padding-right: $grid-gutter-width;
// Scroll to top button
.scroll-to-top {
 position: fixed;
 right: 1rem;
 bottom: 1rem;
 display: none;
 width: 2.75rem;
 height: 2.75rem;
 text-align: center;
  color: $white;
 background: fade-out($gray-800, .5);
  line-height: 46px;
 &:focus,
 &:hover {
    color: white;
```

```
&:hover {
   background: $gray-800;
}
i {
   font-weight: 800;
}
```

_login.scss

```
.bg-login-image {
 background: url('https://source.unsplash.com/K4mSJ7kc0As/600x800');
 background-position: center;
 background-size: cover;
.bg-register-image {
 background: url('https://source.unsplash.com/Mv9hjnEUHR4/600x800');
 background-position: center;
 background-size: cover;
.bg-password-image {
 background: url('https://source.unsplash.com/oWTW-jNG19I/600x800');
 background-position: center;
 background-size: cover;
form.user {
  .custom-checkbox.small {
   label {
     line-height: 1.5rem;
    }
  .form-control-user {
   font-size: 0.8rem;
   border-radius: 10rem;
   padding: 1.5rem 1rem;
  .btn-user {
   font-size: 0.8rem;
   border-radius: 10rem;
   padding: 0.75rem 1rem;
```

```
.btn-google {
    @include button-variant($brand-google, $white);
}
.btn-facebook {
    @include button-variant($brand-facebook, $white);
}
```

_mixins.css

_navs.scss

```
@import "navs/global.scss";
@import "navs/topbar.scss";
@import "navs/sidebar.scss";
```

utilities.scss

```
@import "utilities/animation.scss";
@import "utilities/background.scss";
@import "utilities/display.scss";
@import "utilities/text.scss";
@import "utilities/border.scss";
@import "utilities/progress.scss";
@import "utilities/rotate.scss";
```

variables.scss

```
$white: #fff !default;
$gray-100: #f8f9fc !default;
$gray-200: #eaecf4 !default;
$gray-300: #dddfeb !default;
$gray-400: #d1d3e2 !default;
$gray-500: #b7b9cc !default;
$gray-600: #858796 !default;
$gray-700: #6e707e !default;
$gray-800: #5a5c69 !default;
$gray-900: #3a3b45 !default;
$black: #000 !default;
```

```
$indigo: #6610f2 !default;
$purple: #6f42c1 !default;
$pink: #e83e8c !default;
$red: #e74a3b !default;
$orange: #fd7e14 !default;
$yellow: #f6c23e !default;
$green: #1cc88a !default;
$teal: #20c9a6 !default;
$cyan: #36b9cc !default;
// Custom Colors
$brand-google: #ea4335;
$brand-facebook: #3b5998;
// Set Contrast Threshold
$yiq-contrasted-threshold: 195 !default;
// Typography
$body-color: $gray-600 !default;
$font-family-sans-serif: "Nunito", -apple-
system, BlinkMacSystemFont, "Segoe UI", Roboto, "Helvetica Neue", Arial, sans-
serif, "Apple Color Emoji", "Segoe UI Emoji", "Segoe UI Symbol", 'Noto Color Emoji' !defau
1t;
$font-weight-light: 300 !default;
// $font-weight-base: 400;
$headings-font-weight: 400 !default;
// Shadows
$box-shadow-sm: 0 0.125rem 0.25rem 0 rgba($gray-900, .2) !default;
$box-shadow: 0 0.15rem 1.75rem 0 rgba($gray-900, .15) !default;
// $box-shadow-lg: 0 1rem 3rem rgba($black, .175) !default;
// Borders Radius
$border-radius: 0.35rem !default;
$border-color: darken($gray-200, 2%);
// Spacing Variables
// Change below variable if the height of the navbar changes
$topbar-base-height: 4.375rem;
// Change below variable to change the width of the sidenav
$sidebar-base-width: 14rem;
// Change below variable to change the width of the sidenav when collapsed
$sidebar-collapsed-width: 6.5rem;
// Card
$card-cap-bg: $gray-100;
$card-border-color: $border-color;
// Adjust column spacing for symmetry
$spacer: 1rem;
$grid-gutter-width: $spacer * 1.5;
```

```
// Transitions
$transition-collapse: height .15s ease !default;

// Dropdowns
$dropdown-font-size: 0.85rem;
$dropdown-border-color: $border-color;
```

Sb-admin-2.css

```
@import "variables.scss";
// Import Bootstrap
@import "../vendor/bootstrap/scss/bootstrap.scss";
// Import Custom SB Admin 2 Mixins and Components
@import "mixins.scss";
@import "global.scss";
@import "utilities.scss";
// Custom Components
@import "dropdowns.scss";
@import "navs.scss";
@import "buttons.scss";
@import "cards.scss";
@import "charts.scss";
@import "login.scss";
@import "error.scss";
@import "footer.scss";
```

Changepassword.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');
//error_reporting(0);
if (strlen($_SESSION['uid']==0)) {
    header('location:logout.php');
    } else{
    if(isset($_POST['submit']))
{
    $empid=$_SESSION['uid'];
$cpassword=$_POST['currentpassword'];
$newpassword=$_POST['newpassword'];
$query=mysqli_query($con,"select ID from employeedetail where ID='$empid' and EmpPassword='$cpassword'");</pre>
```

```
$row=mysqli_fetch_array($query);
if($row>0){
$ret=mysqli_query($con,"update employeedetail set EmpPassword='$newpassword' where ID='$em
pid'");
$msg= "Your password successully changed";
} else {
$msg="Your current password is wrong";
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
  <meta name="description" content="">
  <meta name="author" content="">
  <title>Change Password</title>
  <!-- Custom fonts for this template-->
  <link href="vendor/fontawesome-free/css/all.min.css" rel="stylesheet" type="text/css">
  <link href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300,300i,400,400i,60</pre>
0,600i,700,700i,800,800i,900,900i" rel="stylesheet">
 <!-- Custom styles for this template-->
 <link href="css/sb-admin-2.min.css" rel="stylesheet">
<script type="text/javascript">
function checkpass()
if(document.changepassword.newpassword.value!=document.changepassword.confirmpassword.valu
e)
alert('New Password and Confirm Password field does not match');
document.changepassword.confirmpassword();
return false;
return true;
</script>
</head>
<body id="page-top">
```

```
<!-- Page Wrapper -->
  <div id="wrapper">
  <?php include once('includes/sidebar.php')?>
    <!-- End of Sidebar -->
   <!-- Content Wrapper -->
    <div id="content-wrapper" class="d-flex flex-column">
      <!-- Main Content -->
     <div id="content">
        <?php include_once('includes/header.php')?>
        <!-- End of Topbar -->
        <!-- Begin Page Content -->
        <div class="container-fluid">
          <!-- Page Heading -->
          <h1 class="h3 mb-4 text-gray-800">Change Password</h1>
xp style="font-size:16px; color:red" align="center"> <?php if($msg){</pre>
   echo $msg;
 } ?> 
<form name="changepassword" class="user" method="post" onsubmit="return checkpass();">
 <?php
$cid=$ SESSION['uid'];
$ret=mysqli_query($con,"select * from employeedetail where ID='$cid'");
while ($row=mysqli fetch array($ret)) {
?>
              <div class="row">
                <div class="col-4 mb-3">Current Password</div>
                   <div class="col-8 mb-3"> <input type="Password" class="form-</pre>
control form-control-
user" id="Password" name="currentpassword" value="" required="true"></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">New Password </div>
                     <div class="col-8 mb-3"> <input type="Password" class="form-</pre>
control form-control-
user" id="newpassword" name="newpassword" value="" required="true"></div>
                     </div>
                    <div class="row">
                    <div class="col-4 mb-3">Confirm Password </div>
                    <div class="col-8 mb-3">
```

```
<input type="Password" class="form-control form-control-</pre>
user" id="confirmpassword" name="confirmpassword" value="" required="true"></div>
                    </div>
<?php } ?>
                    <div class="row" style="margin-top:4%">
                      <div class="col-4"></div>
                      <div class="col-4">
                      <input type="submit" name="submit" value="Change" class="btn btn-</pre>
primary btn-user btn-block">
                    </div>
                    </div>
                  </form>
        </div>
        <!-- /.container-fluid -->
      </div>
      <!-- End of Main Content -->
      <!-- Footer -->
   <?php include_once('includes/footer.php');?>
      <!-- End of Footer -->
    </div>
    <!-- End of Content Wrapper -->
  </div>
  <!-- End of Page Wrapper -->
  <!-- Scroll to Top Button-->
  <a class="scroll-to-top rounded" href="#page-top">
    <i class="fas fa-angle-up"></i></i>
  </a>
  <!-- Bootstrap core JavaScript-->
  <script src="vendor/jquery/jquery.min.js"></script>
  <script src="vendor/bootstrap/js/bootstrap.bundle.min.js"></script>
  <!-- Core plugin JavaScript-->
  <script src="vendor/jquery-easing/jquery.easing.min.js"></script>
  <!-- Custom scripts for all pages-->
  <script src="js/sb-admin-2.min.js"></script>
  <script type="text/javascript">
    $(".jDate").datepicker({
```

```
format: 'yyyy-mm-dd',
   autoclose: true
}).datepicker("update", "10/10/2016");
   </script>

</body>
</html>
</php } ?>
```

Editmyeducation.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');
//error reporting(0);
if (strlen($_SESSION['uid']==0)) {
 header('location:logout.php');
 } else{
if(isset($_POST['submit']))
$empid=$_SESSION['uid'];
$cpassword=$_POST['currentpassword'];
$newpassword=$_POST['newpassword'];
$query=mysqli_query($con,"select ID from employeedetail where ID='$empid' and EmpPasswor
d='$cpassword'");
$row=mysqli_fetch_array($query);
if($row>0){
$ret=mysqli_query($con,"update employeedetail set EmpPassword='$newpassword' where ID='$em
$msg= "Your password successully changed";
} else {
$msg="Your current password is wrong";
<!DOCTYPE html>
<html lang="en">
<head>
 <meta charset="utf-8">
```

```
<meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
  <meta name="description" content="">
  <meta name="author" content="">
  <title>Change Password</title>
  <!-- Custom fonts for this template-->
  <link href="vendor/fontawesome-free/css/all.min.css" rel="stylesheet" type="text/css">
  <link href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300,300i,400,400i,60</pre>
0,600i,700,700i,800,800i,900,900i" rel="stylesheet">
  <!-- Custom styles for this template-->
  <link href="css/sb-admin-2.min.css" rel="stylesheet">
<script type="text/javascript">
function checkpass()
if(document.changepassword.newpassword.value!=document.changepassword.confirmpassword.valu
e)
alert('New Password and Confirm Password field does not match');
document.changepassword.confirmpassword();
return false;
return true;
</script>
</head>
<body id="page-top">
  <!-- Page Wrapper -->
  <div id="wrapper">
    <!-- Sidebar -->
  <?php include once('includes/sidebar.php')?>
    <!-- End of Sidebar -->
    <!-- Content Wrapper -->
    <div id="content-wrapper" class="d-flex flex-column">
      <!-- Main Content -->
      <div id="content">
        <!-- Topbar -->
         <?php include_once('includes/header.php')?>
        <!-- Begin Page Content -->
        <div class="container-fluid">
          <!-- Page Heading -->
          <h1 class="h3 mb-4 text-gray-800">Change Password</h1>
```

```
 <?php if($msg){</pre>
   echo $msg;
 } ?> 
<form name="changepassword" class="user" method="post" onsubmit="return checkpass();">
 <?php
$cid=$ SESSION['uid'];
$ret=mysqli_query($con,"select * from employeedetail where ID='$cid'");
$cnt=1;
while ($row=mysqli fetch array($ret)) {
?>
             <div class="row">
              <div class="col-4 mb-3">Current Password</div>
                 <div class="col-8 mb-3"> <input type="Password" class="form-</pre>
control form-control-
user" id="Password" name="currentpassword" value="" required="true"></div>
                  </div>
                  <div class="row">
                    <div class="col-4 mb-3">New Password </div>
                   <div class="col-8 mb-3"> <input type="Password" class="form-</pre>
control form-control-
</div>
                  <div class="row">
                  <div class="col-4 mb-3">Confirm Password </div>
                  <div class="col-8 mb-3">
                    <input type="Password" class="form-control form-control-</pre>
user" id="confirmpassword" name="confirmpassword" value="" required="true"></div>
                  </div>
<?php } ?>
                  <div class="row" style="margin-top:4%">
                    <div class="col-4"></div>
                    <div class="col-4">
                    <input type="submit" name="submit" value="Change" class="btn btn-</pre>
primary btn-user btn-block">
                  </div>
                  </div>
                </form>
       </div>
       <!-- /.container-fluid -->
     </div>
```

```
<!-- End of Main Content -->
      <!-- Footer -->
   <?php include_once('includes/footer.php');?>
      <!-- End of Footer -->
    </div>
    <!-- End of Content Wrapper -->
  </div>
  <!-- End of Page Wrapper -->
  <!-- Scroll to Top Button-->
  <a class="scroll-to-top rounded" href="#page-top">
    <i class="fas fa-angle-up"></i></i>
  </a>
  <!-- Bootstrap core JavaScript-->
  <script src="vendor/jquery/jquery.min.js"></script>
  <script src="vendor/bootstrap/js/bootstrap.bundle.min.js"></script>
  <!-- Core plugin JavaScript-->
  <script src="vendor/jquery-easing/jquery.easing.min.js"></script>
  <!-- Custom scripts for all pages-->
  <script src="js/sb-admin-2.min.js"></script>
  <script type="text/javascript">
    $(".jDate").datepicker({
    format: 'yyyy-mm-dd',
    autoclose: true
}).datepicker("update", "10/10/2016");
 </script>
</body>
</html>
<?php } ?>
```

Editmyexp.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');
//error_reporting(0);
if (strlen($_SESSION['uid']==0)) {
  header('location:logout.php');
  } else{</pre>
```

```
if(isset($_POST['submit']))
    $eid=$ SESSION['uid'];
    $emp1name=$_POST['emp1name'];
    $emp1des=$ POST['emp1des'];
    $emp1ctc=$_POST['emp1ctc'];
    $emp1wd=$_POST['emp1workduration'];
    $emp2name=$_POST['emp2name'];
    $emp2des=$_POST['emp2des'];
    $emp2ctc=$_POST['emp2ctc'];
    $emp2wd=$_POST['emp2workduration'];
    $emp3name=$ POST['emp3name'];
    $emp3des=$ POST['emp3des'];
    $emp3ctc=$_POST['emp3ctc'];
    $emp3wd=$_POST['emp3workduration'];
     $query=mysqli_query($con, "update empexpireince set Employer1Name='$emp1name', Emplo
yer1Designation ='$emp1des', Employer1CTC ='$emp1ctc', Employer1WorkDuration='$emp1wd', Em
ployer2Name='$emp2name', Employer2Designation ='$emp2des', Employer2CTC ='$emp2ctc', Empl
oyer2WorkDuration='$emp2wd', Employer3Name='$emp3name', Employer3Designation ='$emp3des',
Employer3CTC ='$emp3ctc', Employer3WorkDuration='$emp3wd' where EmpID='$eid'");
   if ($query) {
   $msg="Your Expirence has been updated.";
 else
     $msg="Something Went Wrong. Please try again.";
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
  <meta name="description" content="">
  <meta name="author" content="">
 <title>Edit My Expirence</title>
 <!-- Custom fonts for this template-->
 <link href="vendor/fontawesome-free/css/all.min.css" rel="stylesheet" type="text/css">
  <link href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300,300i,400,400i,60</pre>
0,600i,700,700i,800,800i,900,900i" rel="stylesheet">
 <!-- Custom styles for this template-->
  <link href="css/sb-admin-2.min.css" rel="stylesheet">
```

```
</head>
<body id="page-top">
 <!-- Page Wrapper -->
 <div id="wrapper">
  <?php include_once('includes/sidebar.php')?>
    <!-- End of Sidebar -->
   <!-- Content Wrapper -->
    <div id="content-wrapper" class="d-flex flex-column">
     <!-- Main Content -->
     <div id="content">
        <?php include_once('includes/header.php')?>
       <!-- Begin Page Content -->
       <div class="container-fluid">
         <!-- Page Heading -->
         <h1 class="h3 mb-4 text-gray-800">Edit My Experience</h1>
 <?php if($msg){</pre>
    echo $msg;
 } ?> 
<form class="user" method="post" action="">
 <?php
$empid=$ SESSION['uid'];
$ret=mysqli_query($con,"select * from empexpireince where EmpID='$empid'");
$num=mysqli num rows($ret);
if($num>0){
$cnt=1;
while ($row=mysqli_fetch_array($ret)) {
?>
              <div class="row">
               <div class="col-4 mb-3">Employer1 Name</div>
                  <div class="col-8 mb-3"> <input type="text" class="form-control form-</pre>
control-user" id="emp1name" name="emp1name" aria-
describedby="emailHelp" value="<?php echo $row['Employer1Name'];?>"></div>
                   </div>
                   <div class="row">
                     <div class="col-4 mb-3">Employer1 Designation </div>
                    <div class="col-8 mb-3"> <input type="text" class="form-</pre>
control form-control-user" id="emp1des" name="emp1des" aria-
describedby="emailHelp" value="<?php echo $row['Employer1Designation'];?>"></div>
                    </div>
```

```
<div class="row">
                    <div class="col-4 mb-3">Employer1 CTC </div>
                    <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp1ctc" name="emp1ctc" aria-
describedby="emailHelp" value="<?php echo $row['Employer1CTC'];?>"></div>
                    <div class="row">
                      <div class="col-4 mb-3">Employer1 WorkDuration</div>
                     <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp1workduration" name="emp1workduration" aria-
describedby="emailHelp" value="<?php echo $row['Employer1WorkDuration'];?>">
                    </div></div>
                    <div class="row">
                <div class="col-4 mb-3">Employer2 Name</div>
                   <div class="col-8 mb-3"> <input type="text" class="form-control form-</pre>
control-user" id="emp2name" name="emp2name" aria-
describedby="emailHelp" value="<?php echo $row['Employer2Name'];?>"></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">Employer2 Designation </div>
                     <div class="col-8 mb-3"> <input type="text" class="form-</pre>
control form-control-user" id="emp2des" name="emp2des" aria-
describedby="emailHelp" value="<?php echo $row['Employer2Designation'];?>"></div>
                     </div>
                    <div class="row">
                    <div class="col-4 mb-3">Employer2 CTC </div>
                    <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp2ctc" name="emp2ctc" aria-
describedby="emailHelp" value="<?php echo $row['Employer2CTC'];?>"></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">Employer2 WorkDuration</div>
                     <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp2workduration" name="emp2workduration" aria-
describedby="emailHelp" value="<?php echo $row['Employer2WorkDuration'];?>">
                    </div></div>
                    <div class="row">
                <div class="col-4 mb-3">Employer3 Name</div>
                   <div class="col-8 mb-3"> <input type="text" class="form-control form-</pre>
control-user" id="emp3name" name="emp3name" aria-
describedby="emailHelp" value="<?php echo $row['Employer3Name'];?>"></div>
```

```
<div class="row">
                      <div class="col-4 mb-3">Employer3 Designation </div>
                     <div class="col-8 mb-3"> <input type="text" class="form-</pre>
control form-control-user" id="emp3des" name="emp3des" aria-
describedby="emailHelp" value="<?php echo $row['Employer3Designation'];?>"></div>
                     </div>
                    <div class="row">
                    <div class="col-4 mb-3">Employer3 CTC </div>
                    <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp3ctc" name="emp3ctc" aria-
describedby="emailHelp" value="<?php echo $row['Employer3CTC'];?>"></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">Employer3 WorkDuration</div>
                     <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp3workduration" name="emp3workduration" aria-
describedby="emailHelp" value="<?php echo $row['Employer3WorkDuration'];?>">
                    </div></div>
<?php } ?>
                    <div class="row" style="margin-top:4%">
                      <div class="col-4"></div>
                      <div class="col-4">
                      <input type="submit" name="submit" value="Update" class="btn btn-</pre>
primary btn-user btn-block">
                    </div>
                    </div>
                  </form>
<?php } else {?>
  <div class="row" style="margin-top:4%">
                      <div class="col-12" style="font-</pre>
size:18px; color:red;">First Add your experience details after that you can edit experienc
e details.</div>
                    </div>
<?php } ?>
        </div>
        <!-- /.container-fluid -->
      </div>
      <!-- End of Main Content -->
      <!-- Footer -->
```

```
<?php include_once('includes/footer.php');?>
      <!-- End of Footer -->
    </div>
    <!-- End of Content Wrapper -->
  </div>
  <!-- End of Page Wrapper -->
  <!-- Scroll to Top Button-->
  <a class="scroll-to-top rounded" href="#page-top">
    <i class="fas fa-angle-up"></i></i>
  </a>
  <!-- Bootstrap core JavaScript-->
  <script src="vendor/jquery/jquery.min.js"></script>
  <script src="vendor/bootstrap/js/bootstrap.bundle.min.js"></script>
  <!-- Core plugin JavaScript-->
  <script src="vendor/jquery-easing/jquery.easing.min.js"></script>
  <!-- Custom scripts for all pages-->
  <script src="js/sb-admin-2.min.js"></script>
  <script type="text/javascript">
    $(".jDate").datepicker({
    format: 'yyyy-mm-dd',
    autoclose: true
}).datepicker("update", "10/10/2016");
 </script>
</body>
</html>
<?php } ?>
```

Forgetpassword.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');

if(isset($_POST['submit']))
    {
        $empid=$_POST['empid'];
        $Email=$_POST['Email'];</pre>
```

```
$query=mysqli_query($con,"select ID from employeedetail where EmpEmail='$Email' a
nd EmpCode='$empid' ");
   $ret=mysqli_fetch_array($query);
   if($ret>0){
     $_SESSION['empid']=$empid;
     $ SESSION['email']=$Email;
     header('location:resetpassword.php');
   else{
     $msg="Invalid Details. Please try again.";
<!DOCTYPE html>
<html lang="en">
<head>
 <meta charset="utf-8">
 <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="Employee Record management System in php and mysql">
  <meta name="description" content="Employee Record management System in php and mysql">
  <meta name="author" content="Sarita Pandey">
  <title>ERMS | Forgot Password</title>
 <!-- Custom fonts for this template-->
 <link href="vendor/fontawesome-free/css/all.min.css" rel="stylesheet" type="text/css">
  <link href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300,300i,400,400i,60</pre>
0,600i,700,700i,800,800i,900,900i" rel="stylesheet">
 <!-- Custom styles for this template-->
 <link href="css/sb-admin-2.min.css" rel="stylesheet">
</head>
<body class="bg-gradient-primary">
 <div class="container">
    <h3 align="center" style="color: black; padding-</pre>
top: 2%">Employee Record Managment System</h3>
    <div class="row justify-content-center">
     <div class="col-xl-10 col-lg-12 col-md-9">
        <div class="card o-hidden border-0 shadow-lg my-5">
          <div class="card-body p-0">
```

```
<div class="row">
             <div class="col-lg-6 d-none d-lg-block bg-login-image"></div>
             <div class="col-lg-6">
                <div class="p-5">
                 <div class="text-center">
                   <h1 class="h4 text-gray-900 mb-4">Recover your password!</h1>
          <?php if($msg){</pre>
   echo $msg;
  } ?> 
                 <form class="user" method="post" action="">
                   <div class="form-group">
                     <input type="email" class="form-control form-control-</pre>
user" id="Email" name="Email" aria-
describedby="emailHelp" placeholder="Enter Email Address..." required="true">
                   </div>
                   <div class="form-group">
                     <input type="text" class="form-control form-control-</pre>
user" id="empid" name="empid" placeholder="Enter your employee Code" required="true">
                   </div>
                    <input type="submit" class="btn btn-primary btn-user btn-
block" name="submit" value="reset">
                   <hr>>
                 </form>
                 <div class="text-center">
                   <a class="small" href="loginerms.php">Already have an account? Login!
/a>
                 </div>
               </div>
             </div>
           </div>
         </div>
       </div>
     </div>
    </div>
  </div>
  <!-- Bootstrap core JavaScript-->
  <script src="vendor/jquery/jquery.min.js"></script>
  <script src="vendor/bootstrap/js/bootstrap.bundle.min.js"></script>
  <!-- Core plugin JavaScript-->
  <script src="vendor/jquery-easing/jquery.easing.min.js"></script>
  <!-- Custom scripts for all pages-->
```

```
<script src="js/sb-admin-2.min.js"></script>
</body>
</html>
```

Index.php

```
<!DOCTYPE html>
<html lang="en">
<head>
 <meta charset="utf-8">
 <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
  <meta name="description" content="">
  <meta name="author" content="">
 <title>ERMS | Home Page</title>
 <!-- Custom fonts for this template-->
 <link href="vendor/fontawesome-free/css/all.min.css" rel="stylesheet" type="text/css">
  <link href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300,300i,400,400i,60</pre>
0,600i,700,700i,800,800i,900,900i" rel="stylesheet">
 <!-- Custom styles for this template-->
 <link href="css/sb-admin-2.min.css" rel="stylesheet">
</head>
<body id="page-top">
 <!-- Page Wrapper -->
 <div id="wrapper" >
    <!-- Content Wrapper -->
    <div id="content-wrapper" class="d-flex flex-column">
     <!-- Main Content -->
      <div id="content">
        <!-- Begin Page Content -->
        <div class="container-fluid">
          <!-- Page Heading -->
```

```
<div class="d-sm-flex align-items-center justify-content-between mb-</pre>
4" style="margin-top: 2%">
            <h1 class="h3 mb-0 text-gray-800">Employee Record Management System</h1>
          </div>
          <div class="row">
            <!-- Earnings (Monthly) Card Example -->
            <div class="col-xl-4 col-md-6 mb-4">
              <div class="card border-left-primary shadow h-100 py-2">
                <div class="card-body">
                  <div class="row no-gutters align-items-center">
                    <div class="col mr-2"> <a href="loginerms.php">
                      <div class="text-xs font-weight-bold text-primary text-uppercase mb-</pre>
1">User Signin</div>
                      </a>
                     </div>
                    <div class="col-auto">
                      <i class="fas fa-user fa-2x text-gray-300"></i></i>
                  </div>
                </div>
              </div>
            </div>
            <!-- Earnings (Monthly) Card Example -->
            <div class="col-x1-4 col-md-6 mb-4">
              <div class="card border-left-success shadow h-100 py-2">
                <div class="card-body">
                  <div class="row no-gutters align-items-center">
                    <div class="col mr-2">
                      <a href="registererms.php">
                      <div class="text-xs font-weight-bold text-success text-uppercase mb-</pre>
1">User Signup</div>
                 </a>
                    </div>
                    <div class="col-auto">
                      <i class="fas fa-user fa-2x text-gray-300"></i></i>
                    </div>
                  </div>
                </div>
              </div>
            </div>
            <!-- Earnings (Monthly) Card Example -->
            <div class="col-x1-4 col-md-6 mb-4">
              <div class="card border-left-info shadow h-100 py-2">
                <div class="card-body">
                  <div class="row no-gutters align-items-center">
                    <div class="col mr-2">
                        <a href="admin/">
```

```
<div class="text-xs font-weight-bold text-info text-uppercase mb-</pre>
1">Admin Login</div>
                   </a>
                    </div>
                    <div class="col-auto">
                      <i class="fas fa-user fa-2x text-gray-300"></i></i>
                  </div>
                </div>
              </div>
            </div>
            <!-- Pending Requests Card Example -->
          </div>
        </div>
        <!-- /.container-fluid -->
      </div>
      <!-- End of Main Content -->
      <!-- Footer -->
    <?php include once('includes/footer.php');?>
      <!-- End of Footer -->
    </div>
    <!-- End of Content Wrapper -->
  </div>
  <!-- End of Page Wrapper -->
  <!-- Scroll to Top Button-->
  <a class="scroll-to-top rounded" href="#page-top">
    <i class="fas fa-angle-up"></i></i>
  </a>
 <!-- Logout Modal-->
  <div class="modal fade" id="logoutModal" tabindex="-1" role="dialog" aria-</pre>
labelledby="exampleModalLabel" aria-hidden="true">
    <div class="modal-dialog" role="document">
      <div class="modal-content">
        <div class="modal-header">
          <h5 class="modal-title" id="exampleModalLabel">Ready to Leave?</h5>
          <button class="close" type="button" data-dismiss="modal" aria-label="Close">
            <span aria-hidden="true">x</span>
          </button>
        </div>
        <div class="modal-
body">Select "Logout" below if you are ready to end your current session.</div>
        <div class="modal-footer">
```

```
<button class="btn btn-secondary" type="button" data-</pre>
dismiss="modal">Cancel</button>
          <a class="btn btn-primary" href="login.html">Logout</a>
        </div>
      </div>
    </div>
  </div>
  <!-- Bootstrap core JavaScript-->
  <script src="vendor/jquery/jquery.min.js"></script>
  <script src="vendor/bootstrap/js/bootstrap.bundle.min.js"></script>
  <!-- Core plugin JavaScript-->
  <script src="vendor/jquery-easing/jquery.easing.min.js"></script>
 <!-- Custom scripts for all pages-->
  <script src="js/sb-admin-2.min.js"></script>
</body>
</html>
```

Loginerms.php

```
<?php
session_start();
error reporting(0);
include('includes/dbconnection.php');
if(isset($_POST['login']))
    $Email=$_POST['Email'];
    $Password=$ POST['Password'];
    $query=mysqli_query($con,"select ID from employeedetail where EmpEmail='$Email' && Em
pPassword='$Password' ");
    $ret=mysqli_fetch_array($query);
    if($ret>0){
      $_SESSION['uid']=$ret['ID'];
    header('location:welcome.php');
    else{
      $msg="Invalid Details.";
<!DOCTYPE html>
<html lang="en">
```

```
<meta charset="utf-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="Employee Record management System in php and mysql">
  <meta name="description" content="Employee Record management System in php and mysql">
  <meta name="author" content="Sarita Pandey">
 <title>ERMS Employee Login</title>
 <!-- Custom fonts for this template-->
 <link href="vendor/fontawesome-free/css/all.min.css" rel="stylesheet" type="text/css">
  <link href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300,300i,400,400i,60</pre>
0,600i,700,700i,800,800i,900,900i" rel="stylesheet">
 <!-- Custom styles for this template-->
 <link href="css/sb-admin-2.min.css" rel="stylesheet">
</head>
<body class="bg-gradient-primary">
 <div class="container">
    <h3 align="center" style="color: black; padding-</pre>
top: 2%">Employee Record Managment System</h3>
    <div class="row justify-content-center">
     <div class="col-xl-10 col-lg-12 col-md-9">
       <div class="card o-hidden border-0 shadow-lg my-5">
         <div class="card-body p-0">
           <div class="row">
             <div class="col-lg-6 d-none d-lg-block bg-login-image"></div>
             <div class="col-lg-6">
               <div class="p-5">
                 <div class="text-center">
                   <h1 class="h4 text-gray-900 mb-4">Welcome Back!</h1>
                 </div>
                  <?php if($msg){</pre>
   echo $msg;
  } ?> 
                 <form class="user" method="post" action="">
                   <div class="form-group">
                     <input type="email" class="form-control form-control-</pre>
user" id="Email" name="Email" aria-
describedby="emailHelp" placeholder="Enter Email Address..." required="true">
                    </div>
                   <div class="form-group">
```

```
<input type="password" class="form-control form-control-</pre>
user" id="Password" name="Password" placeholder="Password" required="true">
                    </div>
                     <input type="submit" class="btn btn-primary btn-user btn-
block" name="login" value="login">
                    <hr>>
                  </form>
                  <hr>>
                  <div class="text-center">
                    <a class="small" href="forgetpassword.php">Forgot Password?</a>
                  </div>
                  <div class="text-center">
                    <a class="small" href="registererms.php">Create an Account!</a>
                  </div>
                </div>
              </div>
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
  <!-- Bootstrap core JavaScript-->
  <script src="vendor/jquery/jquery.min.js"></script>
  <script src="vendor/bootstrap/js/bootstrap.bundle.min.js"></script>
  <!-- Core plugin JavaScript-->
  <script src="vendor/jquery-easing/jquery.easing.min.js"></script>
 <!-- Custom scripts for all pages-->
 <script src="js/sb-admin-2.min.js"></script>
</body>
</html>
```

Logout.php

```
<?php
session_start();
session_unset();
session_destroy();</pre>
```

```
header('location:loginerms.php');
?>
```

Myeducation.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');
//error_reporting(0);
if (strlen($_SESSION['uid']==0)) {
 header('location:logout.php');
 } else{
if(isset($_POST['submit']))
    $eid=$_SESSION['uid'];
     $coursepg=$_POST['coursepg'];
    $schoolclgpg=$_POST['schoolclgpg'];
   $yoppg=$_POST['yoppg'];
    $pipg=$_POST['pipg'];
    $coursegra=$_POST['coursegra'];
   $schoolclggra=$_POST['schoolclggra'];
    $yopgra=$_POST['yopgra'];
   $pigra=$_POST['pigra'];
    $coursessc=$ POST['coursessc'];
   $schoolclgssc=$_POST['schoolclgssc'];
    $yopssc=$_POST['yopssc'];
   $pissc=$_POST['pissc'];
    $coursehsc=$_POST['coursehsc'];
   $schoolclghsc=$_POST['schoolclghsc'];
    $yophsc=$_POST['yophsc'];
    $pihsc=$_POST['pihsc'];
     $query=mysqli_query($con, "insert into empeducation( EmpID,CoursePG, SchoolCollegePG,
YearPassingPG, PercentagePG,CourseGra, SchoolCollegeGra,YearPassingGra,PercentageGra,
CourseSSC, SchoolCollegeSSC, YearPassingSSC, PercentageSSC, CourseHSC, SchoolCollegeHSC,
YearPassingHSC, PercentageHSC) value('$eid','$coursepg', '$schoolclgpg', '$yoppg', '$pipg'
$coursegra', '$schoolclggra', '$yopgra', '$pigra', '$coursessc', '$schoolclgssc', '$yops
sc', '$pissc', '$coursehsc', '$schoolclghsc', '$yophsc', '$pihsc' )");
    if ($query) {
   $msg="Your Education data has been submitted succeesfully.";
 else
      $msg="Something Went Wrong. Please try again.";
```

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="utf-8">
 <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
 <meta name="description" content="">
 <meta name="author" content="">
 <title>My Education</title>
 <!-- Custom fonts for this template-->
 <link href="vendor/fontawesome-free/css/all.min.css" rel="stylesheet" type="text/css">
  <link href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300,300i,400,400i,60</pre>
0,600i,700,700i,800,800i,900,900i" rel="stylesheet">
<link href="vendor/datatables/dataTables.bootstrap4.min.css" rel="stylesheet">
 <!-- Custom styles for this template-->
 <link href="css/sb-admin-2.min.css" rel="stylesheet">
</head>
<body id="page-top">
 <!-- Page Wrapper -->
 <div id="wrapper">
  <?php include_once('includes/sidebar.php')?>
    <!-- Content Wrapper -->
    <div id="content-wrapper" class="d-flex flex-column">
      <!-- Main Content -->
     <div id="content">
        <?php include_once('includes/header.php')?>
        <!-- End of Topbar -->
        <!-- Begin Page Content -->
        <div class="container-fluid">
          <!-- Page Heading -->
          <h1 class="h3 mb-4 text-gray-800">My Education</h1>
style="font-size:16px; color:red" align="center"> <?php if($msg){</pre>
    echo $msg;
 } ?>
```

```
<?php
$empid=$ SESSION['uid'];
$query=mysqli_query($con,"select * from empeducation where EmpID=$empid");
$row=mysqli_fetch_array($query);
if($row>0)
?>
<p style="font-
size:16px; color:red" align="center">Your Education details already added. Now you can onl
y edit the record. 
Post Graduate Course Name
 <?php echo $row['CoursePG'];?>
Post Graduate School/College
 <?php echo $row['SchoolCollegePG'];?>
Year of Passing in PG
 <?php echo $row['YearPassingPG'];?>
Percent in PG
 <?php echo $row['PercentagePG'];?>
Graduation Course Name
 <?php echo $row['CourseGra'];?>
Graduate School/College
 <?php echo $row['SchoolCollegeGra'];?>
Year of Passing in Graduation
 <?php echo $row['YearPassingGra'];?>
Percent in Graduation
 <?php echo $row['PercentageGra'];?>
SSC Course Name
 <?php echo $row['CourseSSC'];?>
SSC School/College
 <?php echo $row['SchoolCollegeSSC'];?>
```

```
Year of Passing in SSC
 <?php echo $row['YearPassingSSC'];?>
Percent in SSC
 <?php echo $row['PercentageSSC'];?>
HSC Course Name
 <?php echo $row['CourseHSC'];?>
HSC School/College
 <?php echo $row['SchoolCollegeHSC'];?>
Year of Passing in HSC
 <?php echo $row['YearPassingHSC'];?>
Percent in HSC
 <?php echo $row['PercentageHSC'];?>
<?php } else {?>
<form class="user" method="post" action="">
             <div class="row">
              <div class="col-4 mb-3">Course Post Graduation</div>
                 <div class="col-8 mb-3"> <input type="text" class="form-control form-</pre>
control-user" id="coursepg" name="coursepg" aria-describedby="emailHelp" value=""></div>
                  </div>
                  <div class="row">
                   <div class="col-4 mb-3">School/College Post Graduation </div>
                  <div class="col-8 mb-3"> <input type="text" class="form-</pre>
control form-control-user" id="schoolclgpg" name="schoolclgpg" aria-
describedby="emailHelp" value=""></div>
                  </div>
                  <div class="row">
                  <div class="col-4 mb-3">Year of Passing Post Graduation </div>
                  <div class="col-8 mb-3">
                   <input type="text" class="form-control form-control-</pre>
user" id="yoppg" name="yoppg" aria-describedby="emailHelp" value=""></div>
                 </div>
                 <div class="row">
```

```
<div class="col-4 mb-3">Percentage in PG</div>
                     <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="pipg" name="pipg" aria-describedby="emailHelp" value="">
                    </div></div>
                    <div class="row">
                <div class="col-4 mb-3">Course Graduation</div>
                   <div class="col-8 mb-3"> <input type="text" class="form-control form-</pre>
control-user" id="coursegra" name="coursegra" aria-
describedby="emailHelp" value="" required="true"></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">School/College Graduation </div>
                     <div class="col-8 mb-3"> <input type="text" class="form-</pre>
control form-control-user" id="schoolclggra" name="schoolclggra" aria-
describedby="emailHelp" value="" required="true"></div>
                     </div>
                    <div class="row">
                    <div class="col-4 mb-3">Year of Passing Graduation </div>
                    <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="yopgra" name="yopgra" aria-
describedby="emailHelp" value="" required="true"></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">Percentage in Graduation</div>
                     <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="pigra" name="pigra" aria-describedby="emailHelp" value="" required="true">
                    </div></div>
                    <div class="row">
                <div class="col-4 mb-3">Course SSC</div>
                                              <input type="text" class="form-control form-</pre>
                   <div class="col-8 mb-3">
control-user" id="coursessc" name="coursessc" aria-
describedby="emailHelp" value="" required="true"></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">School/College SSC </div>
                     <div class="col-8 mb-3"> <input type="text" class="form-</pre>
control form-control-user" id="schoolclgssc" name="schoolclgssc" aria-
describedby="emailHelp" value="" required="true"></div>
                     </div>
                    <div class="row">
                    <div class="col-4 mb-3">Year of Passing SSC </div>
                    <div class="col-8 mb-3">
```

```
<input type="text" class="form-control form-control-</pre>
user" id="yopssc" name="yopssc" aria-
describedby="emailHelp" value="" required="true"></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">Percentage in SSC</div>
                     <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="pissc" name="pissc" aria-describedby="emailHelp" value="" required="true">
                    </div></div>
                    <div class="row">
                <div class="col-4 mb-3">Course HSC</div>
                   <div class="col-8 mb-3"> <input type="text" class="form-control form-</pre>
control-user" id="coursehsc" name="coursehsc" aria-
describedby="emailHelp" value="" required="true"></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">School/College HSC </div>
                     <div class="col-8 mb-3"> <input type="text" class="form-</pre>
control form-control-user" id="schoolclghsc" name="schoolclghsc" aria-
describedby="emailHelp" value="" required="true"></div>
                     </div>
                    <div class="row">
                    <div class="col-4 mb-3">Year of Passing HSC </div>
                    <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="yophsc" name="yophsc" aria-
describedby="emailHelp" value="" required="true"></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">Percentage in HSC</div>
                     <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="pihsc" name="pihsc" aria-describedby="emailHelp" value="" required="true">
                    </div></div>
                    <div class="row" style="margin-top:4%">
                      <div class="col-4"></div>
                      <div class="col-4">
                      <input type="submit" name="submit" value="submit" class="btn btn-</pre>
primary btn-user btn-block">
                    </div>
                    </div>
                  </form>
<?php } ?>
```

```
</div>
           </div>
           <!-- End of Main Content -->
           <!-- Footer -->
     <?php include_once('includes/footer.php');?>
           <!-- End of Footer -->
       </div>
       <!-- End of Content Wrapper -->
   </div>
   <!-- End of Page Wrapper -->
   <!-- Scroll to Top Button-->
   <a class="scroll-to-top rounded" href="#page-top">
       <i class="fas fa-angle-up"></i></i>
   </a>
   <!-- Bootstrap core JavaScript-->
   <script src="vendor/jquery/jquery.min.js"></script>
   <script src="vendor/bootstrap/js/bootstrap.bundle.min.js"></script>
   <!-- Core plugin JavaScript-->
   <script src="vendor/jquery-easing/jquery.easing.min.js"></script>
   <!-- Page level plugins -->
   <script src="vendor/datatables/jquery.dataTables.min.js"></script>
   <script src="vendor/datatables/dataTables.bootstrap4.min.js"></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script>
   <!-- Page level custom scripts -->
   <script src="js/demo/datatables-demo.js"></script>
   <!-- Custom scripts for all pages-->
   <script src="js/sb-admin-2.min.js"></script>
   <script type="text/javascript">
       $(".jDate").datepicker({
       format: 'yyyy-mm-dd',
       autoclose: true
}).datepicker("update", "10/10/2016");
   </script>
</body>
</html>
<?php } ?>
```

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');
//error reporting(0);
if (strlen($_SESSION['uid']==0)) {
 header('location:logout.php');
 } else{
if(isset($_POST['submit']))
    $eid=$_SESSION['uid'];
     $emp1name=$ POST['emp1name'];
    $emp1des=$ POST['emp1des'];
    $emp1ctc=$_POST['emp1ctc'];
    $emp1wd=$_POST['emp1workduration'];
    $emp2name=$ POST['emp2name'];
    $emp2des=$_POST['emp2des'];
   $emp2ctc=$ POST['emp2ctc'];
    $emp2wd=$_POST['emp2workduration'];
    $emp3name=$_POST['emp3name'];
    $emp3des=$_POST['emp3des'];
    $emp3ctc=$ POST['emp3ctc'];
    $emp3wd=$_POST['emp3workduration'];
     $query=mysqli query($con, "insert into empexpireince ( EmpID,Employer1Name, Employer1
Designation, Employer1CTC, Employer1WorkDuration, Employer2Name, Employer2Designation, E
mployer2CTC, Employer2WorkDuration, Employer3Name, Employer3Designation, Employer3CTC, Emp
loyer3WorkDuration) value('$eid','$emp1name', '$emp1des', '$emp1ctc', '$emp1wd', '$emp2nam
e', '$emp2des', '$emp2ctc', '$emp2wd', '$emp3name', '$emp3des', '$emp3ctc', '$emp3wd' )");
   if ($query) {
   $msg="Your Expirence data has been submitted succeesfully.";
 else
     $msg="Something Went Wrong. Please try again.";
<!DOCTYPE html>
<html lang="en">
<head>
 <meta charset="utf-8">
 <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
  <meta name="description" content="">
  <meta name="author" content="">
  <title>My Experience</title>
```

```
<!-- Custom fonts for this template-->
 <link href="vendor/fontawesome-free/css/all.min.css" rel="stylesheet" type="text/css">
 <link href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300,300i,400,400i,60</pre>
0,600i,700,700i,800,800i,900,900i" rel="stylesheet">
 <!-- Custom styles for this template-->
 <link href="css/sb-admin-2.min.css" rel="stylesheet">
</head>
<body id="page-top">
 <!-- Page Wrapper -->
 <div id="wrapper">
 <?php include once('includes/sidebar.php')?>
   <!-- End of Sidebar -->
   <!-- Content Wrapper -->
   <div id="content-wrapper" class="d-flex flex-column">
     <!-- Main Content -->
     <div id="content">
       <!-- Topbar -->
       <?php include once('includes/header.php')?>
       <!-- Begin Page Content -->
       <div class="container-fluid">
        <!-- Page Heading -->
        <h1 class="h3 mb-4 text-gray-800">My Experience</h1>
 <?php if($msg){</pre>
   echo $msg;
 } ?> 
 <?php
$empid=$ SESSION['uid'];
$query=mysqli_query($con,"select * from empexpireince where EmpID=$empid");
$row=mysqli_fetch_array($query);
if($row>0)
?>
size:16px; color:red" align="center">Your Experience details already added. Now you can on
ly edit the record. 
First Employer Name
```

```
<?php echo $row['Employer1Name'];?>
 First Employer Designation
 <?php echo $row['Employer1Designation'];?>
First Employer CTC
 <?php echo $row['Employer1CTC'];?>
First Employer Work Duration
 <?php echo $row['Employer1WorkDuration'];?>
Second Employer Name
 <?php echo $row['Employer2Name'];?>
Second Employer Designation
 <?php echo $row['Employer2Designation'];?>
Second Employer CTC
 <?php echo $row['Employer2CTC'];?>
Second Employer Work Duration
 <?php echo $row['Employer2WorkDuration'];?>
Third Employer Name
 <?php echo $row['Employer3Name'];?>
Third Employer Designation
 <?php echo $row['Employer3Designation'];?>
Third Employer CTC
 <?php echo $row['Employer3CTC'];?>
Third Employer Work Duration
 <?php echo $row['Employer3WorkDuration'];?>
<?php } else {?>
```

```
<form class="user" method="post" action="">
               <div class="row">
                <div class="col-4 mb-3">Employer1 Name</div>
                   <div class="col-8 mb-3"> <input type="text" class="form-control form-</pre>
control-user" id="emp1name" name="emp1name" aria-describedby="emailHelp" value=""></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">Employer1 Designation </div>
                     <div class="col-8 mb-3"> <input type="text" class="form-</pre>
control form-control-user" id="emp1des" name="emp1des" aria-
describedby="emailHelp" value=""></div>
                     </div>
                    <div class="row">
                    <div class="col-4 mb-3">Employer1 CTC </div>
                    <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp1ctc" name="emp1ctc" aria-describedby="emailHelp" value=""></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">Employer1 WorkDuration</div>
                     <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp1workduration" name="emp1workduration" aria-describedby="emailHelp" value="">
                    </div></div>
                    <div class="row">
                <div class="col-4 mb-3">Employer2 Name</div>
                   <div class="col-8 mb-3"> <input type="text" class="form-control form-</pre>
control-user" id="emp2name" name="emp2name" aria-describedby="emailHelp" value=""></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">Employer2 Designation </div>
                     <div class="col-8 mb-3"> <input type="text" class="form-</pre>
control form-control-user" id="emp2des" name="emp2des" aria-
describedby="emailHelp" value=""></div>
                     </div>
                    <div class="row">
                    <div class="col-4 mb-3">Employer2 CTC </div>
                    <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp2ctc" name="emp2ctc" aria-describedby="emailHelp" value=""></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">Employer2 WorkDuration</div>
                     <div class="col-8 mb-3">
```

```
<input type="text" class="form-control form-control-</pre>
user" id="emp2workduration" name="emp2workduration" aria-describedby="emailHelp" value="">
                    </div></div>
                    <div class="row">
                <div class="col-4 mb-3">Employer3 Name</div>
                   <div class="col-8 mb-3"> <input type="text" class="form-control form-</pre>
control-user" id="emp3name" name="emp3name" aria-describedby="emailHelp" value=""></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">Employer3 Designation </div>
                     <div class="col-8 mb-3"> <input type="text" class="form-</pre>
control form-control-user" id="emp3des" name="emp3des" aria-
describedby="emailHelp" value=""></div>
                     </div>
                    <div class="row">
                    <div class="col-4 mb-3">Employer3 CTC </div>
                    <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp3ctc" name="emp3ctc" aria-describedby="emailHelp" value=""></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">Employer3 WorkDuration</div>
                     <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp3workduration" name="emp3workduration" aria-describedby="emailHelp" value="">
                    </div></div>
                    <div class="row" style="margin-top:4%">
                      <div class="col-4"></div>
                      <div class="col-4">
                      <input type="submit" name="submit" value="submit" class="btn btn-</pre>
primary btn-user btn-block">
                    </div>
                    </div>
                  </form>
<?php } ?>
        </div>
        <!-- /.container-fluid -->
      </div>
      <!-- End of Main Content -->
      <!-- Footer -->
```

```
<?php include_once('includes/footer.php');?>
           <!-- End of Footer -->
       </div>
        <!-- End of Content Wrapper -->
    </div>
    <!-- End of Page Wrapper -->
    <!-- Scroll to Top Button-->
    <a class="scroll-to-top rounded" href="#page-top">
       <i class="fas fa-angle-up"></i></i>
    </a>
    <!-- Bootstrap core JavaScript-->
    <script src="vendor/jquery/jquery.min.js"></script>
    <script src="vendor/bootstrap/js/bootstrap.bundle.min.js"></script>
    <!-- Core plugin JavaScript-->
    <script src="vendor/jquery-easing/jquery.easing.min.js"></script>
    <!-- Custom scripts for all pages-->
    <script src="js/sb-admin-2.min.js"></script>
    <script type="text/javascript">
       $(".jDate").datepicker({
       format: 'yyyy-mm-dd',
        autoclose: true
}).datepicker("update", "10/10/2016");
   </script>
<script src="vendor/datatables/jquery.dataTables.min.js"></script>
   <script src="vendor/datatables/dataTables.bootstrap4.min.js"></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script>
   <!-- Page level custom scripts -->
   <script src="js/demo/datatables-demo.js"></script>
</body>
</html>
<?php } ?>
```

Myprofile.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');
//error_reporting(0);
if (strlen($_SESSION['uid']==0)) {
   header('location:logout.php');</pre>
```

```
} else{
if(isset($ POST['submit']))
    $eid=$ SESSION['uid'];
     $emp1name=$ POST['emp1name'];
    $emp1des=$_POST['emp1des'];
    $emp1ctc=$_POST['emp1ctc'];
    $emp1wd=$_POST['emp1workduration'];
    $emp2name=$ POST['emp2name'];
    $emp2des=$ POST['emp2des'];
    $emp2ctc=$_POST['emp2ctc'];
    $emp2wd=$ POST['emp2workduration'];
    $emp3name=$ POST['emp3name'];
    $emp3des=$_POST['emp3des'];
    $emp3ctc=$_POST['emp3ctc'];
    $emp3wd=$ POST['emp3workduration'];
     $query=mysqli query($con, "insert into empexpireince ( EmpID,Employer1Name, Employer1
Designation, Employer1CTC, Employer1WorkDuration, Employer2Name, Employer2Designation, E
mployer2CTC, Employer2WorkDuration, Employer3Name, Employer3Designation, Employer3CTC, Emp
loyer3WorkDuration) value('$eid','$emp1name', '$emp1des', '$emp1ctc', '$emp1wd', '$emp2nam
e', '$emp2des', '$emp2ctc', '$emp2wd', '$emp3name', '$emp3des', '$emp3ctc', '$emp3wd' )");
   if ($query) {
   $msg="Your Expirence data has been submitted succeesfully.";
 else
     $msg="Something Went Wrong. Please try again.";
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
  <meta name="description" content="">
  <meta name="author" content="">
  <title>My Experience</title>
 <!-- Custom fonts for this template-->
 <link href="vendor/fontawesome-free/css/all.min.css" rel="stylesheet" type="text/css">
  <link href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300,300i,400,400i,60</pre>
0,600i,700,700i,800,800i,900,900i" rel="stylesheet">
  <!-- Custom styles for this template-->
  <link href="css/sb-admin-2.min.css" rel="stylesheet">
```

```
</head>
<body id="page-top">
 <!-- Page Wrapper -->
 <div id="wrapper">
 <?php include_once('includes/sidebar.php')?>
   <!-- Content Wrapper -->
   <div id="content-wrapper" class="d-flex flex-column">
     <!-- Main Content -->
     <div id="content">
      <!-- Topbar -->
       <?php include_once('includes/header.php')?>
      <!-- Begin Page Content -->
      <div class="container-fluid">
        <!-- Page Heading -->
        <h1 class="h3 mb-4 text-gray-800">My Experience</h1>
xp style="font-size:16px; color:red" align="center"> <?php if($msg){</pre>
   echo $msg;
 } ?> 
 <?php
$empid=$_SESSION['uid'];
$query=mysqli_query($con,"select * from empexpireince where EmpID=$empid");
$row=mysqli_fetch_array($query);
if($row>0)
?>
size:16px; color:red" align="center">Your Experience details already added. Now you can on
ly edit the record. 
First Employer Name
 <?php echo $row['Employer1Name'];?>
First Employer Designation
 <?php echo $row['Employer1Designation'];?>
```

```
First Employer CTC
 <?php echo $row['Employer1CTC'];?>
First Employer Work Duration
 <?php echo $row['Employer1WorkDuration'];?>
Second Employer Name
 <?php echo $row['Employer2Name'];?>
Second Employer Designation
 <?php echo $row['Employer2Designation'];?>
Second Employer CTC
 <?php echo $row['Employer2CTC'];?>
Second Employer Work Duration
 <?php echo $row['Employer2WorkDuration'];?>
Third Employer Name
 <?php echo $row['Employer3Name'];?>
Third Employer Designation
 <?php echo $row['Employer3Designation'];?>
Third Employer CTC
 <?php echo $row['Employer3CTC'];?>
 Third Employer Work Duration
 <?php echo $row['Employer3WorkDuration'];?>
<?php } else {?>
<form class="user" method="post" action="">
           <div class="row">
            <div class="col-4 mb-3">Employer1 Name</div>
               <div class="col-8 mb-3"> <input type="text" class="form-control form-</pre>
control-user" id="emp1name" name="emp1name" aria-describedby="emailHelp" value=""></div>
               </div>
```

```
<div class="row">
                      <div class="col-4 mb-3">Employer1 Designation </div>
                     <div class="col-8 mb-3"> <input type="text" class="form-</pre>
control form-control-user" id="emp1des" name="emp1des" aria-
describedby="emailHelp" value=""></div>
                     </div>
                    <div class="row">
                    <div class="col-4 mb-3">Employer1 CTC </div>
                    <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp1ctc" name="emp1ctc" aria-describedby="emailHelp" value=""></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">Employer1 WorkDuration</div>
                     <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp1workduration" name="emp1workduration" aria-describedby="emailHelp" value="">
                    </div></div>
                    <div class="row">
                <div class="col-4 mb-3">Employer2 Name</div>
                   <div class="col-8 mb-3"> <input type="text" class="form-control form-</pre>
control-user" id="emp2name" name="emp2name" aria-describedby="emailHelp" value=""></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">Employer2 Designation </div>
                     <div class="col-8 mb-3"> <input type="text" class="form-</pre>
control form-control-user" id="emp2des" name="emp2des" aria-
describedby="emailHelp" value=""></div>
                     </div>
                    <div class="row">
                    <div class="col-4 mb-3">Employer2 CTC </div>
                    <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp2ctc" name="emp2ctc" aria-describedby="emailHelp" value=""></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">Employer2 WorkDuration</div>
                     <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp2workduration" name="emp2workduration" aria-describedby="emailHelp" value="">
                    </div></div>
                    <div class="row">
                <div class="col-4 mb-3">Employer3 Name</div>
                   <div class="col-8 mb-3"> <input type="text" class="form-control form-</pre>
control-user" id="emp3name" name="emp3name" aria-describedby="emailHelp" value=""></div>
```

```
<div class="row">
                      <div class="col-4 mb-3">Employer3 Designation </div>
                     <div class="col-8 mb-3"> <input type="text" class="form-</pre>
control form-control-user" id="emp3des" name="emp3des" aria-
describedby="emailHelp" value=""></div>
                     </div>
                    <div class="row">
                    <div class="col-4 mb-3">Employer3 CTC </div>
                    <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp3ctc" name="emp3ctc" aria-describedby="emailHelp" value=""></div>
                    </div>
                    <div class="row">
                      <div class="col-4 mb-3">Employer3 WorkDuration</div>
                     <div class="col-8 mb-3">
                      <input type="text" class="form-control form-control-</pre>
user" id="emp3workduration" name="emp3workduration" aria-describedby="emailHelp" value="">
                    </div></div>
                    <div class="row" style="margin-top:4%">
                      <div class="col-4"></div>
                      <div class="col-4">
                      <input type="submit" name="submit" value="submit" class="btn btn-</pre>
primary btn-user btn-block">
                    </div>
                    </div>
                  </form>
<?php } ?>
        </div>
        <!-- /.container-fluid -->
      </div>
      <!-- End of Main Content -->
      <!-- Footer -->
   <?php include_once('includes/footer.php');?>
      <!-- End of Footer -->
    </div>
    <!-- End of Content Wrapper -->
  </div>
  <!-- End of Page Wrapper -->
```

```
<!-- Scroll to Top Button-->
    <a class="scroll-to-top rounded" href="#page-top">
       <i class="fas fa-angle-up"></i></i>
    </a>
    <!-- Bootstrap core JavaScript-->
    <script src="vendor/jquery/jquery.min.js"></script>
    <script src="vendor/bootstrap/js/bootstrap.bundle.min.js"></script>
    <!-- Core plugin JavaScript-->
    <script src="vendor/jquery-easing/jquery.easing.min.js"></script>
    <!-- Custom scripts for all pages-->
    <script src="js/sb-admin-2.min.js"></script>
    <script type="text/javascript">
       $(".jDate").datepicker({
       format: 'yyyy-mm-dd',
       autoclose: true
}).datepicker("update", "10/10/2016");
   </script>
<script src="vendor/datatables/jquery.dataTables.min.js"></script>
   <script src="vendor/datatables/dataTables.bootstrap4.min.js"></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script>
   <!-- Page level custom scripts -->
   <script src="js/demo/datatables-demo.js"></script>
</body>
</html>
<?php } ?>
```

Registererms.php

```
else{
    $query=mysqli_query($con, "insert into employeedetail(EmpFname, EmpLName, EmpCode, Emp
Email, EmpPassword) value('$FName', '$LName', '$empcode', '$Email', '$Password' )");
   if ($query) {
   $msg="You have successfully registered";
 else
     $msg="Something Went Wrong. Please try again";
<!DOCTYPE html>
<html lang="en">
<head>
 <meta charset="utf-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
  <meta name="description" content="">
  <meta name="author" content="">
 <title>Employee Record Managment System</title>
 <!-- Custom fonts for this template-->
 <link href="vendor/fontawesome-free/css/all.min.css" rel="stylesheet" type="text/css">
  <link href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300,300i,400,400i,60")</pre>
0,600i,700,700i,800,800i,900,900i" rel="stylesheet">
 <!-- Custom styles for this template-->
 <link href="css/sb-admin-2.min.css" rel="stylesheet">
<script type="text/javascript">
function checkpass()
if(document.register.Password.value!=document.register.RepeatPassword.value)
alert('New Password and Confirm Password field does not match');
document.register.RepeatPassword();
return false;
return true;
</script>
</head>
<body class="bg-gradient-primary">
```

```
<div class="container">
    <h3 align="center" style="color: black; padding-</pre>
top: 1%">Employee Record Managment System</h3>
    <div class="card o-hidden border-0 shadow-lg my-5">
      <div class="card-body p-0">
        <!-- Nested Row within Card Body -->
        <div class="row">
          <div class="col-lg-5 d-none d-lg-block bg-register-image"></div>
          <div class="col-lg-7">
            <div class="p-5">
              <div class="text-center">
                <h1 class="h4 text-gray-900 mb-4">Create an Account!</h1>
              </div>
               <?php if($msg){</pre>
    echo $msg;
  } ?> 
              <form class="user" name="register" method="post" onsubmit="return checkpass()</pre>
;">
                <div class="form-group row">
                  <div class="col-sm-6 mb-3 mb-sm-0">
                    <input type="text" class="form-control form-control-</pre>
user" id="FirstName" name="FirstName" placeholder="First Name" pattern="[A-Za-
z]+" required="true">
                  <div class="col-sm-6">
                    <input type="text" class="form-control form-control-</pre>
user" id="LastName" name="LastName" placeholder="Last Name" pattern="[A-Za-
z]+" required="true">
                  </div>
                </div>
                 <div class="form-group">
                  <input type="text" class="form-control form-control-</pre>
user" id="empcode" name="empcode" placeholder="Enter your Employee Code" pattern="[0-
9]+" required="true">
                </div>
                <div class="form-group">
                  <input type="email" class="form-control form-control-</pre>
user" id="Email" name="Email" placeholder="Email Address" required="true">
                </div>
                <div class="form-group row">
                  <div class="col-sm-6 mb-3 mb-sm-0">
                    <input type="password" class="form-control form-control-</pre>
user" id="Password" name="Password" placeholder="Password" required="true">
                  </div>
                  <div class="col-sm-6">
                    <input type="password" class="form-control form-control-</pre>
user" id="RepeatPassword" name="RepeatPassword" placeholder="Repeat Password" required="tr
ue">
                  </div>
                </div>
```

```
<input type="submit" name="submit" value="Register Account" class="btn btn-</pre>
primary btn-user btn-block">
                </form>
                <hr>>
              <div class="text-center">
                <a class="small" href="loginerms.php">Already have an account? Login!</a>
              </div>
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
  <!-- Bootstrap core JavaScript-->
  <script src="vendor/jquery/jquery.min.js"></script>
  <script src="vendor/bootstrap/js/bootstrap.bundle.min.js"></script>
  <!-- Core plugin JavaScript-->
  <script src="vendor/jquery-easing/jquery.easing.min.js"></script>
  <!-- Custom scripts for all pages-->
  <script src="js/sb-admin-2.min.js"></script>
</body>
</html>
```

Resetpassword.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');
if(strlen($_SESSION['empid']==0))
{
   header('location:forgetpassword.php');
} else {
if(isset($_POST['submit']))
   {
        $email=$_SESSION['email'];
        $empid=$_SESSION['empid'];
        $password=$_POST['newpassword'];</pre>
```

```
$query=mysqli_query($con,"update employeedetail set EmpPassword='$password'
pEmail='$email' && EmpCode='$empid' ");
   if($query)
echo "<script>alert('Password successfully changed');</script>";
session_destroy();
<!DOCTYPE html>
<html lang="en">
<head>
 <meta charset="utf-8">
 <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="Employee Record management System in php and mysql">
  <meta name="description" content="Employee Record management System in php and mysql">
  <meta name="author" content="Sarita Pandey">
  <title>ERMS Employee Reset</title>
 <!-- Custom fonts for this template-->
 <link href="vendor/fontawesome-free/css/all.min.css" rel="stylesheet" type="text/css">
  <link href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300,300i,400,400i,60</pre>
0,600i,700,700i,800,800i,900,900i" rel="stylesheet">
 <!-- Custom styles for this template-->
 <link href="css/sb-admin-2.min.css" rel="stylesheet">
 <script type="text/javascript">
function checkpass()
if(document.changepassword.newpassword.value!=document.changepassword.confirmpassword.valu
e)
alert('New Password and Confirm Password field does not match');
document.changepassword.confirmpassword();
return false;
return true;
</script>
</head>
<body class="bg-gradient-primary">
 <div class="container">
```

```
<h3 align="center" style="color: black; padding-</pre>
top: 2%">Employee Record Managment System</h3>
   <!-- Outer Row -->
    <div class="row justify-content-center">
      <div class="col-xl-10 col-lg-12 col-md-9">
       <div class="card o-hidden border-0 shadow-lg my-5">
         <div class="card-body p-0">
           <!-- Nested Row within Card Body -->
           <div class="row">
             <div class="col-lg-6 d-none d-lg-block bg-login-image"></div>
             <div class="col-lg-6">
               <div class="p-5">
                 <div class="text-center">
                   <h1 class="h4 text-gray-900 mb-4">Reset Password</h1>
                 </div>
                  <?php if($msg){</pre>
   echo $msg;
  } ?> 
                 <form class="user" name="changepassword" method="post" onsubmit="return</pre>
checkpass();">
                   <div class="form-group">
                     <input type="Password" class="form-control form-control-</pre>
user" id="newpassword" name="newpassword" value="" required="true" placeholder="Enter Your
New Password" required="true" >
                   </div>
                    <div class="form-group">
                     <input type="Password" class="form-control form-control-</pre>
user" id="confirmpassword" name="confirmpassword" value="" required="true" placeholder="Co
nfirm Your Password" required="true">
                   </div>
                   <input type="submit" class="btn btn-primary btn-user btn-
block" name="submit" value="Reset">
                   <hr>>
                 </form>
                 <hr>>
              <div class="text-center">
                   <a class="small" href="loginerms.php">Already have an account? Login!
/a>
                 </div>
             </div>
           </div>
         </div>
       </div>
      </div>
```

Welcome.php

```
<?php
session start();
include('includes/dbconnection.php');
if(strlen($_SESSION['uid']==0)){
 header('location:logout.php');
else {
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
  <meta name="description" content="">
  <meta name="author" content="">
  <title>Welcome to ERMS</title>
  <!-- Custom fonts for this template-->
  <link href="vendor/fontawesome-free/css/all.min.css" rel="stylesheet" type="text/css">
  <link href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300,300i,400,400i,60</pre>
0,600i,700,700i,800,800i,900,900i" rel="stylesheet">
  <!-- Custom styles for this template-->
  <link href="css/sb-admin-2.min.css" rel="stylesheet">
```

```
</head>
<body id="page-top">
  <!-- Page Wrapper -->
  <div id="wrapper">
    <!-- Sidebar -->
    <?php include_once('includes/sidebar.php');?>
    <!-- End of Sidebar -->
    <!-- Content Wrapper -->
    <div id="content-wrapper" class="d-flex flex-column">
      <!-- Main Content -->
      <div id="content">
       <?php include_once('includes/header.php');?>
        <!-- End of Topbar -->
        <!-- Begin Page Content -->
        <div class="container-fluid">
          <!-- Page Heading -->
          <div class="d-sm-flex align-items-center justify-content-between mb-4">
            <h1 class="h3 mb-0 text-gray-800">Employee Record Management System</h1>
                   </div>
          <!-- Content Row -->
          <div class="row">
<div class="col-xl-3 col-md-6 mb-4"></div>
            <!-- Earnings (Monthly) Card Example -->
            <div class="col-x1-6 col-md-6 mb-4">
              <div class="card border-left-primary shadow h-100 py-2">
                <div class="card-body">
                  <div class="row no-gutters align-items-center">
                    <div class="col mr-2">
                      <div class="text-xs font-weight-bold text-primary text-uppercase mb-</pre>
1">Welcome Back to ERMS !</div>
                      <?php
$empid=$ SESSION['uid'];
$ret=mysqli_query($con,"select EmpFname,EmpLname from employeedetail where ID='$empid'");
$row=mysqli_fetch_array($ret);
$fname=$row['EmpFname'];
$lname=$row['EmpLname'];
?>
                      <div class="h5 mb-0 font-weight-bold text-gray-</pre>
800"><?php echo $fname." ".$lname; ?></div>
                    </div>
                    <div class="col-auto">
                      <i class="fas fa-user fa-2x text-gray-300"></i>
                    </div>
```

```
</div>
              </div>
            </div>
          </div>
        </div>
        <!-- Content Row -->
      </div>
        </div>
      </div>
      <!-- /.container-fluid -->
   </div>
   <!-- End of Main Content -->
   <!-- Footer -->
    <?php include_once('includes/footer.php');?>
   <!-- End of Footer -->
 </div>
  <!-- End of Content Wrapper -->
</div>
<!-- End of Page Wrapper -->
<!-- Scroll to Top Button-->
<a class="scroll-to-top rounded" href="#page-top">
 <i class="fas fa-angle-up"></i></i>
</a>
<!-- Bootstrap core JavaScript-->
<script src="vendor/jquery/jquery.min.js"></script>
<script src="vendor/bootstrap/js/bootstrap.bundle.min.js"></script>
<!-- Core plugin JavaScript-->
<script src="vendor/jquery-easing/jquery.easing.min.js"></script>
<!-- Custom scripts for all pages-->
<script src="js/sb-admin-2.min.js"></script>
<!-- Page level plugins -->
<script src="vendor/chart.js/Chart.min.js"></script>
<!-- Page level custom scripts -->
```

```
<script src="js/demo/chart-area-demo.js"></script>
  <script src="js/demo/chart-pie-demo.js"></script>

</body>
</html>
</html>
</php

}
</pre>
```

ERMSDB.SQL

```
- phpMyAdmin SQL Dump
- version 4.9.0.1
- https://www.phpmyadmin.net/
-- Host: 127.0.0.1
-- Server version: 10.3.15-MariaDB
-- PHP Version: 7.2.19
SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
SET AUTOCOMMIT = 0;
START TRANSACTION;
SET time zone = "+00:00";
/*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
/*!40101 SET NAMES utf8mb4 */;
- Database: `ermsdb`
 - Table structure for table `empeducation`
CREATE\ TABLE\ `empeducation`\ (
 `Id` int(11) NOT NULL,
 `EmpID` int(10) DEFAULT NULL,
 `CoursePG` varchar(45) DEFAULT NULL,
 `SchoolCollegePG` varchar(45) DEFAULT NULL,
```

```
YearPassingPG` varchar(45) DEFAULT NULL,
  `PercentagePG` varchar(4) DEFAULT NULL,
  `CourseGra` varchar(45) DEFAULT NULL,
  `SchoolCollegeGra` varchar(45) DEFAULT NULL,
  `YearPassingGra` varchar(45) DEFAULT NULL,
  `PercentageGra` varchar(4) DEFAULT NULL,
  `CourseSSC` varchar(45) DEFAULT NULL,
  `SchoolCollegeSSC` varchar(45) DEFAULT NULL,
  `YearPassingSSC` varchar(45) DEFAULT NULL,
  `PercentageSSC` varchar(4) DEFAULT NULL,
  `CourseHSC` varchar(45) DEFAULT NULL,
  `SchoolCollegeHSC` varchar(45) DEFAULT NULL,
  `YearPassingHSC` varchar(45) DEFAULT NULL,
  `PercentageHSC` varchar(4) DEFAULT NULL
 ENGINE=InnoDB DEFAULT CHARSET=latin1;
 Dumping data for table `empeducation`
INSERT INTO `empeducation` (`Id`, `EmpID`, `CoursePG`, `SchoolCollegePG`, `YearPassingPG`,
 `PercentagePG`, `CourseGra`, `SchoolCollegeGra`, `YearPassingGra`, `PercentageGra`, `Cour
seSSC`, `SchoolCollegeSSC`, `YearPassingSSC`, `PercentageSSC`, `CourseHSC`, `SchoolCollege
HSC`, `YearPassingHSC`, `PercentageHSC`) VALUES
(1, 4, 'NA', 'NA', 'NA', 'NA', 'B.Tech(IT)', 'LPU', '2014', '86%', 'Science', 'ABC Senoir
secondary School', '2010', '64%', 'Science', 'abcd', '2008', '98%'),
(2, 2, 'abc', 'ghf', '2016', '89%', 'B.Tech(IT)', 'LPU', '2013', '86%', 'Science', 'DPS Se
noir secondary School', '2009', '64%', 'Science', 'DPS Senoir secondary School', '2008', '
(3, 3, 'Master in charted accountant', 'Bhavi CA college', '2004', '89%', 'Bachelor in cha
rted accountant', 'Bhavi CA college', '1996', '95%', 'Science', 'graimia convent school',
'1993', '75%', 'Science', 'graimia convent school', '1991', '89%'),
(4, 7, 'MCA', 'KITE Ghaziabad', '1990', '64 %', 'BCA', 'TVN', '1997', '68 %', 'Science', '
TVN', '1992', '76 %', 'Science', 'TVN', '2010', '89 %'),
(5, 12, 'NA', 'NA', 'NA', 'NA', 'B.Tech', 'VIT', '1996', '75%', 'Science', 'GHI convent sc
hool', '1993', '66%', 'Science', 'GHI convent school', '1990', '65%'),
(6, 13, 'MBA', 'SMU', '2018', '70', 'B.Tech', 'LPU', '2015', '80', 'PCM', 'Test', '2010',
'74', 'PCM', 'ABC', '2008', '85'),
(7, 1, 'NA', 'NA', 'NA', 'NA', 'B.Tech', 'ABC', '2012', '75', 'PCM', 'XYZ', '2<u>0</u>08', '67',
'10th', 'HGHH', '2006', '89'),
(8, 14, 'M.Tech', 'ABC College', '2014', '65', 'B.Tech', 'XYZ', '2012', '70', 'PCM', 'ABC'
'2008', '56', 'High School', 'XYZ', '2006', '85');
 - Table structure for table `empexpireince`
CREATE TABLE `empexpireince` (
  `ID` int(11) NOT NULL,
  `EmpID` varchar(5) DEFAULT NULL,
 `Employer1Name` varchar(75) DEFAULT NULL,
  `Employer1Designation` varchar(50) DEFAULT NULL,
```

```
Employer1CTC` varchar(50) DEFAULT NULL,
  `Employer1WorkDuration` varchar(11) DEFAULT NULL,
  `Employer2Name` varchar(75) DEFAULT NULL,
  `Employer2Designation` varchar(50) DEFAULT NULL,
  `Employer2CTC` varchar(50) DEFAULT NULL,
  `Employer2WorkDuration` varchar(11) DEFAULT NULL,
  `Employer3Name` varchar(75) DEFAULT NULL,
  `Employer3Designation` varchar(50) DEFAULT NULL,
  `Employer3CTC` varchar(50) DEFAULT NULL,
  `Employer3WorkDuration` varchar(11) DEFAULT NULL
 ENGINE=InnoDB DEFAULT CHARSET=latin1;
 - Dumping data for table `empexpireince`
INSERT INTO `empexpireince` (`ID`, `EmpID`, `Employer1Name`, `Employer1Designation`, `Empl
oyer1CTC`, `Employer1WorkDuration`, `Employer2Name`, `Employer2Designation`, `Employer2CTC
, `Employer2WorkDuration`, `Employer3Name`, `Employer3Designation`, `Employer3CTC`, `Empl
oyer3WorkDuration`) VALUES
(2, '4', 'abc.pvt.td', 'software tester', '20,000 p/m', '4 yrs', 'tch.pvt.td', 'software t
ester', '32000 p/m', '4 yrs', 'dfg.pvt.td', 'SR.software tester', '45000 p/m', '7 yrs'),
(7, '2', 'SAR pvt.ltd', 'Software Developer', '25000 p/m', '3 yrs', 'abc enterprise', 'sof
tware developer', '30000 p/m', '3 yrs', 'dgfhgfg.pt.ltd', 'software developer', '35000 p/m
', '2 yrs till '),
(8, '3', 'GHA pvt.ltd', 'accountant', '25000', '5 yrs', 'HRCH pvt.ltd', 'accountant', '750
00', '5 yrs', 'TCGHB pvt ltd', 'Sr.Accountant', '95000 ', '8 yrs till'),
        'FAG pvt.ltd', 'HR Executive', '25000 p/m', '6 yrs', 'TYS', 'HR Executive', '3500
0 p/m', '7 yrs', 'hirp pvt.ltd', 'HR Executive', '45000 p/m', '4 yrs till'),
(10, '12', 'dfg.pvt.ltd', 'accountant', '25000 p/m', '1 yrs', 'fghpvt.ltd', 'accountant',
'30000 p/m', '3 yrs', 'fghpvt.ltd', 'accountant', '45000 p/m', '5 yrs till'),
(11, '13', 'ABC', 'Developer', '12000 ', '2 years', 'NA', 'NA', 'NA', 'NA', 'NA', 'NA', 'N
A', 'NA'),
(13, '14', 'ABC Tech', 'Jr Devloper', '1258000', '6 Month', 'XYZ Tech', 'Devloper', '25893
00', '6 Month', 'It Tech', 'Sr Devloper', '853214447', '2 + Years');
-- Table structure for table `employeedetail`
CREATE TABLE `employeedetail` (
  `ID` int(11) NOT NULL,
  `EmpFname` varchar(50) DEFAULT NULL,
  `EmpLName` varchar(50) NOT NULL,
  `EmpCode` varchar(50) DEFAULT NULL,
 `EmpDept` varchar(120) DEFAULT NULL,
  `EmpDesignation` varchar(120) DEFAULT NULL,
  `EmpContactNo` bigint(10) DEFAULT NULL,
  `EmpGender` enum('Male','Female') DEFAULT NULL,
  `EmpEmail` varchar(200) DEFAULT NULL,
  `EmpPassword` varchar(100) DEFAULT NULL,
```

```
`EmpJoingdate` date DEFAULT NULL,
  `PostingDate` timestamp NOT NULL DEFAULT current timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=latin1;
-- Dumping data for table `employeedetail`
INSERT INTO `employeedetail` (`ID`, `EmpFname`, `EmpLName`, `EmpCode`, `EmpDept`, `EmpDesi
gnation`, `EmpContactNo`, `EmpGender`, `EmpEmail`, `EmpPassword`, `EmpJoingdate`, `Posting
Date`) VALUES
(1, 'Subhash', 'Pandey', '123465', 'IT', 'Software Developer', 1234567890, 'Male', 'abc@gm
ail.com', 'Test@12345', '2019-01-02', '2019-02-06 06:31:49'),
(2, 'Anuj', 'Kumar', '123465558', 'CS', 'Software Developer', 1234567890, 'Male', 'anuj@gm
ail.com', '123', '2017-03-23', '2019-02-06 06:41:42'),
(3, 'Ankush', 'Pandey', '123467', 'IT', 'Software Developer', 1234567890, 'Male', 'ankush@
gmail.com', '89756', '2010-09-13', '2019-02-06 06:42:15'),
(4, 'Sarita', 'Pandey', '12346012', 'IT', 'Software Developer', 1234567890, '', 'abhi@gmai
l.com', '156975', NULL, '2019-02-06 06:42:47'),
(6, 'Manu', 'Ramesh', '369874', NULL, NULL, NULL, NULL, 'manu@gmail.com', '987563', NULL,
2019-02-06 12:00:50'),
(7, 'Ragunath', 'Shahye', '63', NULL, NULL, NULL, 'Shahye@gmail.com', '99999', NULL,
'2019-02-08 07:22:40'),
(8, '1345556', '', '', NULL, NULL, NULL, '', '', NULL, '2019-02-11 05:08:40'),
(9, 'Garuv', 'Bhatia', '89745', NULL, NULL, NULL, NULL, 'jk@gmail.com', '12', NULL, '2019-
02-11 05:12:28'),
(10, 'Khusi', 'Dev', '1234', NULL, NULL, NULL, NULL, 'hjk@gmail.com', '1990', NULL, '2019-
02-11 05:18:08'),
(11, 'SARITA', 'pANDEY', '789', NULL, NULL, NULL, NULL, 'PANDEY@GMAIL.COM', '1111', NULL,
'2019-02-11 08:50:55'),
(12, 'Dinesh', 'Karthik', '56989', NULL, NULL, NULL, NULL, 'dinesh@gmail.com', '8989', NUL
L, '2019-02-11 12:30:50'),
(13, 'Test', 'User', '2131231', 'IT', 'Software Developer', 1234567890, 'Male', 'testuser@
gmail.com', 'Test@123', '2018-10-09', '2019-02-11 16:21:58'),
(14, 'Anuj', 'Kumar', '1023647885', 'IT', 'Software Developer', 1234567890, 'Male', 'aktes
t@gmail.com', 'Test@123', '2019-01-01', '2020-02-19 16:58:51');
-- Table structure for table `tbladmin`
CREATE TABLE `tbladmin` (
  `ID` int(11) NOT NULL,
 `AdminName` varchar(50) DEFAULT NULL,
 `AdminuserName` varchar(50) DEFAULT NULL,
  `Password` varchar(45) DEFAULT NULL,
 `AdminRegdate` timestamp NULL DEFAULT current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=latin1;
 Dumping data for table `tbladmin`
```

```
INSERT INTO `tbladmin` (`ID`, `AdminName`, `AdminuserName`, `Password`, `AdminRegdate`) VA
LUES
(1, 'Admin', 'Admin', 'Test@123', '2019-02-07 16:52:45');
-- Indexes for dumped tables
-- Indexes for table `empeducation`
ALTER TABLE `empeducation`
 ADD PRIMARY KEY ('Id');
-- Indexes for table `empexpireince`
ALTER TABLE `empexpireince`
 ADD PRIMARY KEY ('ID');
-- Indexes for table `employeedetail`
ALTER TABLE `employeedetail`
 ADD PRIMARY KEY (`ID`),
 ADD UNIQUE KEY `EmpCode` (`EmpCode`);
-- Indexes for table `tbladmin`
ALTER TABLE `tbladmin`
 ADD PRIMARY KEY ('ID');
-- AUTO INCREMENT for dumped tables
 - AUTO_INCREMENT for table `empeducation`
ALTER TABLE `empeducation`
 MODIFY `Id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=9;
 - AUTO_INCREMENT for table `empexpireince`
ALTER TABLE `empexpireince`
 MODIFY `ID` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=14;
-- AUTO_INCREMENT for table `employeedetail`
ALTER TABLE `employeedetail`
```

```
MODIFY `ID` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=15;


--
-- AUTO_INCREMENT for table `tbladmin`
--
ALTER TABLE `tbladmin`
   MODIFY `ID` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=2;
COMMIT;

/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;
/*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
/*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;
```


SCREENSHOT OF

DATABASE TABLE


EMPEDUCATION

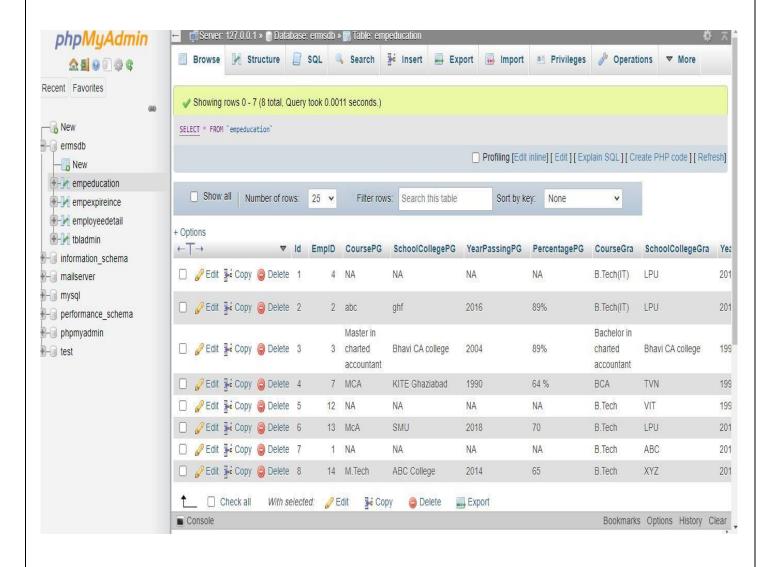


EMPEXPIREINCE

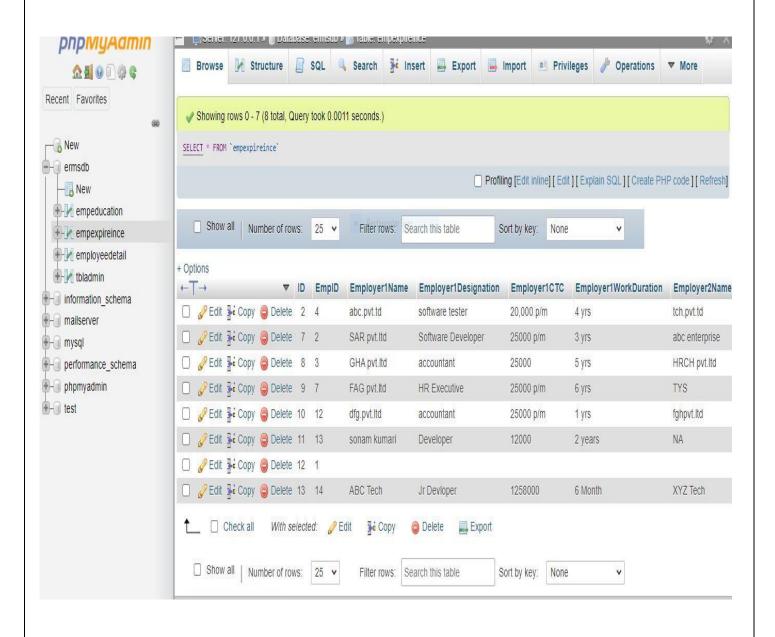

EMPLOYEEDETAIL

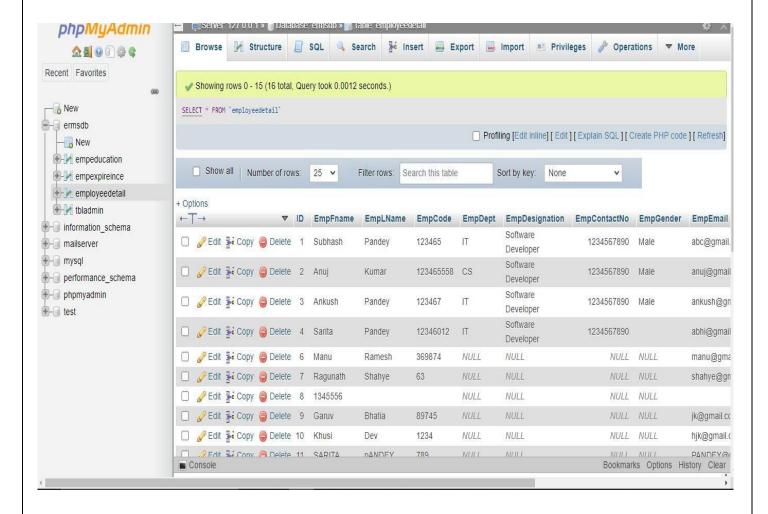

TABLEADMIN

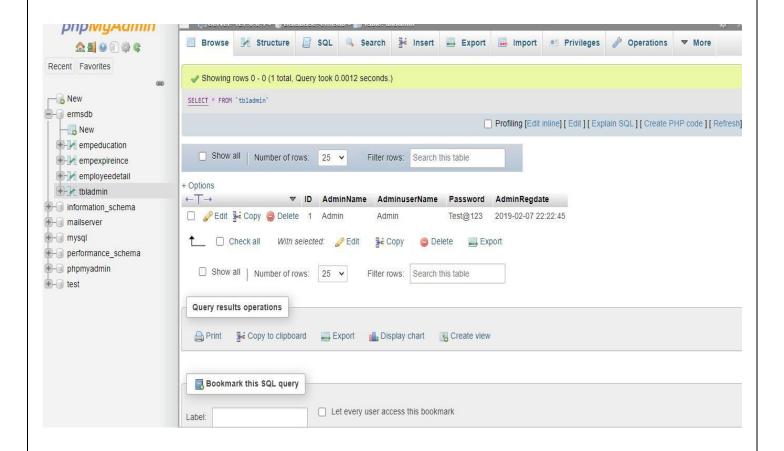

DISCUSSIONS

The system was designed to solve the major problems faced in handling hard copy records of employees inclusive of space consumption time wastage which was achieved" Effective use of the system can therefore deliver. quality of handling employees

and also managing employee promotion compensation and rewards"

<u>RECOMMENDATION</u>

I recommend that the administrator and the employees of the organization be introduced to the functionalities of the new system before deployment" I also recommend that the system be used for purpose it is meant for and should be used only by staff registered "The system should only be available on the intranet since it's for organizational use not a public asset" more so I recommend further study on this system and addition of new features as they emerge from the user requirements and organizational growth

CONCLUSION

There were so many challenges faced in the existing

system that needed to be addressed and these have given rise to development of this system.

The challenges helped determine what the developed system addresses. in case of new challenges sighted with use

of the new system. this calls for system upgrade or addition or more features to mitigate such problems

The employee 1ecords management system developed is a secure and userfriendly application which can be used to manage employee records effectively and efficiently

The developed system is subject to development by integration of more other special features and so it's open

for more study.

The developed system is flexible and can therefore be customized for use by other organizations to manage employee records effectively. Conclusively proper utilization of this system will help optimise resources at the organization and increase the effective flow of business since human resource management lies at the forefront of organizational growth and this is well achieved by having an efficient mechanism of managing their records.

