

## สิ่งที่ทำสำเร็จ

## 1. របៀប Sign in លើ Sign out

- + ตรวจสอบความเป็นสมาชิกก่อนใช้งานระบบ จึงต้องมีตาราง member
- + แบ่งประเภทเป็น admin และ user ซึ่งต้องใช้ Session และใช้ Bootstrap

## 2. ၂၅၂၂ member

- + สามารถ insert, delete, update : member ซึ่งจัดการข้อมูลได้เฉพาะ admin

3. ข้อมูลหลัก คือ ตารางทั้ง 8 ใน Northwind


- + สามารถ select, insert, delete, update ได้ทุกตาราง

4. ระบบ menu อาจเป็น top menu หรือ left menu

- + ซึ่ง menu ของ admin กับ user จะต่างกันไป

## 5. เพิ่ม plug-in ต่าง ๆ

- + pyramid ทั้ง 36 โปรแกรม

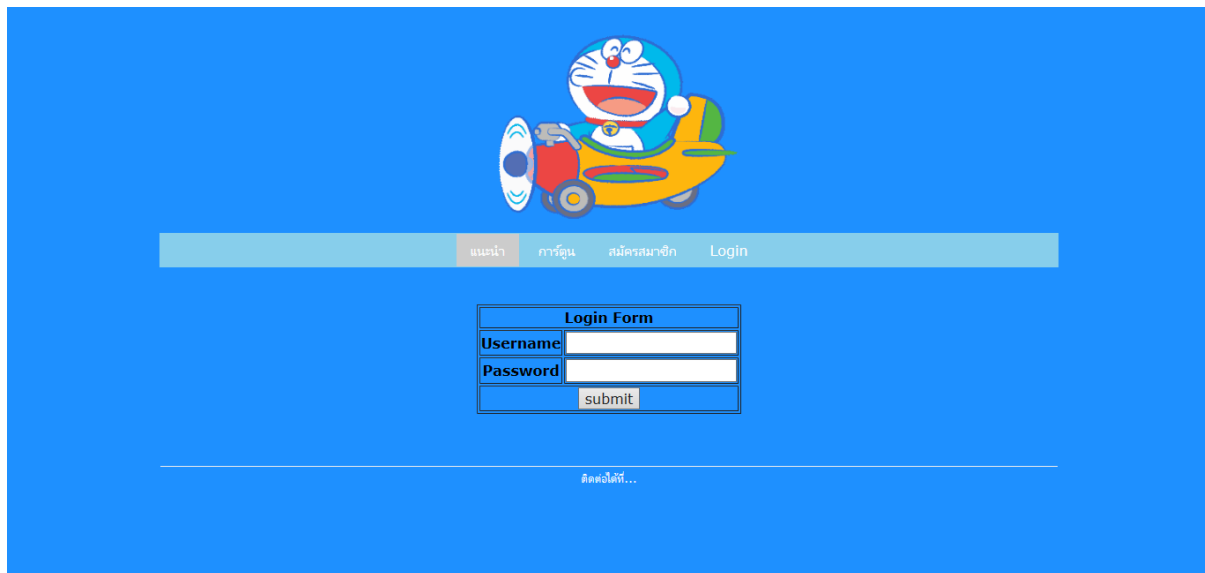

## Code หน้า Login

```
<?php include("yheader.php"); ?>
```

```
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
```

```
<form action="chlog.php" name="frmAdd" method="post">
```

```
    <br>
```

```
    <br>
```

```
<center><table width="284" border >
```

```
    <tr>
```

```
        <th colspan="2" align="center">Login Form</th>
```

```
    </tr>
```

```
<tr>
```

```
    <th width="120">Username</th>
```

```
    <td><input type="text" name="uname" size="20"></td>
```

```
</tr>
```

<tr>

<th width="120">Password</th>

<td><input type="text" name="upass" size="20"></td>

</tr>

<tr>

<td colspan="2" align="center"> <input type="submit" name="submit" value="submit"></td>

</tr>

</table></center>

<br>

<br>

<hr>

<?php include("yfooter.php"); ?>

</TABLE>



## Code หน้า Insert

```
<?php include("yheader.php"); ?>
```

```
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
```

```
<TABLE align="center" width="624" height="800" border="1">
```

```
<Center><h1> ตรวจสอบข้อมูล</h1></Center>
```

```
<?php
```

```
ini_set('display_errors', 1);
```

```
error_reporting(~0);
```

```
$serverName = "127.0.0.1";
```

```
$userName = "root";
```

```
$userPassword = "";
```

```
$dbName = "r";
```

```
// $conn = mysqli_connect($serverName,$userName,$userPassword,$dbName);
```

```
$sql = "SELECT * FROM table01";
```

```
$sql2= "SELECT * FROM table02";
```

```
//mysqli_set_charset($conn,'UTF8');
```

```

        //$query = mysqli_query($conn,$sql);
        //$query2 = mysqli_query($conn,$sql2);
?>
<table width="650" align="center" border="3">
<Center><h1>ข้อมูลส่วนตัว </h1></Center>

<tr>

<th width="50"> <div align="center">ID </div></th>

<th width="550"> <div align="center">Status</div></th>

<th width="550"> <div align="center">ชื่อ-สกุล</div></th>

<th width="550"> <div align="center">รหัสผ่าน </div></th>

<th width="550"> <div align="center">รหัสบัตรประชาชน </div></th>

<th width="550"> <div align="center">เพศ </div></th>

<th width="550"> <div align="center">เบอร์ติดต่อ </div></th>

<th width="550"> <div align="center">อีเมลล์ </div></th>

<th width="550"> <div align="center">Edit </div></th>

</tr>

</tr>

<?php
while($result=mysqli_fetch_array($sql,$sql2))
{
?>

<tr>

<td><div align="center"><?php echo $result["id"];?></div></td>

<td><?php echo $result["username"];?></td>

<td><?php echo $result["password"];?></td>

<td><div align="center"><?php echo $result["pin"];?></div></td>

<td align="right"><?php echo $result["sex"];?></td>

<td align="right"><?php echo $result["phone"];?></td>

<td align="right"><?php echo $result["email"];?></td>

```

```
 <a href="pp.php?id=?php echo $result['id'];?>">Edit</a></td>  <a href="del3.php?id=?php echo $result["id"];?>">Del</a></td> </tr> <?php } ?> | |
```

```

<table width="650" align="center" border="3">

```

```

<Center><h1> ที่อยู่</h1></Center>

```

```

<tr>

```

```

<th width="50"> <div align="center">ID </div></th>

```

```

<th width="550"> <div align="center">บ้านเลขที่</div></th>

```

```

<th width="550"> <div align="center">หมู่ที่</div></th>

```

```

<th width="550"> <div align="center">ชื่อหมู่บ้าน</div></th>

```

```

<th width="550"> <div align="center">ถนน</div></th>

```

```

<th width="550"> <div align="center">ตำบล</div></th>

```

```

<th width="550"> <div align="center">อำเภอ</div></th>

```

```

<th width="550"> <div align="center">จังหวัด</div></th>

```

```

<th width="550"> <div align="center">รหัส ปณ. </div></th>

```

```

<?php

```

```

//while($result=mysqli_fetch_array($query2,MYSQLI_ASSOC))

```

```

{

```

```

?>

```

```

<tr>

```

```

<td><div align="center"><?php echo $result["id"];?></div></td>

```

```

<td><?php echo $result["house_number"];?></td>

```

```

<td><?php echo $result["swine"];?></td>

```

```

<td><div align="center"><?php echo $result["village_name"];?></div></td>

```

```

<td align="right"><?php echo $result["road"];?></td>

```

```

<td align="right"><?php echo $result["districte"];?></td>

```

```

        <td align="right"><?php echo $result["district"];?></td>
        <td align="right"><?php echo $result["province"];?></td>
        <td align="right"><?php echo $result["zip_code"];?></td>
    </tr>
<?php
}
?>
</table>

<?php
//mysqli_close($conn);
?>
<br>
<hr>
<?php include("yfooter.php"); ?>
</TABLE>

```

## Code หน้า 1 Delete

```

<?php
    ini_set('display_errors', 1);

```

```

        error_reporting(~0);

include("connectdb.php");

$sql = "UPDATE customer SET status = '0' WHERE id = '".$_GET["id"]." " ";
$query = mysqli_query($conn,$sql);

if($query){
    echo "<script type='text/javascript'>";
    echo "alert('Delete Succesfully');";
    echo "window.location = 'index.php' ";
    echo "</script>";
}
else{
    echo "<script type='text/javascript'>";
    echo "alert('Error back to Delete again');";
    echo "</script>";
}

mysqli_close($conn);

?>

```

## Code Update

```
<?php include("yheader.php"); ?>
```



```

<?php if(!isset($_SESSION["uch"])){    echo "<CENTER><FONT SIZE=5 COLOR=red>กรุณา
Login!</FONT><BR><FONT SIZE=5 color=yelloe ><A HREF=logout.php>กลับหน้า
Login</A></FONT></CENTER>"; exit();    } ?>

<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />

<?php
ini_set('display_errors', 1);
error_reporting(~0);

include("connectdb.php");

$query = mysqli_query($conn,$sql);

$result=mysqli_fetch_array($query,MYSQLI_ASSOC);

?>

<form action="editsave.php" name="frmAdd" method="post">
<table width="284" border="1">

<tr>

<th width="120">id</th>

<td width="238"><input type="hidden" name="txtid" value="<?php echo $result["id"];?>"><?php echo
$result["id"];?></td>

</tr>

<tr>

<th width="120">name</th>

<td><input type="text" name="txtname" size="20" value="<?php echo $result["name"];?>"></td>

</tr>

<tr>

<th width="120">surname</th>

<td><input type="text" name="txtsurname" size="20" value="<?php echo $result["surname"];?>"></td>

</tr>

```

```

        <tr>

        <th width="120">Username</th>

        <td><input type="text" name="uname" size="20" value="<?php echo $result["uname"];?>"></td>

    </tr>

    <tr>

    <th width="120">Password</th>

    <td><input type="text" name="upass" size="20" value="<?php echo $result["upass"];?>"></td>

    </tr>

    <tr>

    <th width="120">Type</th>

    <td>

    <select class="form-control" name="txttype" >

    <option value="<?php echo $result["type"];?>"><?php if($result["type"]==1){ echo "user1"; }else
    if($result["type"]==2){ echo "user2"; }else{ echo "admin"; }?></option>

    <option value="1">- user1 -</option>

    <option value="2">- user2 -</option>

    <option value="3">- admin -</option>

    </select>

    </td>

    </tr>

</table>

<input type="submit" name="submit" value="submit">

</form>

<?php
mysqli_close($conn);

?>

<?php include("yfooter.php"); ?>

```

## Pyramit 36 โปรแกรม

## 1-36

### 1

```
<?php include("yheader.php"); ?>

<br></br>

<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 1</h3>

<?php include("font_k.php");

for($fon=1;$fon<=4;$fon++) {
    for($scol=2;$scol<=0+$fon;$scol++) {
        echo ("&nbsp;&nbsp;&nbsp;");
    }
    for($scol=$fon;$scol<=$fon+1;$scol++) {
        echo ($fon);
    }
    for($scol=1;$scol<=4-$fon;$scol++){
        echo ("**");
    }
    for($scol=$fon;$scol<=$fon+1;$scol++) {
        echo ($fon);
    }
echo "<br>";
}

?>

<?php include ("yfooter.php"); ?>
```

### 2

```
<?php include("yheader.php"); ?>

<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 2</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=4;$fon++)
```

```
{
```

```
    for($col=$fon;$col<=$fon;$col++)
```

```
    {
```

```
        echo($fon);
```

```
        echo($fon+1);
```

```
        echo($fon+2);
```

```
    }
```

```
    for($col=1;$col<=$fon+2;$col++)
```

```
    {
```

```
        echo("*");
```

```
    }
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

### 3

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp; Pyramid 3</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=4;$fon++) {
```

```
    for($scol=$fon;$scol<=$fon;$scol++) {
```

```
        echo($scol);
```

```
    }
```

```
    for($scol=$fon;$scol<=$fon;$scol++) {
```

```
        echo($scol+4);
```

```
    }
```

```
    for($scol=0;$scol<=3+$fon;$scol++) {
```

```
        echo("*");
```

```
    }
```

```
    echo "<br/>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

**4**

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 4</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=4;$fon++)
```

```
{
```

```
    for($col=1;$col<=$fon;$col++)
```

```
    {
```

```
        echo ("*");
```

```
    }
```

```
    for($col=$fon;$col>=2;$col--)
```

```
    {
```

```
        echo ($col);
```

```
    }
```

```
    for($col=1;$col<=$fon;$col++)
```

```
    {
```

```
        echo ($col);
```

```
    }
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

## 5

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 5</h3>

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=4;$fon++)
```

```
{
```

```
    for($scol=1;$scol<=(4-$fon);$scol++)
```

```
    {
```

```
        echo ("&nbsp;&nbsp;&nbsp;&nbsp;");
```

```
    }
```

```
    echo ($fon);
```

```
    for($scol=2;$scol<=$fon;$scol++)
```

```
    {
```

```
        echo ("**");
```

```
    }
```

```
    echo ($fon);
```

```
    echo "<br>";
```

```
}
```

```
for($fon=3;$fon>=1;$fon--)
```

```
{
```

```
    for($scol=1;$scol<=(4-$fon);$scol++)
```

```
    {
```

```
        echo ("&nbsp;&nbsp;&nbsp;&nbsp;");
```

```
    }
```

```
    echo($fon);
```

```
    for($scol=2;$scol<=$fon;$scol++)
```

```
    {
```

```
        echo ("**");
```

```
    }
```

```
        echo ($fon);  
        echo "<br>";  
    }  
?>  
<?php include ("yfooter.php"); ?>
```

**6**

```
<?php include("yheader.php"); ?>  
<br></br>
```



<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 6</h3>

<?php include("font\_k.php");

for(\$fon=7;\$fon>=1;\$fon--)

{

for(\$col=1;\$col<=(7-\$fon);\$col++)

{

echo ("&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;");

}

for(\$col=1;\$col<=\$fon;\$col++)

{

echo (\$col % 2);

}

for(\$col=2;\$col<=\$fon;\$col++)

{

echo (\$col % 2);

}

echo "<br>";

}

?>

<?php include ("yfooter.php"); ?>

7

<?php include("yheader.php"); ?>

<br></br>

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 7</h3>
```

```
<?php include("font_k.php");  
for($fon=1; $fon <= 7; $fon++)  
{  
    for($col=1;$col<=7 - $fon + 1;$col++)  
    {  
        echo ("&nbsp;&nbsp;&nbsp;");  
    }  
    for($col=1; $col <=$fon ; $col++)  
    {  
        echo ($col);  
    }  
    echo ($fon);  
    for($col=$fon; $col >= 1 ; $col--)  
    {  
        echo ( $col );  
    }  
    echo "<br>";  
}  
?>  
<?php include ("yfooter.php"); ?>
```

## 8

```
<?php include("yheader.php"); ?>  
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 8</h3>
```

```
<?php include("font_k.php");
for($fon=1;$fon<=7;$fon++)
{
    for($col=2;$col<=$fon;$col++)
    {
        echo ("&nbsp;&nbsp;&nbsp;");
    }
    for($col=$fon;$col<=($fon);$col++)
    {
        echo ($fon);
        echo ($fon+1);
        echo ($fon+2);
    }
    for($col=1;$col<=($fon+1);$col++)
    {
        echo ("*");
    }
    echo "<br>";
}
?>
<?php include ("yfooter.php"); ?>
```

## 9

```
<?php include("yheader.php"); ?>
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 9</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=5;$fon>=1;$fon--)
```

```
{
```

```
    for($col=1;$col<=(5-$fon);$col++)
```

```
    {
```

```
        echo ("&nbsp;&nbsp;&nbsp;");
```

```
    }
```

```
    for($col=1;$col<=$fon;$col++)
```

```
    {
```

```
        echo (6-$fon);
```

```
    }
```

```
    for($col=2;$col<=$fon;$col++)
```

```
    {
```

```
        echo (6-$fon);
```

```
    }
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

## 10

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 10</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++) {
```

```
    for($col=1;$col<=5-$fon;$col++) {
```

```
        echo ("&nbsp;&nbsp;&nbsp;");
```

```
    }
```

```
    for($col=1;$col<=$fon;$col++){
```

```
        echo ($col);
```

```
    }
```

```
    for($col=$fon;$col<=$fon;$col++){
```

```
        echo (6-$fon);
```

```
    }
```

```
    for($col=$fon;$col>=1;$col--){
```

```
        echo ($col);
```

```
    }
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

## 11

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 11</h3>
```

```
<?php include("font_k.php");
```

```
    for($fon=1;$fon<=5;$fon++)
    {
        for($col=1;$col<=(5-$fon);$col++)
        {
            echo ("&nbsp;&nbsp;&nbsp;");
        }
        echo ($fon);
        for($col=2;$col<=$fon;$col++)
        {
            echo ("&nbsp;&nbsp;&nbsp;");
        }
        echo ($fon);
        echo "<br>";
    }
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

**12**

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```

<h3>&nbsp;&nbsp;&nbsp;Pyramid 12</h3>
<?php include("font_k.php");
for($fon=1;$fon<=5;$fon++) {
    for($col=2;$col<=$fon;$col++) {
        echo ("&nbsp;&nbsp;");
    }
    for($col=$fon;$col<=10-$fon;$col++){
        echo ($col);
    }
    echo "<br>";
}
?>
<?php include ("yfooter.php"); ?>

```

## 13

```

<?php include("yheader.php"); ?>
<br></br>

```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 13</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++) {
```

```
    for($col=2;$col<=$fon;$col++) {
```

```
        echo (" ");
```

```
    }
```

```
    for($col=11;$col>=11;$col--){
```

```
        echo ($col-$fon-$fon);
```

```
    }
```

```
    for($col=10;$col>=6+$fon;$col--){
```

```
        echo ($col-$fon-$fon);
```

```
    }
```

```
    for($col=5;$col>=1+$fon;$col--){
```

```
        echo ($col-$fon);
```

```
    }
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

## 14

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```



```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 14</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++) {
```

```
    for($col=2;$col<=0+$fon;$col++) {
```

```
        echo ("&nbsp;");
```

```
    }
```

```
    for($col=$fon;$col<=$fon;$col++) {
```

```
        echo($fon);
```

```
    }
```

```
    echo($fon+1);
```

```
    for($col=1;$col<=5-$fon;$col++){
```

```
        echo ("&nbsp;&nbsp;");
```

```
    }
```

```
    for($col=$fon;$col<=$fon;$col++) {
```

```
        echo($fon+1);
```

```
    }
```

```
    echo($fon);
```

```
    echo "<br/>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

**15**

```
<?php include("yheader.php"); ?>
```

### Pyramid 15

```
<?php include("font_k.php");
```

```
for($fon=5;$fon>=1;$fon--)
```

$$\{$$

```
for($col=1;$col<=$fon;$col++)
```

 $\{$ 

```
echo (6-$fon);
```

$$\}$$

```
for($col=1;$col<=(6-$fon);$col++)
```

$$\{$$

```
echo ("&nbsp;&nbsp;&nbsp;");
```

$$\}$$

```
for($col=1;$col<=$fon;$col++)
```

$$\{$$

```
echo (6-$fon);
```

$$\}$$

```
echo "<br>";
```

$$\}$$

?

```
<?php include ("yfooter.php"); ?>
```

16

```
<?php include("yheader.php"); ?>
```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 16</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++)
```

```
{
```

```
    for($col=1;$col<=$fon;$col++)
```

```
    {
```

```
        echo (($fon+1)-$col);
```

```
    }
```

```
    for($col=1;$col<=(5-$fon);$col++)
```

```
    {
```

```
        echo ("&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;");
```

```
    }
```

```
    for($col=1;$col<=$fon;$col++)
```

```
    {
```

```
        echo ("*");
```

```
    }
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

17

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 17</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++)
```

```
{
```

```
    echo ($fon);
```

```
    echo (10-$fon);
```

```
        echo ($fon);
```

```
    echo (10-$fon);
```

```
        echo ($fon);
```

```
    echo (10-$fon);
```

```
        echo ($fon);
```

```
    echo (10-$fon);
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

**18**

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp; Pyramid 18</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++)
```

```
{
```

```
    echo ($fon);
```

```
    for($col=1;$col<=$fon;$col++)
```

```
    {
```

```
        echo ("*");
```

```
    }
```

```
    echo ($fon);
```

```
    for($col=1;$col<=(6-$fon);$col++)
```

```
    {
```

```
        echo ("*");
```

```
    }
```

```
    echo (10-$fon);
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

## 19

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 19</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++)
```

```
{
```

```
    echo ($fon);
```

```
    for($scol=1;$scol<=(10-$fon);$scol++)
```

```
    {
```

```
        echo ("*");
```

```
    }
```

```
    for($scol=2;$scol<=($fon);$scol++)
```

```
    {
```

```
        echo ("&nbsp;&nbsp;&nbsp;");
```

```
    }
```

```
    echo (6-$fon);
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

**20**

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 20</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++)
```

```
{
```

```
    for($col=1;$col<=$fon;$col++)
```

```
    {
```

```
        echo ($fon);
```

```
    }
```

```
    for($col=1;$col<=$fon;$col++)
```

```
    {
```

```
        echo ("*");
```

```
    }
```

```
    for($col=1;$col<=$fon;$col++)
```

```
    {
```

```
        echo ($fon);
```

```
    }
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

## 21

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp; Pyramid 21</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++)
```

```
{
```

```
    for($col=1;$col<=(8-$fon);$col++)
```

```
    {
```

```
        echo ("*");
```

```
    }
```

```
    echo ($fon);
```

```
    for($col=1;$col<=($fon);$col++)
```

```
    {
```

```
        echo ("*");
```

```
    }
```

```
    echo (8-$fon);
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

## 22

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```



```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 22</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++){
```

```
    echo ("*");
```

```
    for($col=1;$col<$fon;$col++){
```

```
        echo ("&nbsp;&nbsp;&nbsp;");
```

```
    }
```

```
    for($col=$fon;$col<=5*2-$fon;$col++){
```

```
        echo ($fon);
```

```
    }
```

```
    for($col=$fon;$col>1;$col--){
```

```
        echo ("&nbsp;&nbsp;&nbsp;");
```

```
    }
```

```
    echo ("*");
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

## 23

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 23</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++)
```

```
{
```

```
    echo ($fon);
```

```
    for($scol=1;$scol<=(7-$fon);$scol++)
```

```
    {
```

```
        echo ("*");
```

```
    }
```

```
    for($scol=2;$scol<=($fon);$scol++)
```

```
    {
```

```
        echo ("&nbsp;&nbsp;&nbsp;");
```

```
    }
```

```
    echo ($fon);
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

## 24

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

<h3>&nbsp;&nbsp;&nbsp; Pyramid 24</h3>

<?php include("font\_k.php");

for(\$fon=1;\$fon<=5;\$fon++) {

    echo(\$fon);

    for(\$col=1;\$col<=\$fon;\$col++) {

        echo("\*");

    }

    for(\$col=2;\$col<=\$fon;\$col++) {

        echo("\*");

    }

    for(\$col=5;\$col>=\$fon;\$col--) {

        echo(\$fon);

    }

    for(\$col=5;\$col>=\$fon;\$col--) {

        echo(\$fon);

    }

    echo "<br/>";

}

?>

<?php include ("yfooter.php"); ?>

## 25

<?php include("yheader.php"); ?>

<br></br>

<h3>&nbsp;&nbsp;&nbsp; Pyramid 25</h3>

<?php include("font\_k.php");

for(\$fon=1;\$fon<=5;\$fon++) {

    for(\$col=1;\$col<=5-\$fon;\$col++) {

        echo ("\*");

    }

    for(\$col=1;\$col<=\$fon;\$col++){

        echo (6-\$fon);

    }

    for(\$col=2;\$col<=\$fon;\$col++){

        echo (6-\$fon);

    }

    for(\$col=0;\$col<=5-\$fon;\$col++) {

        echo ("\*");

    }

    echo "<br>";

}

?>

<?php include ("yfooter.php"); ?>

**26**

<?php include("yheader.php"); ?>

<br></br>

```

<h3>&nbsp;&nbsp;&nbsp; Pyramid 26</h3>

<?php include("font_k.php");
for($fon=1;$fon<=5;$fon++)
{
    for($col=5;$col>=((($fon*2)-$fon);$col--)
    {
        echo ($fon);
    }
    for($col=5;$col>=(6-$fon);$col--)
    {
        echo ("*");
    }
    echo "<br>";
}
?>

<?php include ("yfooter.php"); ?>

```

**27**

```

<?php include("yheader.php"); ?>

<br></br>

```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 27</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++)
```

```
{
```

```
    echo ($fon);
```

```
    for($col=1;$col<=($fon);$col++)
```

```
    {
```

```
        echo ("&nbsp;");
```

```
    }
```

```
    for($col=1;$col<=($fon);$col++)
```

```
    {
```

```
        echo ("*");
```

```
    }
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

**28**

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 28</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++) {
```

```
    for($col=5;$col>=$fon;$col--) {
```

```
        echo ($col);
```

```
    }
```

```
    for($col=1;$col<=$fon;$col++) {
```

```
        echo ("*");
```

```
    }
```

```
    for($col=2;$col<=$fon;$col++) {
```

```
        echo ("*");
```

```
    }
```

```
    for($col=$fon;$col<=5;$col++) {
```

```
        echo ($col);
```

```
    }
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

**29**

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 29</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++)
```

```
{
```

```
    echo ($fon);
```

```
    echo ("*");
```

```
    echo ($fon+2);
```

```
    for($col=7;$col>=(6-$fon);$col--)
```

```
    {
```

```
        echo ("*");
```

```
    }
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

## 30

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```



```
<h3>&nbsp;&nbsp;&nbsp; Pyramid 30</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++) {
```

```
    for($scol=2;$scol<=$fon;$scol++) {
```

```
        echo ("&nbsp;");
```

```
    }
```

```
    for($scol=0;$scol<=5-$fon;$scol++){
```

```
        echo ("*");
```

```
    }
```

```
    for($scol=0;$scol<=4-$fon;$scol++){
```

```
        echo ("*");
```

```
    }
```

```
    for($scol=$fon;$scol>=1;$scol--) {
```

```
        echo ($scol);
```

```
    }
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

## 31

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 31</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=5;$fon>=1;$fon--)
```

```
{
```

```
    for($col=1;$col<=$fon;$col++)
```

```
    {
```

```
        echo (6-$fon);
```

```
    }
```

```
    for($col=1;$col<=(5-$fon);$col++)
```

```
    {
```

```
        echo ("&nbsp;&nbsp;&nbsp;");
```

```
    }
```

```
    for($col=1;$col<=$fon;$col++)
```

```
    {
```

```
        echo ("*");
```

```
    }
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

## 32

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 32</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=5;$fon>=1;$fon--)
```

```
{
```

```
    for($col=7;$col>=(6-$fon);$col--)
```

```
    {
```

```
        echo (8-$col);
```

```
    }
```

```
    for($col=7;$col>=($fon);$col--)
```

```
    {
```

```
        echo("*");
```

```
    }
```

```
    echo(8-$fon);
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

## 33

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 33</h3>

<?php include("font\_k.php");

for(\$fon=1;\$fon<=4;\$fon++){

    for(\$col=\$fon;\$col<=4+1;\$col++){

        echo ("&nbsp;&nbsp;&nbsp;&nbsp;");

    }

    for(\$col=1;\$col<=\$fon\*2-1;\$col++){

        echo ("\*");

    }

    echo "<br>";

}

for(\$fon=1;\$fon<4;\$fon++){

    for(\$col=1;\$col<=\$fon+2;\$col++){

        echo ("&nbsp;&nbsp;&nbsp;&nbsp;");

    }

    for(\$col=\$fon;\$col<=(4-1)\*2-\$fon;\$col++){

        echo ("\*");

    }

    echo "<br>";

}

?>

<?php include ("yfooter.php"); ?>

**34**

<?php include("yheader.php"); ?>

<br></br>

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 34</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=3;$fon++) {
```

```
    for($col=1;$col<=3-$fon;$col++) {
```

```
        echo ("&nbsp;&nbsp;&nbsp;");
```

```
    }
```

```
        echo ("*");
```

```
for($col=2;$col<=$fon;$col++){
```

```
    echo ($col);
```

```
}
```

```
for($col=$fon;$col<=$fon;$col++) {
```

```
    echo ($col);
```

```
}
```

```
for($col=$fon;$col>=2;$col--){
```

```
    echo ($col);
```

```
}
```

```
    echo ("*");
```

```
for($col=1;$col<=3-$fon;$col++) {
```

```
    echo ("&nbsp;&nbsp;&nbsp;");
```

```
}
```

```
    echo "<br>";
```

```
}
```

```

for($fon=2;$fon>=1;$fon--) {
    for($col=1;$col<=3-$fon;$col++) {
        echo ("&nbsp;&nbsp;&nbsp;");
    }

    echo ("*");
    for($col=1;$col<=$fon;$col++){
        echo ($fon);
    }

    for($col=2;$col<=$fon;$col++){
        echo ($col);
    }

    echo ("*");
    for($col=1;$col<=3-$fon;$col++) {
        echo ("&nbsp;&nbsp;&nbsp;");
    }
    echo "<br>";
}
?>
<?php include ("yfooter.php"); ?>

```

**35**

```

<?php include("yheader.php"); ?>

<br></br>

```

```
<h3>&nbsp;&nbsp;&nbsp;Pyramid 35</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++)
```

```
{
```

```
    echo($fon);
```

```
    echo("*");
```

```
    echo(($fon*2)-1);
```

```
    echo("*");
```

```
    echo($fon*2);
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

## 36

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 36</h3>

<?php include("font\_k.php");

```
for($fon=1;$fon<=3;$fon++) {  
    for($col=1;$col<=4-$fon;$col++){  
        echo ($fon+$col-1);  
    }  
    for($col=1;$col<=$fon;$col++){  
        echo ("*");  
    }  
    for($col=2;$col<=$fon;$col++){  
        echo ("*");  
    }  
    for($col=3;$col>=$fon;$col--){  
        echo ($col);  
    }  
    echo "<br>";  
}  
for($fon=2;$fon>=1;$fon--) {  
    for($col=1;$col<=4-$fon;$col++){  
        echo ($fon+$col-1);  
    }  
    for($col=1;$col<=$fon;$col++){  
        echo ("*");  
    }  
    for($col=3;$col<=1+$fon;$col++){  
        echo ("*");  
    }  
}
```



```
}

for($col=3;$col>=$fon;$col--) {
    echo ($col);
}
echo "<br>";
}
?>
<?php include ("yfooter.php"); ?>
```

|                                               |   |        |           |        |        |       |      |   |        |                   |        |   |
|-----------------------------------------------|---|--------|-----------|--------|--------|-------|------|---|--------|-------------------|--------|---|
| <input type="checkbox"/> categories           | ★ | Browse | Structure | Search | Insert | Empty | Drop | 0 | InnoDB | latin1_swedish_ci | 16 KiB | - |
| <input type="checkbox"/> customerss           | ★ | Browse | Structure | Search | Insert | Empty | Drop | 0 | InnoDB | latin1_swedish_ci | 16 KiB | - |
| <input type="checkbox"/> employees            | ★ | Browse | Structure | Search | Insert | Empty | Drop | 0 | InnoDB | latin1_swedish_ci | 16 KiB | - |
| <input type="checkbox"/> kkk                  | ★ | Browse | Structure | Search | Insert | Empty | Drop | 0 | InnoDB | latin1_swedish_ci | 16 KiB | - |
| <input type="checkbox"/> orderdetails         | ★ | Browse | Structure | Search | Insert | Empty | Drop | 0 | InnoDB | latin1_swedish_ci | 16 KiB | - |
| <input type="checkbox"/> orders               | ★ | Browse | Structure | Search | Insert | Empty | Drop | 0 | InnoDB | latin1_swedish_ci | 16 KiB | - |
| <input type="checkbox"/> personal information | ★ | Browse | Structure | Search | Insert | Empty | Drop | 0 | InnoDB | latin1_swedish_ci | 16 KiB | - |
| <input type="checkbox"/> shippers             | ★ | Browse | Structure | Search | Insert | Empty | Drop | 0 | InnoDB | latin1_swedish_ci | 16 KiB | - |
| <input type="checkbox"/> suppliers            | ★ | Browse | Structure | Search | Insert | Empty | Drop | 0 | InnoDB | latin1_swedish_ci | 16 KiB | - |

## Products

### Select

```
<?php
```

```
require("pro_slconnect.php");
```

```
$sql="select * from productsTest";
```

```
if((int)phpversion() >= 7) {
```

```
    $result = $connect->query($sql);
```

```
    if ($result->num_rows > 0) {
```

```
        while($row = $result->fetch_assoc()) {
```

```
            echo "<center> id: " . $row["PID"]. "- PName: " . $row["Pname"]. "-
```

```
SupID: " . $row["SupID"]."- QPU: " . $row["QPU"]."- UP: " . $row["UP"]. "<br/>";
```

```
        }
```

```
    } else {
```

```
        echo "no results";
```

```
    }
```

```

        $connect->close();

    } else {

        if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

        echo "Display all records : <br/>";

        while ($object = mysql_fetch_object($result)) {

            echo $object->PID . "   " . $object->Pname . "<br/>";

        }

        echo "Total " . mysql_num_rows($result) . " records";

        mysql_close($connect);
    }
}

```

## Insert

```
<?php include("yheader.php"); ?>
```

```
<form action=pro_s4insert.php>
```

```
<input name=nid value=>
```

```
<input name=nname value=>
```

```
<input name=sup value=>
```

```
<input name=qpu value=>
```

```
<input name=up value=>
```

```
<input type=submit value=insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['nid']) || !isset($_GET['nname']))
```

```
exit; require("pro_slconnect.php"); $sql="insert into
```

```
$tb
```

```
values('".$_GET['nid']. "','" .$_GET['nname']. "','" .$_GET['sup']. "','" .$_GET['qpu']. "','" .$_GET['up'
```

```
l.');" if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
    else
```

```
        echo "$sql : succeeded";
```

```

        $connect->close();

    } else {

        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            echo "$sql : succeeded";

        mysql_close($connect);

    }

```

```

?>

```

```

<?php include("yfooter.php"); ?>

```

## Delete

```

<?php include("yheader.php"); ?>

```

```

<?php

```

```

$myForm = '<body>

```

```

<form action="pro_s5delete.php">

```

```

<input name="delid" value="1001">

```

```

<input type="submit" value="delete.php">

```

```

</form>';

```

```
if (!isset($_GET['delid'])) {  
  
    echo $myForm;  
  
    exit;  
  
}  
  
require("pro_slconnect.php");  
  
$sql="delete from $tb ";
```

```

$sql.="where PID =".$_GET['delid']."";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        header("location: pro_s0index.php");

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        header("location: pro_s0index.php");

    mysql_close($connect);

}

?>

```

```

<?php include("yfooter.php"); ?>

```

## Update

```

<?php include("yheader.php"); ?>

```

```
<form action="pro_s6update.php">
```

```
<input name="id" value="">
```

```
<input name="name" value="">
```

```
<input name="sup" value="">
```

```
<input name="qpu" value="">
```

```
<input name="up" value="">
```



```
<input type="submit" value="update.php">
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['id'])) { exit; }
```

```
require("pro_slconnect.php");
```

```
$sql="update productsTest set ";
```

```
$sql.="PID =". $_GET['id'] .", ";
```

```
$sql.="Pname =". $_GET['name'] .", ";
```

```
$sql.="SupID =". $_GET['sup'] .", ";
```

```
$sql.="QPU =". $_GET['qpu'] .", ";
```

```
$sql.="UP =". $_GET['up'] .", ";
```

```
$sql.="where PID =". $_GET['id'] ."";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
    else
```

```
echo "<meta http-equiv='refresh' content='0";
```

```
url=pro_s0index.php'/>"; $connect->close();
```

```
} else {
```

```
if(!$result=mysql_db_query($db,$sql))
```

```
echo "$sql : True";
```

```
else
```

```
        echo "<meta http-equiv='refresh' content='0;

        url=pro_s0index.php'/>"; mysql_close($connect);

    }

?>
```

```
<?php include("yfooter.php"); ?>
```

## Create

```
<?php include("yheader.php"); ?>

<?php

if(file_exists("pro_s1connect.php"))

    require("pro_s1connect.php");

else

    die("File not found");

if ($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (PID char(4),Pname char(40),SupID char(40),QPU char(40),UP
char(40))");

//qWork("insert into $tb values('1001','Tom')");
```

```
//qWork("insert into $tb values('1002','Dang')");
```

```
//qWork("insert into $tb values('1003','Pom')");
```

```
if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);
```

```
echo '<a href="pro_s0index.php">back</a>'; function dbWork($sql) {
```

```

global $db,$host,$uname,$upass,$connect;

if((int)phpversion() >= 7) {

    if ($connect->query($sql) === FALSE)

        echo "$sql : failed ". $conn->error . "<br/>";

    else {

        echo "$sql : succeeded<br/>";

        $connect = new mysqli($host, $uname, $upass, $db);

    }

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

```

```
if ($connect->query($sql) === FALSE)
```

```
    echo "$sql : failed ". $conn->error . "<br/>";
```

```
else
```

```
    echo "$sql : succeeded<br/>";
```

```
} else {
```

```
if (!$result=mysql_db_query($db,$sql))
```

```
    echo "$sql : failed<br/>";
```

```
else
```

```
    echo "$sql : succeeded<br/>";
```

```
}
```

```
}
```

```
?>
```

```
<?php include("yfooter.php"); ?>
```

```
}
```

```
echo "<center><a
```

```
href=pro_s0index.php>back</a>"; ?>
```



## Categories

### Create

```
<?php include("header01.php"); ?>

<?php

if(file_exists("cate_slconnect.php"))

    require("cate_slconnect.php");

else

    die("File not found");

if($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (categoryid char(4),categoryname char(40),description char(40))");

//qWork("insert into $tb values('1001','Tom')"); //qWork("insert into $tb

values('1002','Dang')");

//qWork("insert into $tb values('1003','Pom')");

if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);

echo '<a href="index.php">back</a>'; function dbWork($sql) {

    global $db,$host,$uname,$upass,$connect;
```

```
if((int)phpversion() >= 7) {  
  
    if ($connect->query($sql) === FALSE)  
  
        echo "$sql : failed ". $conn->error . "<br/>";  
  
    else {  
  
        echo "$sql : succeeded<br/>";  
  
        $connect = new mysqli($host, $uname, $upass, $db);
```

```

    }

} else {

    if (!$result=mysql_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

        if (!$result=mysql_db_query($db,$sql))

            echo "$sql : failed<br/>";

```

```
else
```

```
    echo "$sql : succeeded<br/>";
```

```
}
```

```
}
```

```
?>
```

```
<?php include("yfooter.php"); ?>
```

## Insert

```
<?php include("yheader.php"); ?>
```

```
<form action=cate_s4insert.php>
```

```
<input name=cateid value=>
```

```
<input name=coname value=>
```

```
<input name=conn value=>
```

```
<input type=submit value=insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['cateid']) || !isset($_GET['coname'])) exit;
```

```
require("cate_s1connect.php");
```

```
$sql="insert into $tb
```

```
values('".$_GET['cateid']."','".$_GET['coname']."','".$_GET['conn']."')";
```

```
if((int)phpversion() >= 7) {
```

```
if($connect->query($sql) === FALSE)

    echo "$sql : failed";

else

    echo "$sql : succeeded";

$connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";
```

```

        else

            echo "$sql : succeeded";

            mysql_close($connect);

        }

    ?>

```

```

<?php include("footer.php"); ?>

```

## Select

```

<?php

require("cate_slconnect.php");

$sql="select * from Categories";

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center> id: " . $row["categoryid"]. "- categoryname: " .

            $row["categoryname"]. "- description: " . $row["description"]."<br/>";

        }

    } else {

```

```
        echo "no results";

    }

    $connect->close();

} else {

    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

    echo "Display all records : <br/>";
```



```

while ($object = mysql_fetch_object($result)) {

    echo $object->PID . "          " . $object->Pname . "<br/>";

}

echo "Total " . mysql_num_rows($result) . " records";

mysql_close($connect);

}

echo "<center><a href=index.php>back</a>";

?>

```

## Delete

```

<?php

$myForm = '<body>

<form action="cate_s5delete.php">

<input name="delid" value=".....">

<input type="submit" value="cate_s5delete.php">

</form>';

if (!isset($_GET['delid'])) {

    echo $myForm;

    exit;
}

```

```
}
```

```
require("cate_slconnect.php");
```

```
$sql="delete from $tb ";
```

```
$sql.="where categoryid='".$$_GET['delid'].'"";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```

        echo "$sql : failed";

    else

        header("location: index.php.php");

        $connect->close();

    } else {

        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            header("location: cate_s0index.php");

            mysql_close($connect);

    }

?>

```

## Update

```

<?php include("yheader.php"); ?>

<form action="cate_s6update.php">

<input name="idd" value="">

<input name="namee" value="">

<input name="des" value="">

```

```
<input type="submit" value="update.php">
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['idd'])) { exit; }
```

```
require("cate_slconnect.php");
```

```
$sql.="update Categories set ";
```

```

$sql.="categoryid='". $_GET['idd'] .'", ";

$sql.="categoryname='". $_GET['namee'] .'", ";

$sql.="description='". $_GET['des'] .'" ";

$sql.="where categoryid='". $_GET['idd'] .'" ";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        echo "<meta http-equiv='refresh' content='0;

        url=index.php'/>"; $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : True";

    else

        echo "<meta http-equiv='refresh' content='0;

        url=index.php'/>"; mysql_close($connect);

}

```

?>

<?php include("footer.php"); ?>

## Employees

### Select

```
<?php

require("emp_slconnect.php");

$sql="select * from Employees";

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center> id: " . $row["empid"]. "- empName: " . $row["empname"].
            "- empBD: " . $row["empbd"]. "- empaddress: " . $row["empaddress"]. "- empphone: " .
            $row["empphone"]. "<br/>";

        }

    } else {

        echo "no results";

    }

    $connect->close();

} else {

    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");
```

```
echo "Display all records : <br/>";

while ($object = mysql_fetch_object($result)) {

    echo $object->PID . " " . $object->Pname . "<br/>";

}

echo "Total " . mysql_num_rows($result) . " records";
```



```
        mysql_close($connect);

    }

    echo "<center><a href=index.php>back</a>";

?>
```

## Create

```
<?php include("yheader.php"); ?>

<?php

if(file_exists("emp_slconnect.php"))

    require("emp_slconnect.php");

else

    die("File not found");

if ($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (empid char(4),empname char(40),empbd char(40),empaddress
char(40),empphone char(40))");

//qWork("insert into $tb values('1001','Tom')");

//qWork("insert into $tb values('1002','Dang')");

//qWork("insert into $tb values('1003','Pom')");
```

```
if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);
```

```
echo '<a href="index.php">back</a>'; function dbWork($sql) {
```

```
    global $db,$host,$uname,$upass,$connect;
```

```
    if((int)phpversion() >= 7) {
```

```
        if ($connect->query($sql) === FALSE)
```

```
            echo "$sql : failed ". $conn->error . "<br/>";
```

```

        else {

            echo "$sql : succeeded <br/>";

            $connect = new mysqli($host, $uname, $upass, $db);

        }

    } else {

        if (!$result=mysqli_query($sql,$connect))

            echo "$sql : failed<br/>";

        else

            echo "$sql : succeeded<br/>";

    }

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    }

}

```

```
} else {  
  
    if (!$result=mysql_db_query($db,$sql))  
  
        echo "$sql : failed<br/>";  
  
    else  
  
        echo "$sql : succeeded<br/>";
```

```
        }  
    }  
?  
  
<?php include  
  
("footer.php"); ?>
```

## Insert

```
<?php include("yheader.php"); ?>  
  
<form action=emp_s4insert.php>  
  
<input name=empid value=>  
  
<input name=empname value=>  
  
<input name=empbd value=>  
  
<input name=empadd value=>  
  
<input name=empph value=>  
  
<input type=submit value=emp_s4insert.php>  
  
</form>  
  
<?php  
  
if (!isset($_GET['empid']) || !isset($_GET['empname'])) exit;
```

```
require("emp_slconnect.php");
```

```
$sql="insert into $tb
```

```
values("$_GET['empid'].","$_GET['empname'].","$_GET['empbd'].","$_GET['empadd'].",'
```

```
"$_GET['wmpth'].')";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```

        echo "$sql : failed";

    else

        echo "$sql : succeeded";

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        echo "$sql : succeeded";

    mysql_close($connect);

}

?>

<?php include("yfooter.php"); ?>

```

## Delete

```

<?php

$myForm = '<body>

<form action="emp_s5delete.php">

<input name="delid" value=".....">

```

```
<input type="submit" value="delete.php">
```

```
</form>;
```

```
if (!isset($_GET['delid'])) {
```

```
    echo $myForm;
```

```
    exit;
```



```
}

require("emp_slconnect.php");

$sql="delete from $tb ";

$sql.="where empid ='".$_GET['delid'].'"";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        header("location: index.php");

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        header("location: index.php");

    mysql_close($connect);

}
```

?>

## **Update**

```
<?php include("header01.php"); ?>
```

```
<form action="emp_s6update.php">
```

```
<input name="empid" value="">
```

```
<input name="empname" value="">
```

```
<input name="empbd" value="">
```

```
<input name="empadd" value="">
```

```
<input name="empph" value="">
```

```
<input type="submit" value="emp_s6update.php">
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['empid'])) { exit; }
```

```
require("emp_s1connect.php");
```

```
$sql="update Employees set ";
```

```
$sql.="empid =". $_GET['empid'] .", ";
```

```
$sql.="empname =". $_GET['empname'] .", ";
```

```
$sql.="empbd =". $_GET['empbd'] .", ";
```

```
$sql.="empaddress =". $_GET['empadd'] .", ";
```

```
$sql.="empphone =". $_GET['empph'] ."";
```

```
$sql.="where empid =". $_GET['empid'] ."";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

else

echo "<meta http-equiv='refresh' content='0;

url=index.php'/>"; \$connect->close();

} else {

if(!\$result=mysql\_db\_query(\$db,\$sql))

```
echo "$sql : True";
```

```
else
```

```
echo "<meta http-equiv='refresh' content='0;
```

```
url=index.php'/>"; mysql_close($connect);
```

```
}
```

```
?>
```

```
<?php include("footer.php"); ?>
```

## Customercss

### Select

```
<?php

require("cus_slconnect.php");

$sql="select * from Customers";

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center> id: " . $row["cusid"]. "- comName: " . $row["company"]. "-
contact: " . $row["contact"]."- address: " . $row["address"]."- Phone: " . $row["phone"]. "<br/>";

        }

    } else {

        echo "no results";

    }

    $connect->close();

} else {

    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

    echo "Display all records : <br/>";
```

```
while ($object = mysql_fetch_object($result)) {  
  
    echo $object->PID . "   " . $object->Pname . "<br/>";  
  
}  
  
echo "Total " . mysql_num_rows($result) . " records";  
  
mysql_close($connect);
```

```
}
```

```
echo "<center><a href=index.php>back</a>";
```

```
?>
```

## Create

```
<?php
```

```
if(file_exists("cus_slconnect.php"))
```

```
    require("cus_slconnect.php");
```

```
else
```

```
    die("File not found");
```

```
if ($dbstatus == 0) dbWork("create database $db");
```

```
qWork("create table $tb (cus char(4),company char(40),contact char(40),address  
char(40),phone char(40))");
```

```
//qWork("insert into $tb values('1001','Tom')");
```

```
//qWork("insert into $tb values('1002','Dang')");
```

```
//qWork("insert into $tb values('1003','Pom')");
```

```
if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);
```

```
echo '<a href="index.php">back</a>'; function dbWork($sql) {
```

```
    global $db,$host,$uname,$upass,$connect;
```



```
if((int)phpversion() >= 7) {  
  
    if ($connect->query($sql) === FALSE)  
  
        echo "$sql : failed ". $conn->error . "<br/>";  
  
    else {  
  
        echo "$sql : succeeded<br/>";  

```

```

        $connect = new mysqli($host, $uname, $upass, $db);

    }

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

        if (!$result=mysqli_db_query($db,$sql))

```

```
echo "$sql : failed<br/>";
```

```
else
```

```
echo "$sql : succeeded<br/>";
```

```
}
```

```
}
```

?>

## Insert

```
<form action=cus_s4insert.php>
```

```
<input name=cusid value=>
```

```
<input name=comname value=>
```

```
<input name=con value=>
```

```
<input name=add value=>
```

```
<input name=phone value=>
```

```
<input type=submit value=cus_s4insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['cusid']) || !isset($_GET['comname'])) exit;
```

```
require("cus_s1connect.php");
```

```
$sql="insert into $tb
```

```
values('".$_GET['cusid']. "','".$_GET['comname']. "','".$_GET['con']. "','".$_GET['add']. "','".$_GE
```

```
T['pho ne']. '")";
```

```
if((int)phpversion() >= 7) {
```

```
if($connect->query($sql) === FALSE)

    echo "$sql : failed";

else

    echo "$sql : succeeded";

$connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))
```

```
        echo "$sql : failed";

    else

        echo "$sql : succeeded";

    mysql_close($connect);

}

?>
```

## Delete

```
<?php

$myForm = '<body>

<form action="cus_s5delete.php">

<input name="delid" value=".....">

<input type="submit" value="cus_s5delete.php">

</form>';

if (!isset($_GET['delid'])) {

    echo $myForm;

    exit;

}

require("cus_s1connect.php");
```

```
$sql="delete from $tb ";
```

```
$sql.="where cus =''.$_GET['delid'].''";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
    else
```

```
        header("location: index.php");

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        header("location: index.php");

    mysql_close($connect);

}

?>
```

## Update

```
<form action="cus_s6update.php">

<input name="cusid" value="">

<input name="com" value="">

<input name="con" value="">

<input name="add" value="">

<input name="ph" value="">
```



```
<input type="submit" value="update.php">
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['cusid'])) { exit; }
```

```
require("cus_slconnect.php");
```

```
$sql="update Customers set ";
```

```

$sql.="cus='". $_GET['cusid'] .'", ";

$sql.="company='". $_GET['com'] .'", ";

$sql.="contact='". $_GET['con'] .'", ";

$sql.="address='". $_GET['add'] .'", ";

$sql.="phone='". $_GET['ph'] .'" ";

$sql.="where cus='". $_GET['cusid'] .""";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        echo "<meta http-equiv='refresh' content='0;

        url=index.php'/>"; $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : True";

    else

        echo "<meta http-equiv='refresh' content='0;

        url=index.php'/>"; mysql_close($connect);

```

?>

## Suppliers

### Select

<?php

```
require("sup_slconnect.php");
```

```
$sql="select * from Suppliers";
```

```
if((int)phpversion() >= 7) {
```

```
    $result = $connect->query($sql);
```

```
    if ($result->num_rows > 0) {
```

```
        while($row = $result->fetch_assoc()) {
```

```
            echo "<center> id: " . $row["supid"]. "- companyName: " .
```

```
$row["comname"]. "- address: " . $row["address"]. "- post: " . $row["post"]. "- phone: " .
```

```
$row["phone"]. "<br/>";
```

```
        }
```

```
    } else {
```

```
        echo "no results";
```

```
    }
```

```
    $connect->close();
```

```
} else {
```

```
if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

echo "Display all records : <br/>";

while ($object = mysql_fetch_object($result)) {

    echo $object->PID . " " . $object->Pname . "<br/>";

}

echo "Total " . mysql_num_rows($result) . " records";
```

```
        mysql_close($connect);

    }

    echo "<center><a href=index.php>back</a>";

?>
```

## Create

```
<?php

if(file_exists("sup_slconnect.php"))

    require("sup_slconnect.php");

else

    die("File not found");

if ($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (supid char(4),comname char(40),address char(40),post char(40),phone
char(40))");

//qWork("insert into $tb values('1001','Tom')");

//qWork("insert into $tb values('1002','Dang')");

//qWork("insert into $tb values('1003','Pom')");

if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);

echo '<a href="index.php">back</a>'; function dbWork($sql) {
```

```
global $db,$host,$uname,$upass,$connect;
```

```
if((int)phpversion() >= 7) {
```

```
    if ($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed ". $conn->error . "<br/>";
```

```
    else {
```

```

        echo "$sql : succeeded<br/>";

        $connect = new mysqli($host, $uname, $upass, $db);

    }

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $connect->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

```

```
if (!$result=mysql_db_query($db,$sql))
```

```
    echo "$sql : failed<br/>";
```

```
else
```

```
    echo "$sql : succeeded<br/>";
```

```
}
```



```
}
```

```
?>
```

## Insert

```
<form action=sup_s4insert.php>
```

```
<input name=supid value=>
```

```
<input name=comname value=>
```

```
<input name=add value=>
```

```
<input name=post value=>
```

```
<input name=ph value=>
```

```
<input type=submit value=insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['supid']) || !isset($_GET['comname'])) exit;
```

```
require("sup_s1connect.php");
```

```
$sql="insert into $tb
```

```
values('".$_GET['supid']. "','".$_GET['comname']. "','".$_GET['add']. "','".$_GET['post']. "','".$_GET['ph ']. "');"
```

```
if((int)phpversion() >= 7) {
```

```
if($connect->query($sql) === FALSE)

    echo "$sql : failed";

else

    echo "$sql : succeeded";

$connect->close();

} else {
```

```
        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            echo "$sql : succeeded";

        mysql_close($connect);

    }

?>
```

## Delete

```
<?php

$myForm = '<body>

<form action="sup_s5delete.php">

<input name="delid" value=".....">

<input type="submit" value="sup_s5delete.php">

</form>';

if (!isset($_GET['delid'])) {

    echo $myForm;

    exit;
```

```
}
```

```
require("sup_slconnect.php");
```

```
$sql="delete from $tb ";
```

```
$sql.="where supid ='".$_GET['delid'].'"';
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";

    else

        header("location: index.php");

        $connect->close();

    } else {

        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            header("location: index.php");

            mysql_close($connect);

    }

?>
```

## Update

```
<form action="sup_s6update.php">

<input name="supid" value="">

<input name="supcom" value="">

<input name="supadd" value="">
```

```
<input name="suppo" value="">
```

```
<input name="supph" value="">
```

```
<input type="submit" value="update.php">
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['supid'])) { exit; }
```

```

require("sup_slconnect.php");

$sql="update Suppliers set ";

$sql="supid='". $_GET['supid'] .'", ";

$sql="comname='". $_GET['supcom'] .'", ";

$sql="address='". $_GET['supadd'] .'", ";

$sql="post='". $_GET['suppo'] .'", ";

$sql="phone='". $_GET['supph'] .'" ";

$sql="where supid='". $_GET['supid'] .'"";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        echo "<meta http-equiv='refresh' content='0;

        url=index.php'/>"; $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : True";

    else

```

```
echo "<meta http-equiv='refresh' content='0;
```

```
url=index.php'/>"; mysql_close($connect);
```

```
}
```

```
?>
```



## Orders

### Select

```
<?php

require("orde_slconnect.php");

$sql="select * from Orderdetails";

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center> orderid: " . $row["orderid"]. "- productid: " .
$row["productid"]. "- unitprice: " . $row["unitprice"]. "- quantity: " . $row["quantity"]. "- discount:
" .
$row["discount"]. "<br/>";

        }

    } else {

        echo "no results";

    }

    $connect->close();

} else {
```

```
if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

echo "Display all records : <br/>";

while ($object = mysql_fetch_object($result)) {

    echo $object->PID . " " . $object->Pname . "<br/>";

}

echo "Total " . mysql_num_rows($result) . " records";
```

```

        mysql_close($connect);

    }

    echo "<center><a href=index.php>back</a>";

?>

```

## Create

```

<?php

if(file_exists("orde_slconnect.php"))

    require("orde_slconnect.php");

else

    die("File not found");

if ($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (orderid char(5),productid char(40),unitprice
char(40),quantity char(40),discount char(40))");

if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);

echo '<a href="orde_s0index.php">back</a>'; function dbWork($sql) {

    global $db,$host,$uname,$upass,$connect;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

```

```
echo "$sql : failed ". $conn->error . "<br/>";
```

```
else {
```

```
echo "$sql : succeeded<br/>";
```

```
$connect = new mysqli($host, $uname, $upass, $db);
```

```
}
```

```

    } else {

        if (!$result=mysql_query($sql,$connect))

            echo "$sql : failed<br/>";

        else

            echo "$sql : succeeded<br/>";

    }

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

        if (!$result=mysql_db_query($db,$sql))

            echo "$sql : failed<br/>";

        else

```

```
echo "$sql : succeeded<br/>";
```

```
}
```

```
}
```

```
?>
```

## Insert

```
<form action=orde_s4insert.php>

<input name=ordeid value=>

<input name=proid value=>

<input name=uni value=>

<input name=qua value=>

<input name=dis value=>

<input type=submit value=orde_s4insert.php>

</form>

<?php

if (!isset($_GET['ordeid']) || !isset($_GET['proid']))

exit; require("orde_s1connect.php"); $sql="insert into

$tb

values('".$_GET['ordeid']."','".$_GET['proid']."','".$_GET['uni']."','".$_GET['qua']."','".$_GET['di

s'].".');" if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";
```

```
else

    echo "$sql : succeeded";

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else
```



```

        echo "$sql : succeeded";

        mysql_close($connect);
    }

?>

```

## Update

```

<?php include("header01.php"); ?>

<form action="orde_s6update.php">

<input name="ordeid" value="">

<input name="prouid" value="">

<input name="unit" value="">

<input name="quan" value="">

<input name="disc" value="">

<input type="submit" value="orde_s6update.php">

</form>

<?php

if (!isset($_GET['ordeid'])) { exit; }

require("orde_s1connect.php");

$sql.="update Orderdetails set ";

```

```
$sql.="orderid='". $_GET['ordeid'] ."', ";
```

```
$sql.="productid='". $_GET['prouid'] ."', ";
```

```
$sql.="unitprice='". $_GET['unit'] ."', ";
```

```
$sql.="quantity='". $_GET['quan'] ."', ";
```

```
$sql.="discount='". $_GET['disc'] .'" ";
```

```

$sql.="where orderid='". $_GET['ordeid'] ."";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        echo "<meta http-equiv='refresh' content='0;

url=index.php'/>"; $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : True";

    else

        echo "<meta http-equiv='refresh' content='0;

url=index.php'/>"; mysql_close($connect);

}

?>

<?php include("footer.php"); ?>

```

## Delete

```
<?php
```

```
$myForm = '<body>
```

```
<form action="orde_s5delete.php">
```

```
<input name="delid" value=".....">
```

```
<input type="submit" value="orde_s5delete.php">
```

```

</form>';

if (!isset($_GET['delid'])) {

    echo $myForm;

    exit;

}

require("orde_slconnect.php");

$sql="delete from $tb ";

$sql.="where orderid='".$_GET['delid']."'";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        header("location: index.php");

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

```

```
header("location: index.php");
```

```
mysql_close($connect);
```

```
}
```

```
?>
```

## Orderdetails Select

```
<?php

require("orde_slconnect.php");

$sql="select * from Orderdetails";

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center>orderid: " . $row["orderid"]. "- productid: " .
$row["productid"]. "- unitprice: " . $row["unitprice"]. "- quantity: " . $row["quantity"]. "- discount:
" .
$row["discount"]. "<br/>";

        }

    } else {

        echo "no results";

    }

    $connect->close();

} else {
```

```
if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

echo "Display all records : <br/>";

while ($object = mysql_fetch_object($result)) {

    echo $object->PID . " " . $object->Pname . "<br/>";

}

echo "Total " . mysql_num_rows($result) . " records";
```



```
        mysql_close($connect);

    }

    echo "<center><a href=index.php>back</a>";

?>
```

## Create

```
<?php

if(file_exists("orde_slconnect.php"))

    require("orde_slconnect.php");

else

    die("File not found");

if ($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (orderid char(5),productid char(40),unitprice
char(40),quantity char(40),discount char(40))");

if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);

echo '<a href="orde_s0index.php">back</a>'; function dbWork($sql) {

    global $db,$host,$uname,$upass,$connect;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)
```

```
echo "$sql : failed ". $conn->error . "<br/>";
```

```
else {
```

```
echo "$sql : succeeded<br/>";
```

```
$connect = new mysqli($host, $uname, $upass, $db);
```

```
}
```

```

    } else {

        if (!$result=mysql_query($sql,$connect))

            echo "$sql : failed<br/>";

        else

            echo "$sql : succeeded<br/>";

    }

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

        if (!$result=mysql_db_query($db,$sql))

            echo "$sql : failed<br/>";

        else

```

```
echo "$sql : succeeded<br/>";
```

```
}
```

```
}
```

```
?>
```

## Insert

```
<form action=orde_s4insert.php>
```

```
<input name=ordeid value=>
```

```
<input name=proid value=>
```

```
<input name=uni value=>
```

```
<input name=qua value=>
```

```
<input name=dis value=>
```

```
<input type=submit value=orde_s4insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['ordeid']) || !isset($_GET['proid']))
```

```
exit; require("orde_s1connect.php"); $sql="insert into
```

```
$tb
```

```
values('".$_GET['ordeid']."'','".$_GET['proid']."'".$_GET['uni']."'".$_GET['qua']."'".$_GET['di
```

```
s'].').""); if((int)phpversion() >= 7) {
```

```
if($connect->query($sql) === FALSE)
```

```
    echo "$sql : failed";
```

```
else

    echo "$sql : succeeded";

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else
```

```
        echo "$sql : succeeded";

    mysql_close($connect);

}

?>
```

## Delete

```
<?php

$myForm = '<body>

<form action="orde_s5delete.php">

<input name="delid" value=".....">

<input type="submit" value="orde_s5delete.php">

</form>';

if (!isset($_GET['delid'])) {

    echo $myForm;

    exit;

}

require("orde_s1connect.php");

$sql="delete from $tb ";
```

```
$sql.="where orderid =".$_GET['delid']."";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
    else
```

```
        header("location: index.php");
```



```
        $connect->close();

    } else {

        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            header("location: index.php");

        mysql_close($connect);

    }

?>
```

## Update

```
<form action="orde_s6update.php">

<input name="ordeid" value="">

<input name="prouid" value="">

<input name="unit" value="">

<input name="quan" value="">

<input name="disc" value="">

<input type="submit" value="orde_s6update.php">
```

</form>

<?php

```
if (!isset($_GET['ordeid'])) { exit; }
```

```
require("orde_slconnect.php");
```

```
$sql.="update Orderdetails set ";
```

```
$sql.="orderid='". $_GET['ordeid'] .'", ";
```

```

$sql.="productid='". $_GET['prouid'] .'", ";

$sql.="unitprice='". $_GET['unit'] .'", ";

$sql.="quantity='". $_GET['quan'] .'", ";

$sql.="discount='". $_GET['disc'] .'" ";

$sql.="where orderid='". $_GET['ordeid'] .'"';

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        echo "<meta http-equiv='refresh' content='0;

        url=index.php'/>"; $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : True";

    else

        echo "<meta http-equiv='refresh' content='0;

        url=index.php'/>"; mysql_close($connect);

}

```

?>

## Shippers

### Select

<?php

```
require("sh_slconnect.php");
```

```
$sql="select * from Shippers";
```

```
if((int)phpversion() >= 7) {
```

```
    $result = $connect->query($sql);
```

```
    if ($result->num_rows > 0) {
```

```
        while($row = $result->fetch_assoc()) {
```

```
            echo "<center> id: " . $row["shid"]. "- Company: " . $row["comname"]. "-
```

```
Phone: " . $row["phone"]. "<br/>";
```

```
        }
```

```
    } else {
```

```
        echo "no results";
```

```
    }
```

```
    $connect->close();
```

```
} else {
```

```
    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");
```

```
    echo "Display all records : <br/>";
```

```
    while ($object = mysql_fetch_object($result)) {
```

```
        echo $object->PID . " " . $object->Pname . "<br/>";
    }
    echo "Total " . mysql_num_rows($result) . " records";

    mysql_close($connect);
```

```
}
```

```
echo "<center><a href=index.php>back</a>";
```

```
?>
```

## Create

```
<?php
```

```
if(file_exists("sh_slconnect.php"))
```

```
    require("sh_slconnect.php");
```

```
else
```

```
    die("File not found");
```

```
if ($dbstatus == 0) dbWork("create database $db");
```

```
qWork("create table $tb (shid char(4),comname char(40),phone char(40))");
```

```
//qWork("insert into $tb values('1001','Tom')"); //qWork("insert into $tb
```

```
values('1002','Dang')");
```

```
//qWork("insert into $tb values('1003','Pom')");
```

```
if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);
```

```
echo '<a href="index.php">back</a>'; function dbWork($sql) {
```

```
    global $db,$host,$uname,$upass,$connect;
```

```
if((int)phpversion() >= 7) {  
  
    if ($connect->query($sql) === FALSE)  
  
        echo "$sql : failed ". $conn->error . "<br/>";  
  
    else {  
  
        echo "$sql : succeeded<br/>";  
  
        $connect = new mysqli($host, $uname, $upass, $db);
```

```

    }

} else {

    if (!$result=mysql_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

        if (!$result=mysql_db_query($db,$sql))

            echo "$sql : failed<br/>";

```



```
else
```

```
    echo "$sql : succeeded<br/>";
```

```
}
```

```
}
```

```
?>
```

## Insert

```
<form action=sh_s4insert.php>
```

```
<input name=shid value=>
```

```
<input name=comname value=>
```

```
<input name=phone value=>
```

```
<input type=submit value=sh_s4insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['shid']) || !isset($_GET['comname'])) exit;
```

```
require("sh_s1connect.php");
```

```
$sql="insert into $tb
```

```
values('".$_GET['shid']. "','".$_GET['comname']. "','".$_GET['phone']. "')";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
else

    echo "$sql : succeeded";

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        echo "$sql : succeeded";

    mysql_close($connect);
```

```
}
```

```
?>
```

## Delete

```
<?php
```

```
$myForm = '<body>
```

```
<form action="sh_s5delete.php">
```

```
<input name="delid" value=".....">
```

```
<input type="submit" value="sh_s5delete.php">
```

```
</form>';
```

```
if (!isset($_GET['delid'])) {
```

```
    echo $myForm;
```

```
    exit;
```

```
}
```

```
require("sh_s1connect.php");
```

```
$sql="delete from $tb ";
```

```
$sql.="where shid='".$_GET['delid']."'";
```

```
if((int)phpversion() >= 7) {
```

```
if($connect->query($sql) === FALSE)

    echo "$sql : failed";

else

    header("location: index.php");

$connect->close();

} else {
```

```
        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            header("location: index.php");

        mysql_close($connect);

    }

?>
```

## Update

```
<form action="sh_s6update.php">

<input name="shid" value="">

<input name="commname" value="">

<input name="phh" value="">

<input type="submit" value="sh_s6update.php">

</form>

<?php

if (!isset($_GET['shid'])) { exit; }

require("sh_s1connect.php");
```

```
$sql="update Shippers set ";
```

```
$sql.="shid='". $_GET['shid'] .'", ";
```

```
$sql.="comname='". $_GET['commname'] .'", ";
```

```
$sql.="phone='". $_GET['phh'] .'" ";
```

```
$sql.="where shid='". $_GET['shid'] .'"";
```

```
if((int)phpversion() >= 7) {
```

```
if($connect->query($sql) === FALSE)

    echo "$sql : failed";

else

    echo "<meta http-equiv='refresh' content='0;

url=index.php'/>"; $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : True";

    else

        echo "<meta http-equiv='refresh' content='0;

url=index.php'/>"; mysql_close($connect);

}

?>
```



## หน้าDrop ของแต่ละตัว

```
<?php include("yheader.php"); ?>

<?php

/* updated for php7 and php 5 on 2560-09-13 */

require("pro_slconnect.php");

$sql = "drop database $db";

if((int)phpversion() >= 7) {

    $connect->close();

    $connect = mysqli_connect($host, $uname, $upass);

    if (mysqli_query($connect, $sql))

        echo "Drop database : succeeded";

    else

        echo "Drop database : failed " . mysqli_error($connect);

    $connect->close();

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "Drop database : failed";

    else

        echo "Drop database : succeeded";

    mysqli_close($connect);

}

?>

<input type='button' onclick="location.href='s0index.php'" value='back'>

<?php include("footer.php"); ?>
```

## ตัวอย่างหน้าInsert And

	Pyramid 1-12	Pyramid 13-24	Pyramid 25-36	Pro	
1004	kmit	insert.php			

## ตัวอย่างหน้าDelete

	Pyramid 1-12	Pyramid 13-24	Pyramid 25-36	Pro	
1001	delete.php				

## ตัวอย่างหน้าupdate

	Pyramid 1-12	Pyramid 13-24	Pyramid 25-36	Pro	
1003	chula	update.php			

```
<?php
session_start(); ?>
<html lang="en">
<title>Pyramid</title>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="stylesheet" href="https://www.w3schools.com/w3css/4/w3.css">
<link rel="stylesheet" href="https://fonts.googleapis.com/css?family=Lato">
<link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/font-awesome/4.7.0/css/font-awesome.min.css">

<center>
    <p>

    <B></B><BR>
    <h2>พีระมิด 36 แบบ (Pyramid)</h2>

<style>
a:link, a:visited {
    background-color: #87CEEB;
    color: white;
    padding: 10px 30px;
    text-align: center;
    text-decoration: none;
```

```
display: inline-block;
}
```

```
a:hover, a:active {
background-color:#F4A460;
}
```

```
</style>
```

```
<META NAME="Generator" CONTENT="EditPlus">
```

```
<META NAME="Author" CONTENT="">
```

```
<META NAME="Keywords" CONTENT="">
```

```
<META NAME="Description" CONTENT="">
```

```
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
```

```
</HEAD>
```

```
<BODY bgcolor =#1E90FF>
```

```
<TABLE align="center" width="1024" border="0">
```

```
<TR>
```

```
<TD colspan="3" bgcolor="#87CEEB" align="center" >
```

```
</div>
```

```
<div class="w3-dropdown-hover w3-hide-small ">
```

```
<a class="w3-bar-item w3-button "><font color="white">Pyramid 1-12</a>
```

```
<div class="w3-dropdown-content w3-bar-block w3-card-4">
```

```
<a href="fon_01.php" class="w3-bar-item w3-button">Pyramid1</a>
<a href="fon_02.php" class="w3-bar-item w3-button">Pyramid2</a>
<a href="fon_03.php" class="w3-bar-item w3-button">Pyramid3</a>
<a href="fon_04.php" class="w3-bar-item w3-button">Pyramid4</a>
<a href="fon_05.php" class="w3-bar-item w3-button">Pyramid5</a>
<a href="fon_06.php" class="w3-bar-item w3-button">Pyramid6</a>
<a href="fon_07.php" class="w3-bar-item w3-button">Pyramid7</a>
<a href="fon_08.php" class="w3-bar-item w3-button">Pyramid8</a>
<a href="fon_09.php" class="w3-bar-item w3-button">Pyramid9</a>
<a href="fon_10.php" class="w3-bar-item w3-button">Pyramid10</a>
<a href="fon_11.php" class="w3-bar-item w3-button">Pyramid11</a>
<a href="fon_12.php" class="w3-bar-item w3-button">Pyramid12</a>
</div>
```

```
</div>
```

```
<div class="w3-dropdown-hover w3-hide-small ">
```

```
<a class="w3-bar-item w3-button "><font color="white">Pyramid 13-24</a>
```

```
<div class="w3-dropdown-content w3-bar-block w3-card-4">
```

```
<a href="fon_13.php" class="w3-bar-item w3-button">Pyramid13</a>
<a href="fon_14.php" class="w3-bar-item w3-button">Pyramid14</a>
<a href="fon_15.php" class="w3-bar-item w3-button">Pyramid15</a>
<a href="fon_16.php" class="w3-bar-item w3-button">Pyramid16</a>
<a href="fon_17.php" class="w3-bar-item w3-button">Pyramid17</a>
<a href="fon_18.php" class="w3-bar-item w3-button">Pyramid18</a>
<a href="fon_19.php" class="w3-bar-item w3-button">Pyramid19</a>
<a href="fon_20.php" class="w3-bar-item w3-button">Pyramid20</a>
```

[Pyramid21](fon_21.php)

[Pyramid22](fon_22.php)

[Pyramid23](fon_23.php)

[Pyramid24](fon_24.php)

</div>

</div>

</div>

</div>

<div class="w3-dropdown-hover w3-hide-small ">

<a class="w3-bar-item w3-button "><font color="white">Pyramid 25-36</a>

<div class="w3-dropdown-content w3-bar-block w3-card-4">

<a href="fon\_25.php" class="w3-bar-item w3-button">Pyramid25</a>

<a href="fon\_26.php" class="w3-bar-item w3-button">Pyramid26</a>

<a href="fon\_27.php" class="w3-bar-item w3-button">Pyramid27</a>

<a href="fon\_28.php" class="w3-bar-item w3-button">Pyramid28</a>

<a href="fon\_29.php" class="w3-bar-item w3-button">Pyramid29</a>

<a href="fon\_30.php" class="w3-bar-item w3-button">Pyramid30</a>

<a href="fon\_31.php" class="w3-bar-item w3-button">Pyramid31</a>

<a href="fon\_32.php" class="w3-bar-item w3-button">Pyramid32</a>

<a href="fon\_33.php" class="w3-bar-item w3-button">Pyramid33</a>

<a href="fon\_34.php" class="w3-bar-item w3-button">Pyramid34</a>

<a href="fon\_35.php" class="w3-bar-item w3-button">Pyramid35</a>

<a href="fon\_36.php" class="w3-bar-item w3-button">Pyramid36</a>

</div>

</div>

<div class="w3-dropdown-hover w3-hide-small ">

<a class="w3-bar-item w3-button "><font color="white">Pro</a>

<div class="w3-dropdown-content w3-bar-block w3-card-4">

<a href="pro\_s0index.php" class="w3-bar-item w3-button">s0</a>

</div>

</TD>

</TR>

<TR>

<TD width="624" >