


สิ่งที่ทำสำเร็จ

จากบทที่เรียนที่ผ่านมาทำให้ข้าพเจ้าได้ทำระบบ Sing in และ Sing out สำเร็จ และในระบบ Sing in นั้น มีการตรวจสอบว่าผู้ที่เข้าว่าเป็น Admin หรือ User ถ้าหากเป็น Admin ก็สามารถแก้ไขข้อมูล ลบข้อมูลและแทรกข้อมูลต่างๆได้ ทั้งนี้ยังได้ทำตารางระบบพื้นฐานการซื้อขาย ทั้ง 8 ตาราง Nothwind สำเร็จ โดยการใส่ Menu เป็น css และ bootstrap ที่เชื่อมต่อกับฐานข้อมูลออนไลน์และประมวลในตัว WebHost นั้นเลย และยังมีการประมวลผลในเครื่องตัวเองนั้นด้วย ต่อจากนี้ยังได้ทำ Pyreamid ลงไปยัง Menu โดยทุกๆ หน้าก็จะมี herder และ tooter

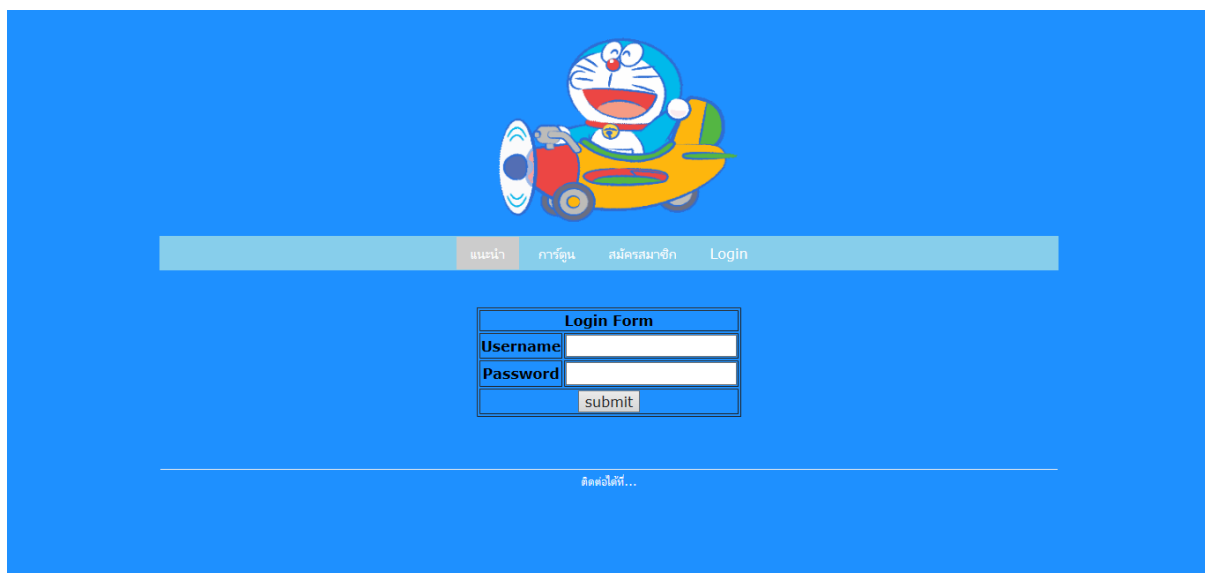

Code หน้า Login

```
<?php include("yheader.php"); ?>

<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />

<form action="chlog.php" name="frmAdd" method="post">

    <br>

    <br>

<center><table width="284" border >

    <tr>

        <th colspan="2" align="center">Login Form</th>

    </tr>

    <tr>

        <th width="120">Username</th>

        <td><input type="text" name="uname" size="20"></td>

    </tr>

    <tr>

        <th width="120">Password</th>

        <td><input type="text" name="upass" size="20"></td>

    </tr>

    <tr>

        <td colspan="2" align="center"><input type="submit" name="submit" value="submit"></td>

    </tr>

</table></center>

<br>

<br>

<hr>
```

```
<?php include("yfooter.php"); ?>
```

```
</TABLE>
```



Code หน้า Insert

```
<?php include("yheader.php"); ?>
```

```
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
```

```
<TABLE align="center" width="624" height="800" border="1">
```

```
<Center><h1> ตรวจสอบข้อมูล</h1></Center>
```

```
<?php
```

```
ini_set('display_errors', 1);
```

```
error_reporting(~0);
```

```
$serverName = "127.0.0.1";
```

```

$userName = "root";
$password = "";
$dbName = "r";

// $conn = mysqli_connect($serverName,$userName,$password,$dbName);

$sql = "SELECT * FROM table01";
$sql2 = "SELECT * FROM table02";
//mysqli_set_charset($conn,'UTF8');

$query = mysqli_query($conn,$sql);
$query2 = mysqli_query($conn,$sql2);
?>
<table width="650" align="center" border="3">
<Center><h1> ข้อมูลส่วนตัว </h1></Center>
<tr>
<th width="50"> <div align="center">ID </div></th>
<th width="550"> <div align="center">Status</div></th>
<th width="550"> <div align="center">ชื่อ-สกุล</div></th>
<th width="550"> <div align="center">รหัสผ่าน </div></th>
<th width="550"> <div align="center">รหัสบัตรประชาชน </div></th>
<th width="550"> <div align="center">เพศ </div></th>
<th width="550"> <div align="center">เบอร์ติดต่อ </div></th>
<th width="550"> <div align="center">อีเมลล์ </div></th>
<th width="550"> <div align="center">Edit </div></th>
</tr>
</tr>
<?php
while($result=mysqli_fetch_array($sql,$sql2))
{

```

?>

<tr>

<td><div align="center"><?php echo \$result["id"];?></div></td>

<td><?php echo \$result["username"];?></td>

<td><?php echo \$result["password"];?></td>

<td><div align="center"><?php echo \$result["pin"];?></div></td>

<td align="right"><?php echo \$result["sex"];?></td>

<td align="right"><?php echo \$result["phone"];?></td>

<td align="right"><?php echo \$result["email"];?></td>

<td align="center"><a href="pp.php?id=<?php echo \$result['id'];?>">Edit</td>

<td align="center"><a href="del3.php?id=<?php echo \$result["id"];?>">Del</td>

</tr>

<?php

}

?>

<table width="650" align="center" border="3">

<Center><h1> **ที่อยู่** </h1></Center>

<tr>

<th width="50"> <div align="center">ID </div></th>

<th width="550"> <div align="center">**บ้านเลขที่**</div></th>

<th width="550"> <div align="center">**หมู่ที่**</div></th>

<th width="550"> <div align="center">**ชื่อหมู่บ้าน**</div></th>

<th width="550"> <div align="center">**ถนน**</div></th>

<th width="550"> <div align="center">**ตำบล**</div></th>

<th width="550"> <div align="center">**อำเภอ**</div></th>

<th width="550"> <div align="center">**จังหวัด**</div></th>

<th width="550"> <div align="center">**รหัส ปณ.**</div></th>

<?php

//while(\$result=mysqli_fetch_array(\$query2,MYSQLI_ASSOC))

```

{
?>
<tr>
    <td><div align="center"><?php echo $result["id"];?></div></td>
    <td><?php echo $result["house_number"];?></td>
    <td><?php echo $result["swine"];?></td>
    <td><div align="center"><?php echo $result["village_name"];?></div></td>
    <td align="right"><?php echo $result["road"];?></td>
    <td align="right"><?php echo $result["districte"];?></td>
        <td align="right"><?php echo $result["district"];?></td>
        <td align="right"><?php echo $result["province"];?></td>
        <td align="right"><?php echo $result["zip_code"];?></td>
    </tr>
<?php
}
?>
</table>
<?php
//mysqli_close($conn);
?>
<br>
<hr>
<?php include("yfooter.php"); ?>
</TABLE>

```

Code หน้า Delete

```
<?php

    ini_set('display_errors', 1);
    error_reporting(~0);

include("connectdb.php");

    $sql = "UPDATE customer SET status = '0' WHERE id = '".$_GET["id"]."' ";
    $query = mysqli_query($conn,$sql);

    if($query){
        echo "<script type='text/javascript'>";
        echo "alert('Delete Succesfully');";
        echo "window.location = 'index.php' ";
        echo "</script>";
    }
    else{
        echo "<script type='text/javascript'>";
        echo "alert('Error back to Delete again');";
        echo "</script>";
    }
}
```

```
mysqli_close($conn);

?>
```

Code Update

```
<?php include("yheader.php"); ?>

<?php if(!isset($_SESSION["uch"])){ echo "<CENTER><FONT SIZE=5 COLOR=red>กรุณา
Login!</FONT><BR><FONT SIZE=5 color=yelloe ><A HREF=logout.php>กดไล้หน้า
Login</A></FONT></CENTER>"; exit(); } ?>

<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />

<?php
ini_set('display_errors', 1);
error_reporting(~0);

include("connectdb.php");

$query = mysqli_query($conn,$sql);

$result=mysqli_fetch_array($query,MYSQLI_ASSOC);

?>

<form action="editsave.php" name="frmAdd" method="post">
<table width="284" border="1">
<tr>
<th width="120">id</th>
```



```
<td width="238"><input type="hidden" name="txtid" value="<?php echo $result["id"];?>"><?php echo $result["id"];?></td>
```

```
</tr>
```

```
<tr>
```

```
<th width="120">name</th>
```

```
<td><input type="text" name="txtname" size="20" value="<?php echo $result["name"];?>"></td>
```

```
</tr>
```

```
<tr>
```

```
<th width="120">surname</th>
```

```
<td><input type="text" name="txtsurname" size="20" value="<?php echo $result["surname"];?>"></td>
```

```
</tr>
```

```
<tr>
```

```
<th width="120">Username</th>
```

```
<td><input type="text" name="uname" size="20" value="<?php echo $result["uname"];?>"></td>
```

```
</tr>
```

```
<tr>
```

```
<th width="120">Password</th>
```

```
<td><input type="text" name="upass" size="20" value="<?php echo $result["upass"];?>"></td>
```

```
</tr>
```

```
<tr>
```

```
<th width="120">Type</th>
```

```
<td>
```

```
<select class="form-control" name="txttype" >
```

```
<option value="<?php echo $result["type"];?>"><?php if($result["type"]==1){ echo "user1"; }else if($result["type"]==2){ echo "user2"; }else{ echo "admin"; }?></option>
```

```
<option value="1">- user1 -</option>
```

```
<option value="2">- user2 -</option>
```

```
<option value="3">- admin -</option>
```

```
</select>
```

```
</td>
```

```

</tr>

</table>

<input type="submit" name="submit" value="submit">

</form>

<?php
mysqli_close($conn);
?>

```

```

<?php include("yfooter.php"); ?>

```

Pyramit 36 โปรแกรม

1-36

1

```

<?php include("yheader.php"); ?>

<br></br>

<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 1</h3>

<?php include("font_k.php");

for($fon=1;$fon<=4;$fon++) {

    for($col=2;$col<=0+$fon;$col++) {

        echo ("&nbsp;&nbsp;&nbsp;");

    }

    for($col=$fon;$col<=$fon+1;$col++) {

        echo ($fon);

    }

    for($col=1;$col<=4-$fon;$col++){

        echo ("**");

    }

    for($col=$fon;$col<=$fon+1;$col++) {

```

```

        echo ($fon);
    }
    echo "<br>";
}
?>
<?php include ("yfooter.php"); ?>

```

2

```

<?php include("yheader.php"); ?>
<br></br>
<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 2</h3>
<?php include("font_k.php");
for($fon=1;$fon<=4;$fon++)
{
    for($col=$fon;$col<=$fon;$col++)
    {
        echo($fon);
        echo($fon+1);
        echo($fon+2);
    }
    for($col=1;$col<=$fon+2;$col++)
    {
        echo("*");
    }
    echo "<br>";
}
?>

```

```
<?php include ("yfooter.php"); ?>
```

3

```
<?php include("yheader.php"); ?>
```


Pyramid 3

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=4;$fon++) {
```

```
for($col=$fon;$col<=$fon;$col++) {
```

```
echo($col);
```

$$\}$$

```
for($col=$fon;$col<=$fon;$col++) {
```

```
echo($col+4);
```

$$\}$$

```
for($col=0;$col<=3+$fon;$col++) {
```

```
echo("*");
```

$$\}$$

```
echo "<br/>";
```

$$\}$$

?

```
<?php include ("yfooter.php"); ?>
```

4

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp; Pyramid 4</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=4;$fon++)
```

```
{
```

```
    for($col=1;$col<=$fon;$col++)
```

```
    {
```

```
        echo ("*");
```

```
    }
```

```
    for($col=$fon;$col>=2;$col--)
```

```
    {
```

```
        echo ($col);
```

```
    }
```

```
    for($col=1;$col<=$fon;$col++)
```

```
    {
```

```
        echo ($col);
```

```
    }
```

```

        echo "<br>";
    }
?>
<?php include ("yfooter.php"); ?>

```

5

```

<?php include("yheader.php"); ?>
<br></br>
<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 5</h3>
<?php include("font_k.php");
for($fon=1;$fon<=4;$fon++)
{
    for($scol=1;$scol<=(4-$fon);$scol++)
    {
        echo ("&nbsp;&nbsp;&nbsp;");
    }
    echo ($fon);
    for($scol=2;$scol<=$fon;$scol++)
    {
        echo ("**");
    }
    echo ($fon);
    echo "<br>";
}
for($fon=3;$fon>=1;$fon--)

```

```
{  
    for($col=1;$col<=(4-$fon);$col++)  
    {  
        echo ("&nbsp;&nbsp; ");  
    }  
    echo($fon);  
    for($col=2;$col<=$fon;$col++)  
    {  
        echo ("**");  
    }  
    echo ($fon);  
    echo "<br>";  
}  
?>  
<?php include ("yfooter.php"); ?>
```

6

```
<?php include("yheader.php"); ?>

<br></br>

<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 6</h3>

<?php include("font_k.php");
for($fon=7;$fon>=1;$fon--)
{
    for($col=1;$col<=(7-$fon);$col++)
    {
        echo ("&nbsp;&nbsp;&nbsp;&nbsp;");
    }
    for($col=1;$col<=$fon;$col++)
    {
        echo ($col % 2);
    }
    for($col=2;$col<=$fon;$col++)
    {
        echo ($col % 2);
    }
    echo "<br>";
}
```


$$\}$$

?>

```
<?php include ("yfooter.php"); ?>
```

7

```
<?php include("yheader.php"); ?>
```


Pyramid 7

```
<?php include("font_k.php");
```

```
for($fon=1; $fon <= 7; $fon++)
```

$$\{$$

```
for($col=1;$col<=7 - $fon + 1;$col++)
```

$$\{$$

```
echo ("&nbsp;&nbsp;");
```

$$\}$$

```
for($col=1; $col <=$fon ; $col++)
```

 $\{$

```
echo ($col);
```

$$\}$$

```
echo ($fon);
```

```
for($col=$fon; $col >= 1 ; $col--)
```

$$\{$$

```
echo ( $col );
```

}

$$\}$$

```
<?php include("yheader.php"); ?>
```

Pyramid 8

$$\{$$
$$\{$$
$$\}$$
 $\{$

```
echo ($fon+1);
```

$$\}$$
 $\{$

```
        echo ("*");
    }

    echo "<br>";
}

?>

<?php include ("yfooter.php"); ?>
```

9

```
<?php include("yheader.php"); ?>

<br></br>

<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 9</h3>

<?php include("font_k.php");
for($fon=5;$fon>=1;$fon--)
{
    for($scol=1;$scol<=(5-$fon);$scol++)
    {
        echo ("&nbsp;&nbsp;&nbsp;&nbsp;");
    }

    for($scol=1;$scol<=$fon;$scol++)
    {
        echo (6-$fon);
    }

    for($scol=2;$scol<=$fon;$scol++)
    {
        echo (6-$fon);
    }
}
```

$$\}$$

```
<?php include("yheader.php"); ?>
```

Pyramid 10

```
for($fon=1;$fon<=5;$fon++) {
```

```
for($col=1;$col<=5-$fon;$col++) {
```

```
echo ("&nbsp;&nbsp;");
```

$$\}$$

```
for($col=1;$col<=$fon;$col++){
```

```
echo ($col);
```

$$\}$$

```
for($col=$fon;$col<=$fon;$col++){
```

```
echo (6-$fon);
```

$$\}$$

```
for($col=$fon;$col>=1;$col--){
```

```
echo ($col);
```

$$\}$$

```
echo "<br>";
```

```
}  
?>  
<?php include ("yfooter.php"); ?>
```

11

```
<?php include("yheader.php"); ?>  
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp; Pyramid 11</h3>
```

```
<?php include("font_k.php");
```

```
    for($fon=1;$fon<=5;$fon++)  
    {  
        for($scol=1;$scol<=(5-$fon);$scol++)  
        {  
            echo ("&nbsp;&nbsp;&nbsp;");  
        }  
        echo ($fon);  
        for($scol=2;$scol<=$fon;$scol++)  
        {  
            echo ("&nbsp;&nbsp;&nbsp;");  
        }  
        echo ($fon);  
        echo "<br>";  
    }
```

```
        }  
    ?>  
    <?php include ("yfooter.php"); ?>
```

12

```
<?php include("yheader.php"); ?>  
  
<br></br>  
  
<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 12</h3>  
<?php include("font_k.php");  
for($fon=1;$fon<=5;$fon++) {  
    for($col=2;$col<=$fon;$col++) {  
        echo ("&nbsp;&nbsp;&nbsp;");  
    }  
    for($col=$fon;$col<=10-$fon;$col++){  
        echo ($col);  
    }  
    echo "<br>";  
}  
?>  
<?php include ("yfooter.php"); ?>
```

13

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp; Pyramid 13</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++) {  
    for($scol=2;$scol<=$fon;$scol++) {  
        echo (" ");  
    }  
    for($scol=11;$scol>=11;$scol--){  
        echo ($scol-$fon-$fon);  
    }  
    for($scol=10;$scol>=6+$fon;$scol--){  
        echo ($scol-$fon-$fon);  
    }  
    for($scol=5;$scol>=1+$fon;$scol--){  
        echo ($scol-$fon);  
    }  
    echo "<br>";
```

```
}  
?>  
<?php include ("yfooter.php"); ?>
```

14

```
<?php include("yheader.php"); ?>  
  
<br></br>  
  
<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 14</h3>  
<?php include("font_k.php");  
for($fon=1;$fon<=5;$fon++) {  
    for($scol=2;$scol<=0+$fon;$scol++) {  
        echo ("&nbsp;");  
    }  
  
    for($scol=$fon;$scol<=$fon;$scol++) {  
        echo($fon);  
    }  
  
    echo($fon+1);  
    for($scol=1;$scol<=5-$fon;$scol++){  
        echo ("&nbsp;&nbsp;&nbsp;&nbsp;");  
    }  
}
```



```

        for($col=$fon;$col<=$fon;$col++) {
            echo($fon+1);
        }
        echo($fon);
        echo "<br/>";
    }
?>

```

```

<?php include ("yfooter.php"); ?>

```

15

```

<?php include("yheader.php"); ?>

```

```

<br></br>

```

```

<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 15</h3>

```

```

<?php include("font_k.php");

```

```

for($fon=5;$fon>=1;$fon--)

```

```

{
    for($col=1;$col<=$fon;$col++)
    {
        echo (6-$fon);
    }
    for($col=1;$col<=(6-$fon);$col++)
    {
        echo ("&nbsp;&nbsp;&nbsp;&nbsp;");
    }
    for($col=1;$col<=$fon;$col++)
    {
        echo (6-$fon);
    }
}

```

```

    }

    echo "<br>";

}

?>

<?php include ("yfooter.php"); ?>

```

16

[illegible]

```
        echo "<br>";
    }
?>
<?php include ("yfooter.php"); ?>
```

17

```
<?php include("yheader.php"); ?>
<br></br>

<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 17</h3>
<?php include("font_k.php");
for($fon=1;$fon<=5;$fon++)
{
    echo ($fon);
    echo (10-$fon);
        echo ($fon);
    echo (10-$fon);
        echo ($fon);
    echo (10-$fon);
        echo ($fon);
    echo (10-$fon);
    echo "<br>";
}
?>
<?php include ("yfooter.php"); ?>
```

18

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp; Pyramid 18</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++)
```

```
{
```

```
    echo ($fon);
```

```
    for($scol=1;$scol<=$fon;$scol++)
```

```
    {
```

```
        echo ("*");
```

```
    }
```

```
    echo ($fon);
```

```
    for($scol=1;$scol<=(6-$fon);$scol++)
```

```
    {
```

```
        echo ("*");
```

```
    }
```

```
    echo (10-$fon);
```

```
    echo "<br>";
```

```
}  
?>  
<?php include ("yfooter.php"); ?>
```

19

```
<?php include("yheader.php"); ?>  
  
<br></br>  
  
<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 19</h3>  
  
<?php include("font_k.php");  
for($fon=1;$fon<=5;$fon++)  
{  
    echo ($fon);  
    for($scol=1;$scol<=(10-$fon);$scol++)  
    {  
        echo ("*");  
    }  
    for($scol=2;$scol<=($fon);$scol++)  
    {  
        echo ("&nbsp;&nbsp;&nbsp;");  
    }  
    echo (6-$fon);  
    echo "<br>";  
}
```

?>

<?php include ("yfooter.php"); ?>

20

<?php include("yheader.php"); ?>

</br>

<h3> Pyramid 20</h3>

<?php include("font_k.php");

for(\$fon=1;\$fon<=5;\$fon++)

{

 for(\$col=1;\$col<=\$fon;\$col++)

 {

 echo (\$fon);

 }

 for(\$col=1;\$col<=\$fon;\$col++)

 {

 echo ("*");

 }

 for(\$col=1;\$col<=\$fon;\$col++)

 {

 echo (\$fon);

 }

```

        echo "<br>";
    }
?>
<?php include ("yfooter.php"); ?>

```

21

```

<?php include("yheader.php"); ?>
<br></br>

<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 21</h3>
<?php include("font_k.php");
for($fon=1;$fon<=5;$fon++)
{
    for($col=1;$col<=(8-$fon);$col++)
    {
        echo ("*");
    }
    echo ($fon);
    for($col=1;$col<=($fon);$col++)
    {
        echo ("*");
    }
    echo (8-$fon);
    echo "<br>";
}

```

?>

<?php include ("yfooter.php"); ?>

22

<?php include("yheader.php"); ?>

</br>

<h3> Pyramid 22</h3>

<?php include("font_k.php");

for(\$fon=1;\$fon<=5;\$fon++){

 echo ("*");

 for(\$scol=1;\$scol<\$fon;\$scol++){

 echo (" ");

 }

 for(\$scol=\$fon;\$scol<=5*2-\$fon;\$scol++){

 echo (\$fon);

 }

 for(\$scol=\$fon;\$scol>1;\$scol--){

 echo (" ");

 }

 echo ("*");

 echo "
";


```
    }  
?>  
<?php include ("yfooter.php"); ?>
```

23

```
<?php include("yheader.php"); ?>  
  
<br></br>  
  
<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 23</h3>  
  
<?php include("font_k.php");  
for($fon=1;$fon<=5;$fon++)  
{  
    echo ($fon);  
    for($scol=1;$scol<=(7-$fon);$scol++)  
    {  
        echo ("*");  
    }  
    for($scol=2;$scol<=($fon);$scol++)  
    {  
        echo ("&nbsp;&nbsp;&nbsp;");  
    }  
    echo ($fon);  
    echo "<br>";  
}
```

?>

<?php include ("yfooter.php"); ?>

24

<?php include("yheader.php"); ?>

</br>

<h3> Pyramid 24</h3>

<?php include("font_k.php");

for(\$fon=1;\$fon<=5;\$fon++) {

 echo(\$fon);

 for(\$col=1;\$col<=\$fon;\$col++) {

 echo("*");

 }

 for(\$col=2;\$col<=\$fon;\$col++) {

 echo("*");

 }

 for(\$col=5;\$col>=\$fon;\$col--) {

 echo(\$fon);

 }

 for(\$col=5;\$col>=\$fon;\$col--) {

 echo(\$fon);

```

    }
    echo "<br/>";
}
?>
<?php include ("yfooter.php"); ?>

```

25

```

<?php include("yheader.php"); ?>
<br></br>

<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 25</h3>

<?php include("font_k.php");
for($fon=1;$fon<=5;$fon++) {
    for($scol=1;$scol<=5-$fon;$scol++) {
        echo ("*");
    }

    for($scol=1;$scol<=$fon;$scol++){
        echo (6-$fon);
    }

    for($scol=2;$scol<=$fon;$scol++){
        echo (6-$fon);
    }

    for($scol=0;$scol<=5-$fon;$scol++) {
        echo ("*");
    }
}

```

```

        echo "<br>";
    }
?>
<?php include ("yfooter.php"); ?>

```

26

```

<?php include("yheader.php"); ?>
<br></br>

<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 26</h3>
<?php include("font_k.php");
for($fon=1;$fon<=5;$fon++)
{
    for($col=5;$col>=(( $fon*2)-$fon);$col--)
    {
        echo ($fon);
    }
    for($col=5;$col>=(6-$fon);$col--)
    {
        echo ("*");
    }
    echo "<br>";
}
?>
<?php include ("yfooter.php"); ?>

```

27

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp; Pyramid 27</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++)
```

```
{
```

```
    echo ($fon);
```

```
    for($scol=1;$scol<=($fon);$scol++)
```

```
    {
```

```
        echo ("&nbsp;");
```

```
    }
```

```
    for($scol=1;$scol<=($fon);$scol++)
```

```
    {
```

```
        echo ("*");
```

```
    }
```

```
    echo "<br>";
```

```
}
```

```
?>
```

```
<?php include ("yfooter.php"); ?>
```

28

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp; Pyramid 28</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++) {
```

```
    for($col=5;$col>=$fon;$col--) {
```

```
        echo ($col);
```

```
    }
```

```
    for($col=1;$col<=$fon;$col++) {
```

```
        echo ("*");
```

```
    }
```

```
    for($col=2;$col<=$fon;$col++) {
```

```
        echo ("*");
```

```
    }
```

```
    for($col=$fon;$col<=5;$col++) {
```

```
        echo ($col);
```

```

        }
        echo "<br>";
    }
?>
<?php include ("yfooter.php"); ?>

```

29

```

<?php include("yheader.php"); ?>
<br></br>

<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 29</h3>
<?php include("font_k.php");
for($fon=1;$fon<=5;$fon++)
{
    echo ($fon);
    echo ("*");
    echo ($fon+2);
    for($scol=7;$scol>=(6-$fon);$scol--)
    {
        echo ("*");
    }
    echo "<br>";
}
?>
<?php include ("yfooter.php"); ?>

```

30

```
<?php include("yheader.php"); ?>
```


Pyramid 30

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=5;$fon++) {
```

```
for($col=2;$col<=$fon;$col++) {
```

```
echo ("&nbsp;");
```

$$\}$$

```
for($col=0;$col<=5-$fon;$col++){
```

```
echo ("*");
```

$$\}$$

```
for($col=0;$col<=4-$fon;$col++){
```

```
echo ("*");
```

$$\}$$

```
for($col=$fon;$col>=1;$col--) {
```

```
echo ($col);
```

$$\}$$


```
        echo "<br>";
    }
?>
<?php include ("yfooter.php"); ?>
```

31

```
<?php include("yheader.php"); ?>
<br></br>

<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 31</h3>
<?php include("font_k.php");
for($fon=5;$fon>=1;$fon--)
{
    for($scol=1;$scol<=$fon;$scol++)
    {
        echo (6-$fon);
    }
    for($scol=1;$scol<=(5-$fon);$scol++)
    {
        echo ("&nbsp;&nbsp;&nbsp;&nbsp;");
    }
    for($scol=1;$scol<=$fon;$scol++)
    {
        echo ("*");
    }
}
```

$$\}$$

?>

```
<?php include ("yfooter.php"); ?>
```

32

```
<?php include("yheader.php"); ?>
```


Pyramid 32

```
<?php include("font_k.php");
```

```
for($fon=5;$fon>=1;$fon--)
```

$$\{$$

```
for($col=7;$col>=(6-$fon);$col--)
```

$$\{$$

```
echo (8-$col);
```

$$\}$$

```
for($col=7;$col>=($fon);$col--)
```

$$\{$$

```
echo("*");
```

$$\}$$

```
echo(8-$fon);
```

```
echo "<br>";
```

$$\}$$

?

```
<?php include ("yfooter.php"); ?>
```

33

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 33</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=4;$fon++){
```

```
    for($col=$fon;$col<=4+1;$col++){
```

```
        echo ("&nbsp;&nbsp;&nbsp;&nbsp;");
```

```
    }
```

```
    for($col=1;$col<=$fon*2-1;$col++){
```

```
        echo ("*");
```

```
    }
```

```
    echo "<br>";
```

```
}
```

```
for($fon=1;$fon<4;$fon++){
```

```
    for($col=1;$col<=$fon+2;$col++){
```

```
        echo ("&nbsp;&nbsp;&nbsp;&nbsp;");
```

```
    }
```

```
    for($col=$fon;$col<=(4-1)*2-$fon;$col++){
```

```

        echo ("*");
    }

    echo "<br>";
}

?>

<?php include ("yfooter.php"); ?>

```

34

```

<?php include("yheader.php"); ?>

<br></br>

<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 34</h3>

<?php include("font_k.php");
for($fon=1;$fon<=3;$fon++) {
    for($col=1;$col<=3-$fon;$col++) {

        echo ("&nbsp;&nbsp;&nbsp;&nbsp;");
    }

    echo ("*");
    for($col=2;$col<=$fon;$col++){
        echo ($col);
    }

    for($col=$fon;$col<=$fon;$col++) {

        echo ($col);
    }
}

```

```

        for($col=$fon;$col>=2;$col--){
            echo ($col);
        }

        echo ("*");
        for($col=1;$col<=3-$fon;$col++) {

            echo ("&nbsp;&nbsp;&nbsp;");

        }

        echo "<br>";
    }
    for($fon=2;$fon>=1;$fon--) {
        for($col=1;$col<=3-$fon;$col++) {
            echo ("&nbsp;&nbsp;&nbsp;");
        }

        echo ("*");
        for($col=1;$col<=$fon;$col++){
            echo ($fon);
        }

        for($col=2;$col<=$fon;$col++){
            echo ($col);
        }

        echo ("*");
        for($col=1;$col<=3-$fon;$col++) {
            echo ("&nbsp;&nbsp;&nbsp;");
        }
    }

```

```
        echo "<br>";
    }
?>
<?php include ("yfooter.php"); ?>
```

35

```
<?php include("yheader.php"); ?>
<br></br>

<h3>&nbsp;&nbsp;&nbsp;&nbsp; Pyramid 35</h3>
<?php include("font_k.php");
for($fon=1;$fon<=5;$fon++)
{
    echo($fon);
    echo("*");
    echo(($fon*2)-1);
    echo("*");
    echo($fon*2);
    echo "<br>";
}
?>
<?php include ("yfooter.php"); ?>
```

36

```
<?php include("yheader.php"); ?>
```

```
<br></br>
```

```
<h3>&nbsp;&nbsp;&nbsp; Pyramid 36</h3>
```

```
<?php include("font_k.php");
```

```
for($fon=1;$fon<=3;$fon++) {
```

```
    for($col=1;$col<=4-$fon;$col++){
```

```
        echo ($fon+$col-1);
```

```
    }
```

```
    for($col=1;$col<=$fon;$col++){
```

```
        echo ("*");
```

```
    }
```

```
    for($col=2;$col<=$fon;$col++){
```

```
        echo ("*");
```

```
    }
```

```
    for($col=3;$col>=$fon;$col--){
```

```
        echo ($col);
```

```
    }
```

```
    echo "<br>";
```

```
}  
for($fon=2;$fon>=1;$fon--) {  
    for($col=1;$col<=4-$fon;$col++){  
        echo ($fon+$col-1);  
    }  
    for($col=1;$col<=$fon;$col++){  
        echo ("*");  
    }  
    for($col=3;$col<=1+$fon;$col++){  
        echo ("*");  
    }  
  
    for($col=3;$col>=$fon;$col--) {  
        echo ($col);  
    }  
    echo "<br>";  
}  
?>  
<?php include ("yfooter.php"); ?>
```


ตารางทั้ง 8 ใน Northwind

<input type="checkbox"/>	categories	★		Browse		Structure		Search		Insert		Empty		Drop	0	InnoDB	latin1_swedish_ci	16 KiB	-
<input type="checkbox"/>	customerss	★		Browse		Structure		Search		Insert		Empty		Drop	0	InnoDB	latin1_swedish_ci	16 KiB	-
<input type="checkbox"/>	employees	★		Browse		Structure		Search		Insert		Empty		Drop	0	InnoDB	latin1_swedish_ci	16 KiB	-
<input type="checkbox"/>	kkk	★		Browse		Structure		Search		Insert		Empty		Drop	0	InnoDB	latin1_swedish_ci	16 KiB	-
<input type="checkbox"/>	orderdetails	★		Browse		Structure		Search		Insert		Empty		Drop	0	InnoDB	latin1_swedish_ci	16 KiB	-
<input type="checkbox"/>	orders	★		Browse		Structure		Search		Insert		Empty		Drop	0	InnoDB	latin1_swedish_ci	16 KiB	-
<input type="checkbox"/>	personal information	★		Browse		Structure		Search		Insert		Empty		Drop	0	InnoDB	latin1_swedish_ci	16 KiB	-
<input type="checkbox"/>	shippers	★		Browse		Structure		Search		Insert		Empty		Drop	0	InnoDB	latin1_swedish_ci	16 KiB	-
<input type="checkbox"/>	suppliers	★		Browse		Structure		Search		Insert		Empty		Drop	0	InnoDB	latin1_swedish_ci	16 KiB	-

Products

Select

```
<?php
```

```
require("pro_s1connect.php");
```

```
$sql="select * from productsTest";
```

```
if((int)phpversion() >= 7) {
```

```
    $result = $connect->query($sql);
```

```
    if ($result->num_rows > 0) {
```

```
        while($row = $result->fetch_assoc()) {
```

```

        echo "<center> id: " . $row["PID"]. " - PName: " . $row["Pname"]. " -
SupID: " . $row["SupID"]. " - QPU: " . $row["QPU"]. " - UP: " . $row["UP"]. "<br/>";

    }

} else {

    echo "no results";

}

$connect->close();

} else {

    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

    echo "Display all records : <br/>";

    while ($object = mysql_fetch_object($result)) {

        echo $object->PID . " " . $object->Pname . "<br/>";

    }

    echo "Total " . mysql_num_rows($result) . " records";

    mysql_close($connect);

```

Insert

```
<?php include("yheader.php"); ?>
```

```
<form action=pro_s4insert.php>
```

```
<input name=nid value=>
```

```
<input name=nname value=>
```

```
<input name=sup value=>
```

```
<input name=qpu value=>
```

```
<input name=up value=>
```

```
<input type=submit value=insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['nid']) || !isset($_GET['nname']))
```

```
exit; require("pro_s1connect.php"); $sql="insert into
```

```
$tb
```

```
values('".$_GET['nid']. "','" .$_GET['nname']. "','" .$_GET['sup']. "','" .$_GET['qpu']. "','" .$_GET['up'
```

```
']. "');" if((int)phpversion() >= 7) {
```

```
if($connect->query($sql) === FALSE)
```

```
    echo "$sql : failed";
```

else

echo "\$sql : succeeded";

```

        $connect->close();

    } else {

        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            echo "$sql : succeeded";

        mysql_close($connect);

    }

?>

<?php include("yfooter.php"); ?>

```

Delete

```

<?php include("yheader.php"); ?>

<?php

$myForm = '<body>

<form action="pro_s5delete.php">

<input name="delid" value="1001">

<input type="submit" value="delete.php">

</form>';

```

```
if (!isset($_GET['delid'])) {  
  
    echo $myForm;  
  
    exit;  
  
}  
  
require("pro_slconnect.php");  
  
$sql="delete from $tb ";
```

```

$sql.="where PID='".$$_GET['delid']."'";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        header("location: pro_s0index.php");

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        header("location: pro_s0index.php");

    mysql_close($connect);

}

?>

```

```

<?php include("yfooter.php"); ?>

```

Update

```

<?php include("yheader.php"); ?>

```

```
<form action="pro_s6update.php">
```

```
<input name="id" value="">
```

```
<input name="name" value="">
```

```
<input name="sup" value="">
```

```
<input name="qpu" value="">
```

```
<input name="up" value="">
```



```
<input type="submit" value="update.php">
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['id'])) { exit; }
```

```
require("pro_slconnect.php");
```

```
$sql="update productsTest set ";
```

```
$sql="PID='". $_GET['id'] .'", ";
```

```
$sql="Pname='". $_GET['name'] .'", ";
```

```
$sql="SupID='". $_GET['sup'] .'", ";
```

```
$sql="QPU='". $_GET['qpu'] .'", ";
```

```
$sql="UP='". $_GET['up'] .'" ";
```

```
$sql="where PID='". $_GET['id'] .'"';
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
    else
```

```
echo "<meta http-equiv='refresh' content='0";
```

```
url=pro_s0index.php'/>"; $connect->close();
```

```
} else {
```

```
if(!$result=mysql_db_query($db,$sql))
```

```
echo "$sql : True";
```

```
else
```

```

        echo "<meta http-equiv='refresh' content='0;

        url=pro_s0index.php'/>"; mysql_close($connect);

    }

?>

```

```

<?php include("yfooter.php"); ?>

```

Create

```

<?php include("yheader.php"); ?>

<?php

if(file_exists("pro_s1connect.php"))

    require("pro_s1connect.php");

else

    die("File not found");

if ($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (PID char(4),Pname char(40),SupID char(40),QPU char(40),UP
char(40))");

//qWork("insert into $tb values('1001','Tom')");

```

```
//qWork("insert into $tb values('1002','Dang')");
```

```
//qWork("insert into $tb values('1003','Pom')");
```

```
if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);
```

```
echo '<a href="pro_s0index.php">back</a>'; function dbWork($sql) {
```

```

global $db,$host,$uname,$upass,$connect;

if((int)phpversion() >= 7) {

    if ($connect->query($sql) === FALSE)

        echo "$sql : failed ". $conn->error . "<br/>";

    else {

        echo "$sql : succeeded<br/>";

        $connect = new mysqli($host, $uname, $upass, $db);

    }

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

```

```
if ($connect->query($sql) === FALSE)
```

```
    echo "$sql : failed ". $conn->error . "<br/>";
```

```
else
```

```
    echo "$sql : succeeded<br/>";
```

```
} else {
```

```
if (!$result=mysql_db_query($db,$sql))
```

```
    echo "$sql : failed<br/>";
```

```
else
```

```
    echo "$sql : succeeded<br/>";
```

```
}
```

```
}
```

```
?>
```

```
<?php include("yfooter.php"); ?>
```

```
}
```

```
echo "<center><a
```

```
href=pro_s0index.php>back</a>"; ?>
```


Categories

Create

```
<?php include("header01.php"); ?>

<?php

if(file_exists("cate_slconnect.php"))

    require("cate_slconnect.php");

else

    die("File not found");

if ($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (categoryid char(4),categoryname char(40),description char(40))");

//qWork("insert into $tb values('1001','Tom')"); //qWork("insert into $tb

values('1002','Dang')");

//qWork("insert into $tb values('1003','Pom')");

if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);

echo '<a href="index.php">back</a>'; function dbWork($sql) {

    global $db,$host,$uname,$upass,$connect;
```

```
if((int)phpversion() >= 7) {  
  
    if ($connect->query($sql) === FALSE)  
  
        echo "$sql : failed ". $conn->error . "<br/>";  
  
    else {  
  
        echo "$sql : succeeded<br/>";  
  
        $connect = new mysqli($host, $uname, $upass, $db);
```

```

    }

} else {

    if (!$result=mysql_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

        if (!$result=mysql_db_query($db,$sql))

            echo "$sql : failed<br/>";

```

```
else
```

```
    echo "$sql : succeeded<br/>";
```

```
}
```

```
}
```

```
?>
```

```
<?php include("yfooter.php"); ?>
```

Insert

```
<?php include("yheader.php"); ?>
```

```
<form action=cate_s4insert.php>
```

```
<input name=cateid value=>
```

```
<input name=coname value=>
```

```
<input name=conn value=>
```

```
<input type=submit value=insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['cateid']) || !isset($_GET['coname'])) exit;
```

```
require("cate_s1connect.php");
```

```
$sql="insert into $tb
```

```
values('".$_GET['cateid']. "','".$_GET['coname']. "','".$_GET['conn']. "')";
```

```
if((int)phpversion() >= 7) {
```

```
if($connect->query($sql) === FALSE)

    echo "$sql : failed";

else

    echo "$sql : succeeded";

$connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";
```

```

        else

            echo "$sql : succeeded";

            mysql_close($connect);

        }

    ?>

```

```

<?php include("footer.php"); ?>

```

Select

```

<?php

require("cate_slconnect.php");

$sql="select * from Categories";

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center> id: " . $row["categoryid"]. "- categoryname: " .

            $row["categoryname"]. "- description: " . $row["description"]."<br/>";

        }

    } else {

```

```
        echo "no results";

    }

    $connect->close();

} else {

    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

    echo "Display all records : <br/>";
```



```

while ($object = mysql_fetch_object($result)) {

    echo $object->PID . "          " . $object->Pname . "<br/>";

}

echo "Total " . mysql_num_rows($result) . " records";

mysql_close($connect);

}

echo "<center><a href=index.php>back</a>";

?>

```

Delete

```

<?php

$myForm = '<body>

<form action="cate_s5delete.php">

<input name="delid" value=".....">

<input type="submit" value="cate_s5delete.php">

</form>';

if (!isset($_GET['delid'])) {

    echo $myForm;

    exit;
}

```

```
}
```

```
require("cate_slconnect.php");
```

```
$sql="delete from $tb ";
```

```
$sql.="where categoryid='".$$_GET['delid'].'"";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```

        echo "$sql : failed";

    else

        header("location: index.php.php");

        $connect->close();

    } else {

        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            header("location: cate_s0index.php");

            mysql_close($connect);

    }

?>

```

Update

```

<?php include("yheader.php"); ?>

<form action="cate_s6update.php">

<input name="idd" value="">

<input name="namee" value="">

<input name="des" value="">

```

```
<input type="submit" value="update.php">
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['idd'])) { exit; }
```

```
require("cate_slconnect.php");
```

```
$sql.="update Categories set ";
```

```

$sql.="categoryid='". $_GET['idd'] .'", ";

$sql.="categoryname='". $_GET['namee'] .'", ";

$sql.="description='". $_GET['des'] .'" ";

$sql.="where categoryid='". $_GET['idd'] .'" ";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        echo "<meta http-equiv='refresh' content='0;

        url=index.php'/>"; $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : True";

    else

        echo "<meta http-equiv='refresh' content='0;

        url=index.php'/>"; mysql_close($connect);

}

```

?>

<?php include("footer.php"); ?>

Employees Select

```
<?php

require("emp_slconnect.php");

$sql="select * from Employees";

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center> id: " . $row["empid"]. "- empName: " . $row["empname"].
            "- empBD: " . $row["empbd"]. "- empaddress: " . $row["empaddress"]. "- empphone: " .
            $row["empphone"]. "<br/>";

        }

    } else {

        echo "no results";

    }

    $connect->close();

} else {

    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");
```

```
echo "Display all records : <br/>";

while ($object = mysql_fetch_object($result)) {

    echo $object->PID . " " . $object->Pname . "<br/>";

}

echo "Total " . mysql_num_rows($result) . " records";
```



```
        mysql_close($connect);

    }

    echo "<center><a href=index.php>back</a>";

?>
```

Create

```
<?php include("yheader.php"); ?>

<?php

if(file_exists("emp_slconnect.php"))

    require("emp_slconnect.php");

else

    die("File not found");

if ($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (empid char(4),empname char(40),empbd char(40),empaddress
char(40),empphone char(40))");

//qWork("insert into $tb values('1001','Tom')");

//qWork("insert into $tb values('1002','Dang')");

//qWork("insert into $tb values('1003','Pom')");
```

```
if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);
```

```
echo '<a href="index.php">back</a>'; function dbWork($sql) {
```

```
    global $db,$host,$uname,$upass,$connect;
```

```
    if((int)phpversion() >= 7) {
```

```
        if ($connect->query($sql) === FALSE)
```

```
            echo "$sql : failed ". $conn->error . "<br/>";
```

```

        else {

            echo "$sql : succeeded <br/>";

            $connect = new mysqli($host, $uname, $upass, $db);

        }

    } else {

        if (!$result=mysqli_query($sql,$connect))

            echo "$sql : failed<br/>";

        else

            echo "$sql : succeeded<br/>";

    }

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    }

}

```

```
} else {  
  
    if (!$result=mysql_db_query($db,$sql))  
  
        echo "$sql : failed<br/>";  
  
    else  
  
        echo "$sql : succeeded<br/>";
```

```
        }  
    }  
?  
  
<?php include  
  
("footer.php"); ?>
```

Insert

```
<?php include("yheader.php"); ?>  
  
<form action=emp_s4insert.php>  
  
<input name=empid value=>  
  
<input name=empname value=>  
  
<input name=empbd value=>  
  
<input name=empadd value=>  
  
<input name=empph value=>  
  
<input type=submit value=emp_s4insert.php>  
  
</form>  
  
<?php  
  
if (!isset($_GET['empid']) || !isset($_GET['empname'])) exit;
```

```
require("emp_slconnect.php");
```

```
$sql="insert into $tb
```

```
values('".$_GET['empid']. "','".$_GET['empname']. "','".$_GET['empbd']. "','".$_GET['empadd']. "','
```

```
"".$_GET['wmpth']. "')";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```

        echo "$sql : failed";

    else

        echo "$sql : succeeded";

        $connect->close();

    } else {

        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            echo "$sql : succeeded";

        mysql_close($connect);

    }

?>

<?php include("yfooter.php"); ?>

```

Delete

```

<?php

$myForm = '<body>

<form action="emp_s5delete.php">

<input name="delid" value=".....">

```

```
<input type="submit" value="delete.php">
```

```
</form>;
```

```
if (!isset($_GET['delid'])) {
```

```
    echo $myForm;
```

```
    exit;
```



```
}

require("emp_slconnect.php");

$sql="delete from $tb ";

$sql.="where empid =".$_GET['delid']."";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        header("location: index.php");

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        header("location: index.php");

    mysql_close($connect);

}
```

?>

Update

```
<?php include("header01.php"); ?>
```

```
<form action="emp_s6update.php">
```

```
<input name="empid" value="">
```

```
<input name="empname" value="">
```

```
<input name="empbd" value="">
```

```
<input name="empadd" value="">
```

```
<input name="empph" value="">
```

```
<input type="submit" value="emp_s6update.php">
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['empid'])) { exit; }
```

```
require("emp_s1connect.php");
```

```
$sql="update Employees set ";
```

```
$sql.="empid =". $_GET['empid'] .", ";
```

```
$sql.="empname =". $_GET['empname'] .", ";
```

```
$sql.="empbd =". $_GET['empbd'] .", ";
```

```
$sql.="empaddress =". $_GET['empadd'] .", ";
```

```
$sql.="empphone =". $_GET['empph'] ."";
```

```
$sql.="where empid =". $_GET['empid'] ."";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
else
```

```
    echo "<meta http-equiv='refresh' content='0;
```

```
url=index.php'/>"; $connect->close();
```

```
} else {
```

```
    if(!$result=mysql_db_query($db,$sql))
```

```
echo "$sql : True";
```

```
else
```

```
echo "<meta http-equiv='refresh' content='0;
```

```
url=index.php'/>"; mysql_close($connect);
```

```
}
```

```
?>
```

```
<?php include("footer.php"); ?>
```

Customerss

Select

```
<?php

require("cus_slconnect.php");

$sql="select * from Customers";

if((int)phpversion() >= 7) {

    $result = $connect->query($sql);

    if ($result->num_rows > 0) {

        while($row = $result->fetch_assoc()) {

            echo "<center> id: " . $row["cusid"]. "- comName: " . $row["company"]. "-
contact: " . $row["contact"]."- address: " . $row["address"]."- Phone: " . $row["phone"]. "<br/>";

        }

    } else {

        echo "no results";

    }

    $connect->close();

} else {

    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

    echo "Display all records : <br/>";
```

```
while ($object = mysql_fetch_object($result)) {  
  
    echo $object->PID . "   " . $object->Pname . "<br/>";  
  
}  
  
echo "Total " . mysql_num_rows($result) . " records";  
  
mysql_close($connect);
```

```
}
```

```
echo "<center><a href=index.php>back</a>";
```

```
?>
```

Create

```
<?php
```

```
if(file_exists("cus_slconnect.php"))
```

```
    require("cus_slconnect.php");
```

```
else
```

```
    die("File not found");
```

```
if ($dbstatus == 0) dbWork("create database $db");
```

```
qWork("create table $tb (cus char(4),company char(40),contact char(40),address  
char(40),phone char(40))");
```

```
//qWork("insert into $tb values('1001','Tom')");
```

```
//qWork("insert into $tb values('1002','Dang')");
```

```
//qWork("insert into $tb values('1003','Pom')");
```

```
if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);
```

```
echo '<a href="index.php">back</a>'; function dbWork($sql) {
```

```
    global $db,$host,$uname,$upass,$connect;
```



```
if((int)phpversion() >= 7) {  
  
    if ($connect->query($sql) === FALSE)  
  
        echo "$sql : failed ". $conn->error . "<br/>";  
  
    else {  
  
        echo "$sql : succeeded<br/>";  
    }  
}
```

```

        $connect = new mysqli($host, $uname, $upass, $db);

    }

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

        if (!$result=mysqli_db_query($db,$sql))

```

```
echo "$sql : failed<br/>";
```

```
else
```

```
echo "$sql : succeeded<br/>";
```

```
}
```

```
}
```

?>

Insert

```
<form action=cus_s4insert.php>
```

```
<input name=cusid value=>
```

```
<input name=comname value=>
```

```
<input name=con value=>
```

```
<input name=add value=>
```

```
<input name=phone value=>
```

```
<input type=submit value=cus_s4insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['cusid']) || !isset($_GET['comname'])) exit;
```

```
require("cus_s1connect.php");
```

```
$sql="insert into $tb
```

```
values('".$_GET['cusid']."','".$_GET['comname']."','".$_GET['con']."','".$_GET['add']."','".$_GE
```

```
T['pho ne'].")";
```

```
if((int)phpversion() >= 7) {
```

```
if($connect->query($sql) === FALSE)

    echo "$sql : failed";

else

    echo "$sql : succeeded";

$connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))
```

```
        echo "$sql : failed";

    else

        echo "$sql : succeeded";

    mysql_close($connect);

}

?>
```

Delete

```
<?php

$myForm = '<body>

<form action="cus_s5delete.php">

<input name="delid" value=".....">

<input type="submit" value="cus_s5delete.php">

</form>';

if (!isset($_GET['delid'])) {

    echo $myForm;

    exit;

}

require("cus_s1connect.php");
```

```
$sql="delete from $tb ";
```

```
$sql.="where cus =''.$_GET['delid'].''";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
    else
```

```
        header("location: index.php");

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        header("location: index.php");

    mysql_close($connect);

}

?>
```

Update

```
<form action="cus_s6update.php">

<input name="cusid" value="">

<input name="com" value="">

<input name="con" value="">

<input name="add" value="">

<input name="ph" value="">
```



```
<input type="submit" value="update.php">
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['cusid'])) { exit; }
```

```
require("cus_slconnect.php");
```

```
$sql.="update Customers set ";
```

```

$sql.="cus='". $_GET['cusid'] .'", ";

$sql.="company='". $_GET['com'] .'", ";

$sql.="contact='". $_GET['con'] .'", ";

$sql.="address='". $_GET['add'] .'", ";

$sql.="phone='". $_GET['ph'] .'" ";

$sql.="where cus='". $_GET['cusid'] .'"";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        echo "<meta http-equiv='refresh' content='0;

        url=index.php'/>"; $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : True";

    else

        echo "<meta http-equiv='refresh' content='0;

        url=index.php'/>"; mysql_close($connect);

```

?>

Suppliers

Select

<?php

```
require("sup_slconnect.php");
```

```
$sql="select * from Suppliers";
```

```
if((int)phpversion() >= 7) {
```

```
    $result = $connect->query($sql);
```

```
    if ($result->num_rows > 0) {
```

```
        while($row = $result->fetch_assoc()) {
```

```
            echo "<center> id: " . $row["supid"]. "- companyName: " .
```

```
$row["comname"]. "- address: " . $row["address"]. "- post: " . $row["post"]. "- phone: " .
```

```
$row["phone"]. "<br/>";
```

```
        }
```

```
    } else {
```

```
        echo "no results";
```

```
    }
```

```
    $connect->close();
```

```
} else {
```

```
if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

echo "Display all records : <br/>";

while ($object = mysql_fetch_object($result)) {

    echo $object->PID . "    " . $object->Pname . "<br/>";

}

echo "Total " . mysql_num_rows($result) . " records";
```

```
        mysql_close($connect);

    }

    echo "<center><a href=index.php>back</a>";

?>
```

Create

```
<?php

if(file_exists("sup_slconnect.php"))

    require("sup_slconnect.php");

else

    die("File not found");

if ($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (supid char(4),comname char(40),address char(40),post char(40),phone
char(40))");

//qWork("insert into $tb values('1001','Tom')");

//qWork("insert into $tb values('1002','Dang')");

//qWork("insert into $tb values('1003','Pom')");

if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);

echo '<a href="index.php">back</a>'; function dbWork($sql) {
```

```
global $db,$host,$uname,$upass,$connect;
```

```
if((int)phpversion() >= 7) {
```

```
    if ($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed ". $conn->error . "<br/>";
```

```
    else {
```

```

        echo "$sql : succeeded<br/>";

        $connect = new mysqli($host, $uname, $upass, $db);

    }

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

```

```
if (!$result=mysql_db_query($db,$sql))
```

```
    echo "$sql : failed<br/>";
```

```
else
```

```
    echo "$sql : succeeded<br/>";
```

```
}
```



```
}
```

```
?>
```

Insert

```
<form action=sup_s4insert.php>
```

```
<input name=supid value=>
```

```
<input name=comname value=>
```

```
<input name=add value=>
```

```
<input name=post value=>
```

```
<input name=ph value=>
```

```
<input type=submit value=insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['supid']) || !isset($_GET['comname'])) exit;
```

```
require("sup_s1connect.php");
```

```
$sql="insert into $tb
```

```
values('".$_GET['supid']."','".$_GET['comname']."','".$_GET['add']."','".$_GET['post']."','".$_GET['ph']."')";
```

```
if((int)phpversion() >= 7) {
```

```
if($connect->query($sql) === FALSE)

    echo "$sql : failed";

else

    echo "$sql : succeeded";

$connect->close();

} else {
```

```
        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            echo "$sql : succeeded";

        mysql_close($connect);

    }

?>
```

Delete

```
<?php

$myForm = '<body>

<form action="sup_s5delete.php">

<input name="delid" value=".....">

<input type="submit" value="sup_s5delete.php">

</form>';

if (!isset($_GET['delid'])) {

    echo $myForm;

    exit;
```

```
}
```

```
require("sup_slconnect.php");
```

```
$sql="delete from $tb ";
```

```
$sql.="where supid ='".$_GET['delid'].'"';
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";

    else

        header("location: index.php");

        $connect->close();

    } else {

        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            header("location: index.php");

            mysql_close($connect);

    }

?>
```

Update

```
<form action="sup_s6update.php">

<input name="supid" value="">

<input name="supcom" value="">

<input name="supadd" value="">
```

```
<input name="suppo" value="">
```

```
<input name="supph" value="">
```

```
<input type="submit" value="update.php">
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['supid'])) { exit; }
```

```

require("sup_slconnect.php");

$sql="update Suppliers set ";

$sql="supid='". $_GET['supid'] .'", ";

$sql="comname='". $_GET['supcom'] .'", ";

$sql="address='". $_GET['supadd'] .'", ";

$sql="post='". $_GET['suppo'] .'", ";

$sql="phone='". $_GET['supph'] .'" ";

$sql="where supid='". $_GET['supid'] .'" ";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        echo "<meta http-equiv='refresh' content='0;

        url=index.php'/>"; $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : True";

    else

```

```
echo "<meta http-equiv='refresh' content='0;
```

```
url=index.php'/>"; mysql_close($connect);
```

```
}
```

```
?>
```


Orders

Select

```
<?php
```

```
require("orde_slconnect.php");
```

```
$sql="select * from Orderdetails";
```

```
if((int)phpversion() >= 7) {
```

```
    $result = $connect->query($sql);
```

```
    if ($result->num_rows > 0) {
```

```
        while($row = $result->fetch_assoc()) {
```

```
            echo "<center> orderid: " . $row["orderid"]. "- productid: " .
```

```
$row["productid"]. "- unitprice: " . $row["unitprice"]. "- quantity: " . $row["quantity"]. "- discount:
```

```
" .
```

```
$row["discount"]. "<br/>";
```

```
        }
```

```
    } else {
```

```
        echo "no results";
```

```
    }
```

```
    $connect->close();
```

```
} else {
```

```
if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

echo "Display all records : <br/>";

while ($object = mysql_fetch_object($result)) {

    echo $object->PID . " " . $object->Pname . "<br/>";

}

echo "Total " . mysql_num_rows($result) . " records";
```

```

        mysql_close($connect);

    }

    echo "<center><a href=index.php>back</a>";

?>

```

Create

```

<?php

if(file_exists("orde_slconnect.php"))

    require("orde_slconnect.php");

else

    die("File not found");

if ($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (orderid char(5),productid char(40),unitprice
char(40),quantity char(40),discount char(40))");

if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);

echo '<a href="orde_s0index.php">back</a>'; function dbWork($sql) {

    global $db,$host,$uname,$upass,$connect;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

```

```
echo "$sql : failed ". $conn->error . "<br/>";
```

```
else {
```

```
echo "$sql : succeeded<br/>";
```

```
$connect = new mysqli($host, $uname, $upass, $db);
```

```
}
```

```

    } else {

        if (!$result=mysql_query($sql,$connect))

            echo "$sql : failed<br/>";

        else

            echo "$sql : succeeded<br/>";

    }

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

        if (!$result=mysql_db_query($db,$sql))

            echo "$sql : failed<br/>";

        else

```

```
echo "$sql : succeeded<br/>";
```

```
}
```

```
}
```

```
?>
```

Insert

```
<form action=orde_s4insert.php>

<input name=ordeid value=>

<input name=proid value=>

<input name=uni value=>

<input name=qua value=>

<input name=dis value=>

<input type=submit value=orde_s4insert.php>

</form>

<?php

if (!isset($_GET['ordeid']) || !isset($_GET['proid']))

exit; require("orde_s1connect.php"); $sql="insert into

$tb

values('".$_GET['ordeid']."','".$_GET['proid']."','".$_GET['uni']."','".$_GET['qua']."','".$_GET['di

s'].".');" if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";
```

```
else

    echo "$sql : succeeded";

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else
```



```
        echo "$sql : succeeded";

        mysql_close($connect);

    }

?>
```

Update

```
<?php include("header01.php"); ?>

<form action="orde_s6update.php">

    <input name="ordeid" value="">

    <input name="prouid" value="">

    <input name="unit" value="">

    <input name="quan" value="">

    <input name="disc" value="">

    <input type="submit" value="orde_s6update.php">

</form>

<?php

if (!isset($_GET['ordeid'])) { exit; }

require("orde_s1connect.php");

$sql.="update Orderdetails set ";
```

```
$sql.="orderid='". $_GET['ordeid'] ."', ";
```

```
$sql.="productid='". $_GET['prouid'] ."', ";
```

```
$sql.="unitprice='". $_GET['unit'] ."', ";
```

```
$sql.="quantity='". $_GET['quan'] ."', ";
```

```
$sql.="discount='". $_GET['disc'] .'" ";
```

```

$sql.="where orderid='". $_GET['ordeid'] ."";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        echo "<meta http-equiv='refresh' content='0;

url=index.php'/>"; $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : True";

    else

        echo "<meta http-equiv='refresh' content='0;

url=index.php'/>"; mysql_close($connect);

}

?>

<?php include("footer.php"); ?>

```

Delete

```
<?php
```

```
$myForm = '<body>
```

```
<form action="orde_s5delete.php">
```

```
<input name="delid" value=".....">
```

```
<input type="submit" value="orde_s5delete.php">
```

```

</form>';

if (!isset($_GET['delid'])) {

    echo $myForm;

    exit;

}

require("orde_slconnect.php");

$sql="delete from $tb ";

$sql.="where orderid='".$_GET['delid']."'";

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        header("location: index.php");

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

```

```
header("location: index.php");
```

```
mysql_close($connect);
```

```
}
```

```
?>
```

Orderdetails

Select

```
<?php
```

```
require("orde_slconnect.php");
```

```
$sql="select * from Orderdetails";
```

```
if((int)phpversion() >= 7) {
```

```
    $result = $connect->query($sql);
```

```
    if ($result->num_rows > 0) {
```

```
        while($row = $result->fetch_assoc()) {
```

```
            echo "<center>orderid: " . $row["orderid"]. "- productid: " .
```

```
$row["productid"]. "- unitprice: " . $row["unitprice"]. "- quantity: " . $row["quantity"]. "- discount: " .
```

```
$row["discount"]. "<br/>";
```

```
        }
```

```
    } else {
```

```
        echo "no results";
```

```
    }
```

```
    $connect->close();
```

```
} else {
```

```
if (!$result=mysql_db_query($db,$sql)) die("Query : failed");

echo "Display all records : <br/>";

while ($object = mysql_fetch_object($result)) {

    echo $object->PID . " " . $object->Pname . "<br/>";

}

echo "Total " . mysql_num_rows($result) . " records";
```



```

        mysql_close($connect);

    }

    echo "<center><a href=index.php>back</a>";

?>

```

Create

```

<?php

if(file_exists("orde_slconnect.php"))

    require("orde_slconnect.php");

else

    die("File not found");

if ($dbstatus == 0) dbWork("create database $db");

qWork("create table $tb (orderid char(5),productid char(40),unitprice
char(40),quantity char(40),discount char(40))");

if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);

echo '<a href="orde_s0index.php">back</a>'; function dbWork($sql) {

    global $db,$host,$uname,$upass,$connect;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

```

```
echo "$sql : failed ". $conn->error . "<br/>";
```

```
else {
```

```
echo "$sql : succeeded<br/>";
```

```
$connect = new mysqli($host, $uname, $upass, $db);
```

```
}
```

```

    } else {

        if (!$result=mysql_query($sql,$connect))

            echo "$sql : failed<br/>";

        else

            echo "$sql : succeeded<br/>";

    }

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

        if (!$result=mysql_db_query($db,$sql))

            echo "$sql : failed<br/>";

        else

```

```
echo "$sql : succeeded<br/>"
```

```
}
```

```
}
```

```
?>
```

Insert

```
<form action=orde_s4insert.php>
```

```
<input name=ordeid value=>
```

```
<input name=proid value=>
```

```
<input name=uni value=>
```

```
<input name=qua value=>
```

```
<input name=dis value=>
```

```
<input type=submit value=orde_s4insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['ordeid']) || !isset($_GET['proid']))
```

```
exit; require("orde_s1connect.php"); $sql="insert into
```

```
$tb
```

```
values('".$_GET['ordeid']."'','".$_GET['proid']."'".$_GET['uni']."'".$_GET['qua']."'".$_GET['di
```

```
s']."'); if((int)phpversion() >= 7) {
```

```
if($connect->query($sql) === FALSE)
```

```
echo "$sql : failed";
```

```
else

    echo "$sql : succeeded";

    $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else
```

```
        echo "$sql : succeeded";

    mysql_close($connect);

}

?>
```

Delete

```
<?php

$myForm = '<body>

<form action="orde_s5delete.php">

<input name="delid" value=".....">

<input type="submit" value="orde_s5delete.php">

</form>';

if (!isset($_GET['delid'])) {

    echo $myForm;

    exit;

}

require("orde_s1connect.php");

$sql="delete from $tb ";
```

```
$sql.="where orderid =".$_GET['delid']."";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
    else
```

```
        header("location: index.php");
```



```
        $connect->close();

    } else {

        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            header("location: index.php");

        mysql_close($connect);

    }

?>
```

Update

```
<form action="orde_s6update.php">

<input name="ordeid" value="">

<input name="prouid" value="">

<input name="unit" value="">

<input name="quan" value="">

<input name="disc" value="">

<input type="submit" value="orde_s6update.php">
```

</form>

<?php

```
if (!isset($_GET['ordeid'])) { exit; }
```

```
require("orde_slconnect.php");
```

```
$sql.="update Orderdetails set ";
```

```
$sql.="orderid='". $_GET['ordeid'] ."', ";
```

```

$sql.="productid='". $_GET['prouid'] ."', ";

$sql.="unitprice='". $_GET['unit'] ."', ";

$sql.="quantity='". $_GET['quan'] ."', ";

$sql.="discount='". $_GET['disc'] ."' ";

$sql.="where orderid='". $_GET['ordeid'] .'"';

if((int)phpversion() >= 7) {

    if($connect->query($sql) === FALSE)

        echo "$sql : failed";

    else

        echo "<meta http-equiv='refresh' content='0;

        url=index.php'/>"; $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : True";

    else

        echo "<meta http-equiv='refresh' content='0;

        url=index.php'/>"; mysql_close($connect);

}

```

?>

Shippers

Select

<?php

```
require("sh_slconnect.php");
```

```
$sql="select * from Shippers";
```

```
if((int)phpversion() >= 7) {
```

```
    $result = $connect->query($sql);
```

```
    if ($result->num_rows > 0) {
```

```
        while($row = $result->fetch_assoc()) {
```

```
            echo "<center> id: " . $row["shid"]. "- Company: " . $row["comname"]. "-
```

```
Phone: " . $row["phone"]. "<br/>";
```

```
        }
```

```
    } else {
```

```
        echo "no results";
```

```
    }
```

```
    $connect->close();
```

```
} else {
```

```
    if (!$result=mysql_db_query($db,$sql)) die("Query : failed");
```

```
    echo "Display all records : <br/>";
```

```
    while ($object = mysql_fetch_object($result)) {
```

```
        echo $object->PID . " " . $object->Pname . "<br/>";
    }
    echo "Total " . mysql_num_rows($result) . " records";

    mysql_close($connect);
```

```
}
```

```
echo "<center><a href=index.php>back</a>";
```

```
?>
```

Create

```
<?php
```

```
if(file_exists("sh_slconnect.php"))
```

```
    require("sh_slconnect.php");
```

```
else
```

```
    die("File not found");
```

```
if ($dbstatus == 0) dbWork("create database $db");
```

```
qWork("create table $tb (shid char(4),comname char(40),phone char(40))");
```

```
//qWork("insert into $tb values('1001','Tom')"); //qWork("insert into $tb
```

```
values('1002','Dang')");
```

```
//qWork("insert into $tb values('1003','Pom')");
```

```
if((int)phpversion() >= 7) $connect->close(); else mysql_close($connect);
```

```
echo '<a href="index.php">back</a>'; function dbWork($sql) {
```

```
    global $db,$host,$uname,$upass,$connect;
```

```
if((int)phpversion() >= 7) {  
  
    if ($connect->query($sql) === FALSE)  
  
        echo "$sql : failed ". $conn->error . "<br/>";  
  
    else {  
  
        echo "$sql : succeeded<br/>";  
  
        $connect = new mysqli($host, $uname, $upass, $db);
```

```

    }

} else {

    if (!$result=mysql_query($sql,$connect))

        echo "$sql : failed<br/>";

    else

        echo "$sql : succeeded<br/>";

}

}

function qWork($sql) {

    global $connect,$db;

    if((int)phpversion() >= 7) {

        if ($connect->query($sql) === FALSE)

            echo "$sql : failed ". $conn->error . "<br/>";

        else

            echo "$sql : succeeded<br/>";

    } else {

        if (!$result=mysql_db_query($db,$sql))

            echo "$sql : failed<br/>";

```



```
else
```

```
    echo "$sql : succeeded<br/>";
```

```
}
```

```
}
```

```
?>
```

Insert

```
<form action=sh_s4insert.php>
```

```
<input name=shid value=>
```

```
<input name=comname value=>
```

```
<input name=phone value=>
```

```
<input type=submit value=sh_s4insert.php>
```

```
</form>
```

```
<?php
```

```
if (!isset($_GET['shid']) || !isset($_GET['comname'])) exit;
```

```
require("sh_s1connect.php");
```

```
$sql="insert into $tb
```

```
values('".$_GET['shid']. "','".$_GET['comname']. "','".$_GET['phone']. "')";
```

```
if((int)phpversion() >= 7) {
```

```
    if($connect->query($sql) === FALSE)
```

```
        echo "$sql : failed";
```

```
else

    echo "$sql : succeeded";

$connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : failed";

    else

        echo "$sql : succeeded";

    mysql_close($connect);
```

```
}
```

```
?>
```

Delete

```
<?php
```

```
$myForm = '<body>
```

```
<form action="sh_s5delete.php">
```

```
<input name="delid" value=".....">
```

```
<input type="submit" value="sh_s5delete.php">
```

```
</form>';
```

```
if (!isset($_GET['delid'])) {
```

```
    echo $myForm;
```

```
    exit;
```

```
}
```

```
require("sh_s1connect.php");
```

```
$sql="delete from $tb ";
```

```
$sql.="where shid='".$_GET['delid']."'";
```

```
if((int)phpversion() >= 7) {
```

```
if($connect->query($sql) === FALSE)

    echo "$sql : failed";

else

    header("location: index.php");

$connect->close();

} else {
```

```
        if(!$result=mysql_db_query($db,$sql))

            echo "$sql : failed";

        else

            header("location: index.php");

        mysql_close($connect);

    }

?>
```

Update

```
<form action="sh_s6update.php">

<input name="shid" value="">

<input name="commname" value="">

<input name="phh" value="">

<input type="submit" value="sh_s6update.php">

</form>

<?php

if (!isset($_GET['shid'])) { exit; }

require("sh_s1connect.php");
```

```
$sql="update Shippers set ";
```

```
$sql.="shid='". $_GET['shid'] .'", ";
```

```
$sql.="comname='". $_GET['commname'] .'", ";
```

```
$sql.="phone='". $_GET['phh'] .'" ";
```

```
$sql.="where shid='". $_GET['shid'] .'"";
```

```
if((int)phpversion() >= 7) {
```

```
if($connect->query($sql) === FALSE)

    echo "$sql : failed";

else

    echo "<meta http-equiv='refresh' content='0;

url=index.php'/>"; $connect->close();

} else {

    if(!$result=mysql_db_query($db,$sql))

        echo "$sql : True";

    else

        echo "<meta http-equiv='refresh' content='0;

url=index.php'/>"; mysql_close($connect);

}

?>
```


หน้าDrop ของแต่ละตัว

```
<?php include("yheader.php"); ?>

<?php

/* updated for php7 and php 5 on 2560-09-13 */

require("pro_slconnect.php");

$sql = "drop database $db";

if((int)phpversion() >= 7) {

    $connect->close();

    $connect = mysqli_connect($host, $uname, $upass);

    if (mysqli_query($connect, $sql))

        echo "Drop database : succeeded";

    else

        echo "Drop database : failed " . mysqli_error($connect);

    $connect->close();

} else {

    if (!$result=mysqli_query($sql,$connect))

        echo "Drop database : failed";

    else

        echo "Drop database : succeeded";

    mysqli_close($connect);

}

?>

<input type='button' onclick="location.href='s0index.php'" value='back'>

<?php include("footer.php"); ?>
```

ตัวอย่างหน้าInsert And

	Pyramid 1-12	Pyramid 13-24	Pyramid 25-36	Pro	
1004	kmit	insert.php			

ตัวอย่างหน้าDelete

	Pyramid 1-12	Pyramid 13-24	Pyramid 25-36	Pro	
1001	delete.php				

ตัวอย่างหน้าupdate

	Pyramid 1-12	Pyramid 13-24	Pyramid 25-36	Pro	
1003	chula	update.php			

```
<?php
session_start(); ?>
<html lang="en">
<title>Pyramid</title>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="stylesheet" href="https://www.w3schools.com/w3css/4/w3.css">
<link rel="stylesheet" href="https://fonts.googleapis.com/css?family=Lato">
<link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/font-awesome/4.7.0/css/font-awesome.min.css">

<center>
    <p>

    <B></B><BR>
    <h2>พีระมิด 36 แบบ (Pyramid)</h2>

<style>
a:link, a:visited {
    background-color: #87CEEB;
    color: white;
    padding: 10px 30px;
    text-align: center;
    text-decoration: none;
```

```
display: inline-block;
}
```

```
a:hover, a:active {
    background-color:#F4A460;
}
```

```
</style>
```

```
<META NAME="Generator" CONTENT="EditPlus">
```

```
<META NAME="Author" CONTENT="">
```

```
<META NAME="Keywords" CONTENT="">
```

```
<META NAME="Description" CONTENT="">
```

```
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
```

```
</HEAD>
```

```
<BODY bgcolor =#1E90FF>
```

```
<TABLE align="center" width="1024" border="0">
```

```
<TR>
```

```
<TD colspan="3" bgcolor="#87CEEB" align="center" >
```

```
</div>
```

```
<div class="w3-dropdown-hover w3-hide-small ">
```

```
<a class="w3-bar-item w3-button "><font color="white">Pyramid 1-12</a>
```

```
<div class="w3-dropdown-content w3-bar-block w3-card-4">
```

```
<a href="fon_01.php" class="w3-bar-item w3-button">Pyramid1</a>
<a href="fon_02.php" class="w3-bar-item w3-button">Pyramid2</a>
<a href="fon_03.php" class="w3-bar-item w3-button">Pyramid3</a>
<a href="fon_04.php" class="w3-bar-item w3-button">Pyramid4</a>
<a href="fon_05.php" class="w3-bar-item w3-button">Pyramid5</a>
<a href="fon_06.php" class="w3-bar-item w3-button">Pyramid6</a>
<a href="fon_07.php" class="w3-bar-item w3-button">Pyramid7</a>
<a href="fon_08.php" class="w3-bar-item w3-button">Pyramid8</a>
<a href="fon_09.php" class="w3-bar-item w3-button">Pyramid9</a>
<a href="fon_10.php" class="w3-bar-item w3-button">Pyramid10</a>
<a href="fon_11.php" class="w3-bar-item w3-button">Pyramid11</a>
<a href="fon_12.php" class="w3-bar-item w3-button">Pyramid12</a>
</div>
```

```
</div>
```

```
<div class="w3-dropdown-hover w3-hide-small ">
```

```
<a class="w3-bar-item w3-button "><font color="white">Pyramid 13-24</a>
```

```
<div class="w3-dropdown-content w3-bar-block w3-card-4">
```

```
<a href="fon_13.php" class="w3-bar-item w3-button">Pyramid13</a>
<a href="fon_14.php" class="w3-bar-item w3-button">Pyramid14</a>
<a href="fon_15.php" class="w3-bar-item w3-button">Pyramid15</a>
<a href="fon_16.php" class="w3-bar-item w3-button">Pyramid16</a>
<a href="fon_17.php" class="w3-bar-item w3-button">Pyramid17</a>
<a href="fon_18.php" class="w3-bar-item w3-button">Pyramid18</a>
<a href="fon_19.php" class="w3-bar-item w3-button">Pyramid19</a>
<a href="fon_20.php" class="w3-bar-item w3-button">Pyramid20</a>
```

[Pyramid21](fon_21.php)

[Pyramid22](fon_22.php)

[Pyramid23](fon_23.php)

[Pyramid24](fon_24.php)

</div>

</div>

</div>

</div>

<div class="w3-dropdown-hover w3-hide-small ">

Pyramid 25-36

<div class="w3-dropdown-content w3-bar-block w3-card-4">

Pyramid25

Pyramid26

Pyramid27

Pyramid28

Pyramid29

Pyramid30

Pyramid31

Pyramid32

Pyramid33

Pyramid34

Pyramid35

Pyramid36

</div>

</div>

<div class="w3-dropdown-hover w3-hide-small ">

Pro

<div class="w3-dropdown-content w3-bar-block w3-card-4">

s0

</div>

</TD>

</TR>

<TR>

<TD width="624" >