


Example for Binary Search Tree: Remove (2), two children.

For example 5.3: if there is **the exist** BinarySearchTree's instance variable name **bst** contains the elements as the image following:

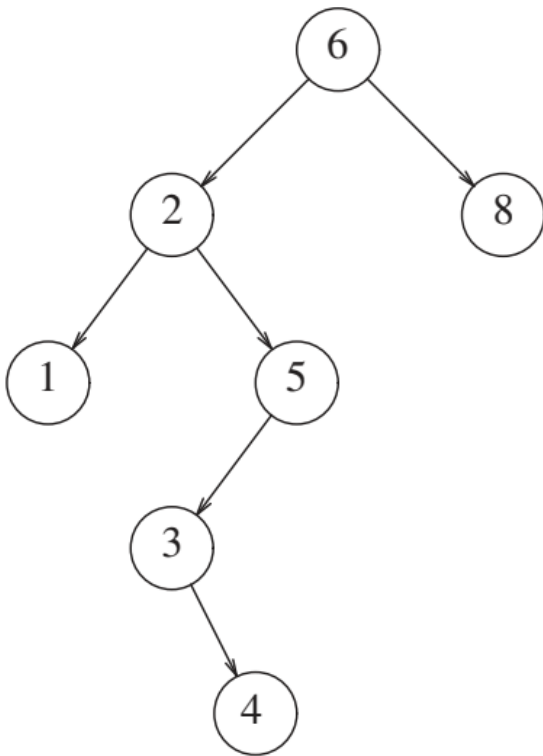


Write the steps for the `_delete_recursive()` function when remove 2 from the instance variable `bst`. In each round,consists of

- 1) what are the values of the parameters value and `current_node` of the `_delete_recursive()` function, and
- 2) what statements are executed under the if-else condition that is checked as true.

Each iteration must write 2 things.

Answer:

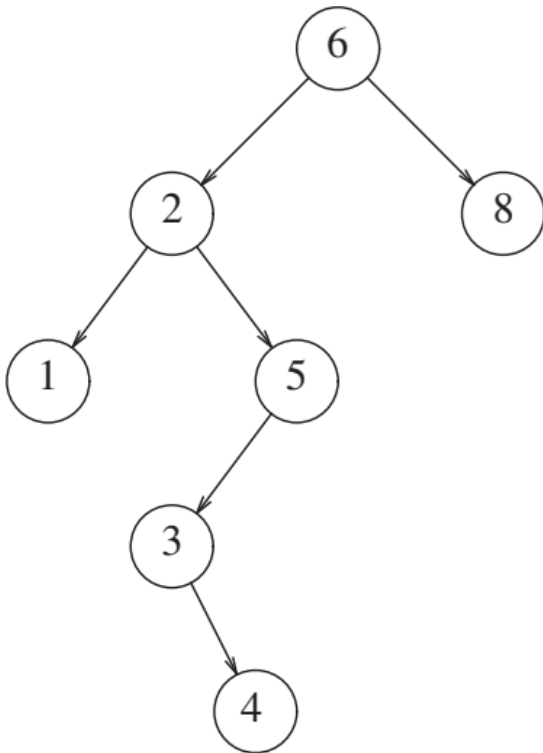

Each iteration for the `_delete_recursive()` function when remove 2

First round value = 2 , current_node = **6**

current_node.left =

_delete_recursive(current_node.left, value)

round 2: value = 2 , current_node =

temp_node =

3

5


2


5

Each iteration for the `_min_value_node()` function to find minimum of right subtree

First round `current_node =` **5**

```
_min_value_node(self, node):  
    current = node  
    while current.left is not None:  
        current = current.left  
    return current
```

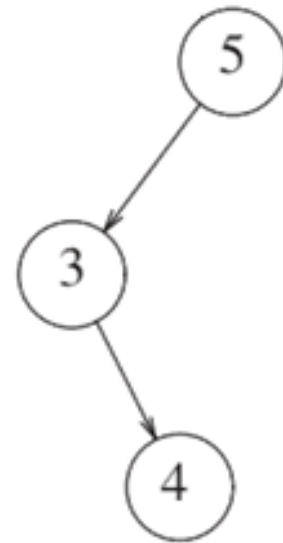

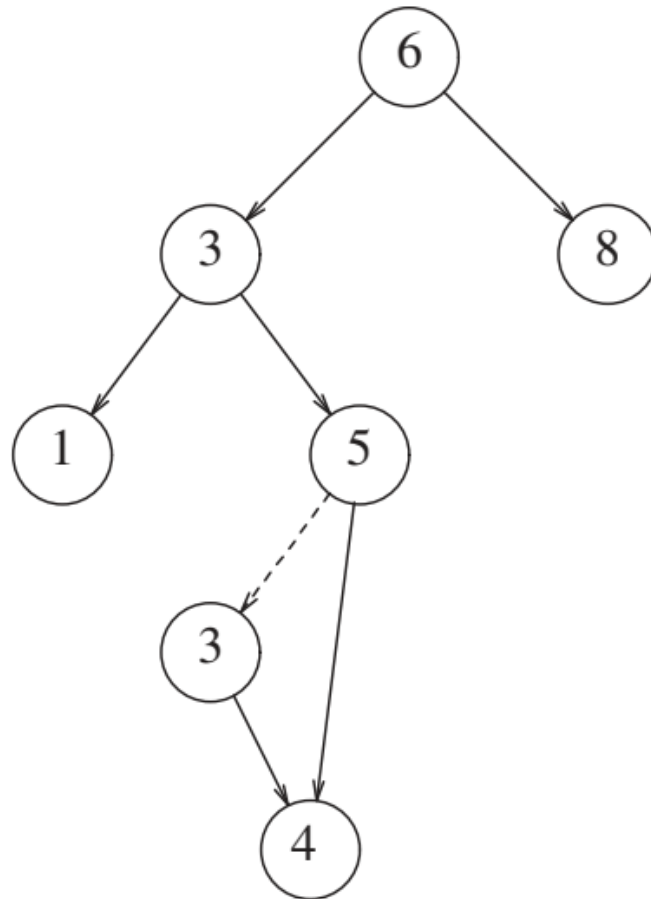

round 3: value = , current_node =

round 4: value = , current_node =

