

▼ Ungraded Lab: CelebA GAN Experiments

This lab will demonstrate a GAN trained on the [CelebA](#) dataset. This is a resource-intensive task so you will use a TPU and a distributed strategy to train the network. It will take 40 to 50 minutes to run the entire exercise. Afterwards, you will see a gif showing new faces generated by the trained model.

▼ Imports

```
# install tensorflow_addons
!pip install -U tensorflow-addons

Looking in indexes: https://pypi.org/simple, https://us-python.pkg.dev/colab-wheels/public/simple/
Collecting tensorflow-addons
  Downloading tensorflow_addons-0.19.0-cp38-cp38-manylinux_2_17_x86_64.manylinux2014_x86_64.whl (1.1 MB)
    |████████| 1.1 MB 5.0 MB/s
Requirement already satisfied: packaging in /usr/local/lib/python3.8/dist-packages (from tensorflow-addons) (21.3)
Requirement already satisfied: typeguard>=2.7 in /usr/local/lib/python3.8/dist-packages (from tensorflow-addons) (2.7.1)
Requirement already satisfied: pyparsing!=3.0.5,>=2.0.2 in /usr/local/lib/python3.8/dist-packages (from packaging->tensorflow-addons) (3.1.1)
Installing collected packages: tensorflow-addons
Successfully installed tensorflow-addons-0.19.0
```

```
import tensorflow as tf
import tensorflow_datasets as tfds
from tensorflow.keras.utils import plot_model
from tensorflow.keras import layers
import tensorflow_addons as tfa

import os
import zipfile
import glob
import urllib.request
from enum import Enum
from tqdm import tqdm
from functools import partial

import matplotlib.pyplot as plt
import numpy as np

from PIL import Image
from IPython.display import display
from IPython.display import Image as IpyImage
import imageio
import cv2
```

▼ Setup TPU

You will use a TPU and its corresponding [distribution strategy](#) to speed up the training. We've provided the setup code and helper functions below. You might recognize some of these from taking Course 2 of this Specialization.

```
tpu_grpc_url = "grpc://" + os.environ["COLAB_TPU_ADDR"]
tpu_cluster_resolver = tf.distribute.cluster_resolver.TPUClusterResolver(tpu_grpc_url)
tf.config.experimental_connect_to_cluster(tpu_cluster_resolver)
tf.tpu.experimental.initialize_tpu_system(tpu_cluster_resolver)
strategy = tf.distribute.experimental.TPUStrategy(tpu_cluster_resolver)
```

WARNING:absl:`tf.distribute.experimental.TPUStrategy` is deprecated, please use the non experimental symbol `tf.distribute.TPUStrategy`

```
class Reduction(Enum):
    NONE = 0
    SUM = 1
    MEAN = 2
    CONCAT = 3

def distributed(*reduction_flags):
    def _decorator(fun):
        def per_replica_reduction(z, flag):
            if flag == Reduction.NONE:
                return z
            elif flag == Reduction.SUM:
                return strategy.reduce(tf.distribute.ReduceOp.SUM, z, axis=None)
            elif flag == Reduction.MEAN:
```

```

        return strategy.reduce(tf.distribute.ReduceOp.MEAN, z, axis=None)
    elif flag == Reduction.CONCAT:
        z_list = strategy.experimental_local_results(z)
        return tf.concat(z_list, axis=0)
    else:
        raise NotImplementedError()

@tf.function
def _decorated_fun(*args, **kwargs):
    fun_result = strategy.run(fun, args=args, kwargs=kwargs)
    if len(reduction_flags) == 0:
        assert fun_result is None
        return
    elif len(reduction_flags) == 1:
        assert type(fun_result) is not tuple and fun_result is not None
        return per_replica_reduction(fun_result, *reduction_flags)
    else:
        assert type(fun_result) is tuple
        return tuple((per_replica_reduction(fr, rf) for fr, rf in zip(fun_result, reduction_flags)))
return _decorated_fun
return _decorator

```

▼ Download and Prepare the Dataset

Next, you will fetch the celebrity faces dataset. We've hosted a copy of the data in a Google Drive but the filesize is around 1GB so it will take some time to download.

```

# make a data directory
try:
    os.mkdir('/tmp/celeb')
except OSError:
    pass

# download the dataset archive
data_url = "https://storage.googleapis.com/lauencemoroney-blog.appspot.com/Resources/archive.zip"
data_file_name = "archive.zip"
download_dir = '/tmp/celeb/'
urllib.request.urlretrieve(data_url, data_file_name)

# extract the zipped file
zip_ref = zipfile.ZipFile(data_file_name, 'r')
zip_ref.extractall(download_dir)
zip_ref.close()

```

You will then prepare the dataset. Preprocessing steps include cropping and transforming the pixel values to the range [-1, 1]. Training batches are then prepared so it can be fed into the model later.

```

def load_celeba(batch_size, resize=64, crop_size=128):
    """Creates batches of preprocessed images from the JPG files
    Args:
        batch_size - batch size
        resize - size in pixels to resize the images
        crop_size - size to crop from the image

    Returns:
        prepared dataset
    """
    # initialize zero-filled array equal to the size of the dataset
    image_paths = sorted(glob.glob("/tmp/celeb/img_align_celeba/img_align_celeba/*.jpg"))
    images = np.zeros((len(image_paths), resize, resize, 3), np.uint8)
    print("Creating Images")

    # crop and resize the raw images then put into the array
    for i, path in tqdm(enumerate(image_paths)):
        with Image.open(path) as img:
            left = (img.size[0] - crop_size) // 2
            top = (img.size[1] - crop_size) // 2
            right = left + crop_size
            bottom = top + crop_size
            img = img.crop((left, top, right, bottom))
            img = img.resize((resize, resize), Image.LANCZOS)
            images[i] = np.asarray(img, np.uint8)

    # split the images array into two
    split_n = images.shape[0] // 2
    images1, images2 = images[:split_n], images[split_n:2 * split_n]
    del images

```

```

# preprocessing function to convert the pixel values into the range [-1,1]
def preprocess(img):
    x = tf.cast(img, tf.float32) / 127.5 - 1.0
    return x

# use the preprocessing function on the arrays and create batches
dataset = tf.data.Dataset.from_tensor_slices((images1, images2))
dataset = dataset.map(
    lambda x1, x2: (preprocess(x1), preprocess(x2)))
).shuffle(4096).batch(batch_size, drop_remainder=True).prefetch(tf.data.experimental.AUTOTUNE)

return dataset

# use the function above to load and prepare the dataset
batch_size = 8
batch_size = batch_size * strategy.num_replicas_in_sync
dataset = load_celeba(batch_size)
out_dir = "celeba_out"

Creating Images
202599it [04:33, 740.39it/s]

```

▼ Build the Model

Next, you will build the generator and discriminator. As mentioned in the lecture, the code in this notebook is generalized to make it easy to reconfigure (such as choosing the type of normalization). With that, you will notice a lot of extra code, mostly related to gradient penalty. You can ignore those and we've set the defaults to reflect the architecture shown in class.

You can try the other settings once you've gone through these defaults. Additional modes made available are based on DRAGAN and WGAN-GP and you can read about it [here](#) and [here](#). These settings are reconfigured using the utilities below.

```

# Utilities

def _get_norm_layer(norm):
    if norm == 'NA':
        return lambda x: x
    elif norm == 'batch_normalization':
        return layers.BatchNormalization
    elif norm == 'instance_normalization':
        return tfa.layers.InstanceNormalization
    elif norm == 'layer_normalization':
        return layers.LayerNormalization

def get_initializers():
    return (tf.keras.initializers.RandomNormal(mean=0.0, stddev=0.02), # conv initializer
            tf.keras.initializers.RandomNormal(mean=1.0, stddev=0.02)) # bn gamma initializer

def gradient_penalty(f, real, fake, mode):
    def _gradient_penalty(f, real, fake=None):
        def _interpolate(a, b=None):
            if b is None: # interpolation in DRAGAN
                beta = tf.random.uniform(shape=tf.shape(a), minval=0., maxval=1.)
                b = a + 0.5 * tf.math.reduce_std(a) * beta
            shape = [tf.shape(a)[0]] + [1] * (a.shape.ndims - 1)
            alpha = tf.random.uniform(shape=shape, minval=0., maxval=1.)
            inter = a + alpha * (b - a)
            inter.set_shape(a.shape)
            return inter

            x = _interpolate(real, fake)
            with tf.GradientTape() as t:
                t.watch(x)
                pred = f(x)
            grad = t.gradient(pred, x)
            norm = tf.norm(tf.reshape(grad, [tf.shape(grad)[0], -1]), axis=1)
            gp = tf.reduce_mean((norm - 1.)**2)

            return gp

        if mode == 'none':
            gp = tf.constant(0, dtype=real.dtype)
        elif mode == 'dragan':
            gp = _gradient_penalty(f, real)
        elif mode == 'wgan-gp':
            gp = _gradient_penalty(f, real, fake)

        return gp

```

▼ Generator

You will first define the generator layers. Again, you will notice some extra code but the default will follow the architecture in class. Like the DCGAN you previously built, the model here primarily uses blocks containing Conv2D, BatchNormalization, and ReLU layers.

```
def create_generator(input_shape=(1, 1, 128),
                     output_channels=3,
                     dim=64,
                     n_upsamplings=4,
                     norm='batch_normalization',
                     name='generator'):

    Normalization = _get_norm_layer(norm)
    conv_initializer, bn_gamma_initializer = get_initializers()

    # 0
    x = inputs = tf.keras.Input(shape=input_shape)

    # 1: 1x1 -> 4x4
    dimensions = min(dim * 2 ** (n_upsamplings - 1), dim * 8)
    x = layers.Conv2DTranspose(
        dimensions, 4, strides=1, padding='valid', use_bias=False,
        # kernel_initializer=conv_initializer
    )(x)
    x = Normalization(
        # gamma_initializer=bn_gamma_initializer
    )(x)
    x = layers.ReLU()(x)

    # 2: upsamplings, 4x4 -> 8x8 -> 16x16 -> ...
    for i in range(n_upsamplings - 1):
        dimensions = min(dim * 2 ** (n_upsamplings - 2 - i), dim * 8)
        x = layers.Conv2DTranspose(
            dimensions, 4, strides=2, padding='same', use_bias=False,
            # kernel_initializer=conv_initializer
        )(x)
        x = Normalization(
            # gamma_initializer=bn_gamma_initializer
        )(x)
        x = layers.ReLU()(x)

    x = layers.Conv2DTranspose(
        output_channels, 4, strides=2, padding='same',
        # kernel_initializer=conv_initializer
    )(x)

    outputs = layers.Activation('tanh')(x)

    return tf.keras.Model(inputs=inputs, outputs=outputs, name=name)
```

▼ Discriminator

The discriminator will use strided convolutions to reduce the dimensionality of the features. These will be connected to a [LeakyReLU](#) activation.

```
def create_discriminator(input_shape=(64, 64, 3),
                        dim=64,
                        n_downsamplings=4,
                        norm='batch_normalization',
                        name='discriminator'):

    Normalization = _get_norm_layer(norm)
    conv_initializer, bn_gamma_initializer = get_initializers()

    # 0
    x = inputs = tf.keras.Input(shape=input_shape)

    # 1: downsamplings, ... -> 16x16 -> 8x8 -> 4x4
    x = layers.Conv2D(dim, 4, strides=2, padding='same',
                      # kernel_initializer=conv_initializer
    )(x)
    x = layers.LeakyReLU(alpha=0.2)(x)

    for i in range(n_downsamplings - 1):
        dimensions = min(dim * 2 ** (i + 1), dim * 8)
        x = layers.Conv2D(dimensions, 4, strides=2, padding='same', use_bias=False,
                          # kernel_initializer=conv_initializer
        )(x)
        x = Normalization(
            # gamma_initializer=bn_gamma_initializer
        )(x)
```

```

x = layers.LeakyReLU(alpha=0.2)(x)

# 2: logit
outputs = layers.Conv2D(1, 4, strides=1, padding='valid',
                       # kernel_initializer=conv_initializer
                       )(x)

return tf.keras.Model(inputs=inputs, outputs=outputs, name=name)

```

With the layers for the generator and discriminator defined, you can now create the models and set it up for training.

```

# Settings
resize = 64
shape = (resize, resize, 3)
z_dim = 128
n_G_upsamplings = n_D_downsamplings = 4
gradient_penalty_mode = 'none'

if gradient_penalty_mode == 'none':
    d_norm = 'batch_normalization'
elif gradient_penalty_mode in ['dragan', 'wgan-gp']:
    # Avoid using BN with GP
    d_norm = 'layer_normalization'
gradient_penalty_weight = 10.0

# Build the GAN
with strategy.scope():
    # create the generator model
    model_G = create_generator(input_shape=(1, 1, z_dim), output_channels=shape[-1], n_upsamplings=n_G_upsamplings)

    # create the discriminator model
    model_D = create_discriminator(input_shape=shape, n_downsamplings=n_D_downsamplings, norm=d_norm)

    # set optimizers
    param_G = tf.keras.optimizers.Adam(lr=0.0002, beta_1=0.5)
    param_D = tf.keras.optimizers.Adam(lr=0.0002, beta_1=0.5)

    # create distributed dataset
    dataset = strategy.experimental_distribute_dataset(dataset)

    # set the loss function
    loss_func = tf.keras.losses.BinaryCrossentropy(
        from_logits=True,
        reduction=tf.keras.losses.Reduction.NONE
    )

```

```
model_G.summary()
```

Model: "generator"

Layer (type)	Output Shape	Param #
<hr/>		
input_1 (InputLayer)	[None, 1, 1, 128]	0
conv2d_transpose (Conv2DTra nspose)	(None, 4, 4, 512)	1048576
batch_normalization (BatchN ormalization)	(None, 4, 4, 512)	2048
re_lu (ReLU)	(None, 4, 4, 512)	0
conv2d_transpose_1 (Conv2DT ranspose)	(None, 8, 8, 256)	2097152
batch_normalization_1 (Bac hNormalization)	(None, 8, 8, 256)	1024
re_lu_1 (ReLU)	(None, 8, 8, 256)	0
conv2d_transpose_2 (Conv2DT ranspose)	(None, 16, 16, 128)	524288
batch_normalization_2 (Bac hNormalization)	(None, 16, 16, 128)	512
re_lu_2 (ReLU)	(None, 16, 16, 128)	0
conv2d_transpose_3 (Conv2DT ranspose)	(None, 32, 32, 64)	131072
batch_normalization_3 (Bac hNormalization)	(None, 32, 32, 64)	256

```

re_lu_3 (ReLU)           (None, 32, 32, 64)      0
conv2d_transpose_4 (Conv2DT (None, 64, 64, 3)    3075
                    transpose)

activation (Activation) (None, 64, 64, 3)      0
=====
Total params: 3,808,003
Trainable params: 3,806,083
Non-trainable params: 1,920

```

```
model_D.summary()
```

Model: "discriminator"

Layer (type)	Output Shape	Param #
input_2 (InputLayer)	[None, 64, 64, 3]	0
conv2d (Conv2D)	(None, 32, 32, 64)	3136
leaky_re_lu (LeakyReLU)	(None, 32, 32, 64)	0
conv2d_1 (Conv2D)	(None, 16, 16, 128)	131072
batch_normalization_4 (BatchNormalization)	(None, 16, 16, 128)	512
leaky_re_lu_1 (LeakyReLU)	(None, 16, 16, 128)	0
conv2d_2 (Conv2D)	(None, 8, 8, 256)	524288
batch_normalization_5 (BatchNormalization)	(None, 8, 8, 256)	1024
leaky_re_lu_2 (LeakyReLU)	(None, 8, 8, 256)	0
conv2d_3 (Conv2D)	(None, 4, 4, 512)	2097152
batch_normalization_6 (BatchNormalization)	(None, 4, 4, 512)	2048
leaky_re_lu_3 (LeakyReLU)	(None, 4, 4, 512)	0
conv2d_4 (Conv2D)	(None, 1, 1, 1)	8193

```

=====
Total params: 2,767,425
Trainable params: 2,765,633
Non-trainable params: 1,792

```

▼ Training

Finally, you can now train the model. We've provided some helper functions for visualizing and saving the images per epoch.

```
# Utilities
```

```

def make_grid(imgs, nrow, padding=0):
    assert imgs.ndim == 4 and nrow > 0

    batch, height, width, ch = imgs.shape
    n = nrow * (batch // nrow + np.sign(batch % nrow))
    ncol = n // nrow
    pad = np.zeros((n - batch, height, width, ch), imgs.dtype)
    x = np.concatenate([imgs, pad], axis=0)

    # border padding if required
    if padding > 0:
        x = np.pad(x, ((0, 0), (0, padding), (0, padding), (0, 0)),
                   "constant", constant_values=(0, 0))
        height += padding
        width += padding

    x = x.reshape(ncol, nrow, height, width, ch)
    x = x.transpose([0, 2, 1, 3, 4]) # (ncol, height, nrow, width, ch)
    x = x.reshape(height * ncol, width * nrow, ch)

    if padding > 0:
        x = x[:, :height * ncol - padding, :width * nrow - padding, :]

```

```
return x
```

```
def save_img(imgs, filepath, nrow, padding=0):
    grid_img = make_grid(imgs, nrow, padding=padding)
    grid_img = ((grid_img + 1.0) * 127.5).astype(np.uint8)
    with Image.fromarray(grid_img) as img:
        img.save(filepath)
```

This function defines the training on a given batch. It does the two-phase training discussed in class.

- First, you train the discriminator to distinguish between fake and real images.
- Next, you train the generator to create fake images that will fool the discriminator.

```
@distributed(Reduction.SUM, Reduction.SUM, Reduction.CONCAT)
def train_on_batch(real_img1, real_img2):
    '''trains the GAN on a given batch'''
    # concatenate the real image inputs
    real_img = tf.concat([real_img1, real_img2], axis=0)

    # PHASE ONE - train the discriminator
    with tf.GradientTape() as d_tape:

        # create noise input
        z = tf.random.normal(shape=(real_img.shape[0], 1, 1, z_dim))

        # generate fake images
        fake_img = model_G(z)

        # feed the fake images to the discriminator
        fake_out = model_D(fake_img)

        # feed the real images to the discriminator
        real_out = model_D(real_img)

        # use the loss function to measure how well the discriminator
        # labels fake or real images
        d_fake_loss = loss_func(tf.zeros_like(fake_out), fake_out)
        d_real_loss = loss_func(tf.ones_like(real_out), real_out)

        # get the total loss
        d_loss = (d_fake_loss + d_real_loss)
        d_loss = tf.reduce_sum(d_loss) / (batch_size * 2)

        # Gradient Penalty (ignore if you set mode to `none`)
        gp = gradient_penalty(partial(model_D, training=True), real_img, fake_img, mode=gradient_penalty_mode)
        gp = gp / (batch_size * 2)
        d_loss = d_loss + gp * gradient_penalty_weight

        # get the gradients
        gradients = d_tape.gradient(d_loss, model_D.trainable_variables)

        # update the weights of the discriminator
        param_D.apply_gradients(zip(gradients, model_D.trainable_variables))

    # PHASE TWO - train the generator
    with tf.GradientTape() as g_tape:
        # create noise input
        z = tf.random.normal(shape=(real_img.shape[0], 1, 1, z_dim))

        # generate fake images
        fake_img = model_G(z)

        # feed fake images to the discriminator
        fake_out = model_D(fake_img)

        # use loss function to measure how well the generator
        # is able to trick the discriminator (i.e. model_D should output 1's)
        g_loss = loss_func(tf.ones_like(fake_out), fake_out)
        g_loss = tf.reduce_sum(g_loss) / (batch_size * 2)

        # get the gradients
        gradients = g_tape.gradient(g_loss, model_G.trainable_variables)

        # update the weights of the generator
        param_G.apply_gradients(zip(gradients, model_G.trainable_variables))

    # return the losses and fake images for monitoring
    return d_loss, g_loss, fake_img
```

This will start the training loop. We set the number of **epochs** but feel free to revise it. From initial runs, it takes around 50 seconds to complete 1 epoch. We've setup a progress bar to display the losses per epoch and there is code as well to print the fake images generated.

```
# generate a batch of noisy input
test_z = tf.random.normal(shape=(64, 1, 1, z_dim))

# start loop
for epoch in range(30):
    with tqdm(dataset) as pbar:
        pbar.set_description(f"[Epoch {epoch}]")
        for step, (X1, X2) in enumerate(pbar):
            # train on the current batch
            d_loss, g_loss, fake = train_on_batch(X1, X2)


            # display the losses
            pbar.set_postfix({"g_loss": g_loss.numpy(), "d_loss": d_loss.numpy()})

    # generate fake images
    fake_img = model_G(test_z)


    # save output
    if not os.path.exists(out_dir):
        os.makedirs(out_dir)
    file_path = out_dir+f"/epoch_{epoch:04}.png"
    save_img(fake_img.numpy()[:64], file_path, 8)

    # display gallery of fake faces
    if epoch % 1 == 0:
        with Image.open(file_path) as img:
            plt.imshow(np.asarray(img))
            plt.show()
```


[Epoch 0]: : 1581it [01:04, 29.72it/s, g_loss=0.207, d_loss=0.249]Exception ignored in: <function Execu
Traceback (most recent call last):
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 0]: : 1582it [01:04, 24.40it/s, g_loss=0.207, d_loss=0.249]

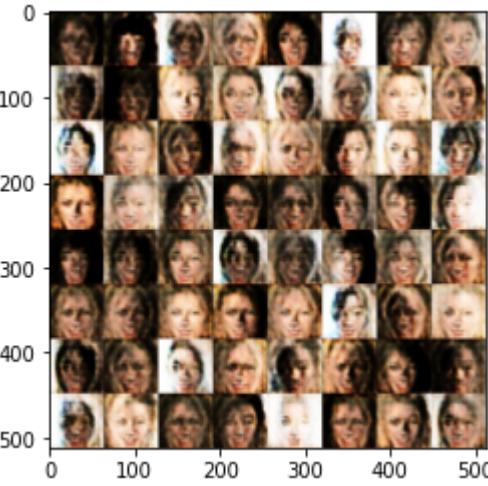


[Epoch 1]: : 1580it [00:56, 29.51it/s, g_loss=0.17, d_loss=0.0812]Exception ignored in: <function Execu
Traceback (most recent call last):
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 1]: : 1582it [00:56, 28.17it/s, g_loss=0.17, d_loss=0.0812]

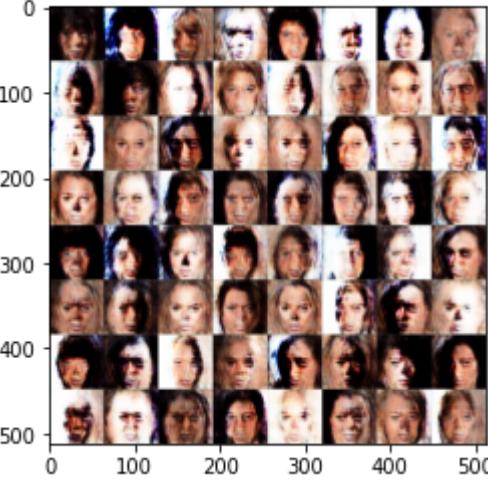


[Epoch 2]: : 1581it [00:57, 30.23it/s, g_loss=0.0273, d_loss=0.0644]Exception ignored in: <function Execu
Traceback (most recent call last):
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 2]: : 1582it [00:57, 27.58it/s, g_loss=0.0273, d_loss=0.0644]

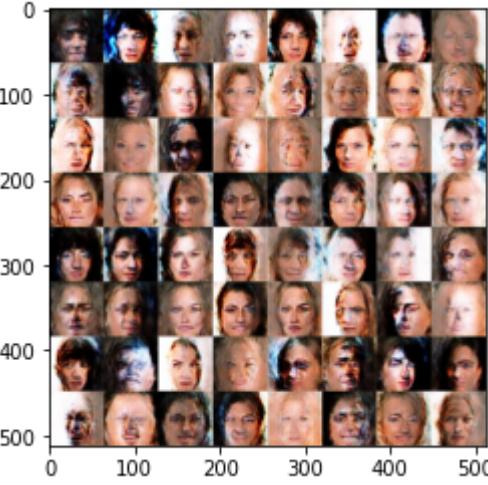


[Epoch 3]: : 1580it [00:55, 30.18it/s, g_loss=0.0932, d_loss=0.121] Exception ignored in: <function Execu
Traceback (most recent call last):
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 3]: : 1582it [00:55, 28.29it/s, g_loss=0.0932, d_loss=0.121]

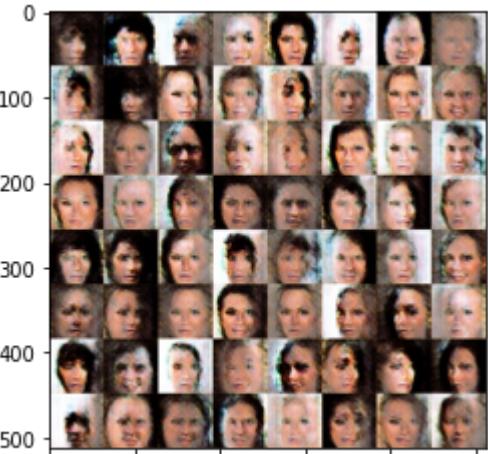


[Epoch 4]: : 1582it [00:55, 27.56it/s, g_loss=0.443, d_loss=0.4]Exception ignored in: <function ExecutorWaitForAllPendingNodes>
Traceback (most recent call last):
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 4]: : 1582it [00:55, 28.32it/s, g_loss=0.443, d_loss=0.4]

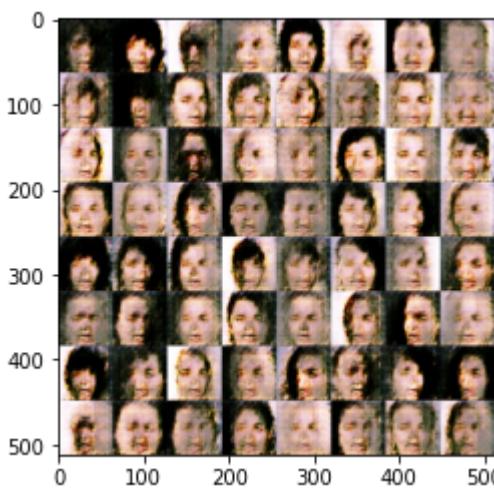


[Epoch 5]: : 1580it [00:56, 29.25it/s, g_loss=0.00612, d_loss=0.0214]Exception ignored in: <function ExecutorWaitForAllPendingNodes>
Traceback (most recent call last):
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 5]: : 1582it [00:56, 28.20it/s, g_loss=0.00612, d_loss=0.0214]

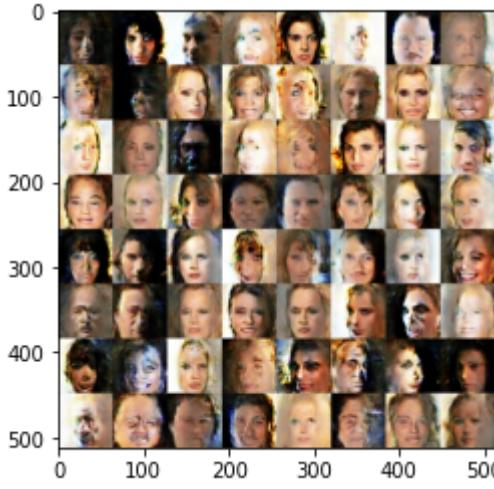


[Epoch 6]: : 1582it [00:55, 28.96it/s, g_loss=0.00598, d_loss=0.0369]Exception ignored in: <function ExecutorWaitForAllPendingNodes>
Traceback (most recent call last):
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 6]: : 1582it [00:55, 28.51it/s, g_loss=0.00598, d_loss=0.0369]

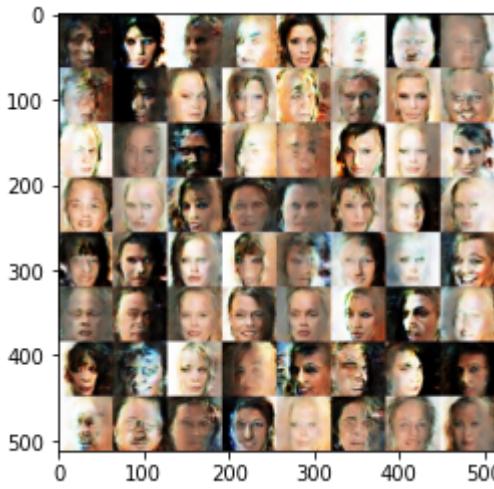

[Epoch 7]: : 1580it [00:56, 28.56it/s, g_loss=0.0164, d_loss=0.026]Exception ignored in: <function ExecutorWaitForAllPendingNodes>
Traceback (most recent call last):
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 7]: : 1582it [00:56, 28.22it/s, g_loss=0.0164, d_loss=0.026]

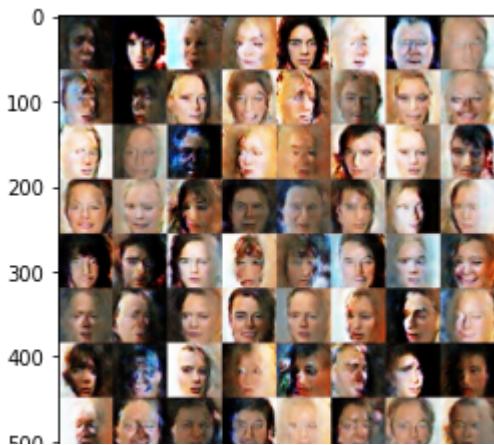



[Epoch 8]: : 1580it [00:55, 30.40it/s, g_loss=0.0477, d_loss=0.0536]Exception ignored in: <function Exec

Traceback (most recent call last):

File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del_


self.wait()

File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait

pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)

tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence

[Epoch 8]: : 1582it [00:55, 28.29it/s, g_loss=0.0477, d_loss=0.0536]

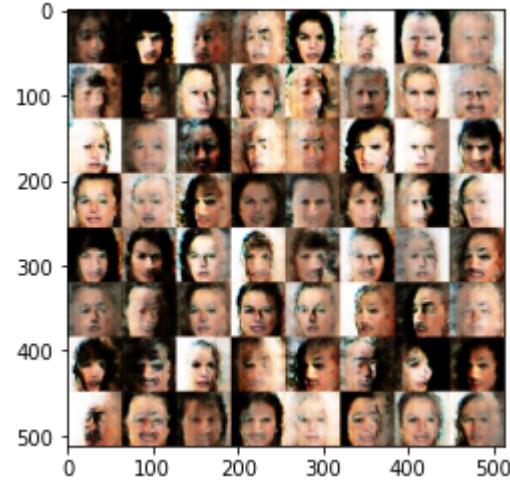

[Epoch 9]: : 1581it [00:56, 29.24it/s, g_loss=0.00776, d_loss=0.00603]Exception ignored in: <function Exec

Traceback (most recent call last):

File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del_


self.wait()

File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait

pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)

tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence

[Epoch 9]: : 1582it [00:56, 28.01it/s, g_loss=0.00776, d_loss=0.00603]

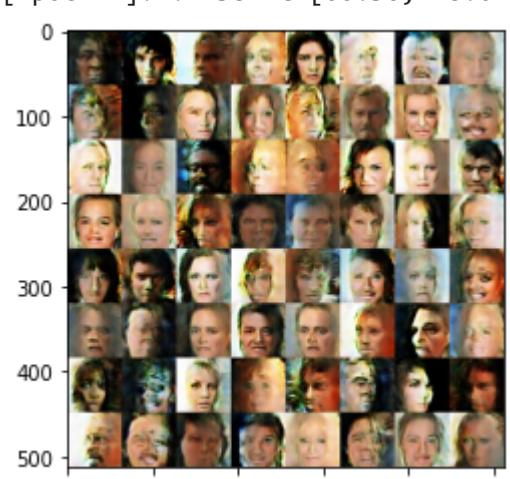

[Epoch 10]: : 1581it [00:55, 28.99it/s, g_loss=0.00868, d_loss=0.011] Exception ignored in: <function Exec

Traceback (most recent call last):

File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del_

self.wait()

File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait

pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)

tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence

[Epoch 10]: : 1582it [00:55, 28.64it/s, g_loss=0.00868, d_loss=0.011]



[Epoch 11]: : 1581it [00:55, 29.81it/s, g_loss=1.29, d_loss=0.657]Exception ignored in: <function Exec

Traceback (most recent call last):

File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del_


self.wait()

File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait

pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)


tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence

[Epoch 11]: : 1582it [00:55, 28.38it/s, g_loss=1.29, d_loss=0.657]

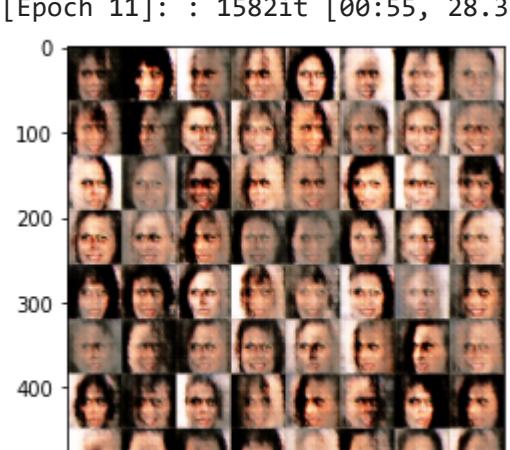





[Epoch 12]: : 1581it [00:56, 30.98it/s, g_loss=0.00244, d_loss=0.007] Exception ignored in: <function Traceback (most recent call last):
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 12]: : 1582it [00:56, 28.14it/s, g_loss=0.00244, d_loss=0.007]

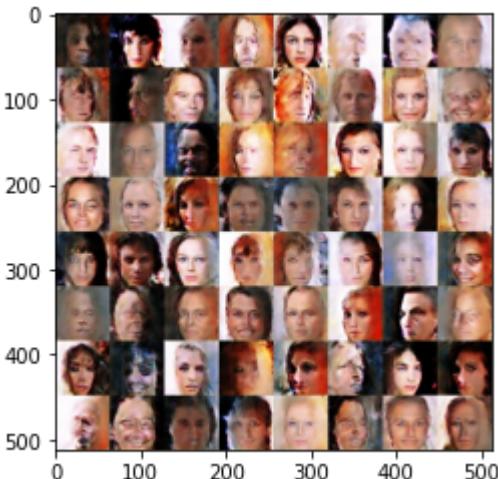

[Epoch 13]: : 1582it [00:56, 28.89it/s, g_loss=0.00351, d_loss=0.0403] Exception ignored in: <function E Traceback (most recent call last):
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 13]: : 1582it [00:56, 28.17it/s, g_loss=0.00351, d_loss=0.0403]

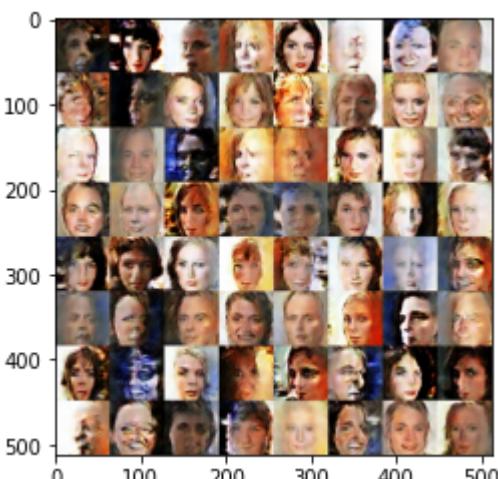

[Epoch 14]: : 1580it [00:56, 30.32it/s, g_loss=0.00273, d_loss=0.0124] Exception ignored in: <function Traceback (most recent call last):
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 14]: : 1582it [00:56, 28.23it/s, g_loss=0.00273, d_loss=0.0124]

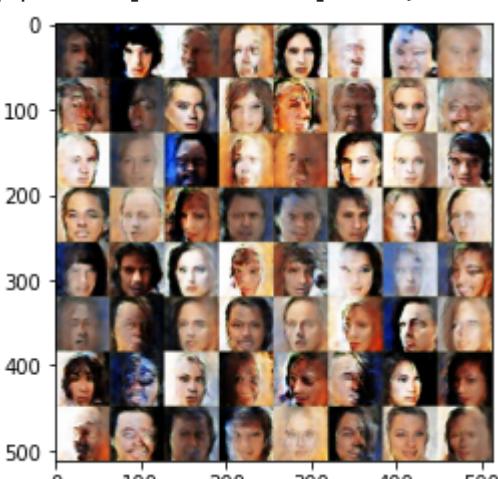

[Epoch 15]: : 1581it [00:55, 29.66it/s, g_loss=0.00342, d_loss=0.00966] Exception ignored in: <function Traceback (most recent call last):
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 15]: : 1582it [00:55, 28.71it/s, g_loss=0.00342, d_loss=0.00966]





[Epoch 16]: : 1581it [00:55, 28.99it/s, g_loss=0.00195, d_loss=0.0195] Exception ignored in: <function E>

Traceback (most recent call last):

File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__


self.wait()

File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait

pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)

tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence

[Epoch 16]: : 1582it [00:55, 28.34it/s, g_loss=0.00195, d_loss=0.0195]

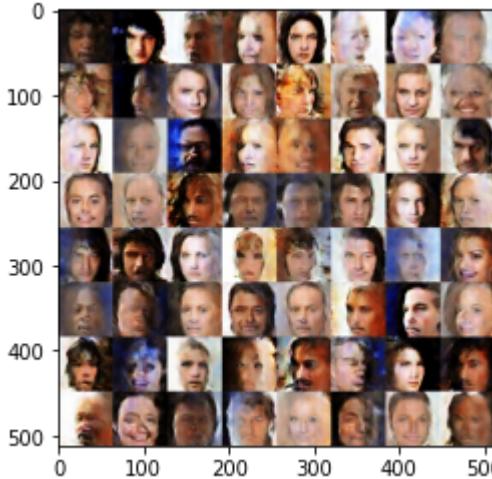

[Epoch 17]: : 1581it [00:55, 31.05it/s, g_loss=0.0132, d_loss=0.0328] Exception ignored in: <function E>

Traceback (most recent call last):

File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__


self.wait()

File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait

pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)

tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence

[Epoch 17]: : 1582it [00:55, 28.41it/s, g_loss=0.0132, d_loss=0.0328]

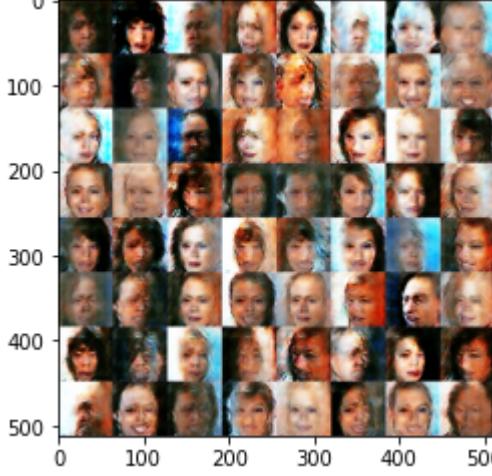

[Epoch 18]: : 1582it [00:55, 31.50it/s, g_loss=0.0018, d_loss=0.00966] Exception ignored in: <function E>

Traceback (most recent call last):

File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__


self.wait()

File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait

pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)

tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence

[Epoch 18]: : 1582it [00:55, 28.52it/s, g_loss=0.0018, d_loss=0.00966]

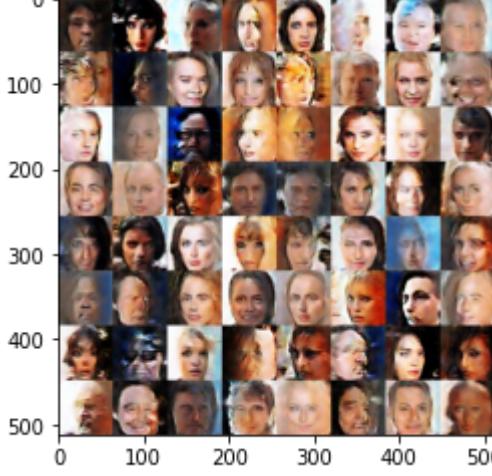

[Epoch 19]: : 1581it [00:56, 30.27it/s, g_loss=0.00939, d_loss=0.0248] Exception ignored in: <function E>

Traceback (most recent call last):

File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__

self.wait()

File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait

pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)


tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence

[Epoch 19]: : 1582it [00:56, 28.02it/s, g_loss=0.00939, d_loss=0.0248]







[Epoch 20]: : 1581it [00:56, 29.58it/s, g_loss=0.00325, d_loss=0.00717]Exception ignored in: <function E
Traceback (most recent call last):
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 20]: : 1582it [00:56, 28.15it/s, g_loss=0.00325, d_loss=0.00717]

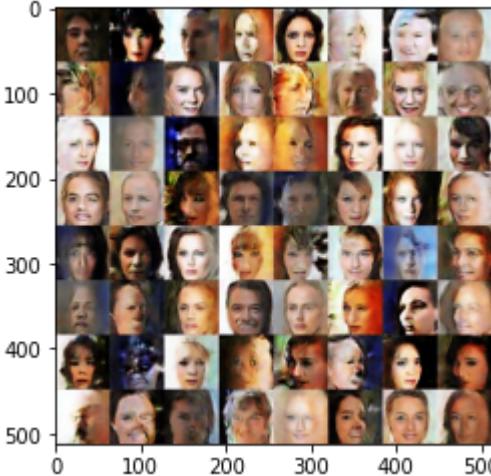


[Epoch 21]: : 1581it [00:56, 26.57it/s, g_loss=0.0116, d_loss=0.00622]Exception ignored in: <function E
Traceback (most recent call last):
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 21]: : 1582it [00:56, 28.23it/s, g_loss=0.0116, d_loss=0.00622]

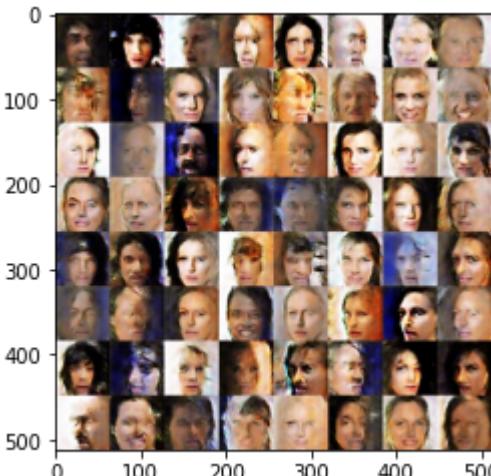


[Epoch 22]: : 1580it [00:55, 29.39it/s, g_loss=0.0422, d_loss=0.00229]Exception ignored in: <function E
Traceback (most recent call last):
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 22]: : 1582it [00:55, 28.39it/s, g_loss=0.0422, d_loss=0.00229]

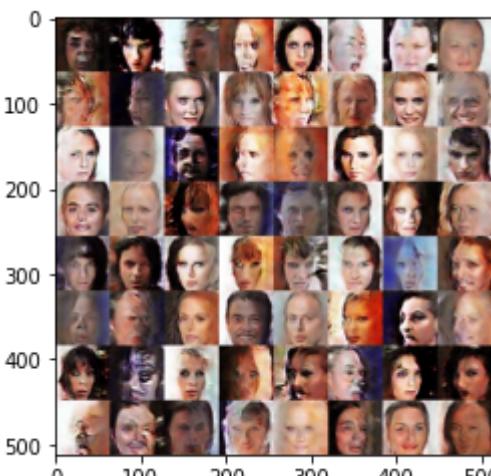


[Epoch 23]: : 1582it [00:58, 27.59it/s, g_loss=0.00405, d_loss=0.0207]Exception ignored in: <function E
Traceback (most recent call last):
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 23]: : 1582it [00:58, 27.04it/s, g_loss=0.00405, d_loss=0.0207]

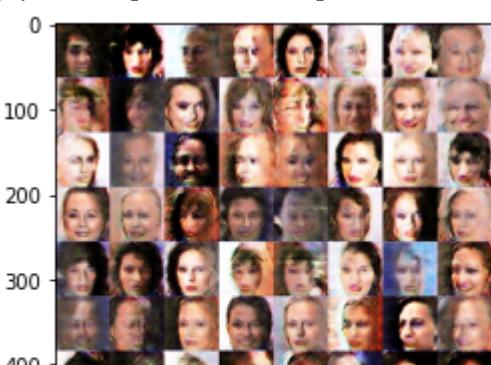

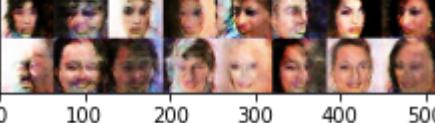


[Epoch 24]: : 1582it [00:58, 29.32it/s, g_loss=0.000634, d_loss=0.00181]Exception ignored in: <function Traceback (most recent call last):

```
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
    self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
    pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 24]: : 1582it [00:58, 26.85it/s, g_loss=0.000634, d_loss=0.00181]
```

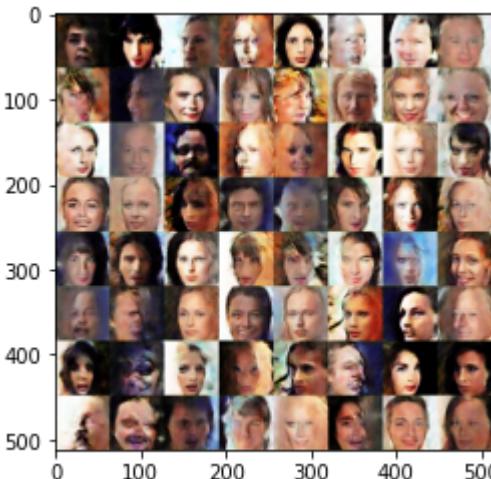


[Epoch 25]: : 1581it [00:57, 30.47it/s, g_loss=0.00406, d_loss=0.0179]Exception ignored in: <function E Traceback (most recent call last):

```
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
    self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
    pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 25]: : 1582it [00:57, 27.51it/s, g_loss=0.00406, d_loss=0.0179]
```

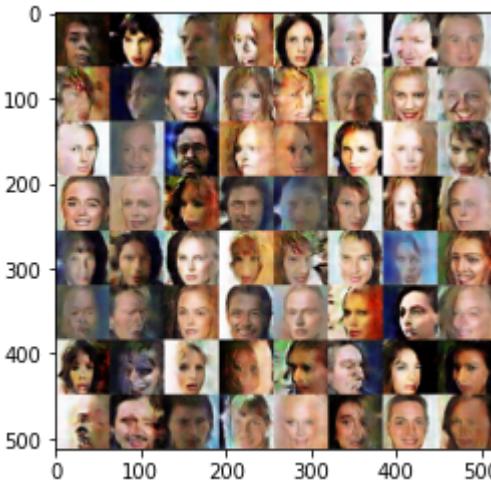

[Epoch 26]: : 1582it [00:56, 28.45it/s, g_loss=0.000288, d_loss=0.0337]Exception ignored in: <function Traceback (most recent call last):

```
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
    self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
    pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 26]: : 1582it [00:56, 28.05it/s, g_loss=0.000288, d_loss=0.0337]
```

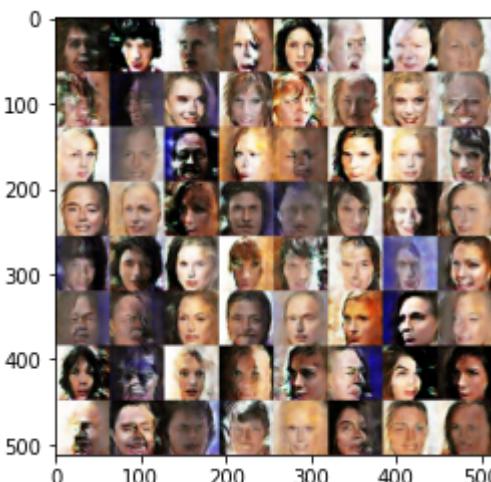

[Epoch 27]: : 1582it [00:57, 30.22it/s, g_loss=0.000628, d_loss=0.00241]Exception ignored in: <function Traceback (most recent call last):

```
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 46, in __del__
    self.wait()
File "/usr/local/lib/python3.8/dist-packages/tensorflow/python/eager/executor.py", line 65, in wait
    pywrap_tfe.TFE_ExecutorWaitForAllPendingNodes(self._handle)
tensorflow.python.framework.errors_impl.OutOfRangeError: End of sequence
[Epoch 27]: : 1582it [00:57, 27.46it/s, g_loss=0.000628, d_loss=0.00241]
```



▼ Display GIF sample results

You can run the cells below to display the galleries as an animation.




```
400 + [ ]
```

```
imgs = os.listdir('celeba_out')
imgs.sort()
imgs = [cv2.imread('celeba_out/' + i) for i in imgs]
imgs = [cv2.cvtColor(i, cv2.COLOR_BGR2RGB) for i in imgs]
imageio.mimsave('anim.gif', imgs, fps=2)
```

```
path="anim.gif"
```

```
with open(path,'rb') as f:
    display(IpyImage(data=f.read(), format='png'))
```

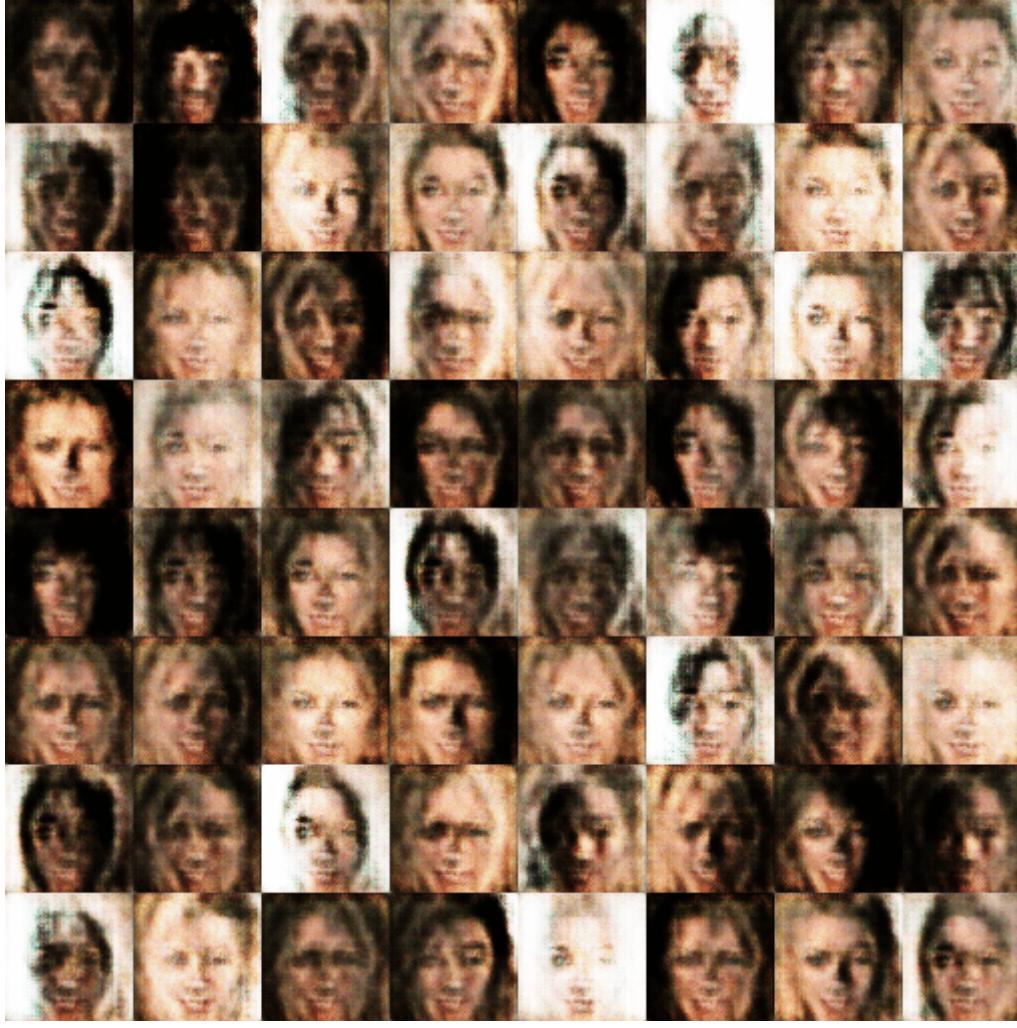

Congratulations on completing the final ungraded lab for this course!



Colab 付费产品 - 在此处取消合同

✓ 0 秒 完成时间: 22:32

